

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.209

FOR:

Sensible Medical Innovations Ltd.
ReDS Pro System
Version: 2.7 Conf. C
Part number: GAS0047
FCC ID:2AONF-27C01

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	EUT parts	5
6.3	Operating frequencies.....	5
6.4	Test configuration.....	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C	7
7.1	Field strength of emissions.....	7
7.2	Conducted emissions	39
8	Unintentional emissions according to 47CFR part 15 subpart B	42
8.1	Radiated emissions	42
8.2	Conducted emissions	51
8.3	Antenna requirements	54
9	APPENDIX A Test equipment and ancillaries used for tests.....	55
10	APPENDIX B Test equipment correction factors.....	56
11	APPENDIX C Test facility description	59
12	APPENDIX D Measurement uncertainties	60
13	APPENDIX E Specification references.....	61
14	APPENDIX F Abbreviations and acronyms.....	62

1 Applicant information

Client name: Sensible Medical Innovations Ltd.
Address: P.O.Box 8702, Meir Ariel 6, intergama Building 1, Netanya, 4053942, Israel
Telephone: 058-6999563
Fax: 09-8654472
E-mail: keren.d@sensible-medical.com
Contact name: Mr. Keren Halperin

2 Equipment under test attributes

Product name: ReDS Pro System
Product type: Medical
Part number: GAS0047
Serial number: 2009CVXWUK
Hardware version: V2.7 Conf. C
Software release: 1.10
Receipt date 13 Aug 2019

3 Manufacturer information

Manufacturer name: Sensible Medical Innovations Ltd.
Address: P.O.Box 8702, Meir Ariel 6, intergama Building 1, Netanya, 4053942, Israel
Telephone: 058-6999563
Fax: 09-8654472
E-Mail: keren.d@sensible-medical.com
Contact name: Mr. Keren Halperin

4 Test details

Project ID: 34190
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 02-Dec-19
Test completed: 05-Dec-19
Test specification(s): FCC 47CFR part 15, subpart C, §15.209

5 Tests summary

Test	Status
Transmitter characteristics	
FCC section 15.209, Field strength of emissions	Pass
FCC Part 15, Section 207, Conducted emission	Pass
FCC Part 15, Section 109, Radiated emission	Pass
FCC Part 15, Section 107, Conducted emission	Pass
FCC section 15.203, Antenna requirement	Pass

This test report supersedes the previously issued test report identified by Doc ID: SENRAD_FCC.34190_Rev1

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Morozov test engineer EMC & Radio	02-Dec-19 - 05-Dec-19	
Reviewed by:	Mrs. S Peysahov Sheynin test engineer EMC & Radio	25-Dec-19 – 21-Jan-20	
Approved by:	Mr. S. Samokha, technical manager, EMC and Radio	21-Jan-20	

6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The EUT, ReDS Pro System V2.7 Conf. C, is a non-invasive bedside monitor connected to a sensor unit and used for the measurement of lung fluid. The ReDS™ Pro System V2.7 Conf. C is comprised of a two Sensors Unit and a Bedside console.

The vest is designed to be adjusted to enable correct fit to an individual patient. The Sensor Unit is controlled and passes the data to the Bedside console via a cable.

In the ReDS Pro System V2.7 Conf. C, the tissue being examined is subjected to RF signals generated from a body coupled sensor. It does this by stepping a low power CW signal through 25 different frequencies between 950 MHz and 1.8 GHz (see attached table) the signal is generated in the RF TX-module connected via (fixed) Cable to the TX body matched sensor embedded in the Sensor Unit and attached during measurement to the patient thorax. The penetrating EM signal is collected with the RX-sensor, amplified, converted to Baseband, amplified and sampled by an A2D for later processing to detection of fluid content.

The EUT is powered from AC mains via AC/DC adapter. The AC/DC adapter manufactured by Adapter, part number ATM065TA150515202, serial number 1913000016 was used during the testing.


6.2 EUT parts

Description	Manufacturer	Part number	Serial number
ReDS system	Sensible Medical	GAS0047	2009CVXWUK

6.3 Operating frequencies

Source	Frequency, MHz				
	957	958	NA	NA	NA
900 MHz band	957	958	NA	NA	NA
1200-1400 MHz band	1242	1243	1256	1257	1292
	1293	1294	1295	1428	1429
1600 MHz band	1430	1431	NA	NA	NA
	1629	1635	1636	1655	1656
1700 MHz band	1657	NA	NA	NA	NA
	1711	1712	1716	1717	1718

6.4 Test configuration

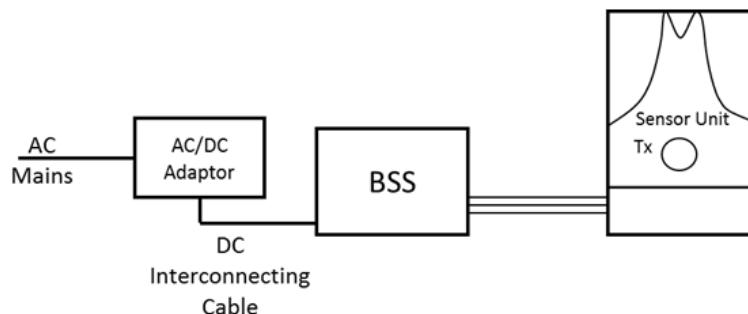

6.5 Transmitter characteristics

Type of equipment			
V	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
Operating frequencies:		Refer to section 6.3	
Maximum field strength		60.93 dB(μ V/m) at 3 m test distance	
Is transmitter output power variable?	V	No	
			continuous variable
	Yes	stepped variable with stepsize, software controlled	dB
Antenna connection			
unique coupling	standard connector	V	Integral V without temporary RF connector
Antenna/s technical characteristics			
Type internal	Manufacturer Sensible Medical Innovations	Model number RX sensor EAS0039 Rev A TX Sensor EAS0040 rev A	Gain about 10 dBi (in Air)
Type of modulation	stepped CW		
Transmitter duty cycle supplied for test	100%		
Transmitter power source			
	Battery	Nominal rated voltage	Battery type
V	AC mains	Nominal rated voltage	120 VAC
	DC	Nominal rated voltage	
Common power source for transmitter and receiver		V	yes no



HERMON LABORATORIES

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given Table 7.1.1. During the test Rx module was disabled, Tx module was active.

Table 7.1.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705		73.8 – 63.0**	
1.705 – 30.0*		69.5	
30 – 88	NA	40.0	NA
88 – 216		43.5	
216 – 960		46.0	
960 - 1000		54.0	
1000 – 10 th harmonic	74.0	NA	54.0

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lims_2 = Lims_1 + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

7.1.2 Test procedure for fundamental and spurious emission field strength measurements in 9 kHz to 30 MHz

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with a loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis. The measuring antenna polarization was switched from vertical to horizontal.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.3 The worst test results (the lowest margins) were recorded in Table 7.1.5 and shown in the associated plots.



HERMON LABORATORIES

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz


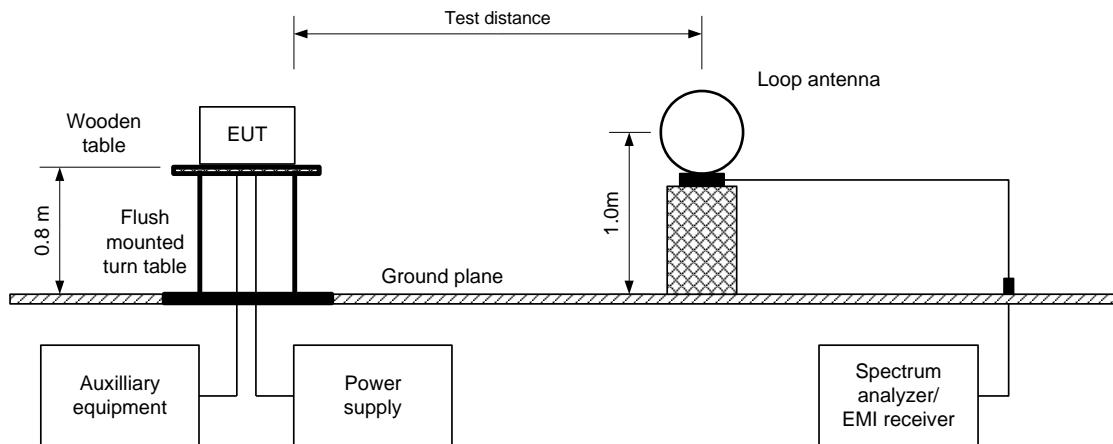


Figure 7.1.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz



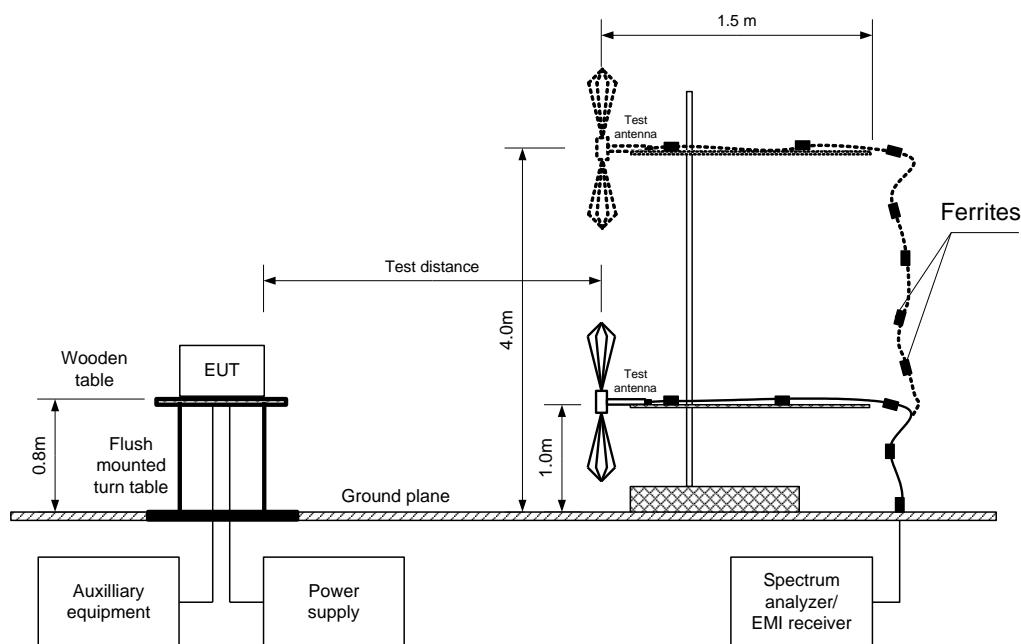


HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Figure 7.1.3 Setup for spurious emission field strength measurements above 1000 MHz

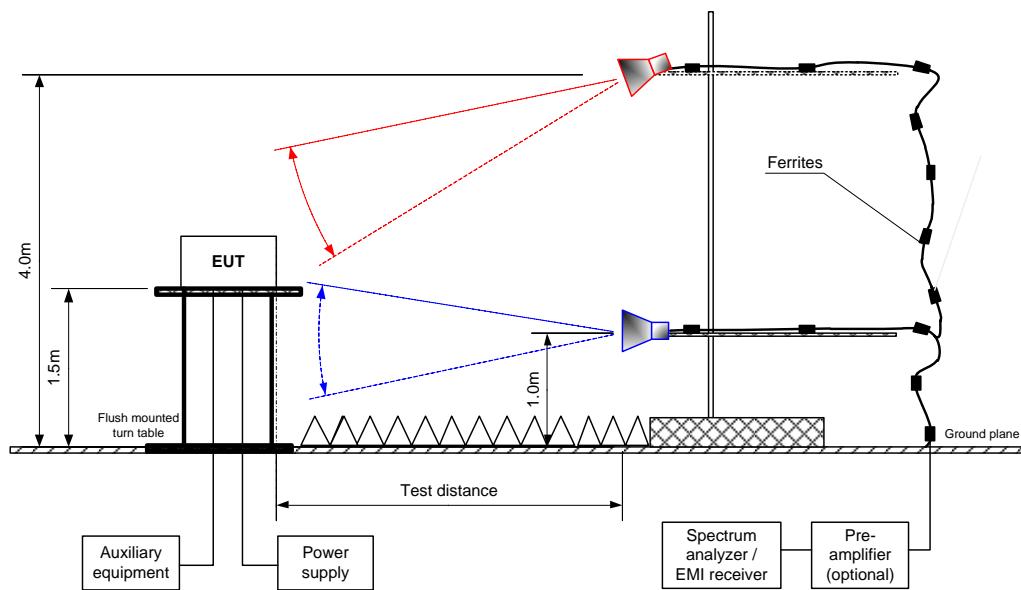



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions	
Test procedure:	ANSI C63.10, Sections 6.4, 6.5
Test mode:	Compliance
Date(s):	02-Dec-19
Temperature: 24 °C	Relative Humidity: 39 %
	Air Pressure: 1015 hPa
	Power: 120 VAC
Remarks:	

Table 7.1.2 Field strength of fundamental emission

TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT POSITION:	Typical (Vertical)
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
VIDEO BANDWIDTH:	≥ Resolution bandwidth
FREQUENCY RANGE:	30-1000 MHz
DETECTOR USED:	Quasi-peak
RESOLUTION BANDWIDTH:	120 kHz (30 MHz – 1000 MHz)
TEST ANTENNA TYPE:	Biconilog
CARRIER FREQUENCY:	Below 1 GHz
OPERATION MODE:	CW Stopped

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
957.075	40.54	40.38	46.0	-5.62	Horizontal	1.75	226	Pass
958.084	40.24	40.09	46.0	-5.91	Vertical	1.04	178	

CARRIER FREQUENCY: Below 1 GHz

OPERATION MODE: CW Stepped

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
957.075	40.66	40.42	46.0	-5.58	Horizontal	1.75	226	Pass
958.084	41.01	40.88	46.0	-5.12	Vertical	1.04	178	

TEST ANTENNA TYPE: Double Rigged Horn

DETECTOR USED: Peak/Average

CARRIER FREQUENCY: Above 1 GHz

VIDEO BANDWIDTH: ≥ Resolution bandwidth

RESOLUTION BANDWIDTH: 1000 kHz

OPERATION MODE: CW Stopped

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
1241.917	Ver	1.92	185	53.13	74.00	-20.24	53.76	26.43	54.00	-27.57	Pass
1635.905	Hor	1.62	177	60.93	74.00	-13.07	60.93	33.60	54.00	-20.40	
1718.017	Hor	2.33	174	60.88	74.00	-13.12	60.88	33.55	54.00	-20.45	

CARRIER FREQUENCY: Above 1 GHz

OPERATION MODE: CW Stepped

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
1241.917	Ver	1.92	185	52.44	74.00	-21.56	52.44	25.11	54.0	-28.89	Pass
1635.905	Hor	1.62	177	58.73	74.00	-15.27	58.73	31.40	54.0	-22.60	
1718.017	Hor	2.33	174	59.61	74.00	-14.39	59.61	32.28	54.0	-21.72	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin (dB) = measured result - specification limit.



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure:	ANSI C63.10, Sections 6.4, 6.5		
Test mode:	Compliance		Verdict: PASS
Date(s):	02-Dec-19		
Temperature: 24 °C	Relative Humidity: 39 %		Air Pressure: 1015 hPa
Remarks:		Power: 120 VAC	

Table 7.1.3 Average factor calculation

Frequencies	Number of transmission bursts within 100 ms	Transmission burst duration, ms	Average factor, dB
957 MHz 958 MHz	2	4.3	-21.31
1242 MHz 1636 MHz 1718 MHz	1	4.3	-27.33

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

Average factor = $20 \times \log_{10} ((\text{Number of bursts within 100 ms} \times \text{Burst duration})/100\text{ms})$

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

Table 7.1.4 Field strength of spurious emissions at carrier frequencies

TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT POSITION:	Typical (Vertical)
OPERATION MODE:	CW Stepped
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
VIDEO BANDWIDTH:	≥ Resolution bandwidth
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
35.961	32.57	30.44	40.0	-9.56	Vertical	1.02	82	Pass
55.633	38.47	36.87	40.0	-3.13	Vertical	1.02	81	
69.118	36.70	35.22	40.0	-4.78	Horizontal	3.21	183	
360.265	43.95	37.03	46.0	-8.97	Horizontal	1.00	14	
707.277	53.04	35.79	46.0	-10.21	Horizontal	1.04	24	
721.621	56.87	39.55	46.0	-6.45	Horizontal	1.00	13	
780.659	53.84	41.06	46.0	-4.94	Horizontal	1.02	360	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions					
Test procedure:		ANSI C63.10, Sections 6.4, 6.5			
Test mode:		Compliance		Verdict: PASS	
Date(s):		02-Dec-19			
Temperature: 24 °C		Relative Humidity: 39 %		Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:					

Table 7.1.5 Field strength of spurious emissions above 1 GHz

TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT POSITION: Typical (Vertical)
 MODULATING SIGNAL: CW Stopped
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 RESOLUTION BANDWIDTH: 1000 kHz
 INVESTIGATED FREQUENCY RANGE: 1 – 18 GHz
 TEST ANTENNA TYPE: Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
Carrier frequency 957 MHz										
										Pass
Carrier frequency 958 MHz										
										Pass
Carrier frequency 1242 MHz										
										Pass
Carrier frequency 1636 MHz										
										Pass
Carrier frequency 1718 MHz										
										Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refers to 0 degrees position of turntable.

Table 7.1.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4360	HL 4933	HL 5288	HL 5405	
---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.1.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 957 MHz
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

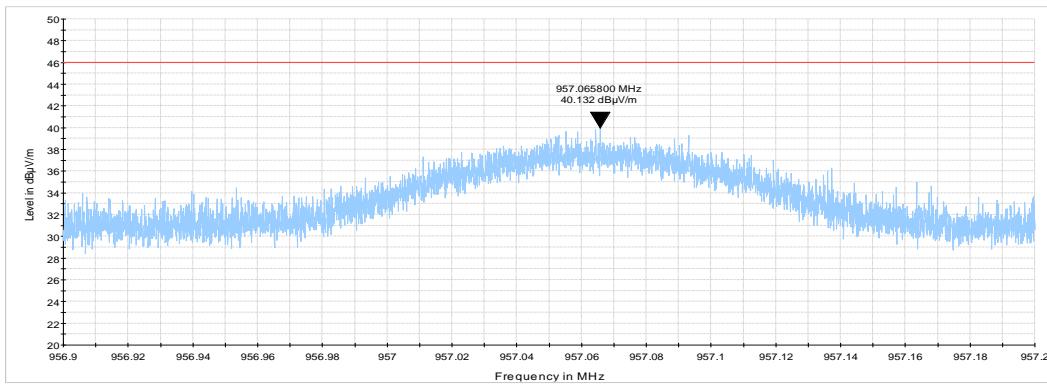

Plot 7.1.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 958 MHz
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

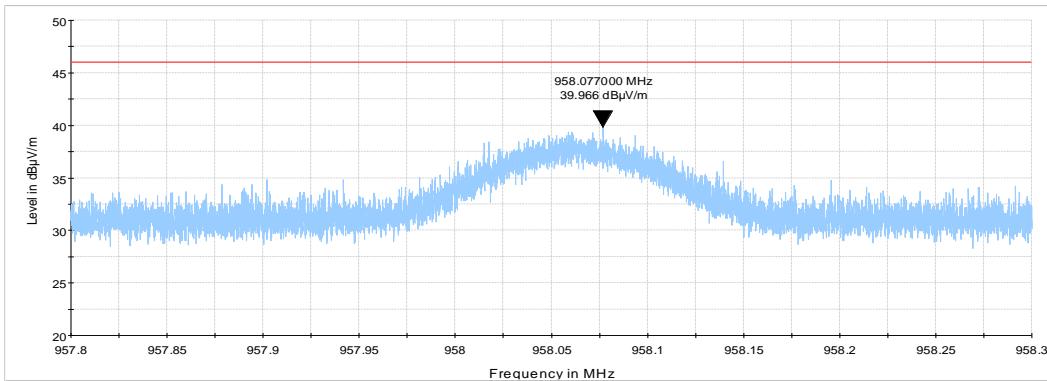




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1242 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Quasi Peak detector
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

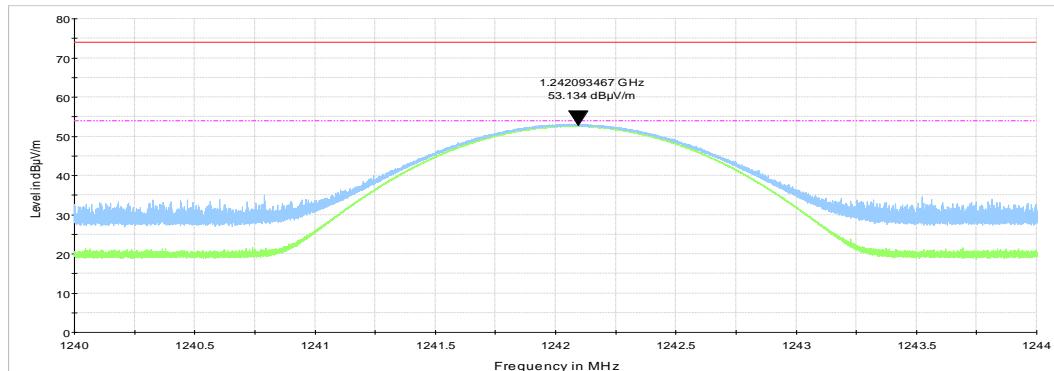




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.4 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1636 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Quasi Peak detector
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

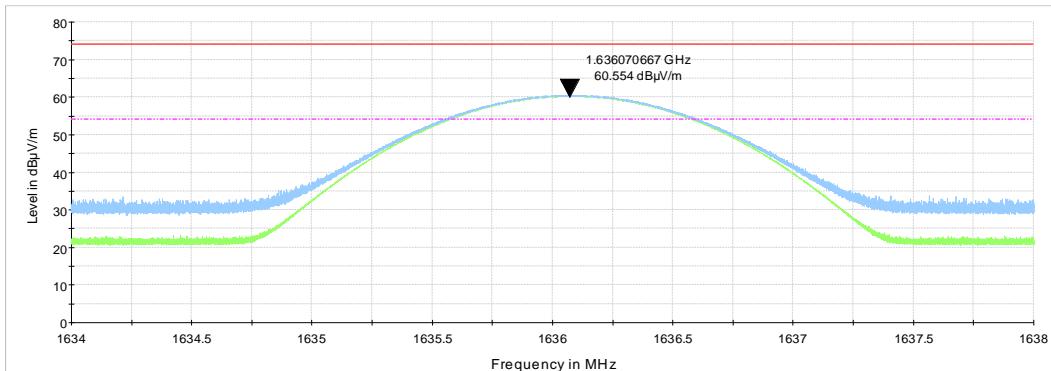




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.5 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1718 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Quasi Peak detector
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

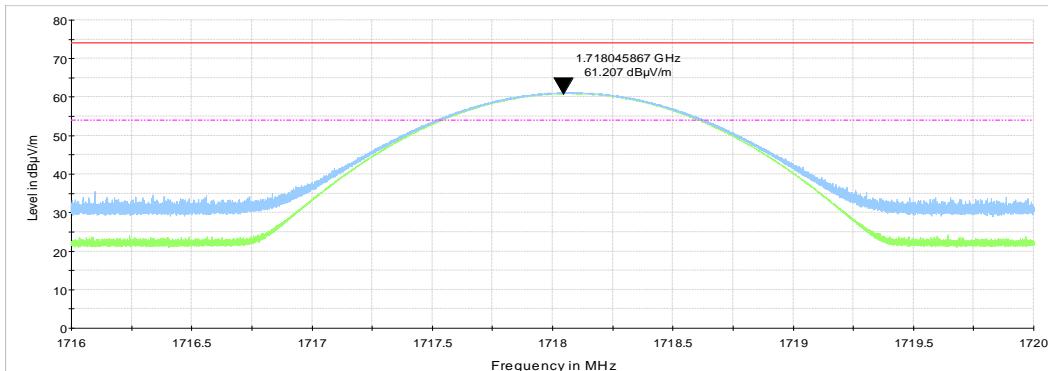




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.1.6 Radiated emission measurements from 9 kHz to 30 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATION MODE: CW Stepped
RESOLUTION BANDWIDTH: 1 KHz / 10 KHz
VIDEO BANDWIDTH: 3 KHz / 30 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 100 - 200 Hz / 4.5 - 9 KHz
NUMBER OF POINTS: 1410 / 6634

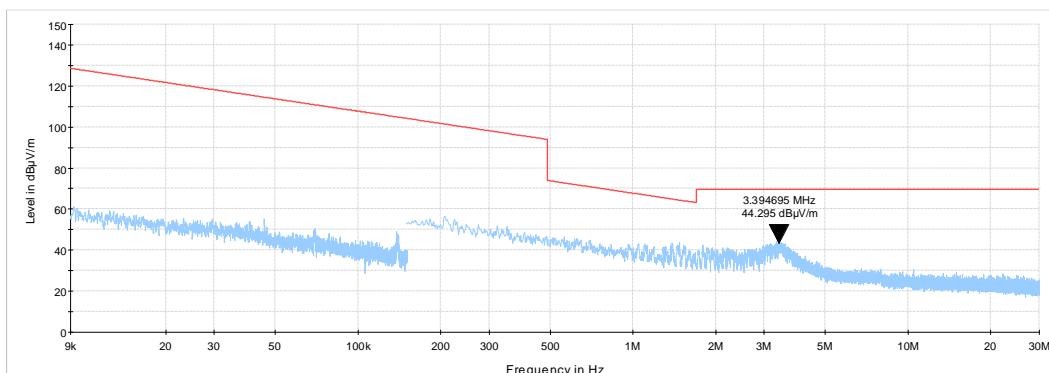

Plot 7.1.7 Radiated emission measurements from 9 kHz to 30 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 957 MHz
RESOLUTION BANDWIDTH: 1 KHz / 10 KHz
VIDEO BANDWIDTH: 3 KHz / 30 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 100 - 200 Hz / 4.5 - 9 KHz
NUMBER OF POINTS: 1410 / 6634

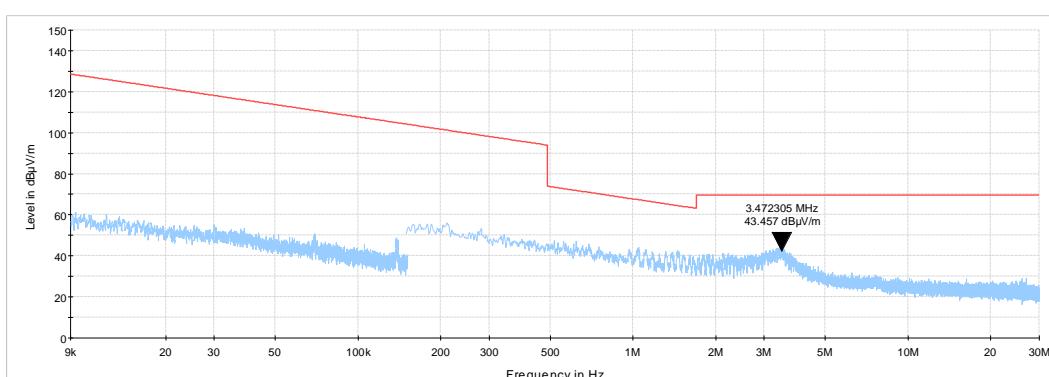




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.1.8 Radiated emission measurements from 9 kHz to 30 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 958 MHz
RESOLUTION BANDWIDTH: 1 KHz / 10 KHz
VIDEO BANDWIDTH: 3 KHz / 30 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 100 - 200 Hz / 4.5 - 9 KHz
NUMBER OF POINTS: 1410 / 6634

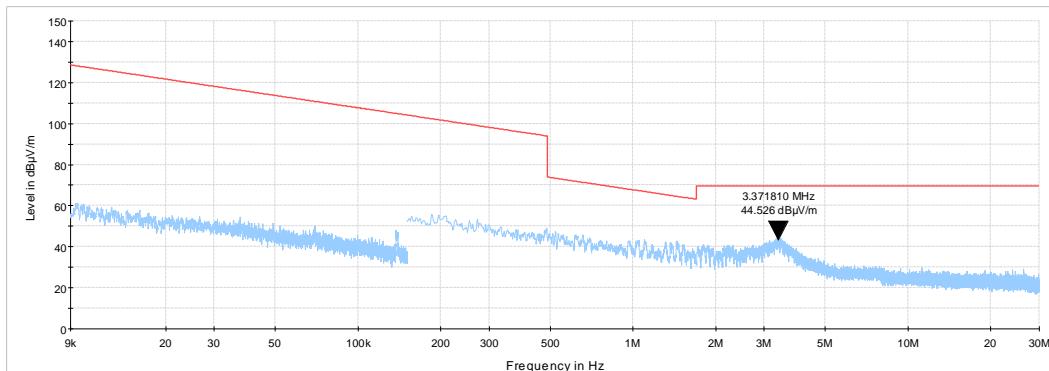

Plot 7.1.9 Radiated emission measurements from 9 kHz to 30 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1242 MHz
RESOLUTION BANDWIDTH: 1 KHz / 10 KHz
VIDEO BANDWIDTH: 3 KHz / 30 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 100 - 200 Hz / 4.5 - 9 KHz
NUMBER OF POINTS: 1410 / 6634

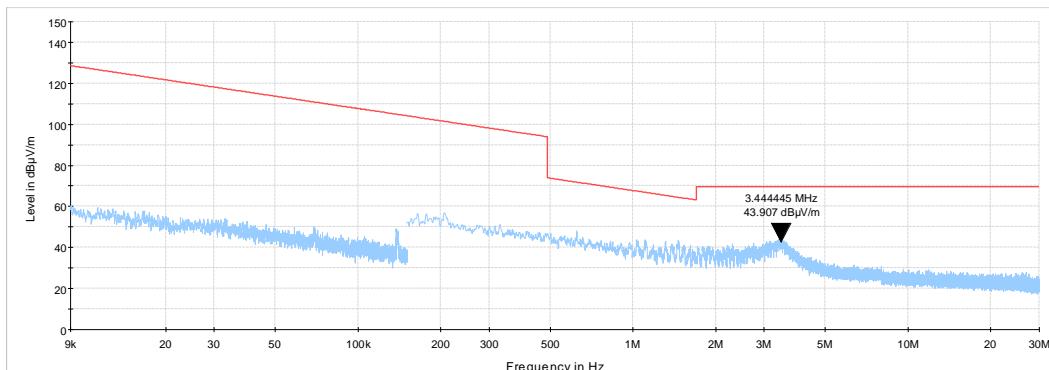




HERMON LABORATORIES

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.1.10 Radiated emission measurements from 9 kHz to 30 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1636 MHz
RESOLUTION BANDWIDTH: 1 KHz / 10 KHz
VIDEO BANDWIDTH: 3 KHz / 30 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 100 - 200 Hz / 4.5 - 9 KHz
NUMBER OF POINTS: 1410 / 6634

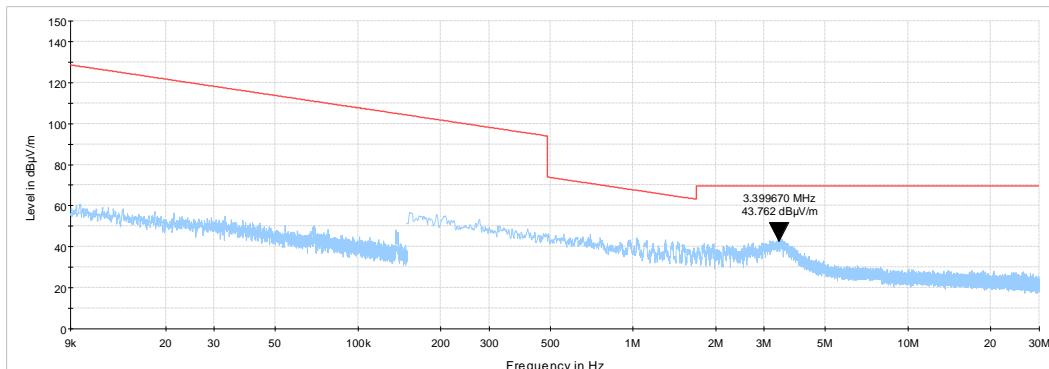

Plot 7.1.11 Radiated emission measurements from 9 kHz to 30 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1718 MHz
RESOLUTION BANDWIDTH: 1 KHz / 10 KHz
VIDEO BANDWIDTH: 3 KHz / 30 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 100 - 200 Hz / 4.5 - 9 KHz
NUMBER OF POINTS: 1410 / 6634

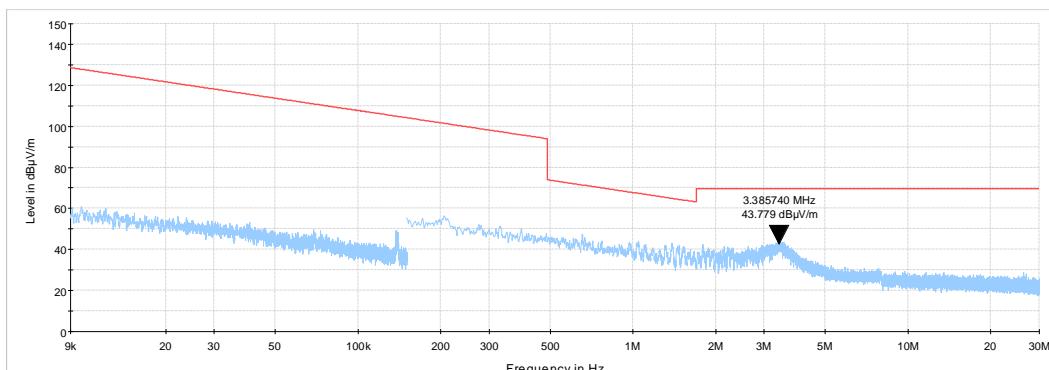




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.12 Radiated emission measurements from 30 to 1000 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped
TRACE Peak Hold*
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 60 KHz
NUMBER OF POINTS: 16200

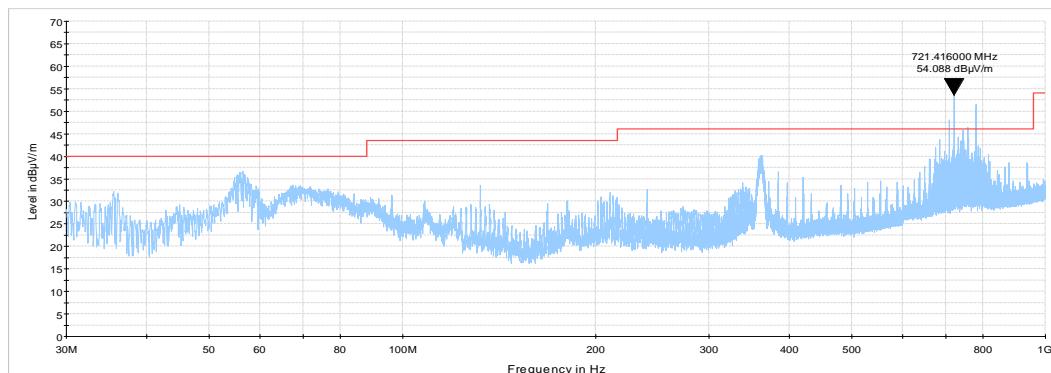

* Limit is in Quasi Peak, the Quasi Peak values are provided in Table 7.1.3




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.13 Radiated emission measurements from 30 to 1000 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 957 MHz
TRACE Peak Hold*
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 60 KHz
NUMBER OF POINTS: 16200

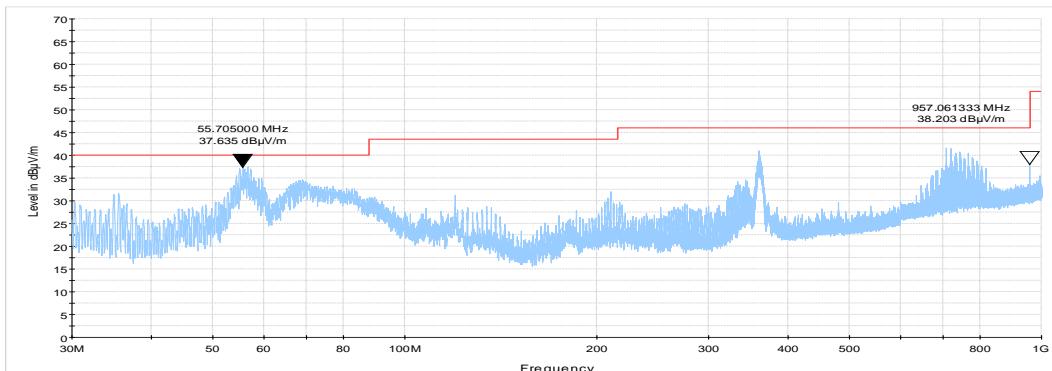

* Limit is in Quasi Peak, the Quasi Peak values are provided in Table 7.1.3




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.14 Radiated emission measurements from 30 to 1000 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 958 MHz
TRACE: Peak Hold*
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 60 KHz
NUMBER OF POINTS: 16200

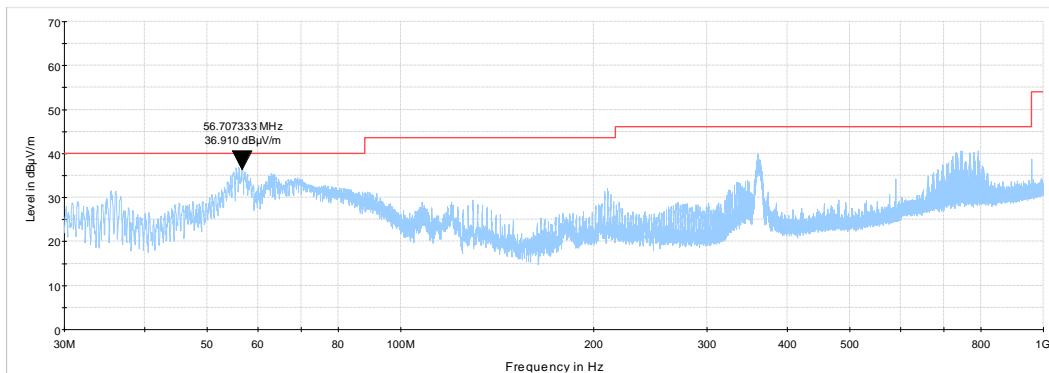

* Limit is in Quasi Peak, the Quasi Peak values are provided in Table 7.1.3




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.15 Radiated emission measurements from 30 to 1000 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1242 MHz
TRACE Peak Hold*
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 60 KHz
NUMBER OF POINTS: 16200

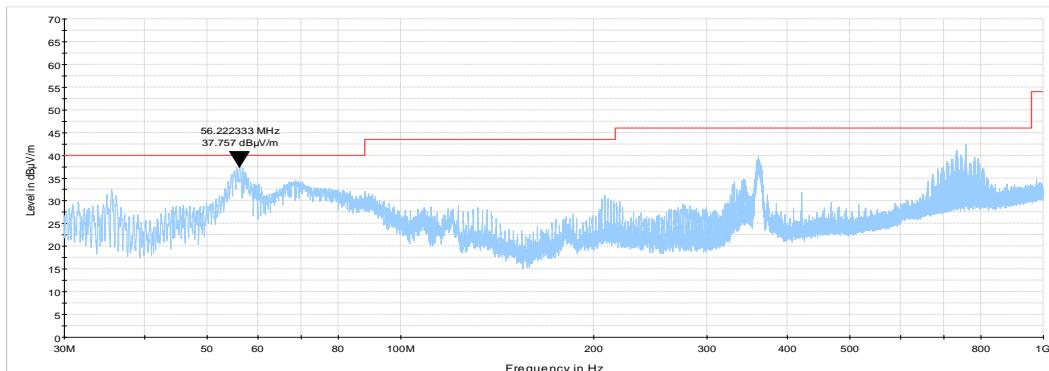

* Limit is in Quasi Peak, the Quasi Peak values are provided in Table 7.1.3




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.16 Radiated emission measurements from 30 to 1000 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1636 MHz
TRACE Peak Hold*
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 60 KHz
NUMBER OF POINTS: 16200

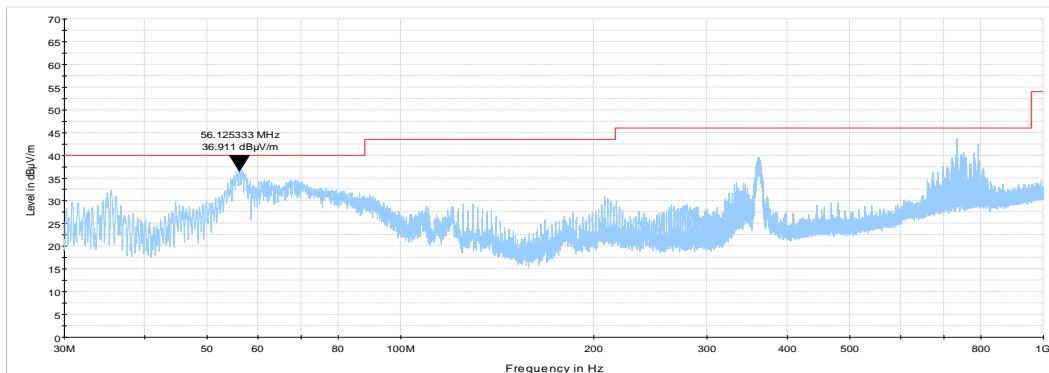

* Limit is in Quasi Peak, the Quasi Peak values are provided in Table 7.1.3




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.17 Radiated emission measurements from 30 to 1000 MHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1718 MHz
TRACE Peak Hold*
RESOLUTION BANDWIDTH: 120 KHz
VIDEO BANDWIDTH: 300 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 60 KHz
NUMBER OF POINTS: 16200

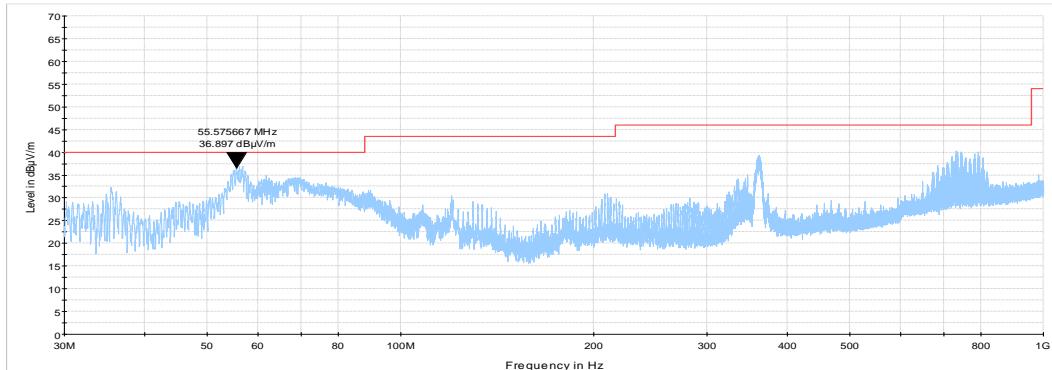

* Limit is in Quasi Peak, the Quasi Peak values are provided in Table 7.1.3




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.18 Radiated emission measurements from 1 to 18 GHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped
BLUE TRACE: Peak detector
GREEN TRACE: Average detector
RESOLUTION BANDWIDTH: 1000 KHz
VIDEO BANDWIDTH: 3000 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

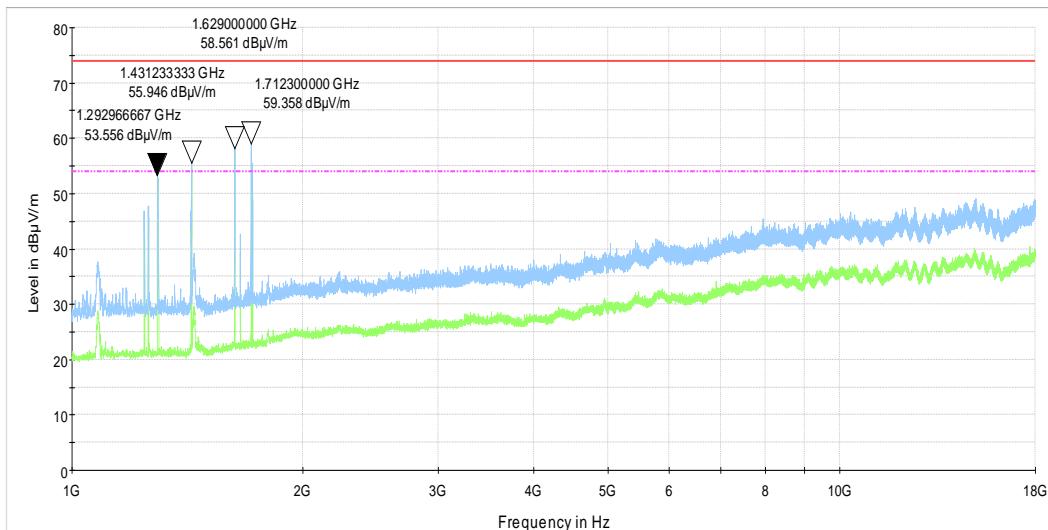




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.19 Radiated emission measurements from 1 to 18 GHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 957 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Average detector
RESOLUTION BANDWIDTH: 1000 KHz
VIDEO BANDWIDTH: 3000 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

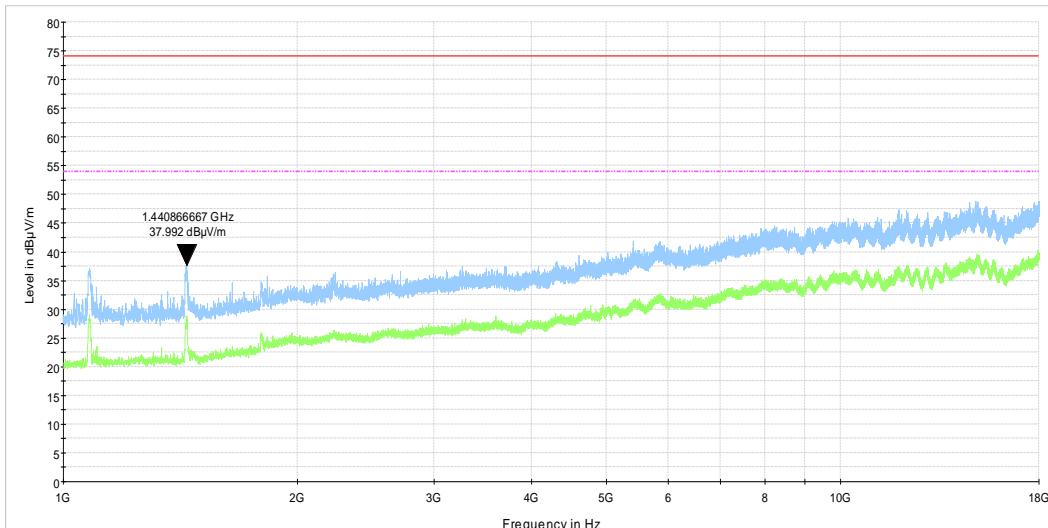




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.20 Radiated emission measurements from 1 to 18 GHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 958 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Average detector
RESOLUTION BANDWIDTH: 1000 KHz
VIDEO BANDWIDTH: 3000 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

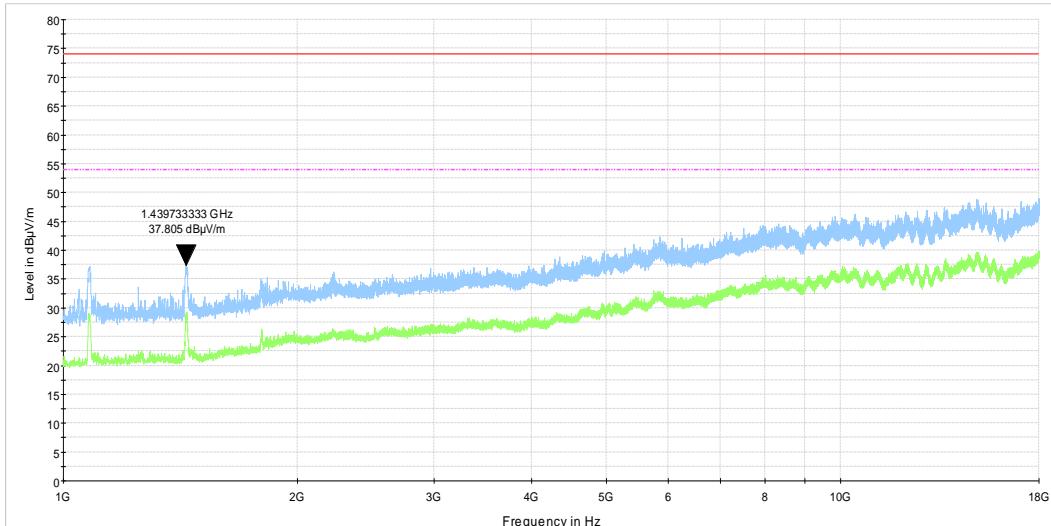




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.21 Radiated emission measurements from 1 to 18 GHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1242 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Average detector
RESOLUTION BANDWIDTH: 1000 KHz
VIDEO BANDWIDTH: 3000 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

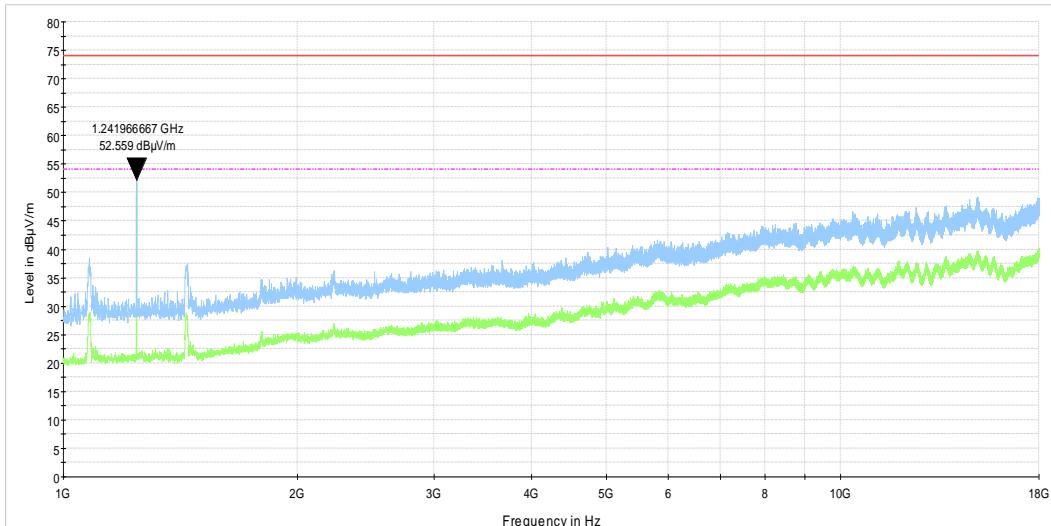




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.22 Radiated emission measurements from 1 to 18 GHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1636 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Average detector
RESOLUTION BANDWIDTH: 1000 KHz
VIDEO BANDWIDTH: 3000 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

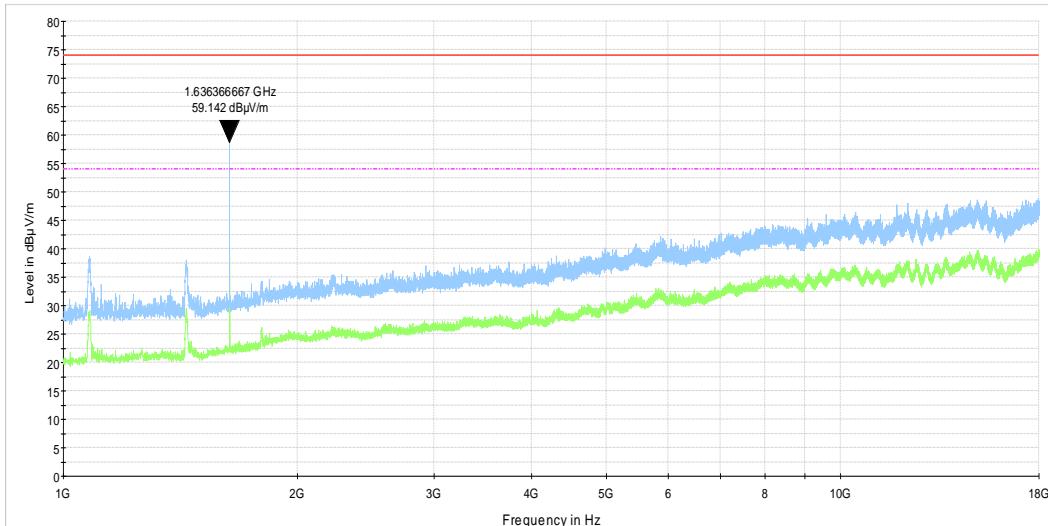




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.23 Radiated emission measurements from 1 to 18 GHz, Tx Mode Only

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stopped
CARRIER FREQUENCY: 1718 MHz
BLUE TRACE: Peak detector
GREEN TRACE: Average detector
RESOLUTION BANDWIDTH: 1000 KHz
VIDEO BANDWIDTH: 3000 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

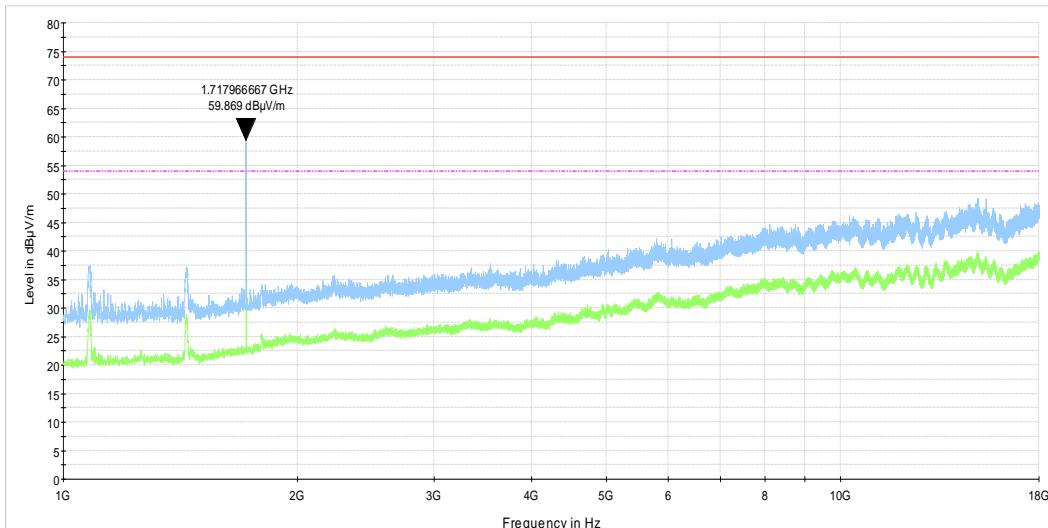




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions	
Test procedure:	ANSI C63.10, Sections 6.4, 6.5
Test mode:	Compliance
Date(s):	02-Dec-19
Temperature: 24 °C	Relative Humidity: 39 %
	Air Pressure: 1015 hPa
	Power: 120 VAC
Remarks:	


Plot 7.1.24 Radiated emission measurements from 1.24 to 1.305 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

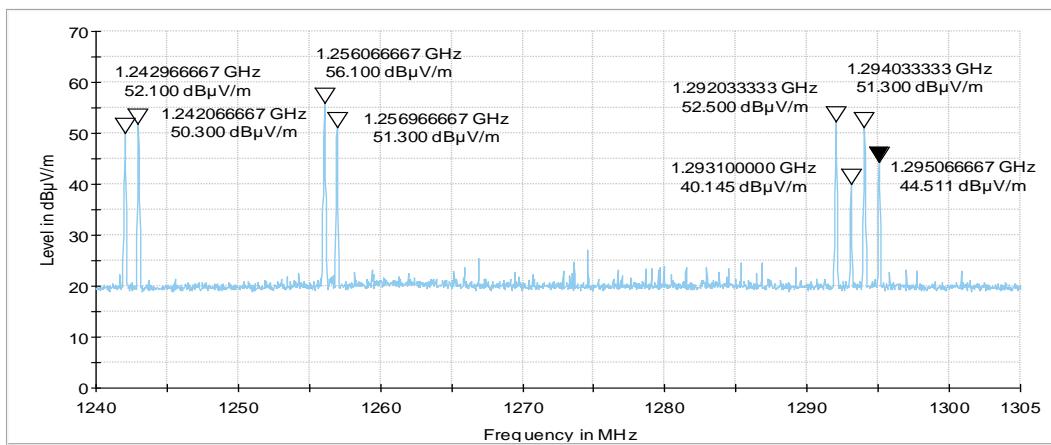

Plot 7.1.25 Radiated emission measurements from 1.41 to 1.45 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

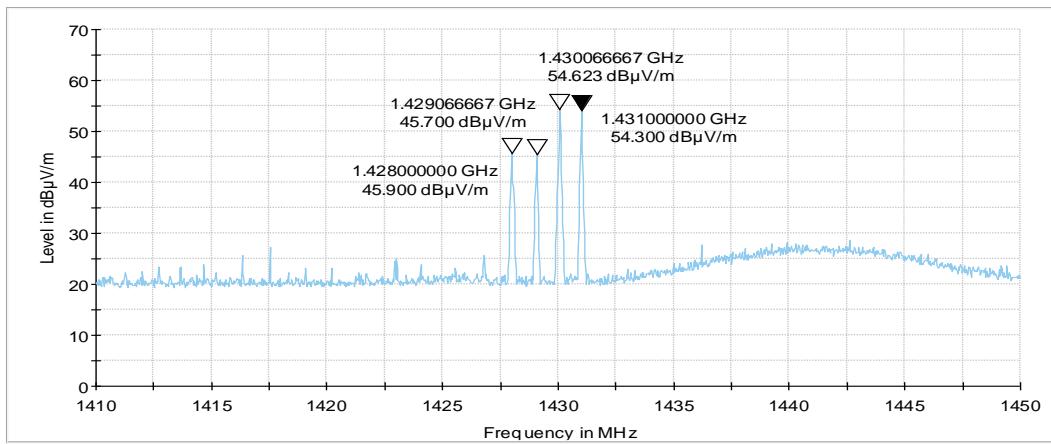




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.1.26 Radiated emission measurements from 1.62 to 1.67 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

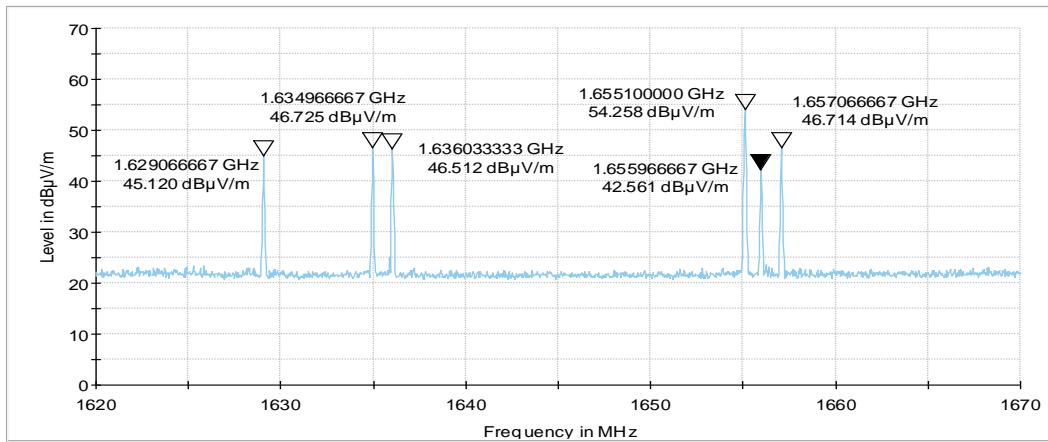

Plot 7.1.27 Radiated emission measurements from 1.705 to 1.725 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

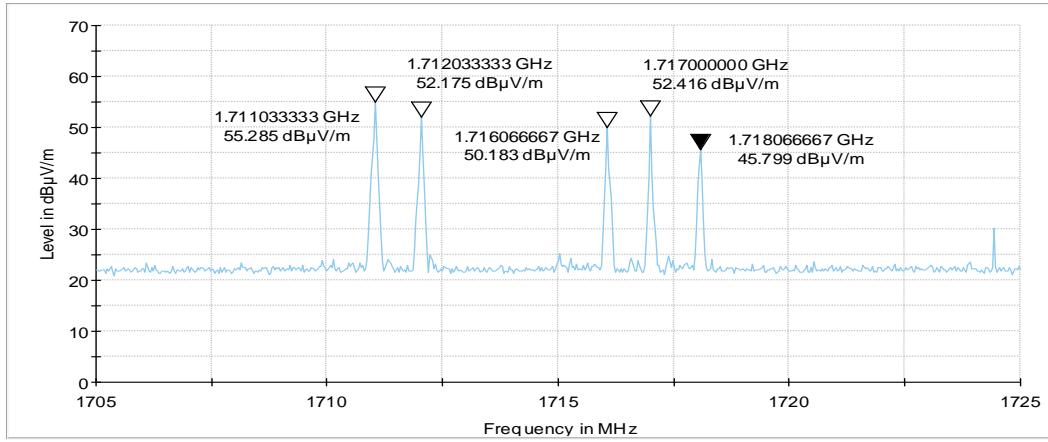




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions	
Test procedure:	ANSI C63.10, Sections 6.4, 6.5
Test mode:	Compliance
Date(s):	02-Dec-19
Temperature: 24 °C	Relative Humidity: 39 %
	Air Pressure: 1015 hPa
	Power: 120 VAC
Remarks:	


Plot 7.1.28 Radiated emission in restricted band from 1 to 1.25 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

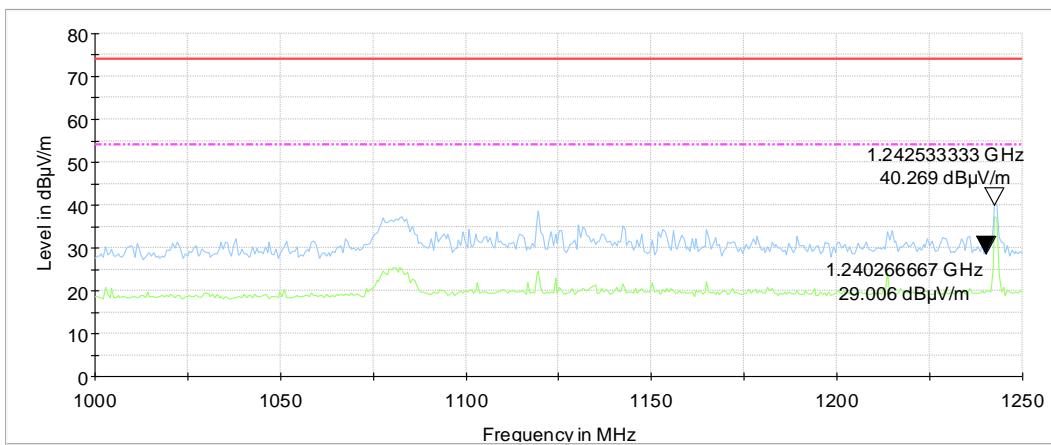

Plot 7.1.29 Radiated emission in restricted band from 1.29 to 1.43 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

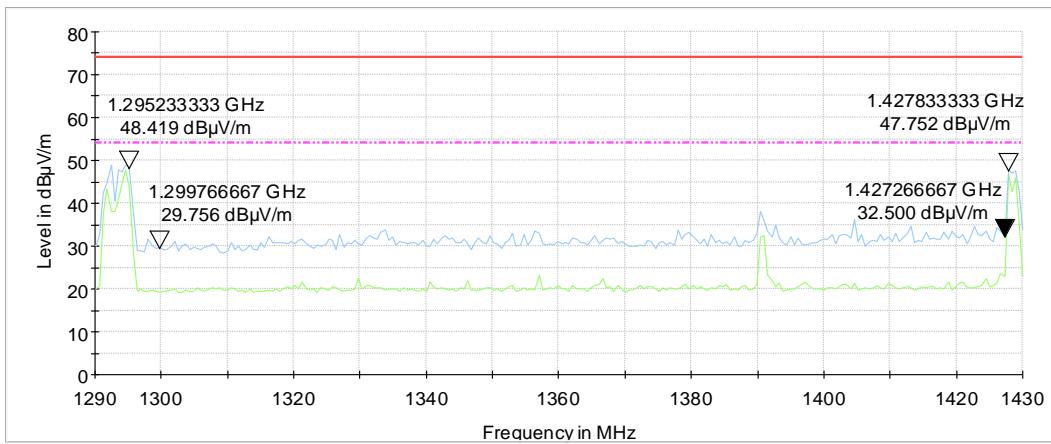




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.1.30 Radiated emission in restricted band from 1.43 to 1.63 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

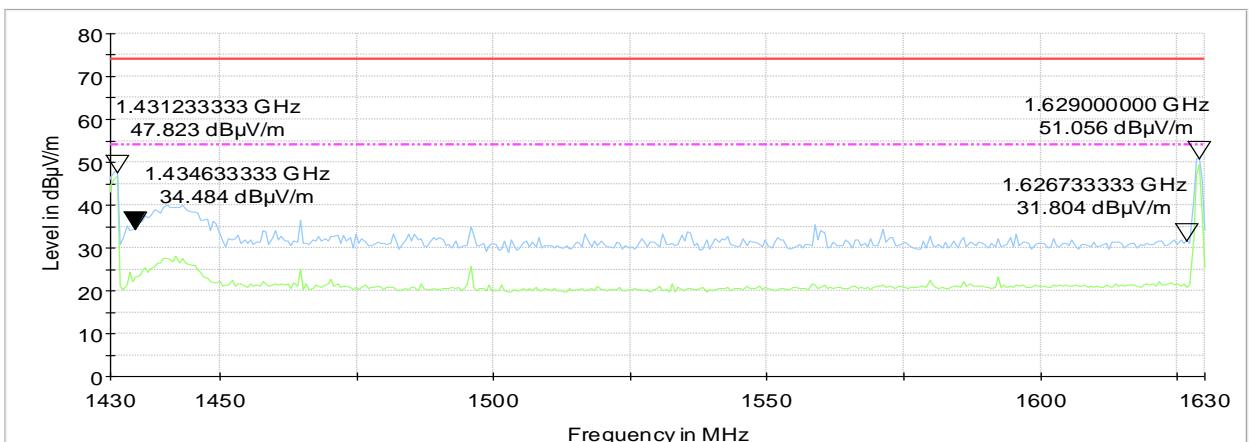

Plot 7.1.31 Radiated emission in restricted band from 1.635 to 1.655 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

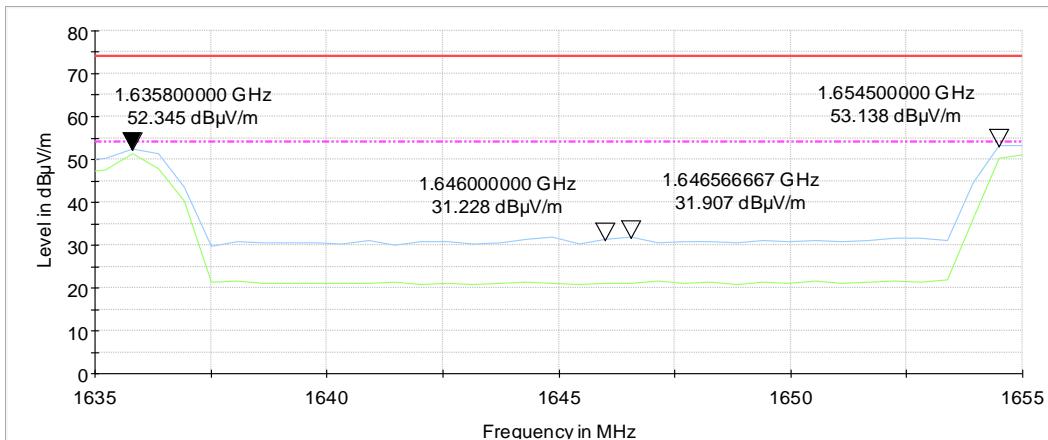




HERMON LABORATORIES

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.1.32 Radiated emission in restricted band from 1.655 to 1.715 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped

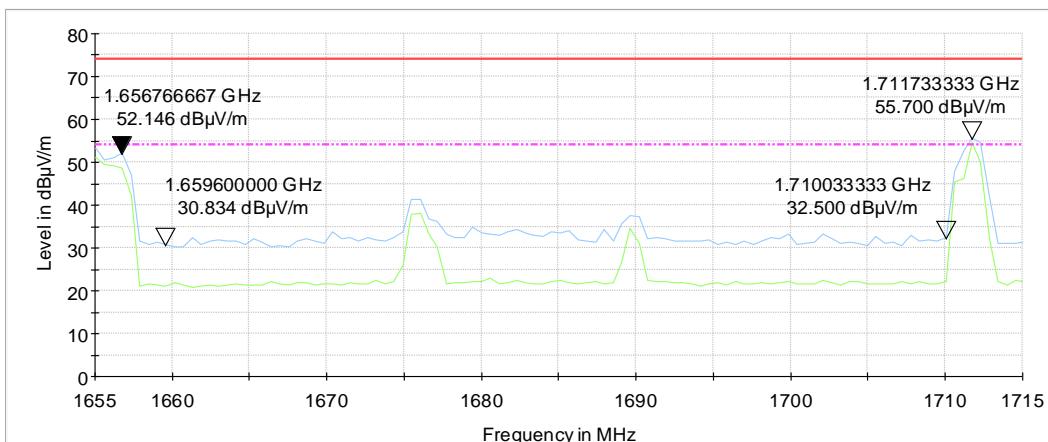

Plot 7.1.33 Radiated emission in restricted band from 1.715 to 1.725 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped


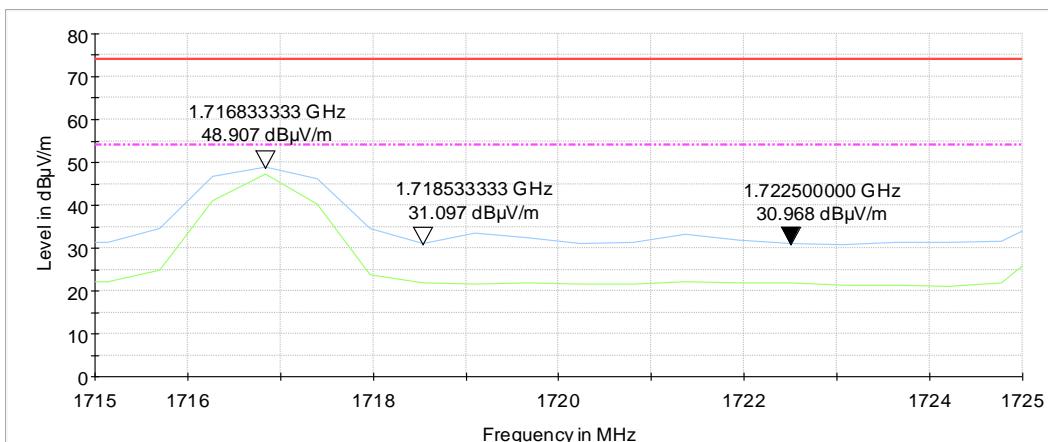






HERMON LABORATORIES

Test specification: Section 15.209, Field strength of emissions	
Test procedure:	ANSI C63.10, Sections 6.4, 6.5
Test mode:	Compliance
Date(s):	02-Dec-19
Temperature: 24 °C	Relative Humidity: 39 %
	Air Pressure: 1015 hPa
Remarks:	Power: 120 VAC

Plot 7.1.34 Transmission burst duration

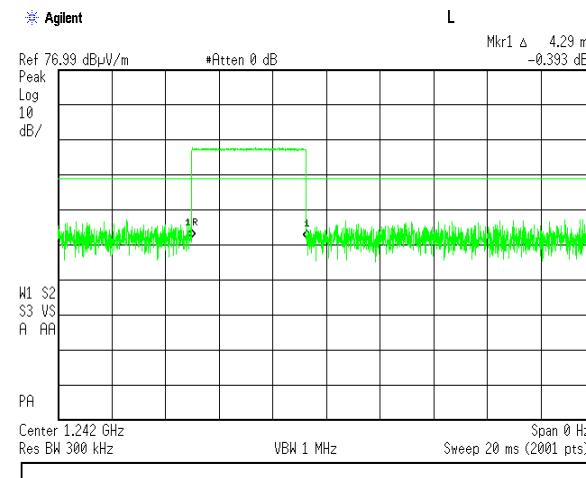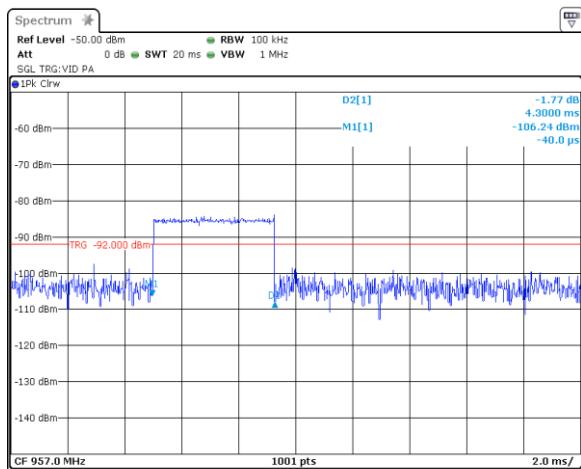

Plot 7.1.35 Number of transmission burst within 100 ms

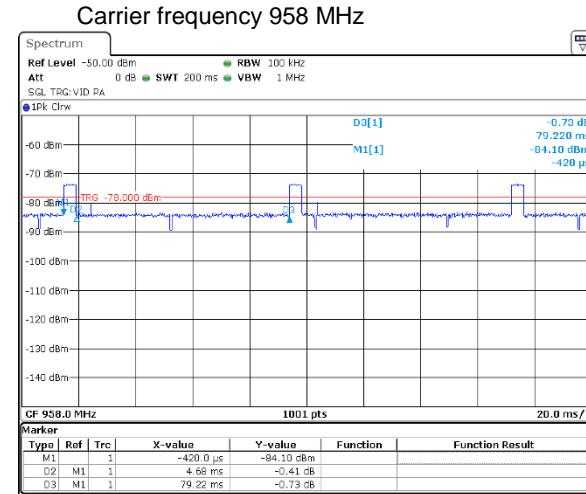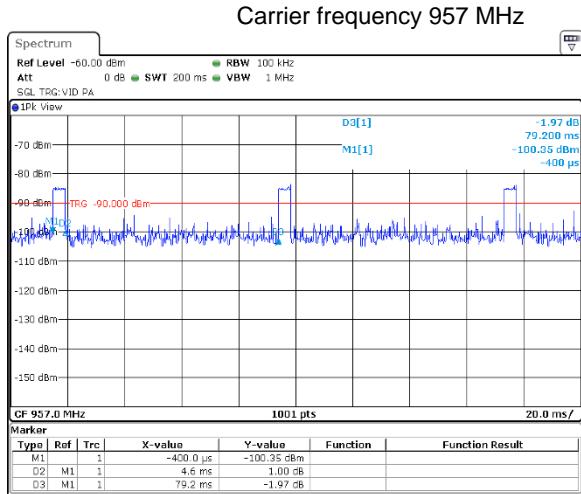






HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.209, Field strength of emissions			
Test procedure: ANSI C63.10, Sections 6.4, 6.5			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 7.1.36 Number of transmission burst within 100 ms

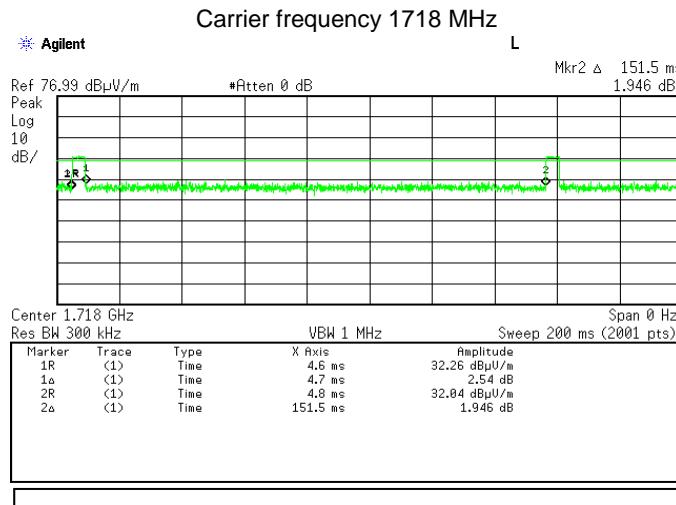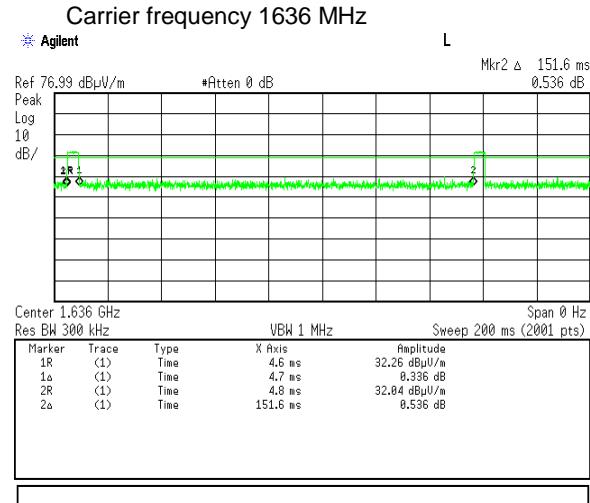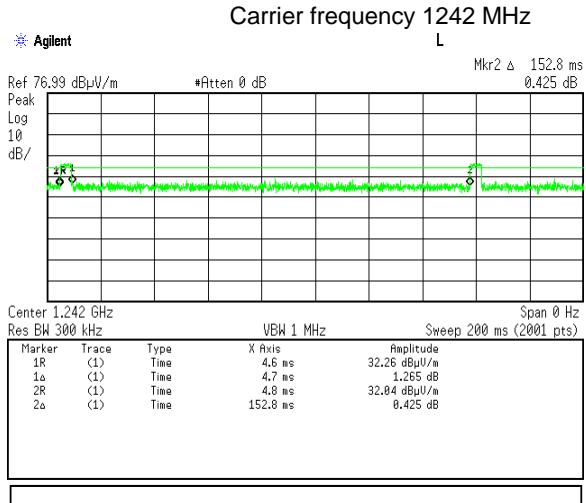



HERMON LABORATORIES

Test specification: Section 15.207(a) Conducted emission			
Test procedure: ANSI C63.10, Section 6.2			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

7.2 Conducted emissions

7.2.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Limits for conducted emissions according to FCC Part 15


Frequency, MHz	Class B limit, dB(µV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* - The limit decreases linearly with the logarithm of frequency.

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1 and associated photographs, energized and the performance check was conducted.
- 7.2.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer while unused coaxial connector of the LISN was terminated with 50 Ohm.
- 7.2.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.2.2.4 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

Figure 7.2.1 Setup for conducted emission measurements, table-top equipment

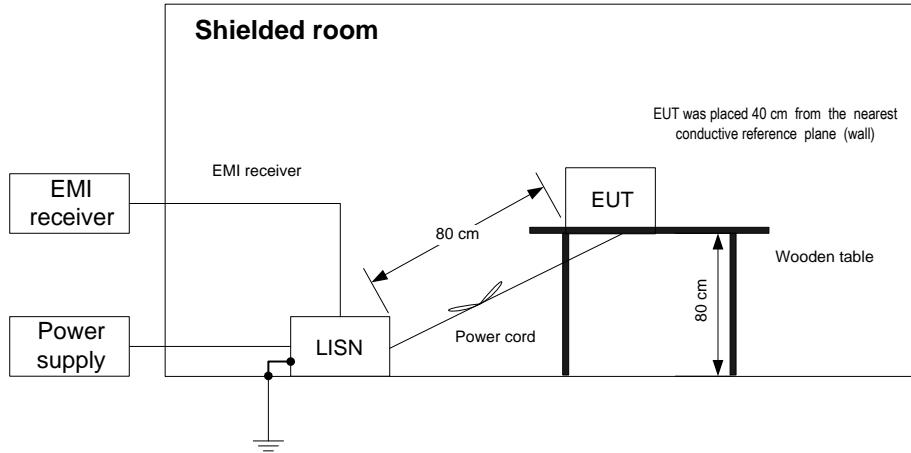



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.207(a) Conducted emission	
Test procedure:	ANSI C63.10, Section 6.2
Test mode:	Compliance
Date(s):	02-Dec-19
Temperature: 24 °C	Relative Humidity: 39 %
Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:	

Table 7.2.2 Conducted emission test results according to FCC Part 15, Section 207

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.151	56.8	48.9	66.0	-17.1	31.6	56.0	-24.4	L1	Pass
0.325	51.0	48.3	59.6	-11.3	47.4	49.6	-2.2		
0.450	45.7	42.5	57.0	-14.5	34.9	47.0	-12.1		
0.647	44.9	42.8	56.0	-13.2	41.0	46.0	-5.0		
0.970	48.9	47.2	56.0	-8.8	45.5	46.0	-0.5		
1.293	47.5	45.4	56.0	-10.6	43.2	46.0	-2.8		
1.942	46.3	44.3	56.0	-11.7	42.3	46.0	-3.7		
2.588	44.5	42.2	56.0	-13.8	39.3	46.0	-6.7		
4.208	41.8	39.2	56.0	-16.8	34.2	46.0	-11.8		
11.656	40.5	38.3	60.0	-21.7	26.6	50.0	-23.4		
0.154	55.8	48.2	65.8	-17.6	31.1	55.8	-24.7	L2	Pass
0.323	51.1	48.1	59.7	-11.6	47.9	49.7	-1.8		
0.466	45.1	41.7	56.6	-14.9	34.2	46.6	-12.4		
0.648	44.0	41.8	56.0	-14.2	40.8	46.0	-5.2		
0.970	47.1	46.2	56.0	-9.8	45.5	46.0	-0.5		
1.293	46.2	44.9	56.0	-11.1	43.5	46.0	-2.5		
1.941	45.2	43.9	56.0	-12.1	42.4	46.0	-3.6		
2.586	43.5	42.0	56.0	-14.0	39.2	46.0	-6.8		
4.203	40.7	39.3	56.0	-16.7	35.0	46.0	-11.0		
11.650	40.6	37.9	60.0	-22.1	26.4	50.0	-23.6		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0787	HL 3016	HL 4778	HL 5476				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification:	Section 15.207(a) Conducted emission		
Test procedure:	ANSI C63.10, Section 6.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Dec-19		
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 7.2.1 Conducted emission measurements according to FCC Part 15, Section 207 / RSS-Gen, Section 7.2.2

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

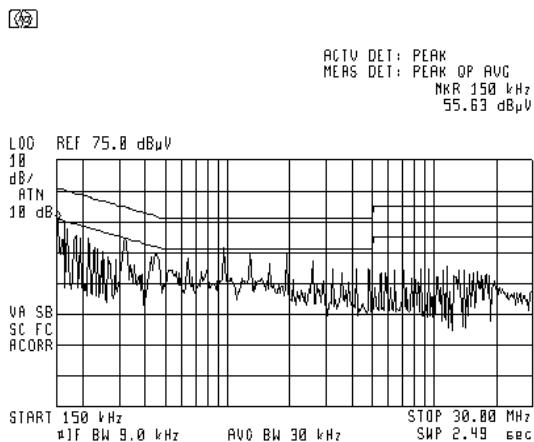

Plot 7.2.2 Conducted emission measurements according to FCC Part 15, Section 207 / RSS-Gen, Section 7.2.2

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

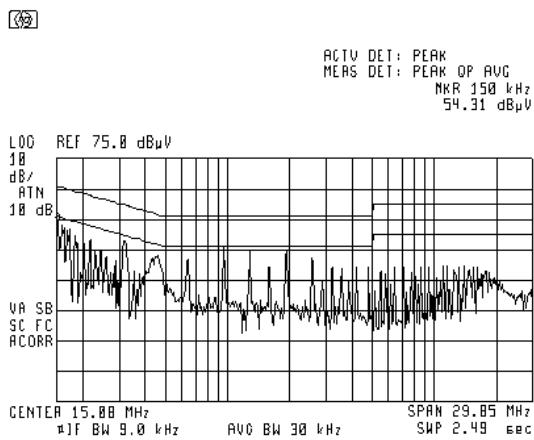



HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

8 Unintentional emissions according to 47CFR part 15 subpart B

8.1 Radiated emissions

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1. During the test Rx module was active, Tx module was disabled.

Table 8.1.1 Radiated emission limits

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 th harmonic**	43.5*	54.0	49.5	60.0*

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor:

$$Lims_2 = Lims_1 + 20 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.


8.1.2 Test procedure for measurements in semi-anechoic chamber

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.

Figure 8.1.1 Setup for radiated emission measurements

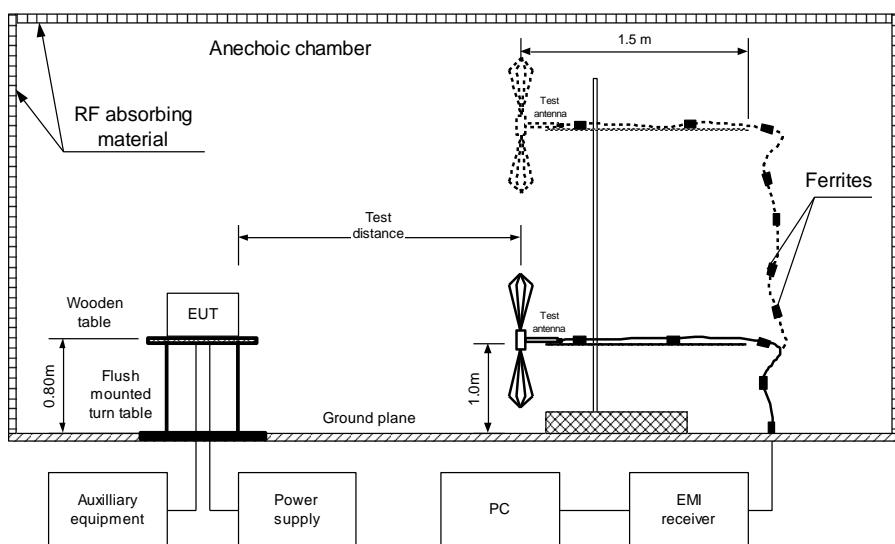



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.109, Radiated emission	
Test procedure: ANSI C63.4, Sections 8.3	
Test mode: Compliance	Verdict: PASS
Date(s): 02-Dec-19	
Temperature: 24 °C	Relative Humidity: 39 %
Air Pressure: 1015 hPa	
Power: 120 VAC	
Remarks:	

Table 8.1.2 Field strength of spurious emissions below 1 GHz

TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT POSITION:	Typical (Vertical)
OPERATION MODE:	CW Stepped
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
VIDEO BANDWIDTH:	≥ Resolution bandwidth
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
35.961	32.57	30.44	40.0	-9.56	Vertical	1.02	82	Pass
55.633	38.47	36.87	40.0	-3.13	Vertical	1.02	81	
69.118	36.70	35.22	40.0	-4.78	Horizontal	3.21	183	
360.238	43.37	38.49	46.00	-7.51	Hor	1.0	-166	
707.277	53.04	35.79	46.0	-10.21	Horizontal	1.04	24	
733.621	56.87	39.55	46.0	-6.45	Horizontal	1.00	13	
766.348	45.47	33.52	46.00	12.48	Hor	1.0	180	
780.659	53.84	41.06	46.0	-4.94	Horizontal	1.02	360	

Table 8.1.3 Field strength of spurious emissions above 1 GHz

TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT POSITION:	Typical (Vertical)
MODULATING SIGNAL:	CW Stopped
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
VIDEO BANDWIDTH:	≥ Resolution bandwidth
RESOLUTION BANDWIDTH:	1000 kHz
INVESTIGATED FREQUENCY RANGE:	1 – 18 GHz
TEST ANTENNA TYPE:	Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
Carrier frequency 1391 MHz										
6955.170	Ver	1.91	151	47.89	74.0	-26.11	47.89	28.66	54.0	-25.34
Carrier frequency 1392MHz										
6960.195	Hor	1.32	105	50.97	74.0	-23.03	50.97	31.67	54.0	-22.33
Carrier frequency 1676 MHz										
10056.002	Hor	1.63	112	60.30	74.0	-13.70	60.30	34.86	54.0	-19.14
Carrier frequency 2070 MHz										
10350.250	Hor	1.72	120	57.59	74.0	-16.41	57.59	32.15	54.0	-21.85
Carrier frequency 2152 MHz										
10760.120	Hor	1.94	64	58.99	74.0	-22.01	58.99	33.55	54.0	-20.45
Pass										

*- Margin = Measured emission - specification limit.

**- EUT front panel refers to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Table 8.1.4 Average factor calculation

Frequencies	Number of transmission pulses within 100 ms	Transmission pulse duration, ms	Average factor, dB
1391 MHz	2	5.46	-19.23
1392 MHz	2	5.42	-19.30
1676 MHz	1	5.34	-25.45
2070 MHz	1	5.34	-25.45
2152 MHz	1	5.34	-25.45

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

Average factor = $20 \times \log_{10} (\text{Number of bursts within 100 ms} \times \text{Burst duration})/100\text{ms}$

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$


Reference numbers of test equipment used

HL 0604	HL 2909	HL 3818	HL 4276	HL 4353	HL 4933		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and horizontal
 OPERATION MODE: CW Stepped
 TRACE: Peak Hold*
 RESOLUTION BANDWIDTH: 120 KHz
 VIDEO BANDWIDTH: 300 KHz
 MEASUREMENT TIME: 15 Sec
 STEP SIZE: 60 KHz
 NUMBER OF POINTS: 16200

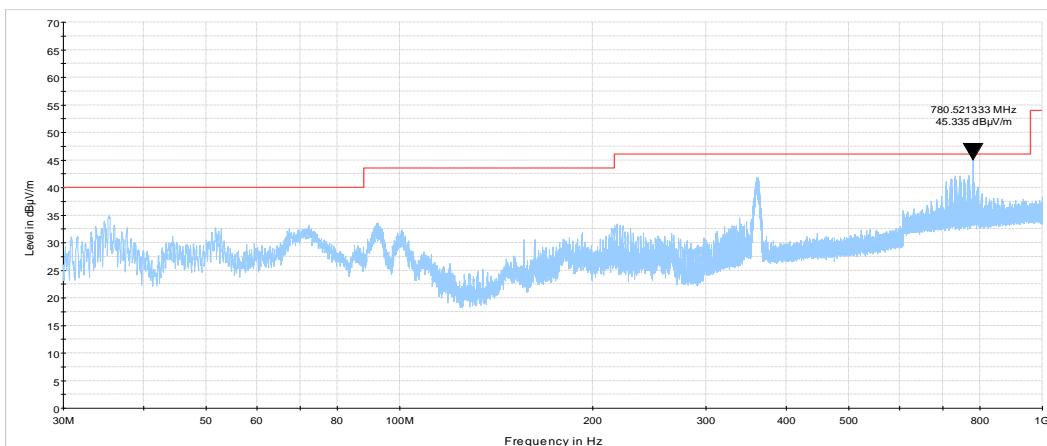




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.109, Radiated emission	
Test procedure:	ANSI C63.4, Sections 8.3
Test mode:	Compliance
Date(s):	02-Dec-19
Temperature: 24 °C	Relative Humidity: 39 %
	Air Pressure: 1015 hPa
	Power: 120 VAC
Remarks:	

Plot 8.1.2 Radiated emission measurements from 1 to 18 GHz,

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATION MODE: CW Stepped
BLUE TRACE: Peak detector
GREEN TRACE: Average detector
RESOLUTION BANDWIDTH: 1000 KHz
VIDEO BANDWIDTH: 3000 KHz
MEASUREMENT TIME: 15 Sec
STEP SIZE: 500 KHz
NUMBER OF POINTS: 30001

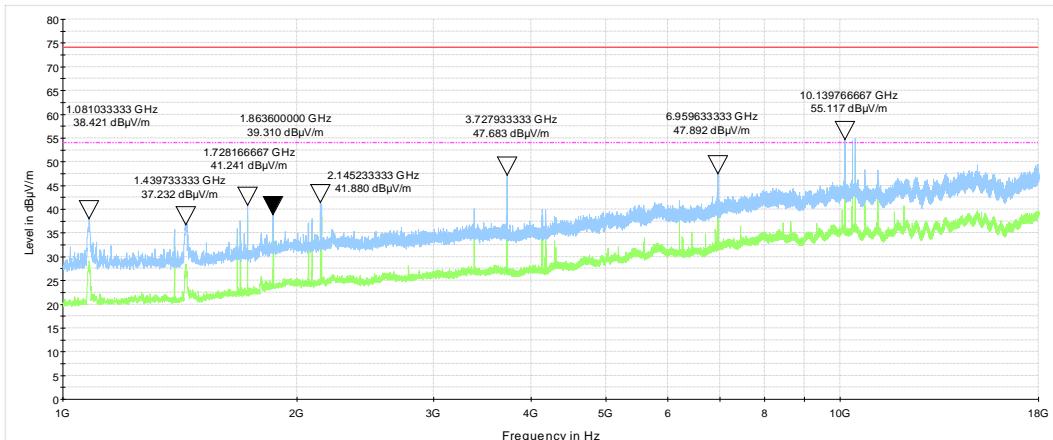




HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 8.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Dec-19		
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 8.1.3 Transmission pulse duration LO Rx Mode Only

Carrier frequency 1391 MHz

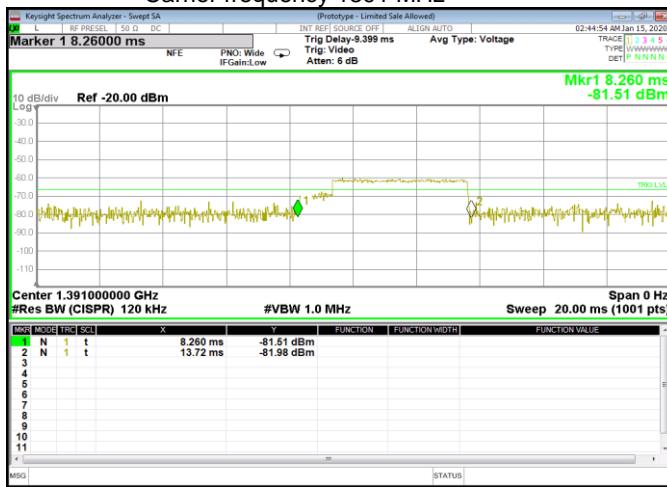

Plot 8.1.4 Number of transmission pulse within 100 ms, LO Rx Mode Only

Carrier frequency 1391 MHz

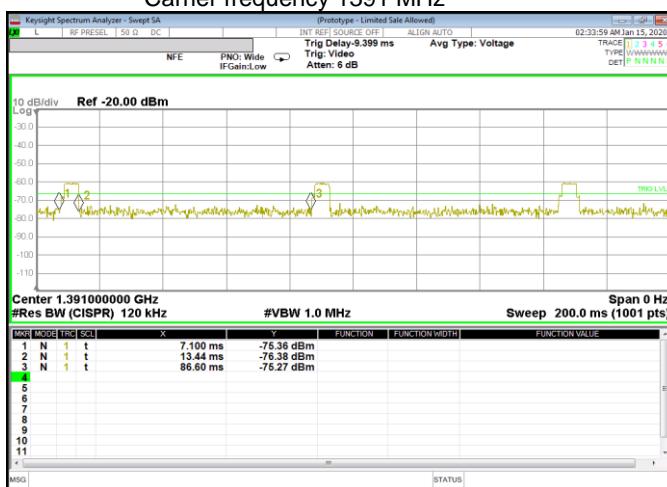




HERMON LABORATORIES


Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 8.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Dec-19		
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 8.1.5 Transmission pulse duration LO Rx Mode Only

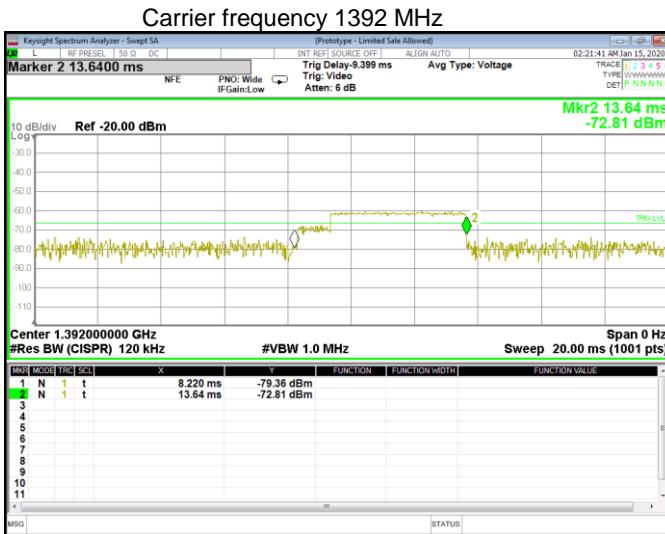

Plot 8.1.6 Number of transmission pulse within 100 ms, LO Rx Mode Only

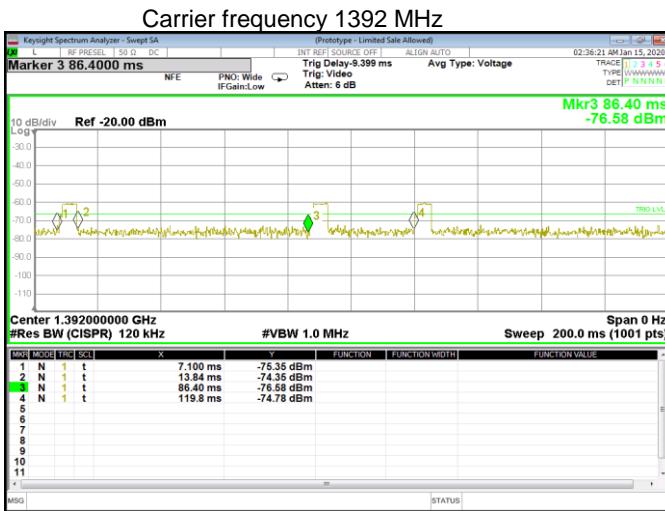




HERMON LABORATORIES


Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 8.1.7 Transmission pulse duration LO Rx Mode Only

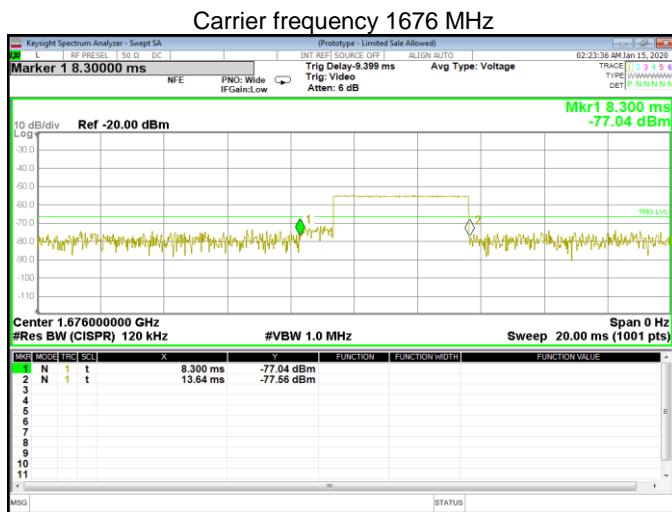

Plot 8.1.8 Number of transmission pulse within 100 ms, LO Rx Mode Only

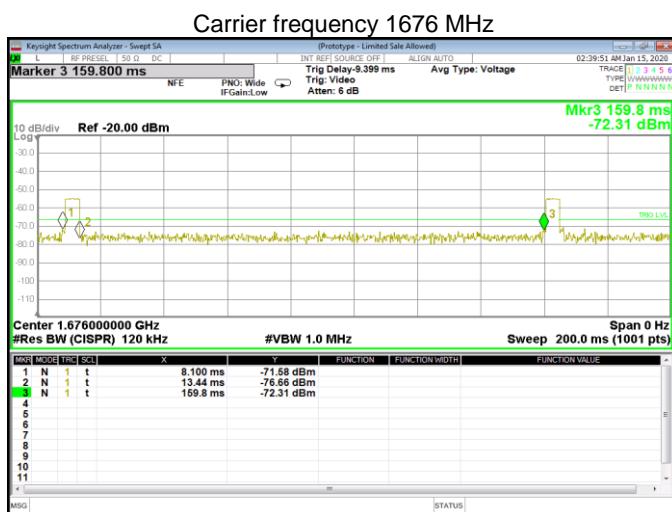




HERMON LABORATORIES


Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 8.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Dec-19		
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 8.1.9 Transmission pulse duration LO Rx Mode Only

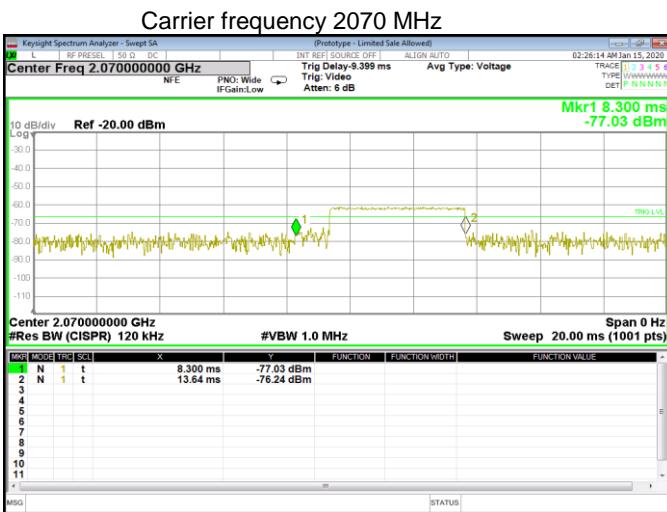

Plot 8.1.10 Number of transmission pulse within 100 ms, LO Rx Mode Only

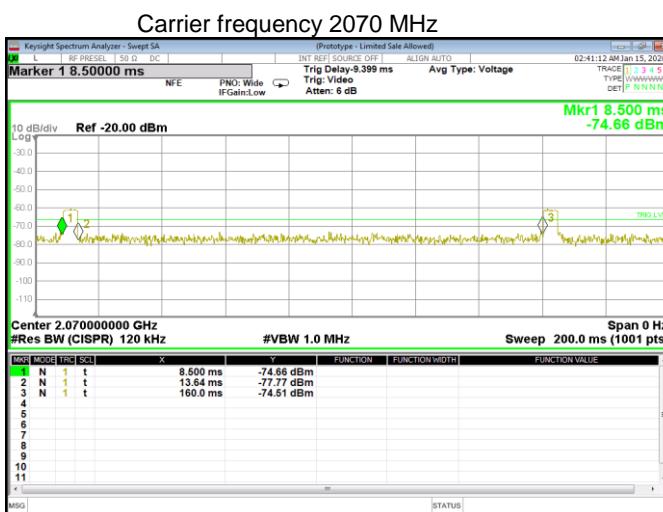




HERMON LABORATORIES


Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Dec-19			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

Plot 8.1.11 Transmission pulse duration LO Rx Mode Only

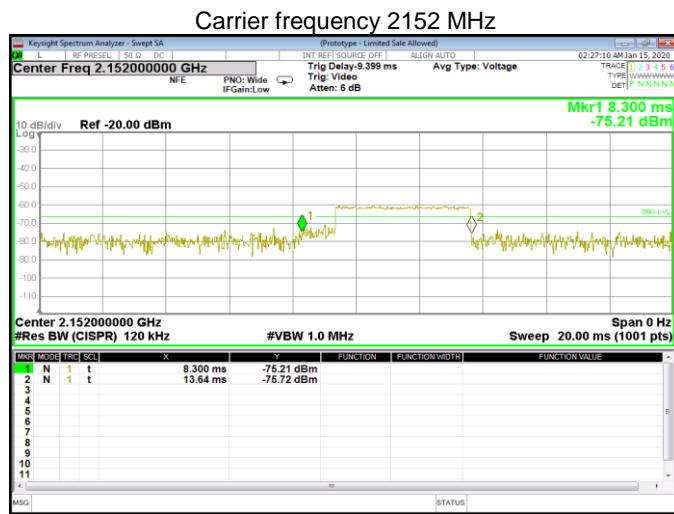

Plot 8.1.12 Number of transmission pulse within 100 ms, LO Rx Mode Only

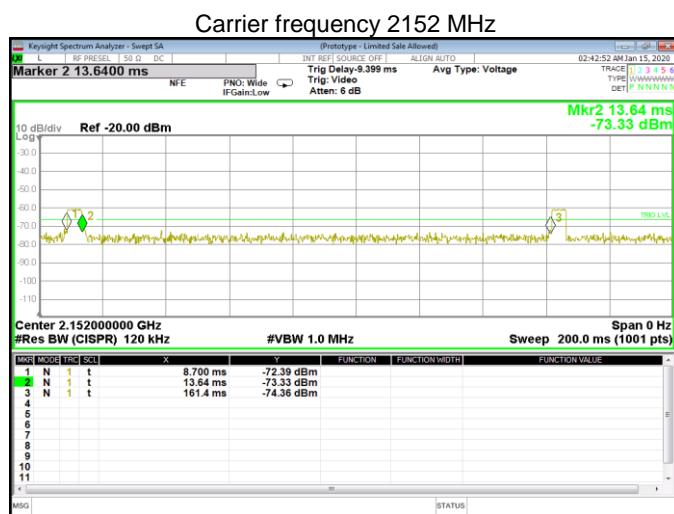



Test specification:	Section 15.107, Conducted emission		
Test procedure:	ANSI C63.4, Section 7.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Dec-19		
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			

8.2 Conducted emissions

8.2.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Limits for conducted emissions according to FCC Part 15, Section 107


Frequency, MHz	Class B limit, dB(µV)		Class A limit, dB(µV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* - The limit decreases linearly with the logarithm of frequency.

8.2.2 Test procedure

- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photographs, energized and the performance check was conducted.
- 8.2.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer while unused coaxial connector of the LISN was terminated with 50 Ohm.
- 8.2.2.3 The position of the device cables was varied to determine maximum emission level.
- 8.2.2.4 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

Figure 8.2.1 Setup for conducted emission measurements, table-top equipment

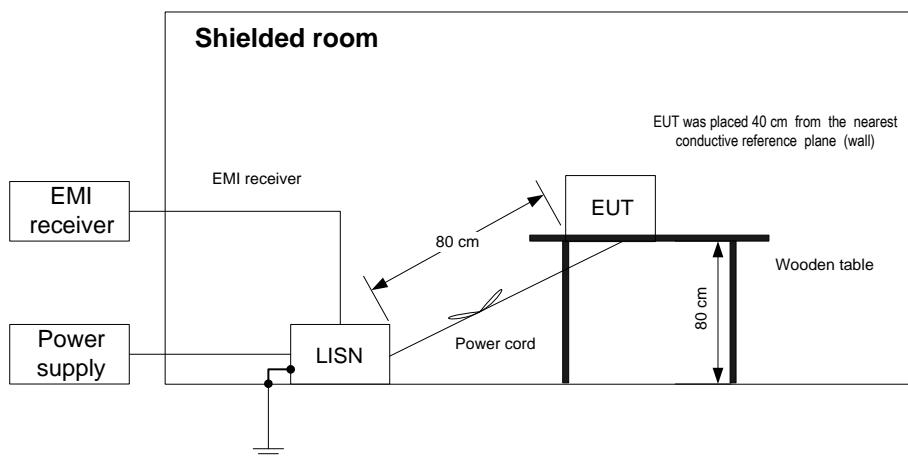



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification: Section 15.107, Conducted emission									
Test procedure: ANSI C63.4, Section 7.3									
Test mode: Compliance					Verdict:	PASS			
Date(s): 02-Dec-19									
Temperature: 24 °C	Relative Humidity: 39 %		Air Pressure: 1015 hPa		Power: 120 VAC				
Remarks:									

Table 8.2.2 Conducted emission test results according to FCC Part 15, Section 107

LINE: AC mains
 EUT OPERATING MODE: Receive
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 FREQUENCY RANGE: 150 KHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.152	56.6	48.3	65.9	-17.6	30.7	55.9	-25.2	L1	Pass
0.322	51.2	49.0	59.6	-10.6	47.8	49.6	-1.8		
0.449	45.0	41.8	57.0	-15.2	33.6	47.0	-13.4		
0.646	46.0	43.0	56.0	-13.0	40.8	46.0	-5.2		
0.969	49.8	47.1	56.0	-8.9	45.1	46.0	-0.9		
1.290	48.2	45.5	56.0	-10.5	43.1	46.0	-2.9		
1.932	46.7	44.1	55.9	-11.8	37.5	45.9	-8.4		
2.571	45.1	40.2	56.0	-15.8	27.5	46.0	-18.5		
4.192	42.1	39.5	56.1	-16.6	33.2	46.1	-12.9		
7.111	40.8	38.4	60.0	-21.6	29.0	50.0	-21.0		
0.153	55.9	49.4	65.9	-16.5	33.3	55.9	-22.6	L2	Pass
0.322	51.2	48.0	59.7	-11.7	47.8	49.7	-1.9		
0.462	45.2	41.2	56.8	-15.6	33.4	46.8	-13.4		
0.647	44.4	41.5	56.0	-14.5	40.3	46.0	-5.7		
0.967	47.5	46.1	56.0	-9.9	45.0	46.0	-1.0		
1.292	46.2	4.8	56.0	-51.2	43.6	46.0	-2.4		
1.936	45.5	44.1	56.0	-11.9	42.2	46.0	-3.8		
2.585	43.8	41.9	56.0	-14.1	37.8	46.0	-8.2		
4.192	40.8	39.1	55.9	-16.8	33.5	45.9	-12.4		
11.631	40.7	38.5	60.0	-21.5	27.6	50.0	-22.4		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0787	HL 3016	HL 4778	HL 5476				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.107, Conducted emission		
Test procedure:	ANSI C63.4, Section 7.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Dec-19		
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1015 hPa	Power: 120 VAC
Remarks:			


Plot 8.2.1 Conducted emission measurements

LINE: L1
LIMIT: Class B
EUT OPERATING MODE: Receive
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

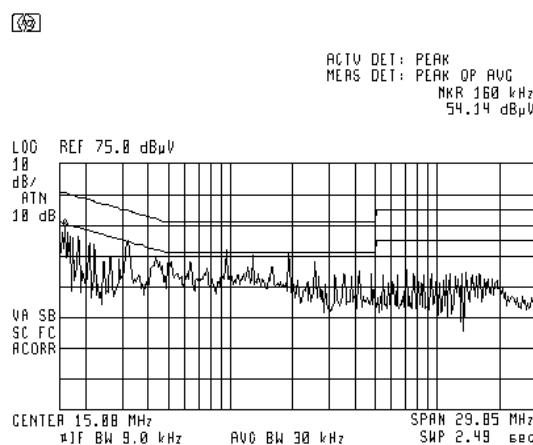

Plot 8.2.2 Conducted emission measurements

LINE: L2
LIMIT: Class B
EUT OPERATING MODE: Receive
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

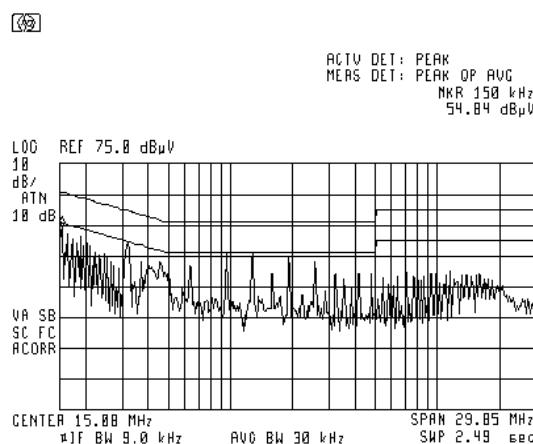



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

Test specification:	Section 15.203, Antenna requirements		
Test procedure:	Visual inspection/supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Dec-19	Air Pressure:	1019 hPa
Temperature: 24 °C	Relative Humidity: 48 %	Power:	120 VAC
Remarks:			

8.3 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 8.3.1.

Table 8.3.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	24-Feb-19	24-Feb-20
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	08-Oct-19	08-Oct-20
3016	LISN, Two-line V-network, 9 kHz to 30 MHz, (50 uH+5 Ohm), CISPR16-1, MIL-461E	Rohde & Schwarz	ESH 3-Z5	892239/00 2	27-Jan-19	27-Jan-20
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	07-Apr-19	07-Apr-20
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	31-Dec-18	31-Dec-19
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00 262, 3427A001 23	04-Nov-19	04-Nov-20
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	06-Jan-19	06-Jan-20
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5405	RF cable, 18 GHz, N-N, 6 m	Huber-Suhner	SF118/11 N(x2)	500023/11 8	11-Aug-19	11-Aug-20
5476	Cable, BNC/BNC, 10.5 m	Western wire	MIL-C-17G	NA	30-Jan-19	30-Jan-20



HERMON LABORATORIES

10 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dB _S /m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dB _S /m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB_μV to obtain field strength in dB_μA/m.

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB_μV to obtain field strength in dB_μV/m.



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

HL 3016: LISN, Two-line V-network, 9 to 30 MHz, (50 uH+5 Ohm)
Rohde & Schwarz, model: ESH 3-Z5, s/n 892239/002, HL 3016

Voltage division factor (insertion loss)

Frequency,	L1, dB	N, dB	Uncertainty, dB
10	0.70	0.72	±0.12
15	0.43	0.42	±0.12
20	0.30	0.28	±0.12
25	0.23	0.21	±0.12
30	0.18	0.17	±0.08
40	0.15	0.12	±0.08
50	0.13	0.11	±0.08
60	0.12	0.10	±0.09
70	0.11	0.09	±0.09
80	0.10	0.08	±0.09
90	0.10	0.08	±0.09
100	0.10	0.08	±0.09
150	0.10	0.08	±0.09
170	0.10	0.08	±0.09
200	0.09	0.08	±0.09
250	0.09	0.08	±0.09
300	0.10	0.08	±0.09
350	0.10	0.09	±0.09
400	0.10	0.08	±0.09
500	0.11	0.08	±0.09
600	0.11	0.09	±0.09
700	0.11	0.09	±0.09
800	0.11	0.09	±0.09
900	0.12	0.10	±0.09
1000	0.12	0.10	±0.09
1200	0.13	0.10	±0.16
1500	0.13	0.12	±0.16
2000	0.15	0.13	±0.16
2500	0.17	0.14	±0.16
3000	0.18	0.15	±0.16
4000	0.21	0.19	±0.16
5000	0.25	0.21	±0.16
7000	0.38	0.32	±0.16
10000	0.49	0.40	±0.16
15000	0.82	0.72	±0.16
20000	1.03	0.87	±0.16
30000	1.34	0.98	±0.32



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

11 APPENDIX C Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site and T-1606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC and radio group manager



HERMON LABORATORIES

12 APPENDIX D Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

Report ID: SENRAD_FCC.34190_Rev2
Date of Issue: 17-Mar-20

13 APPENDIX E

Specification references

FCC 47CFR part 15:2018	Radio Frequency Devices.
ANSI C63.4:2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT