



TEST REPORT

APPLICANT : Vaultek Safe, Inc.
PRODUCT NAME : Dual Bands Dual Modes Module
MODEL NAME : VT22M
BRAND NAME : Vaultek
FCC ID : 2AONI-2450-8720DB16
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2023-10-10
TEST DATE : 2023-10-12 to 2023-10-25
ISSUE DATE : 2023-11-09



Edited by: Su Xiaoxian
Su Xiaoxian (Rapporteur)
Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Summary of Test Results	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	11
3. Test Results	14
3.1. Antenna Requirement	14
3.2. Duty Cycle of Test Signal	15
3.3. Maximum Peak Conducted Output Power	16
3.4. Maximum Average Conducted Output Power	17
3.5. 6 dB Bandwidth	18
3.6. Conducted Spurious Emissions and Band Edge	19
3.7. Power Spectral Density	20
3.8. Conducted Emission	21
3.9. Restricted Frequency Bands	22
3.10. Radiated Emission	23
Annex A Test Data and Result	25



Change History		
Version	Date	Reason for change
1.0	2023-11-09	First edition



1. Summary of Test Results

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Oct 12, 2023	Zhong Yanshan	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Oct 12, 2023	Zhong Yanshan	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Oct 12, 2023	Zhong Yanshan	PASS	No deviation
5	15.247(a)	Bandwidth	Oct 12, 2023	Zhong Yanshan	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Oct 12, 2023	Zhong Yanshan	PASS	No deviation
7	15.247(e)	Power Spectral Density	Oct 12, 2023	Zhong Yanshan	PASS	No deviation
8	15.207	Conducted Emission	Oct 13, 2023	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Oct 24, 2023	Su Zhan	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Oct 24, 2023	Su Zhan	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.06.27	2024.06.26
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2023.06.27	2024.06.26
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Vaultek Safe, Inc.
Applicant Address	37 N Orange Ave.Suite 770 Orlando, FL 32801
Manufacturer	Jeritech Electronics, Ltd.
Manufacturer Address	Guannanyong Industrial Estate, Shiqi Town, Panyu, GuangZhou, China

2.2. Information of EUT

Product Name:	Dual Bands Dual Modes Module
Sample No.:	1#
Hardware Version:	1.0.0
Software Version:	1.0.0
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.0
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0.43dBi

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

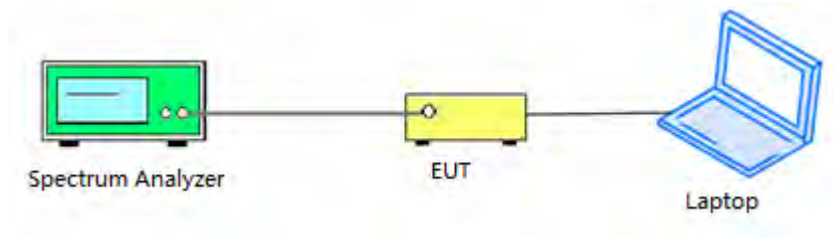


2.6.2. Conducted Emission Measurement




2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

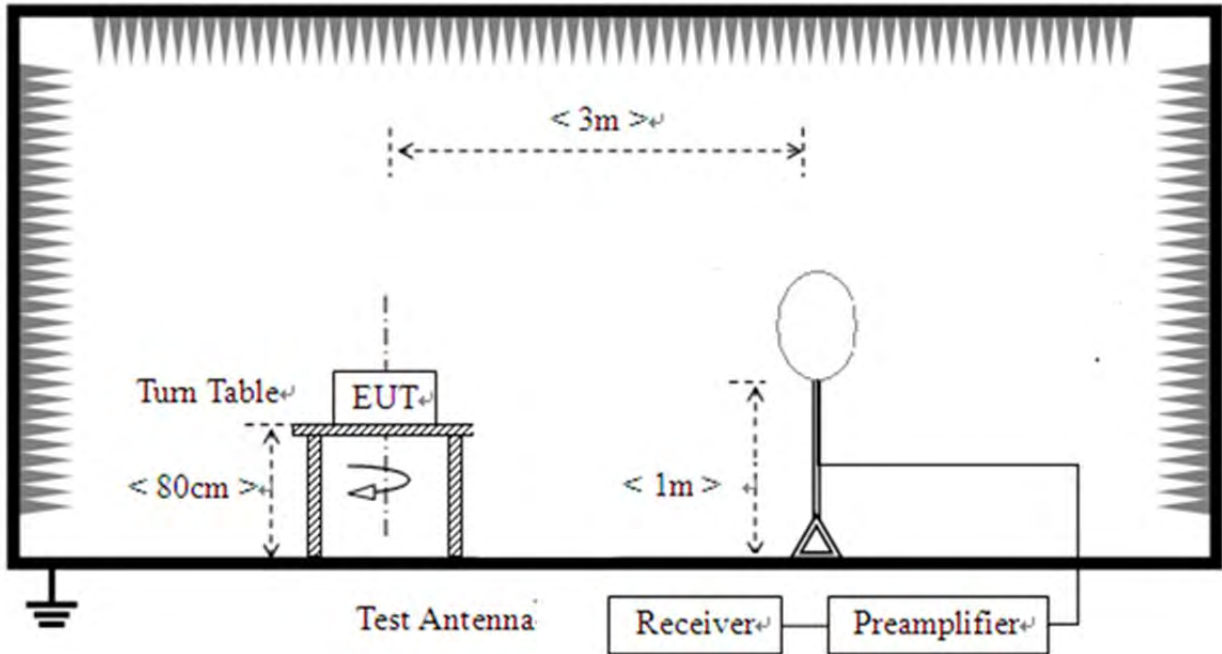

2) For radiated emissions from 30MHz to 1GHz

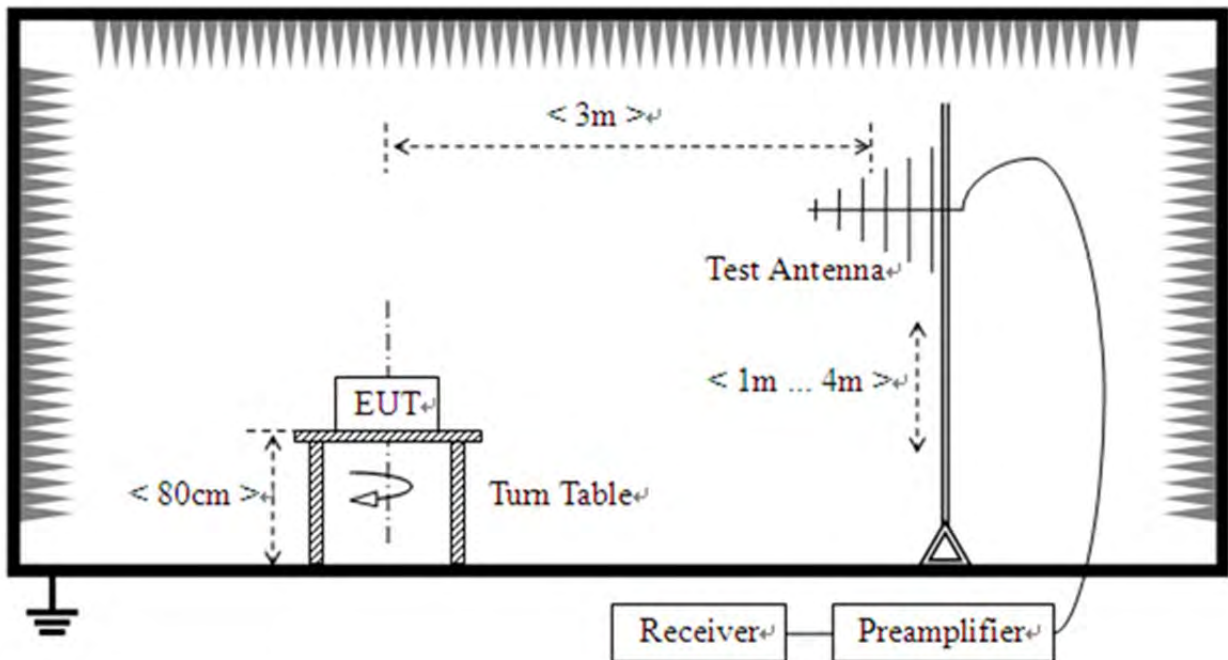

3) For radiated emissions above 1GHz

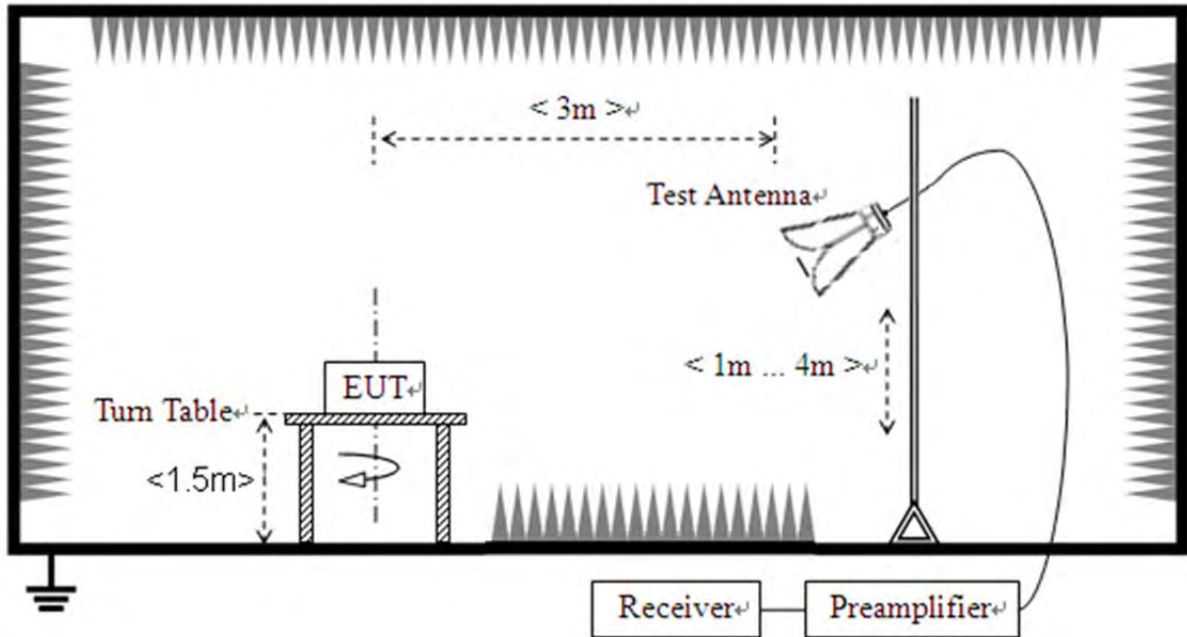



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100 \text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6 \text{ dB}$.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.

3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

Refer to Annex A.8 in this report.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.8 in this report.



3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4. Test Result

Refer to Annex A.9 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	43.2	3.65	1.85
NVNT	BLE 1M	2440	Ant1	43.2	3.65	1.85
NVNT	BLE 1M	2480	Ant1	43.2	3.65	1.85
NVNT	BLE 2M	2402	Ant1	44.44	3.52	3.57
NVNT	BLE 2M	2440	Ant1	45.16	3.45	3.57
NVNT	BLE 2M	2480	Ant1	44.44	3.52	3.57




Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

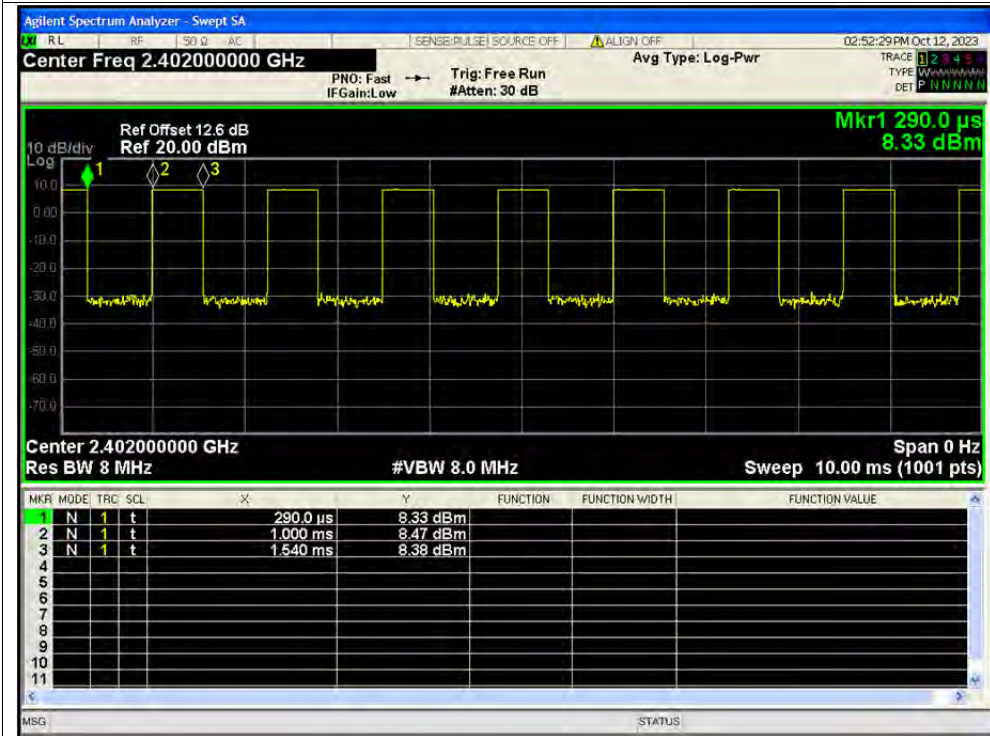


Duty Cycle NVNT BLE 1M 2440MHz Ant1

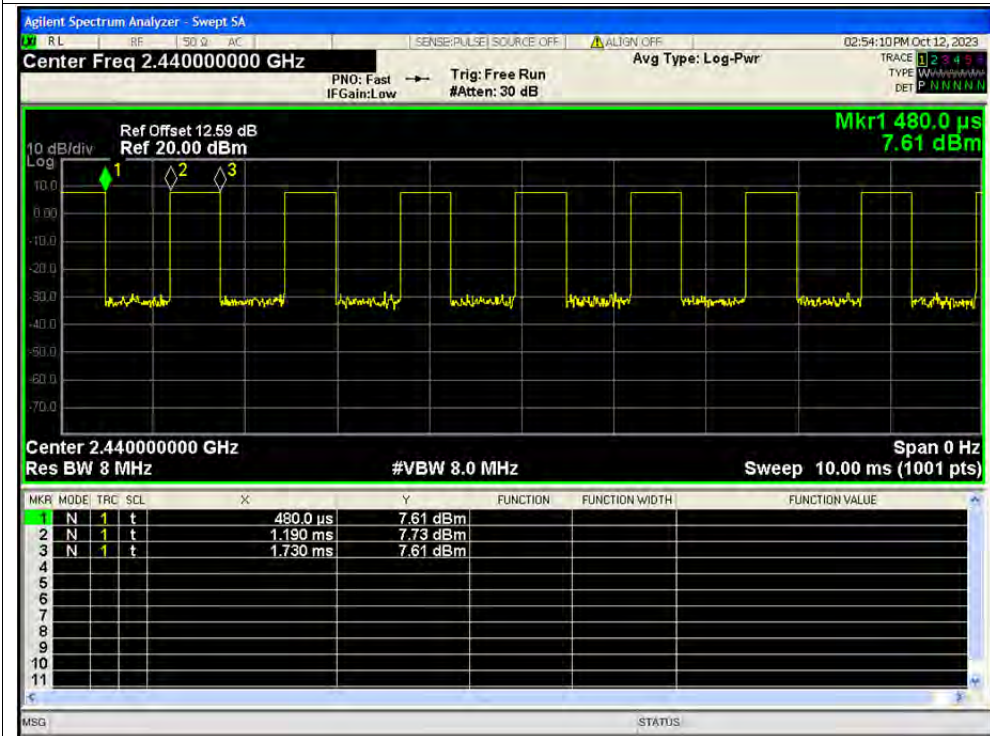




Duty Cycle NVNT BLE 1M 2480MHz Ant1

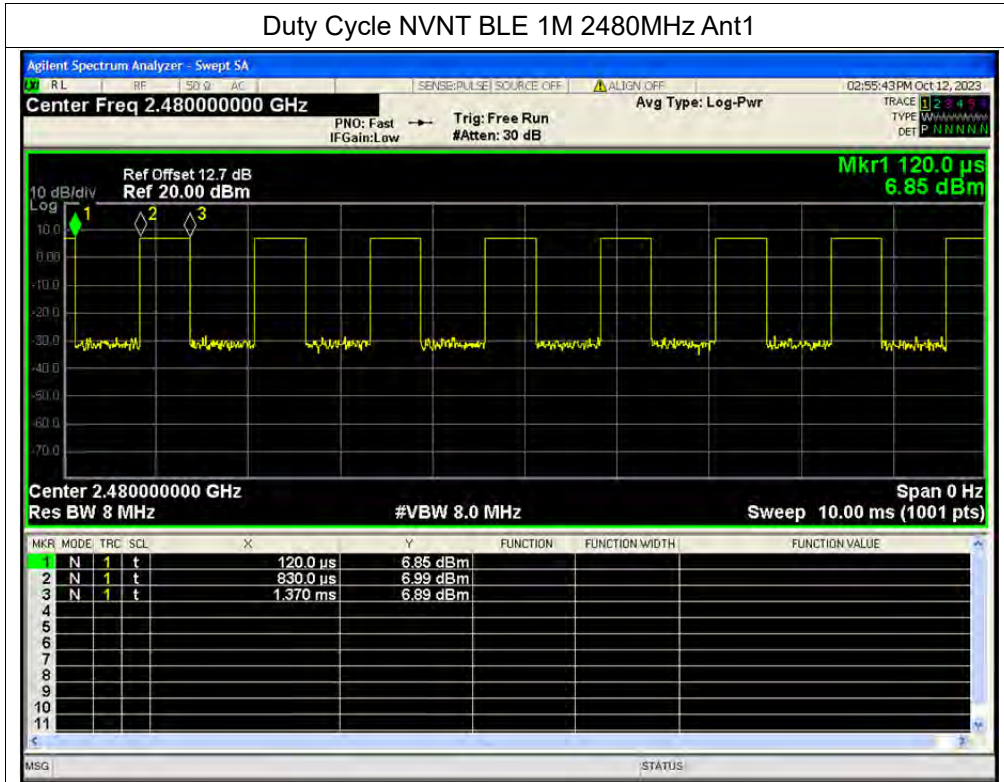


Duty Cycle NVNT BLE 2M 2402MHz Ant1

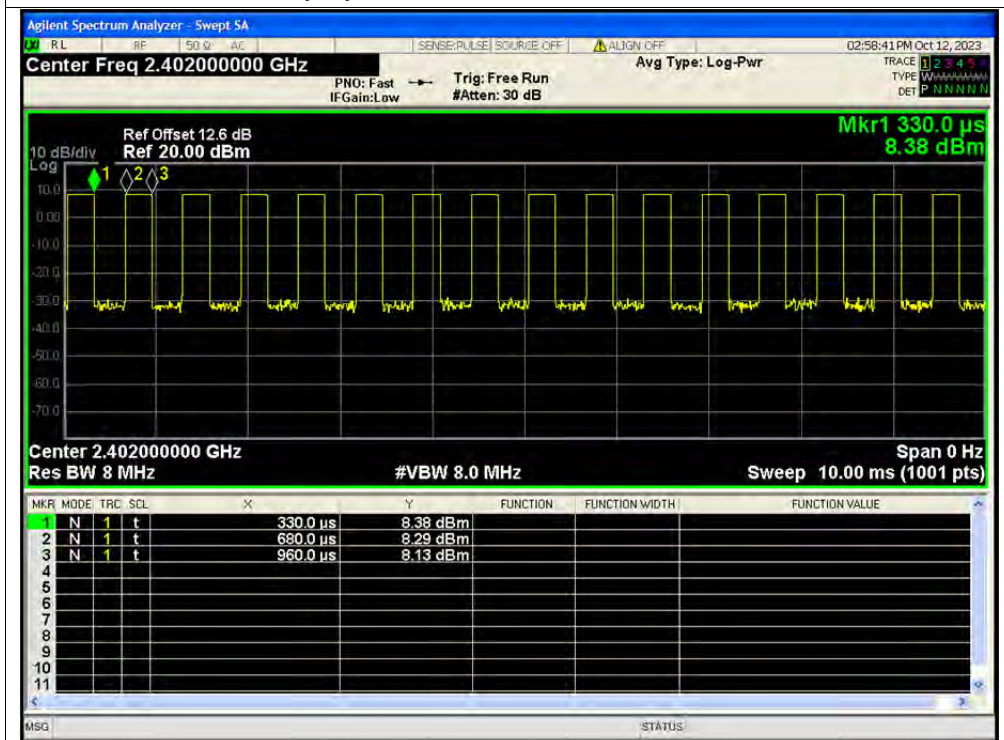




Duty Cycle NVNT BLE 2M 2440MHz Ant1

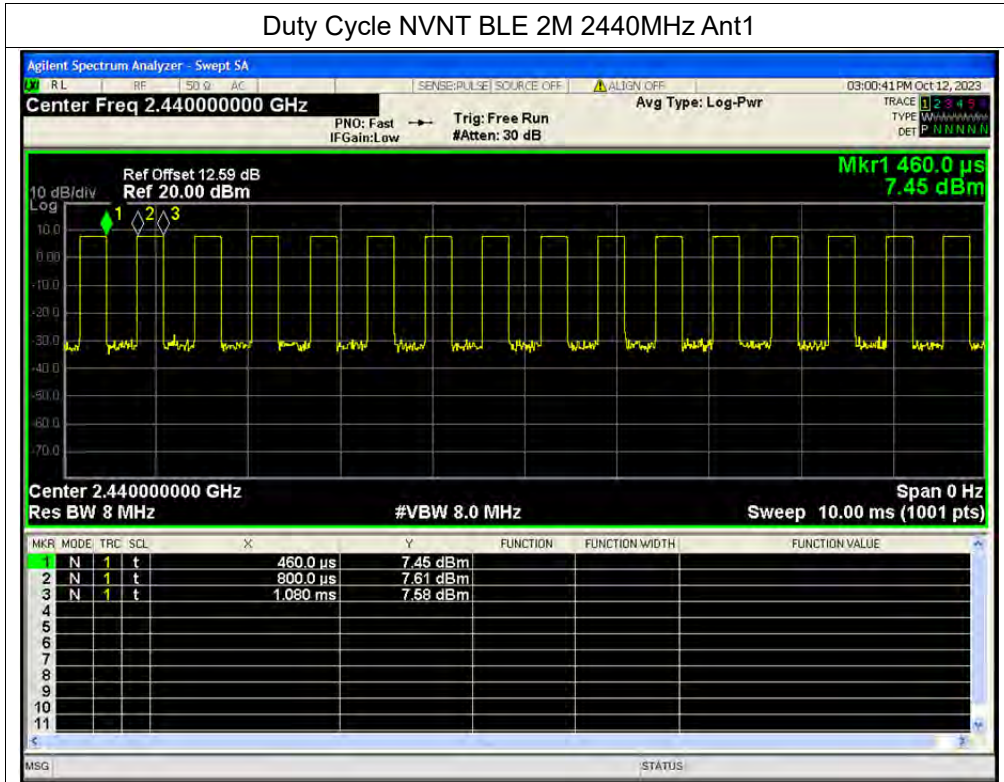

Duty Cycle NVNT BLE 2M 2480MHz Ant1

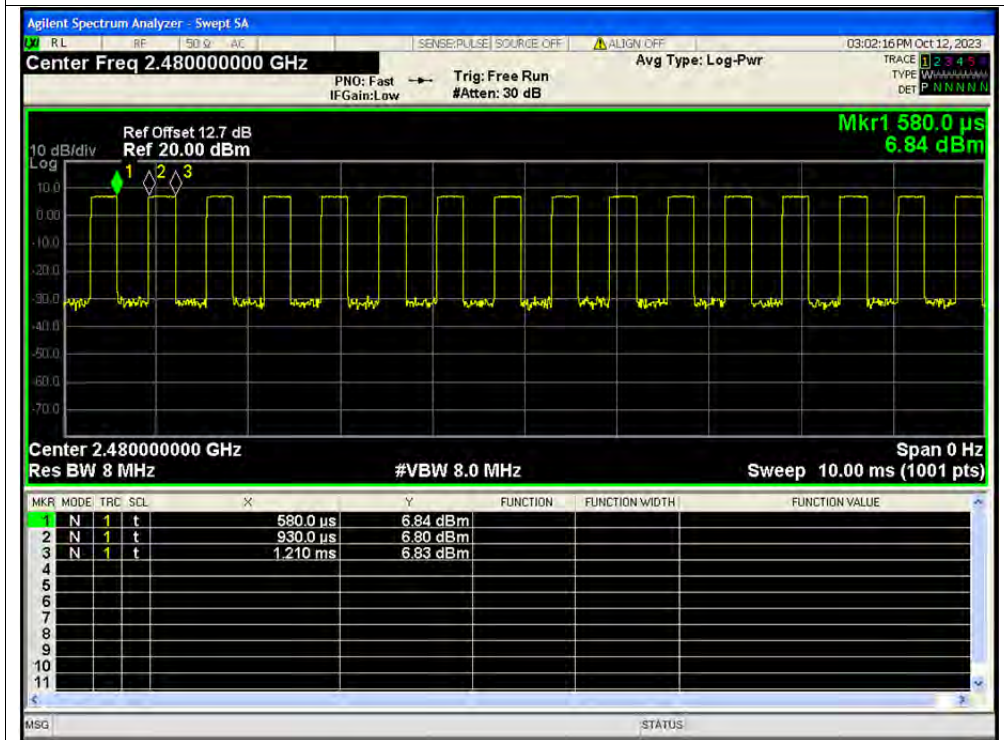

**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	8.46	0	8.46	0.00701	30	Pass
NVNT	BLE 1M	2440	Ant1	7.73	0	7.73	0.00593	30	Pass
NVNT	BLE 1M	2480	Ant1	6.98	0	6.98	0.00499	30	Pass
NVNT	BLE 2M	2402	Ant1	8.28	0	8.28	0.00673	30	Pass
NVNT	BLE 2M	2440	Ant1	7.56	0	7.56	0.0057	30	Pass
NVNT	BLE 2M	2480	Ant1	6.77	0	6.77	0.00475	30	Pass




Test Graphs


Peak Power NVNT BLE 1M 2402MHz Ant1



Peak Power NVNT BLE 1M 2440MHz Ant1

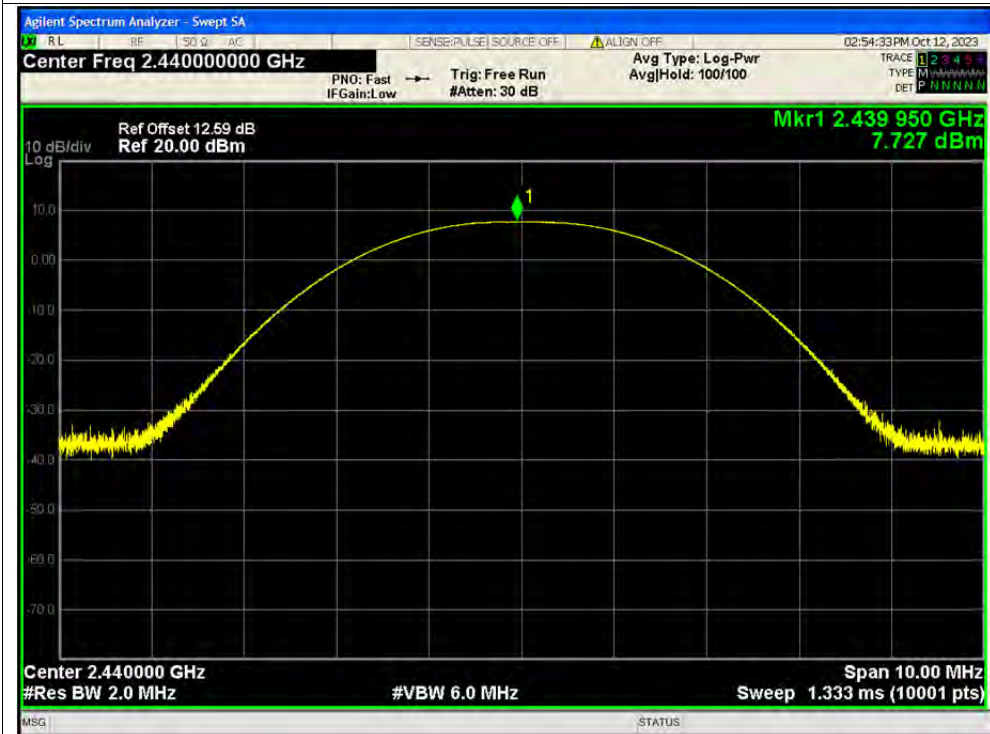

Peak Power NVNT BLE 1M 2480MHz Ant1

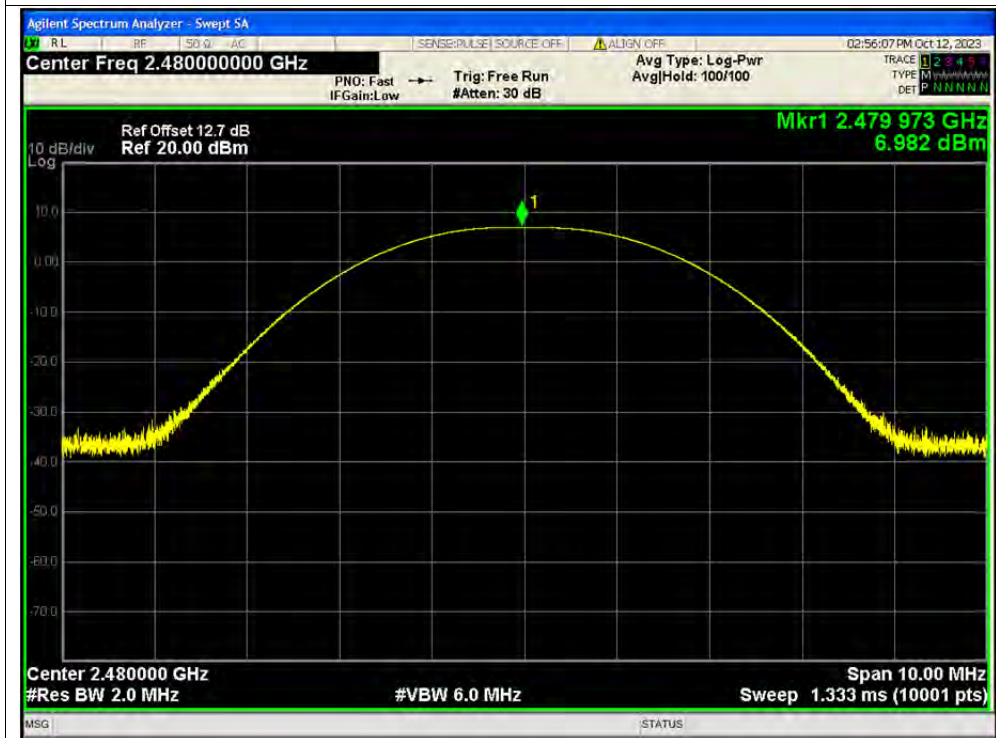


Peak Power NVNT BLE 2M 2402MHz Ant1





Peak Power NVNT BLE 2M 2440MHz Ant1

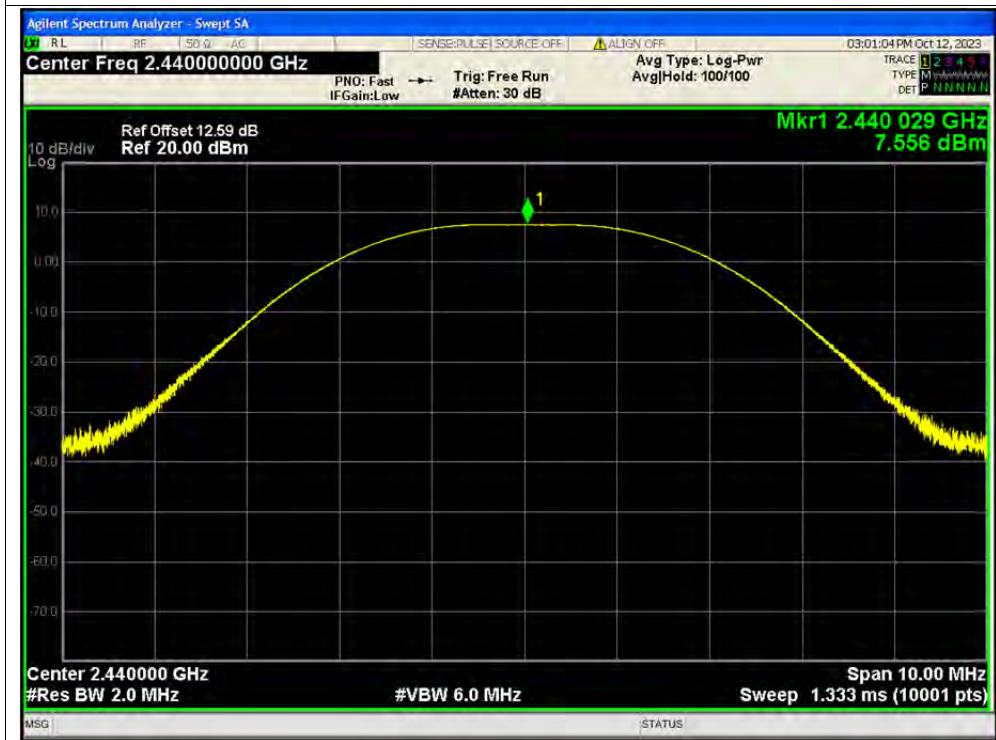

Peak Power NVNT BLE 2M 2480MHz Ant1




**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	4.36	3.65	8.01	0.00632	30	Pass
NVNT	BLE 1M	2440	Ant1	3.82	3.65	7.47	0.00558	30	Pass
NVNT	BLE 1M	2480	Ant1	3.09	3.65	6.74	0.00472	30	Pass
NVNT	BLE 2M	2402	Ant1	4.56	3.52	8.08	0.00643	30	Pass
NVNT	BLE 2M	2440	Ant1	3.91	3.45	7.36	0.00545	30	Pass
NVNT	BLE 2M	2480	Ant1	3.11	3.52	6.63	0.0046	30	Pass




Test Graphs

Average Power NVNT BLE 1M 2402MHz Ant1

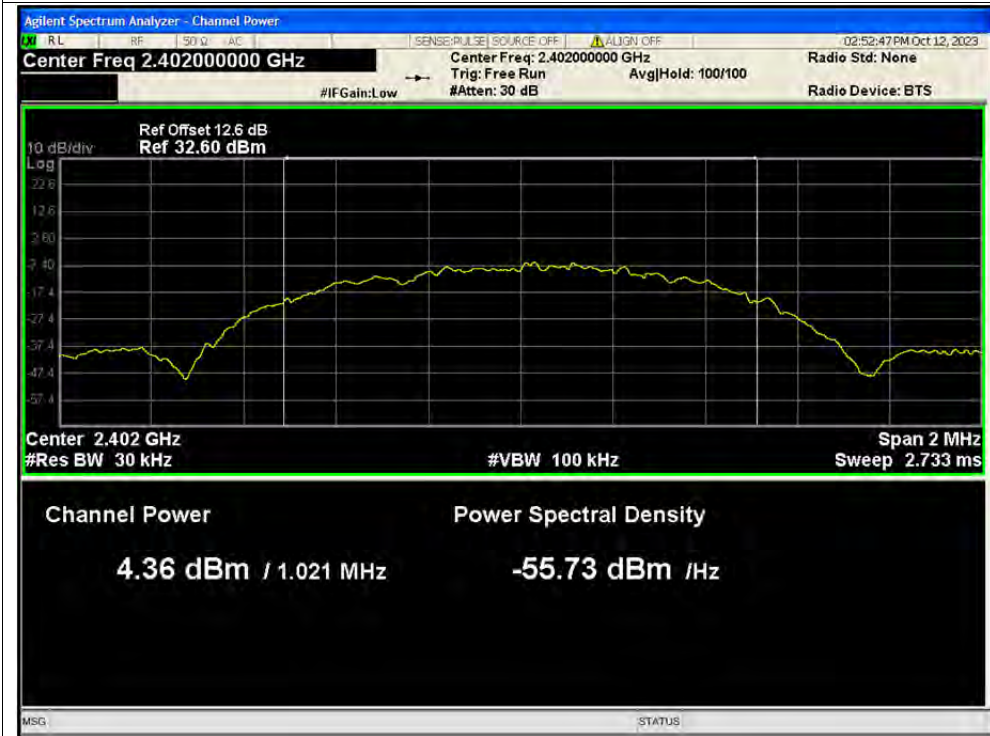


Average Power NVNT BLE 1M 2440MHz Ant1

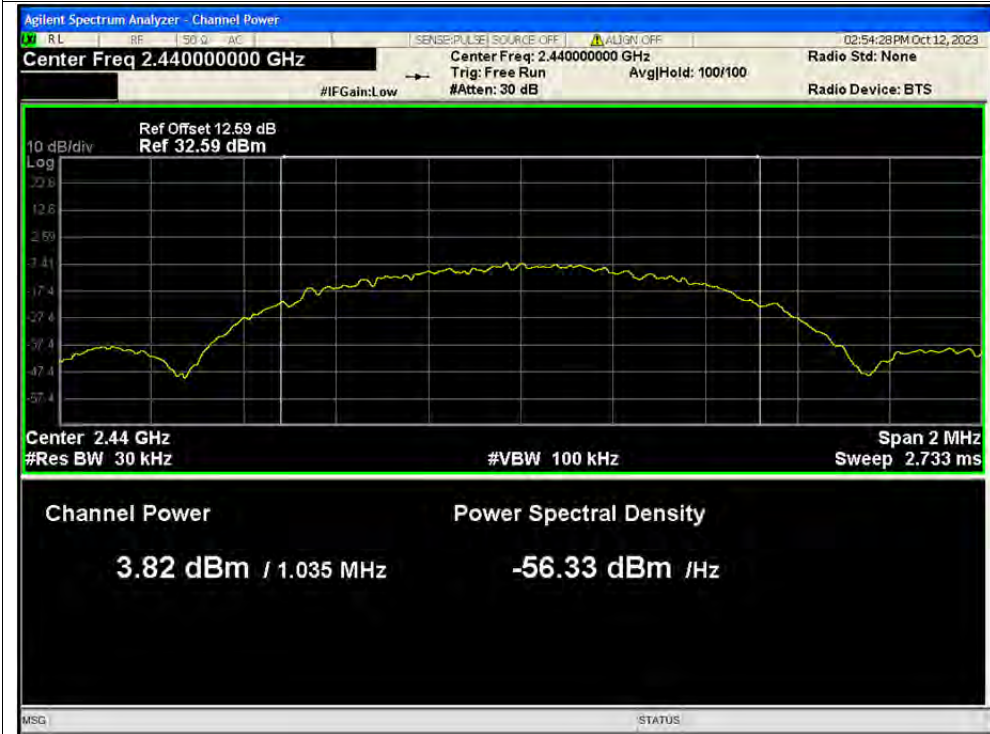



Average Power NVNT BLE 1M 2480MHz Ant1

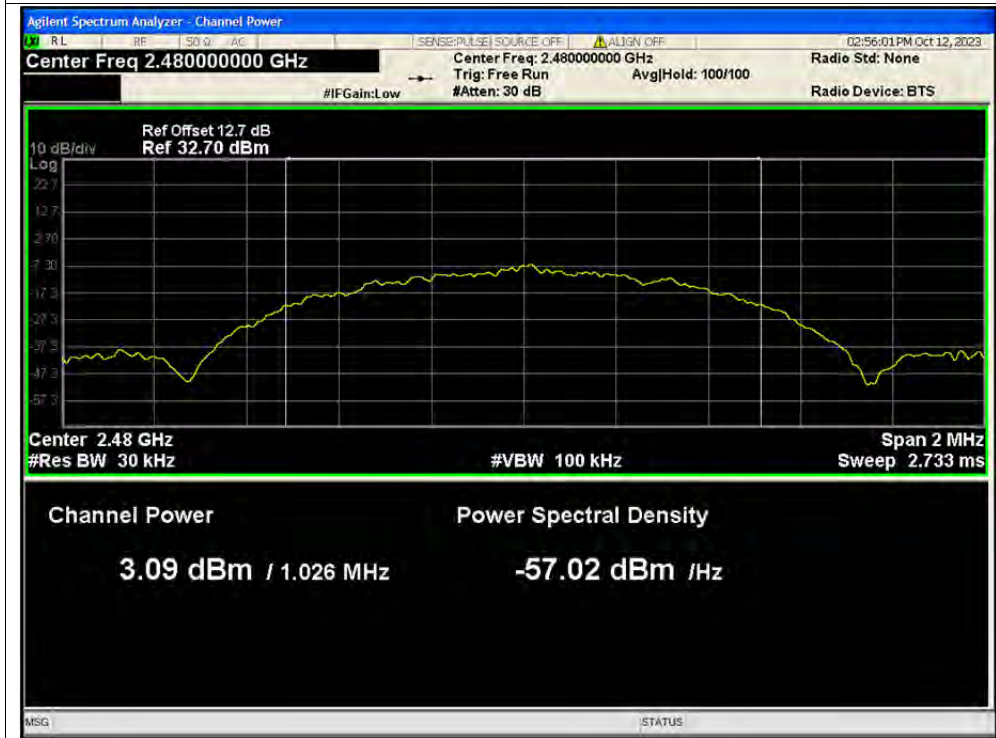

Average Power NVNT BLE 2M 2402MHz Ant1





Average Power NVNT BLE 2M 2440MHz Ant1



Average Power NVNT BLE 2M 2480MHz Ant1



**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.625	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.65	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.645	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.113	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.066	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.137	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1




-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1





-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

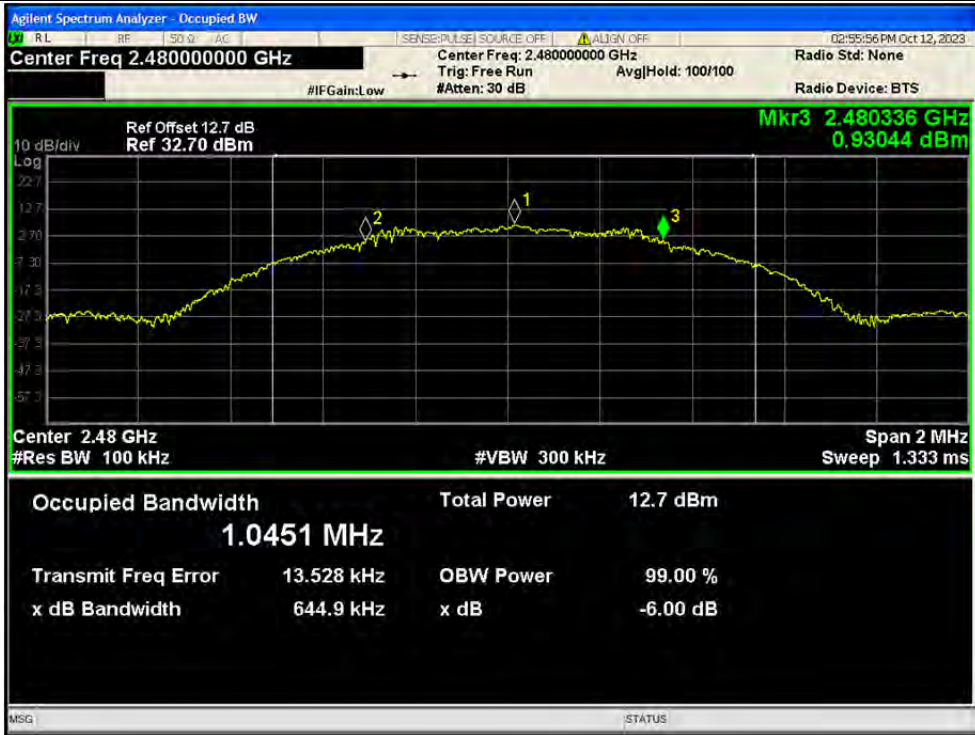


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1





-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

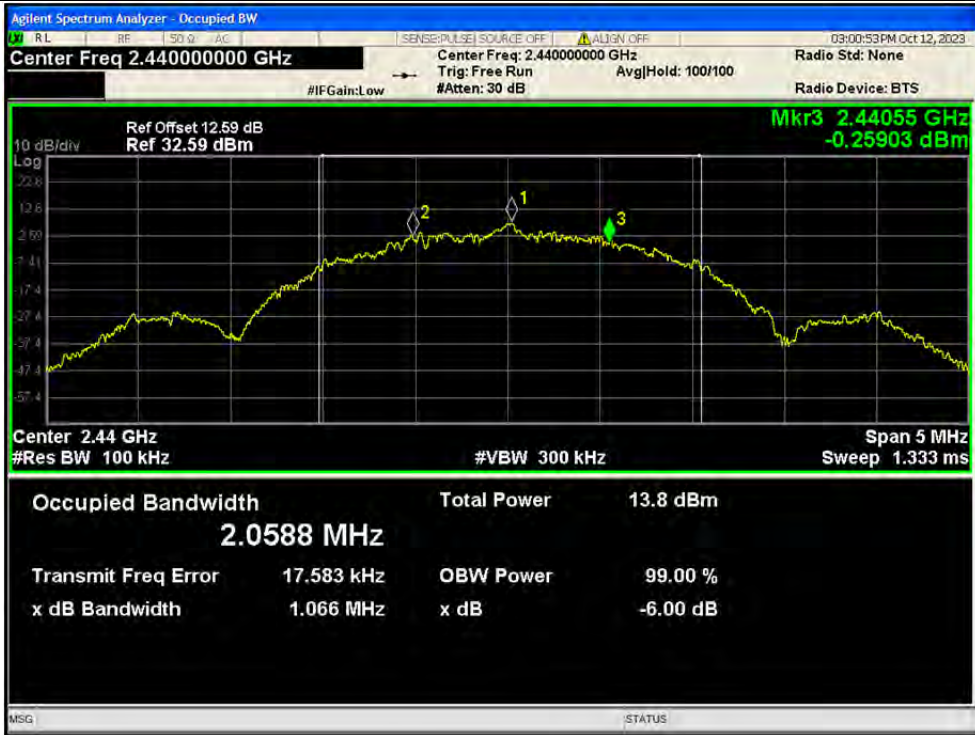

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1



**A.5. Conducted Spurious Emissions**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-37.7	-20	Pass
NVNT	BLE 1M	2440	Ant1	-36.15	-20	Pass
NVNT	BLE 1M	2480	Ant1	-35.84	-20	Pass
NVNT	BLE 2M	2402	Ant1	-37.26	-20	Pass
NVNT	BLE 2M	2440	Ant1	-36.47	-20	Pass
NVNT	BLE 2M	2480	Ant1	-35.13	-20	Pass




Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref



Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

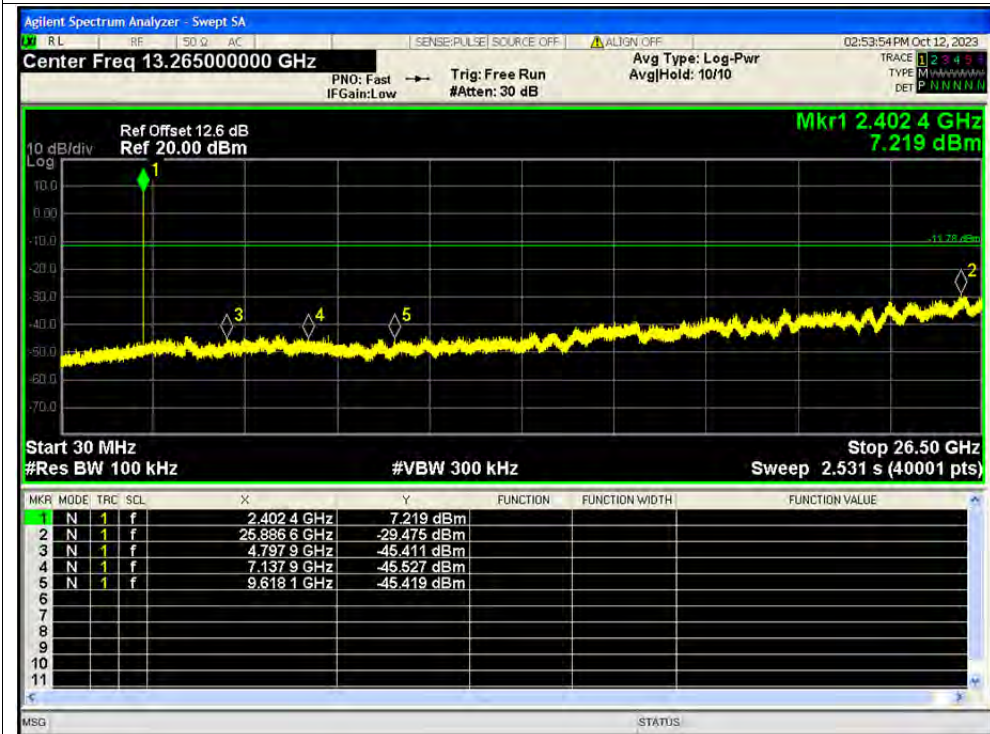




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref



Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

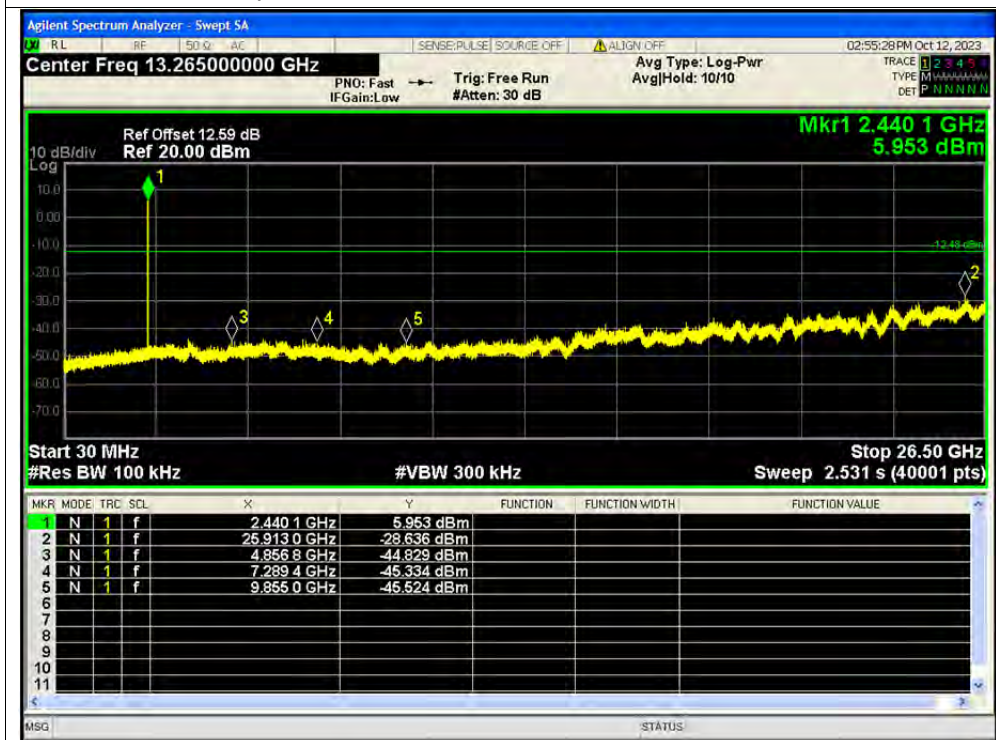




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

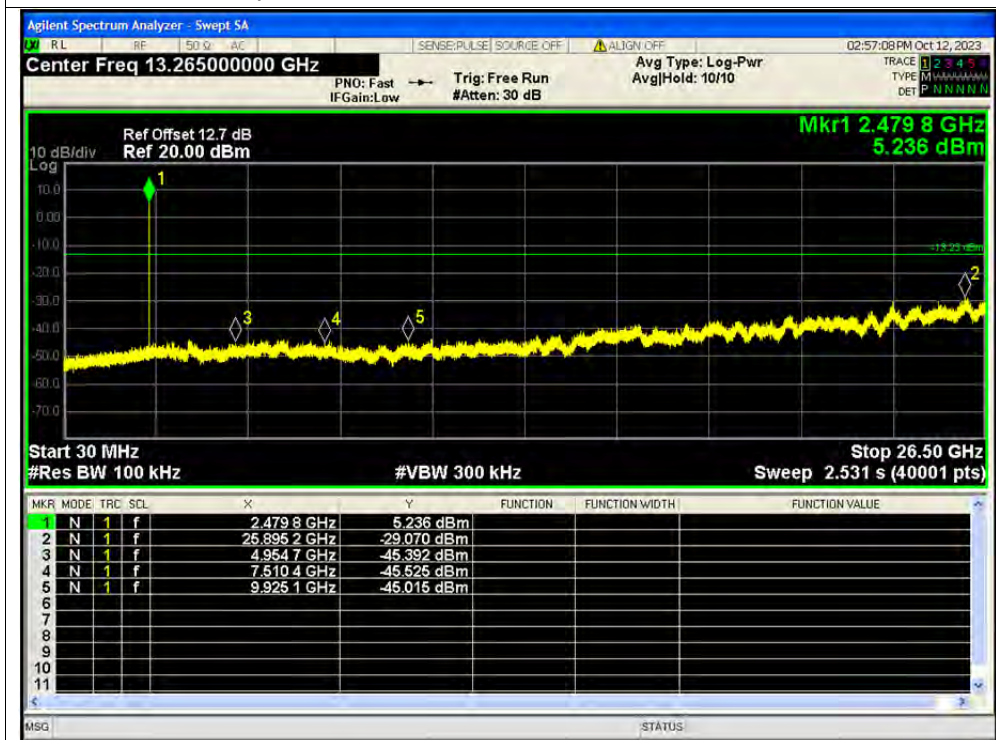

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

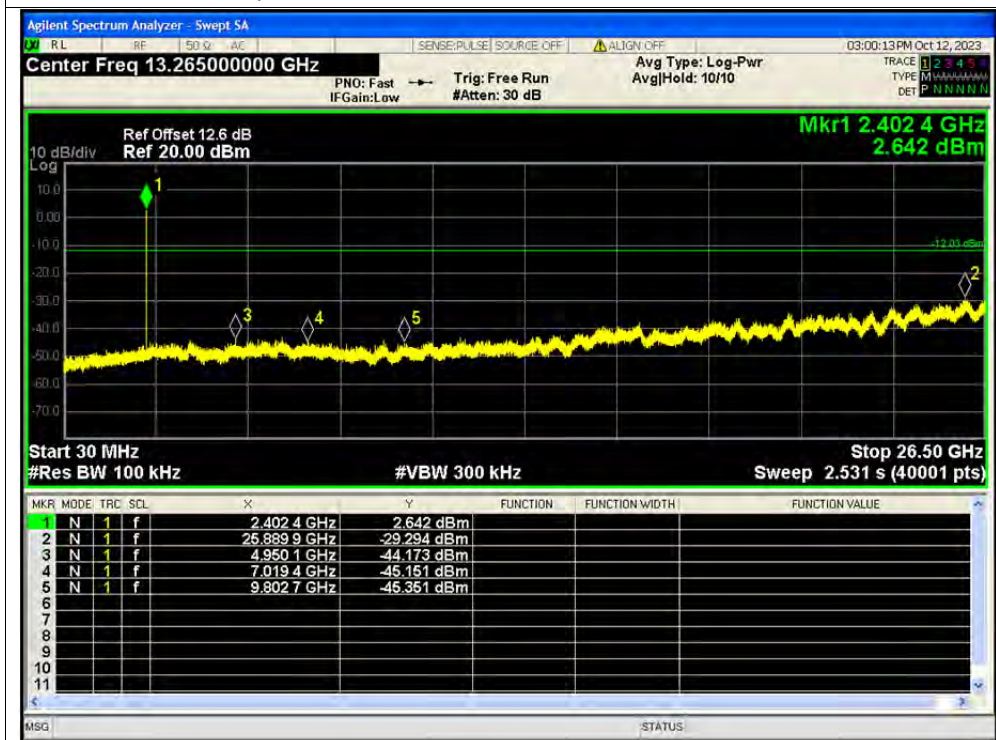

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

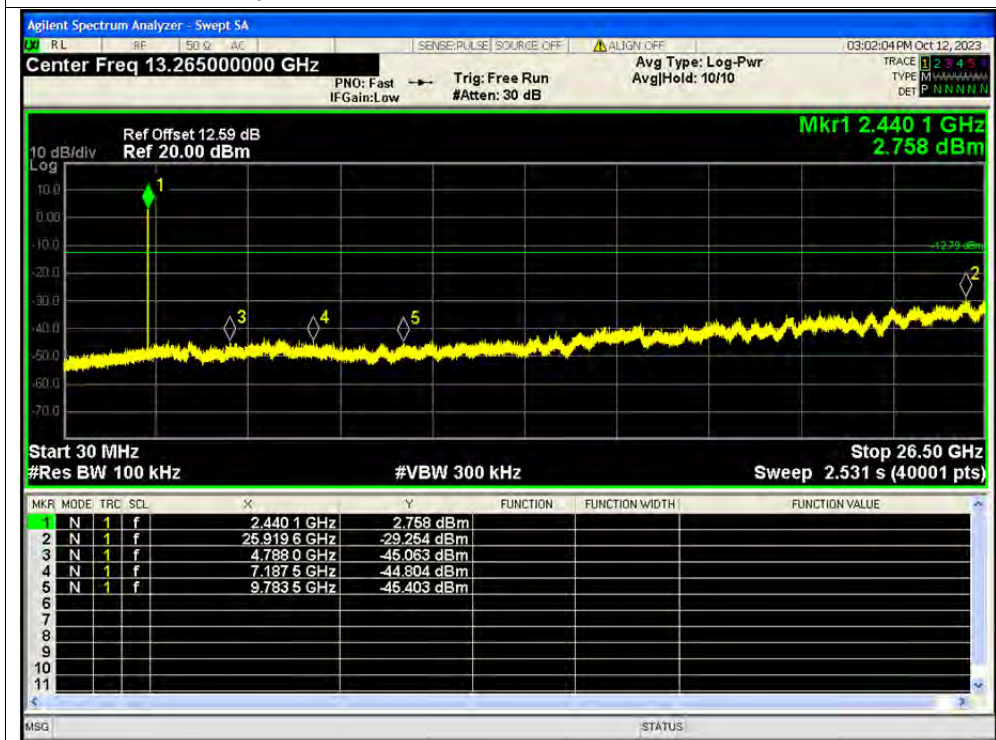




Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

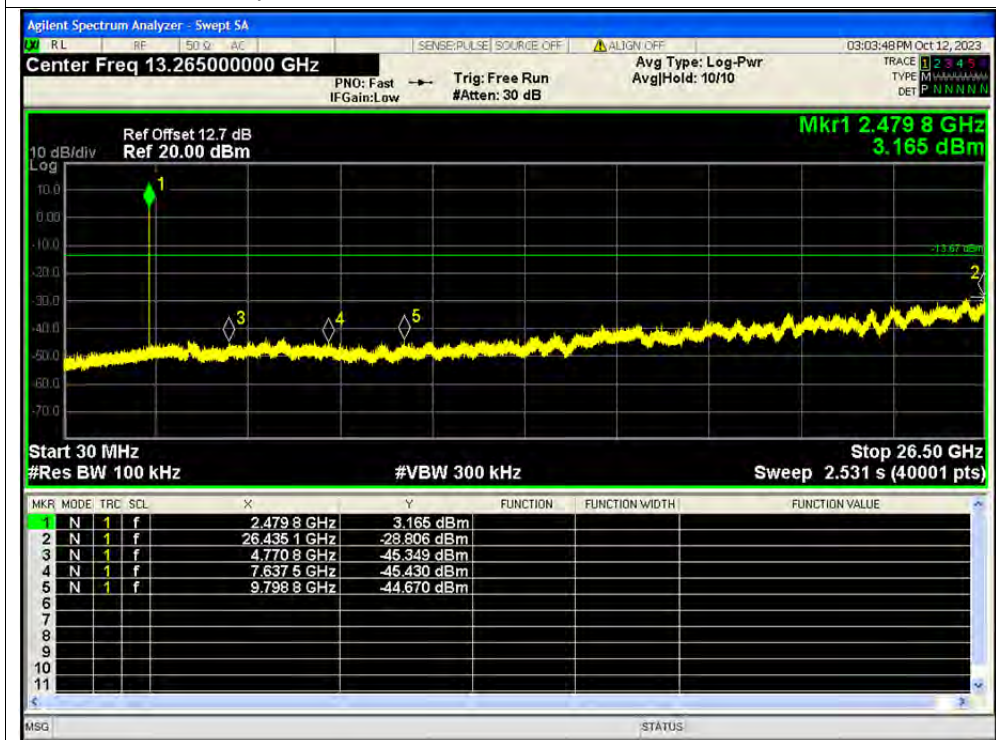




A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.14	-20	Pass
NVNT	BLE 1M	2480	Ant1	-52.86	-20	Pass
NVNT	BLE 2M	2402	Ant1	-32.65	-20	Pass
NVNT	BLE 2M	2480	Ant1	-52.83	-20	Pass




Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

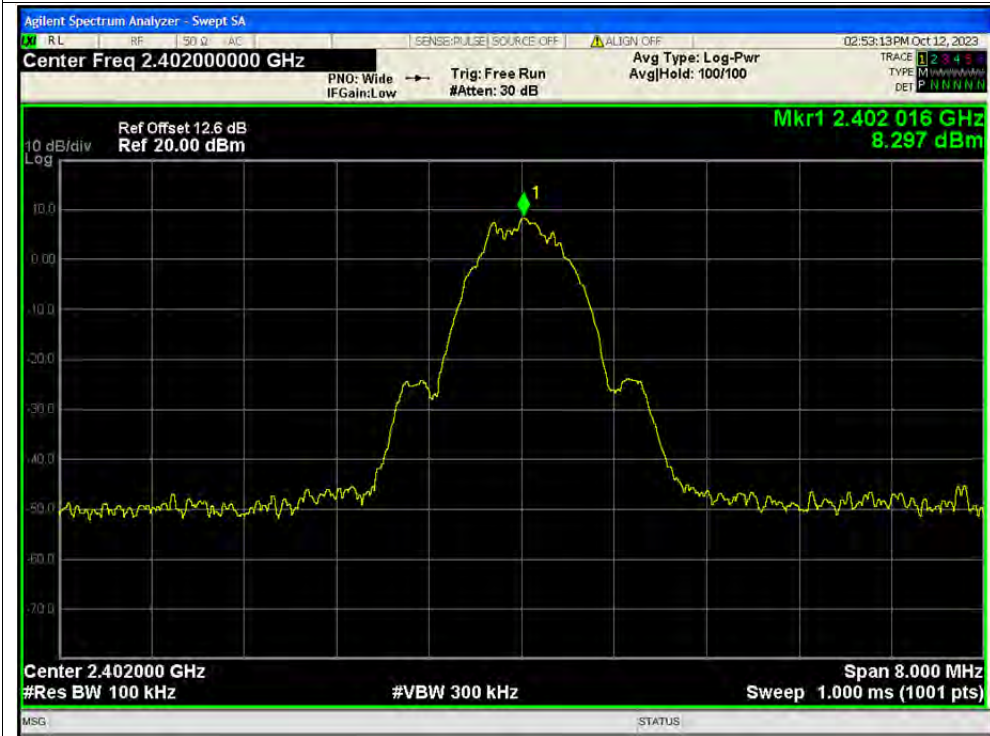


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

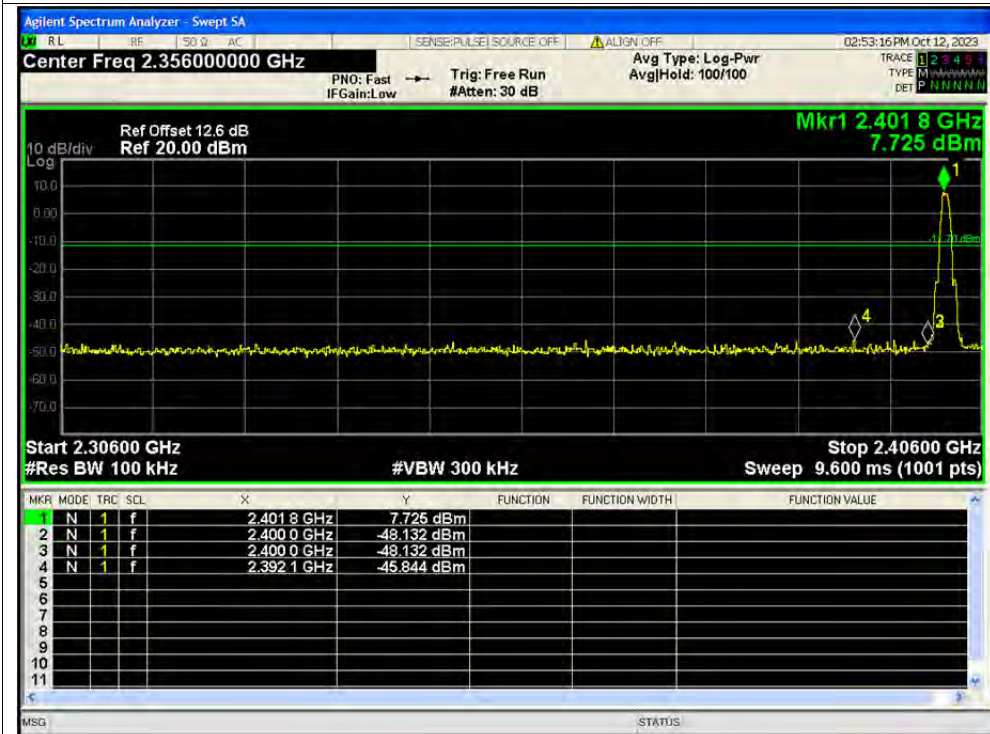




Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

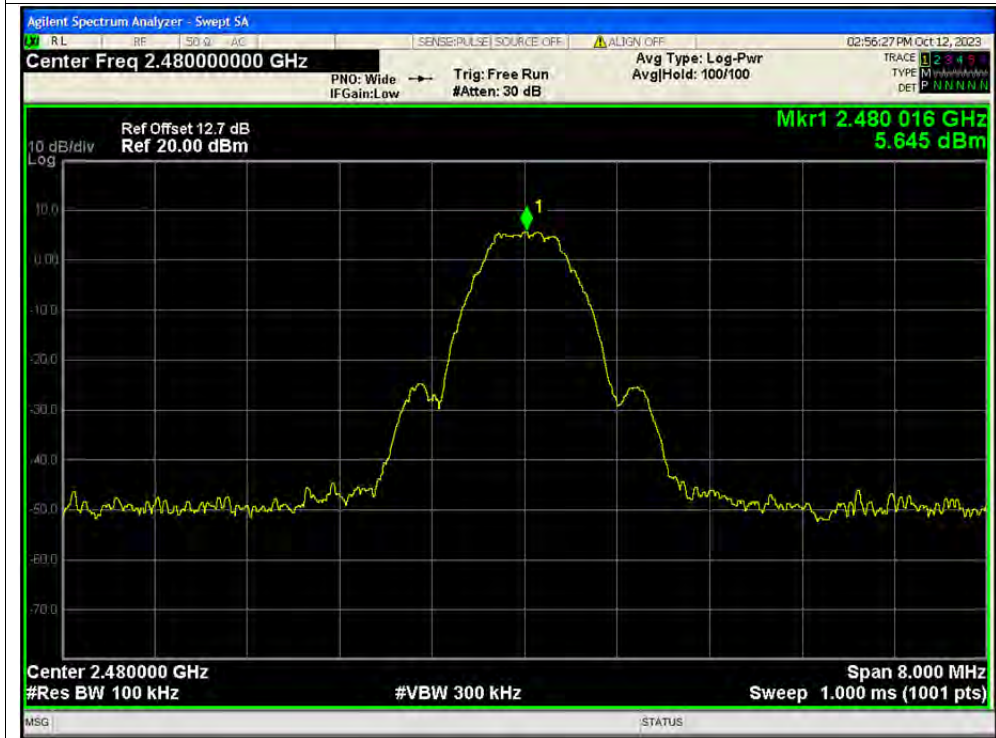

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

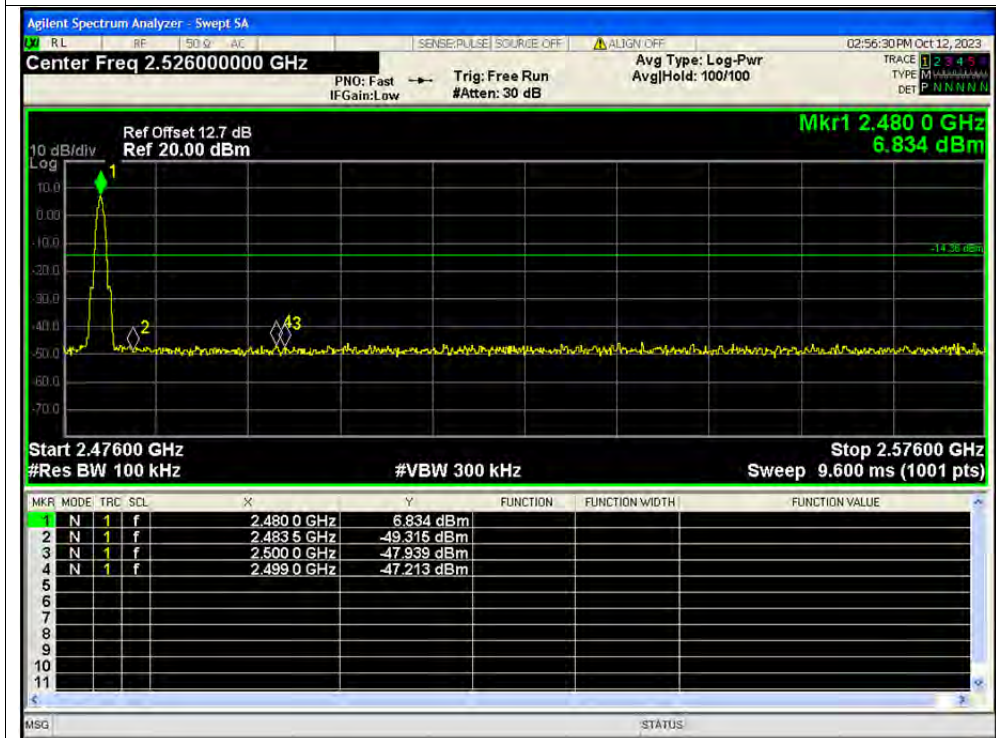




Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

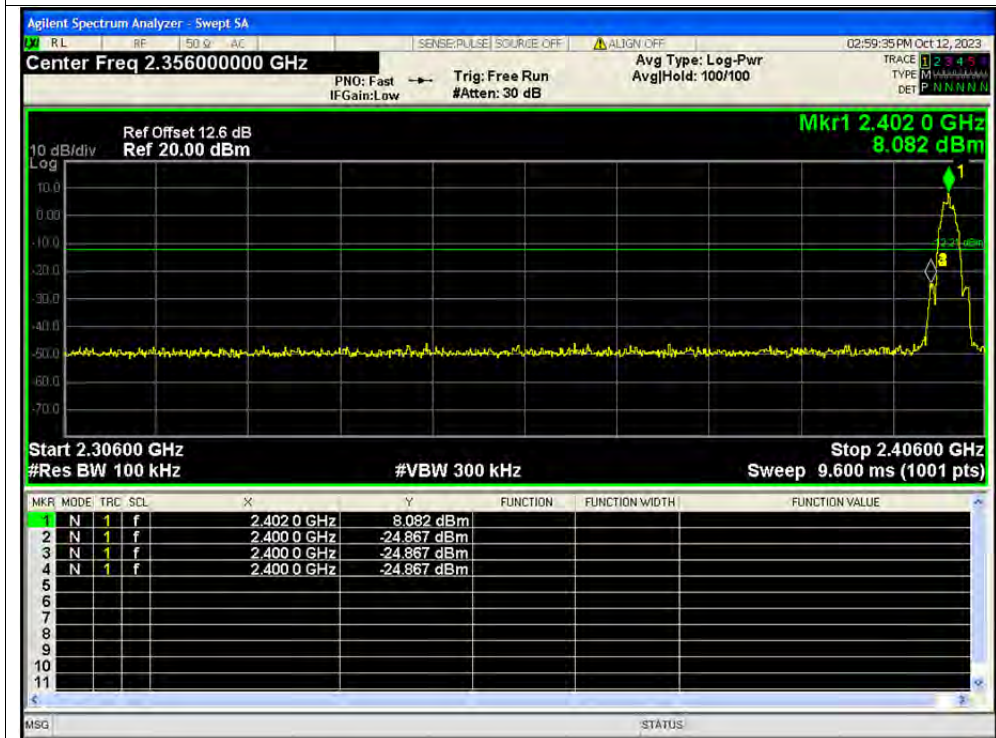

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref



Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

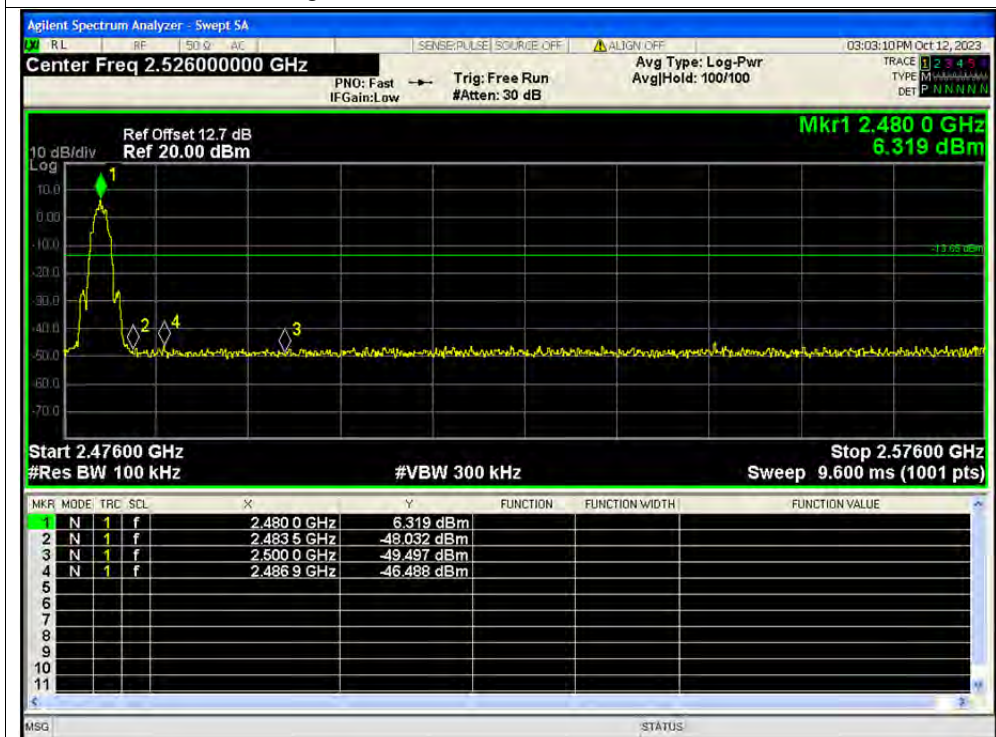

**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-5.29	0	-5.29	8	Pass
NVNT	BLE 1M	2440	Ant1	-7.28	0	-7.28	8	Pass
NVNT	BLE 1M	2480	Ant1	-9.21	0	-9.21	8	Pass
NVNT	BLE 2M	2402	Ant1	-8.86	0	-8.86	8	Pass
NVNT	BLE 2M	2440	Ant1	-10.66	0	-10.66	8	Pass
NVNT	BLE 2M	2480	Ant1	-11.75	0	-11.75	8	Pass




Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1




PSD NVNT BLE 1M 2440MHz Ant1

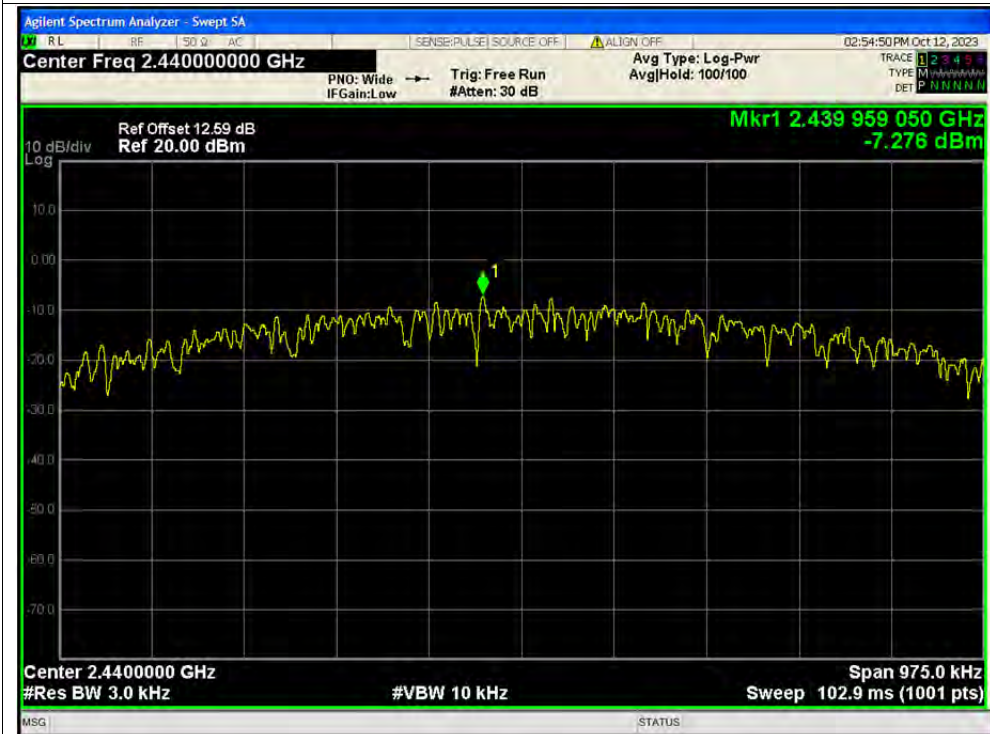




PSD NVNT BLE 1M 2480MHz Ant1

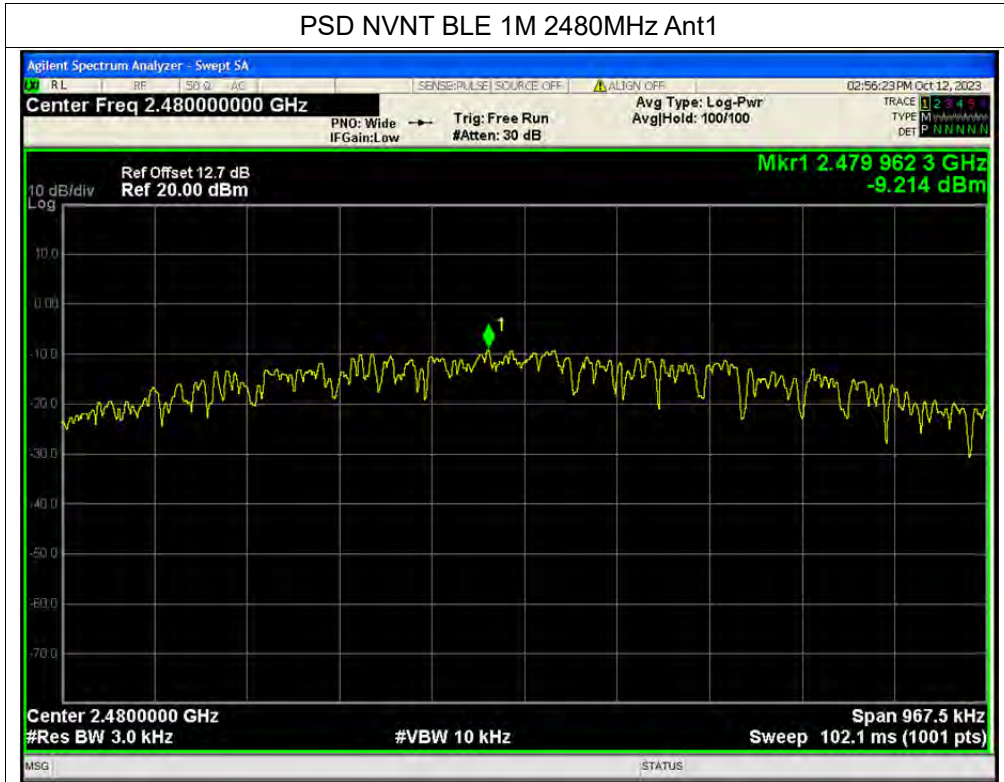


PSD NVNT BLE 2M 2402MHz Ant1

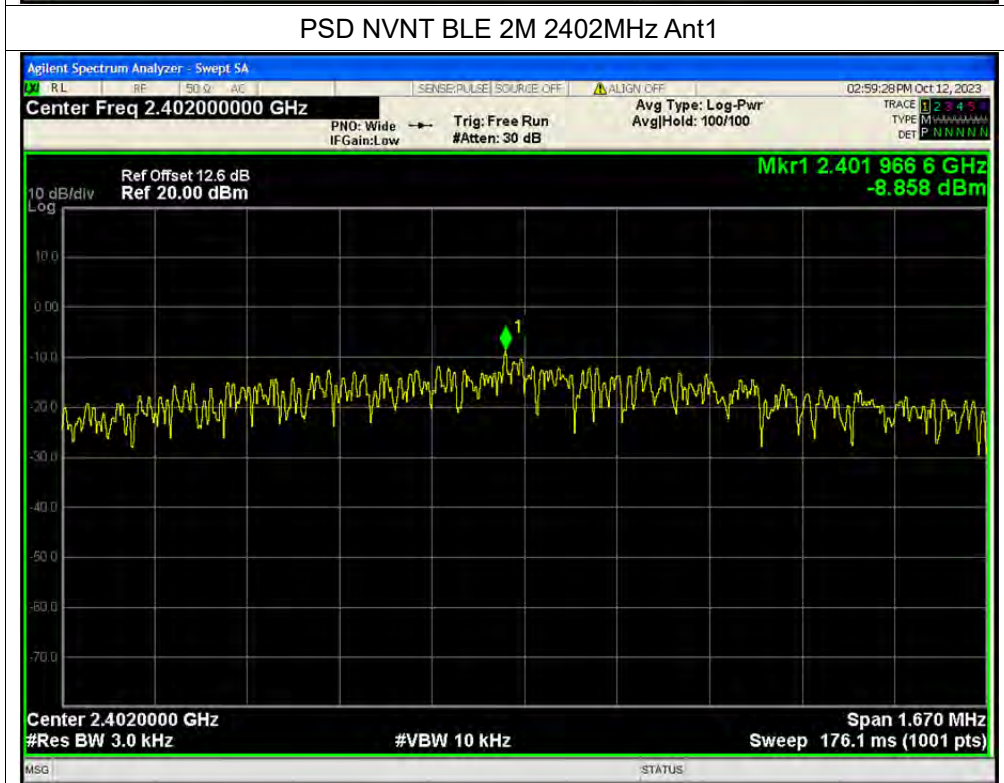




PSD NVNT BLE 2M 2440MHz Ant1

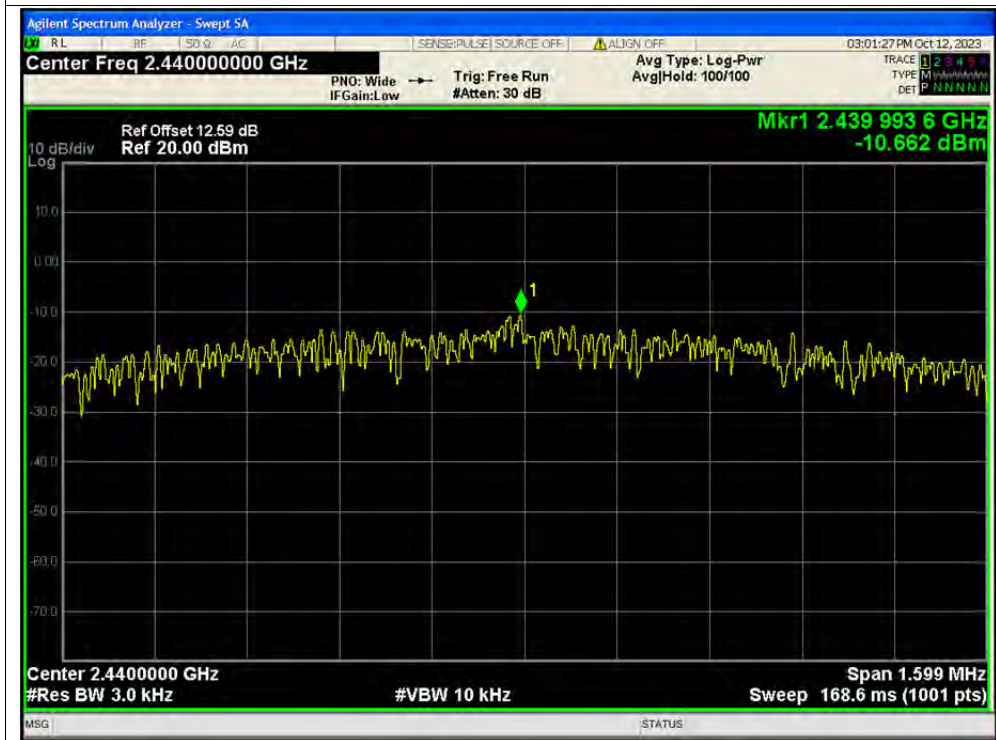

PSD NVNT BLE 2M 2480MHz Ant1

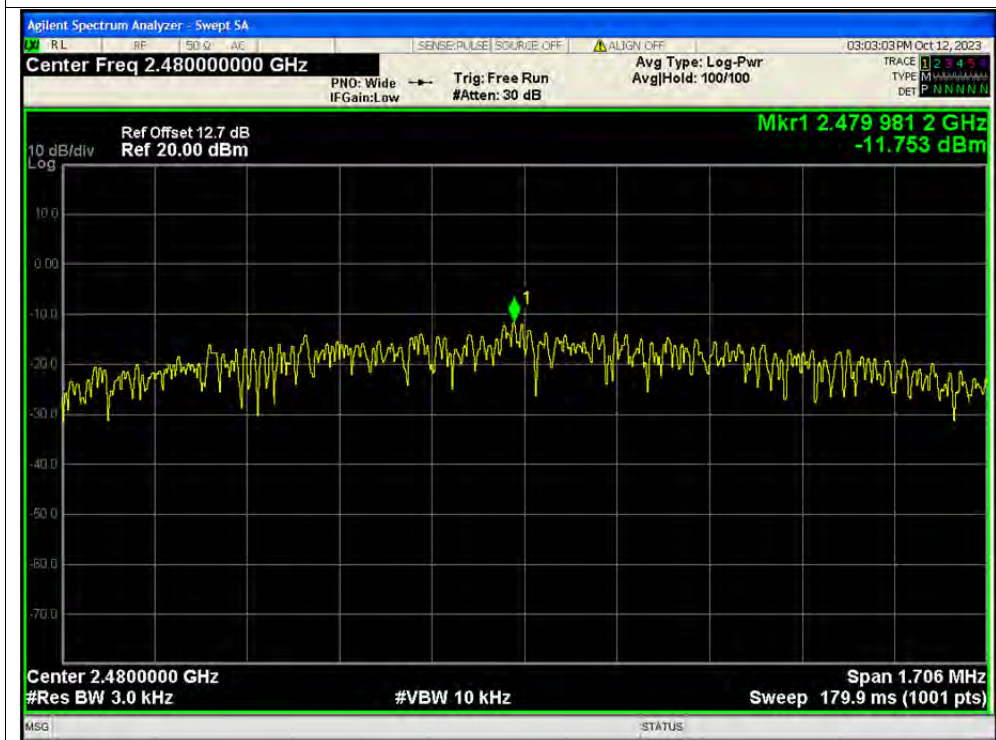



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + PC Adapter + PC + BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

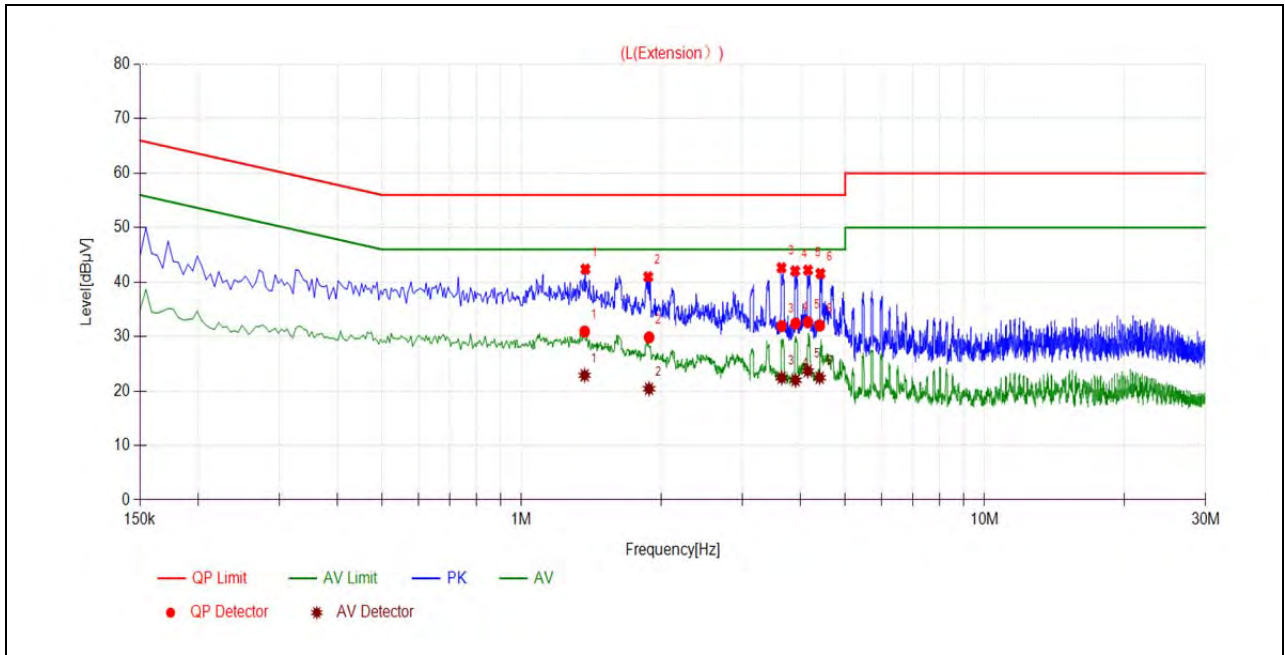

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	1.3687	30.93	22.89	56.00	46.00	Line	PASS
2	1.8853	29.86	20.42	56.00	46.00		PASS
3	3.6454	31.93	22.44	56.00	46.00		PASS
4	3.9058	32.40	21.99	56.00	46.00		PASS
5	4.1510	32.66	23.68	56.00	46.00		PASS
6	4.4033	32.02	22.45	56.00	46.00		PASS

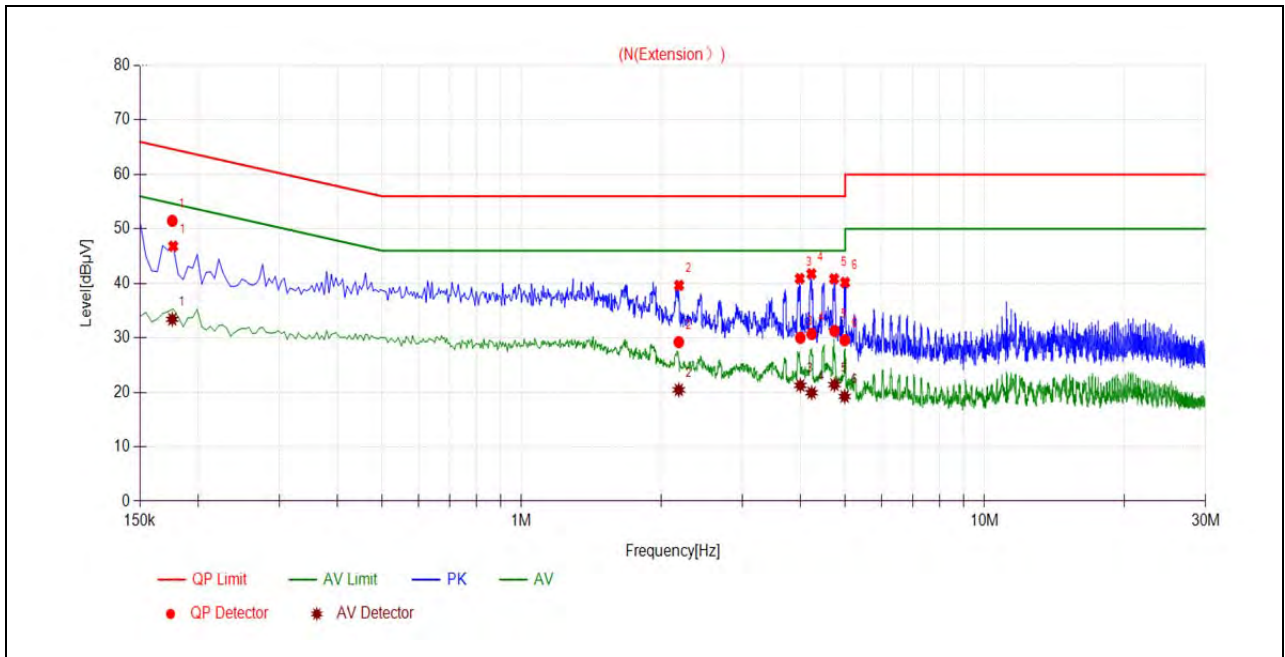

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1762	51.49	33.41	64.66	54.66	Neutral	PASS
2	2.1859	29.22	20.45	56.00	46.00		PASS
3	4.0001	30.01	21.27	56.00	46.00		PASS
4	4.2308	30.72	19.92	56.00	46.00		PASS
5	4.7407	31.28	21.40	56.00	46.00		PASS
6	4.9856	29.57	19.24	56.00	46.00		PASS

**A.9. Restricted Frequency Bands**

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

1Mbps


Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dB μ V)					
0	2367.70	PK	20.70	6.74	27.20	54.64	74	PASS
0	2389.13	AV	7.80	6.74	27.20	41.74	54	PASS
39	2485.92	PK	20.63	6.74	27.20	54.57	74	PASS
39	2483.50	AV	8.35	6.74	27.20	42.29	54	PASS

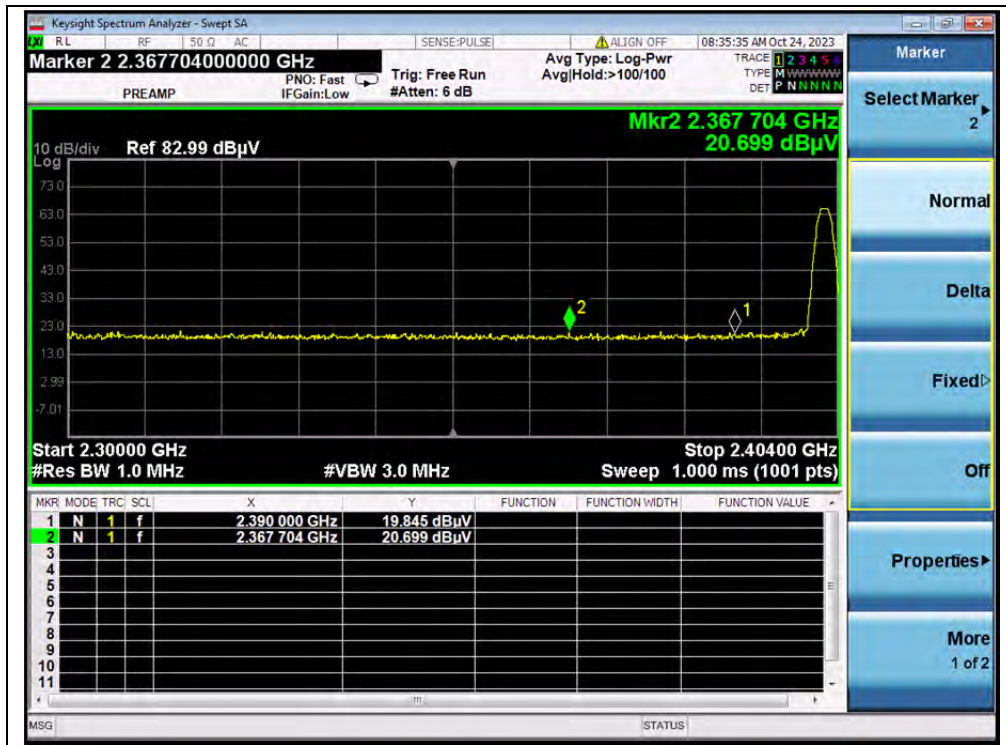


(PEAK, Channel 0)

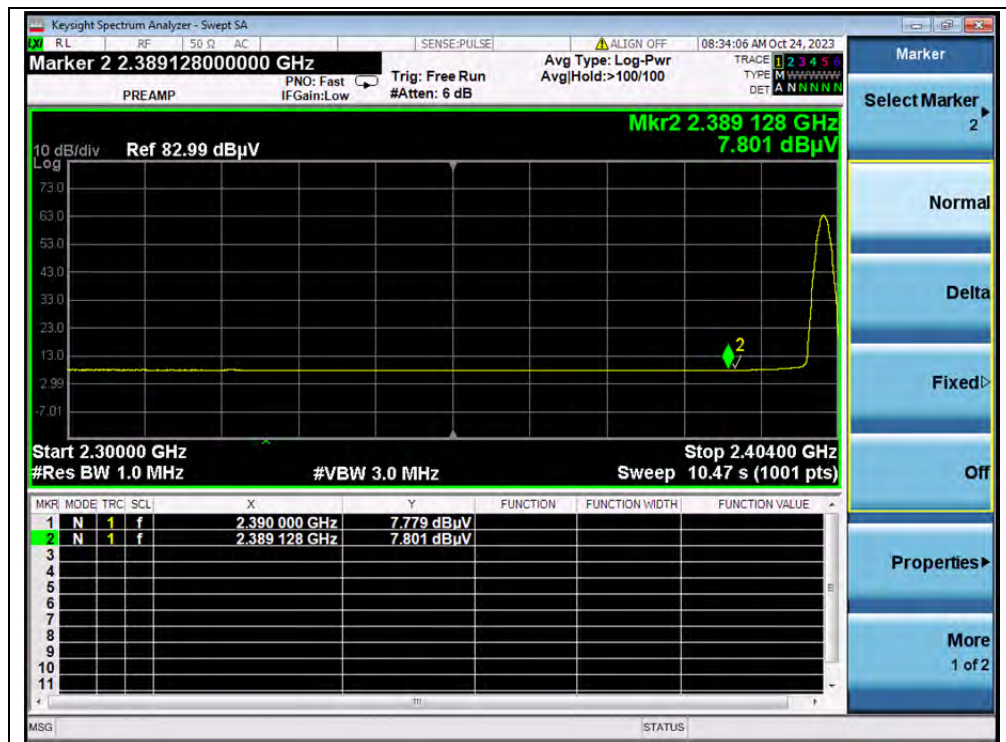

(AVERAGE, Channel 0)

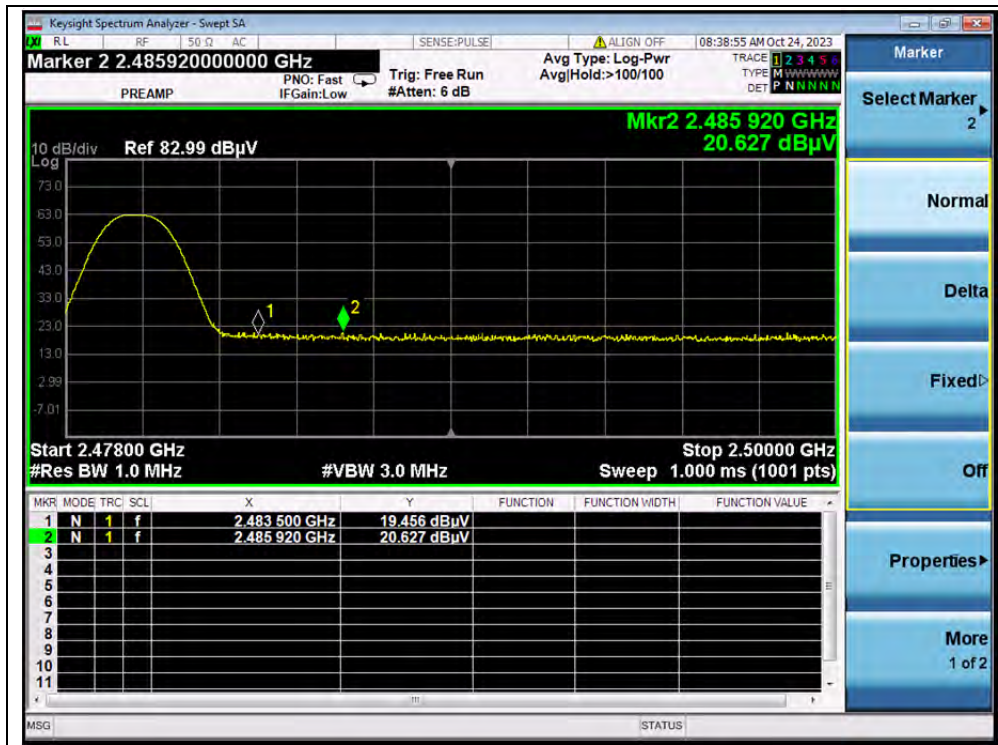

(PEAK, Channel 39)

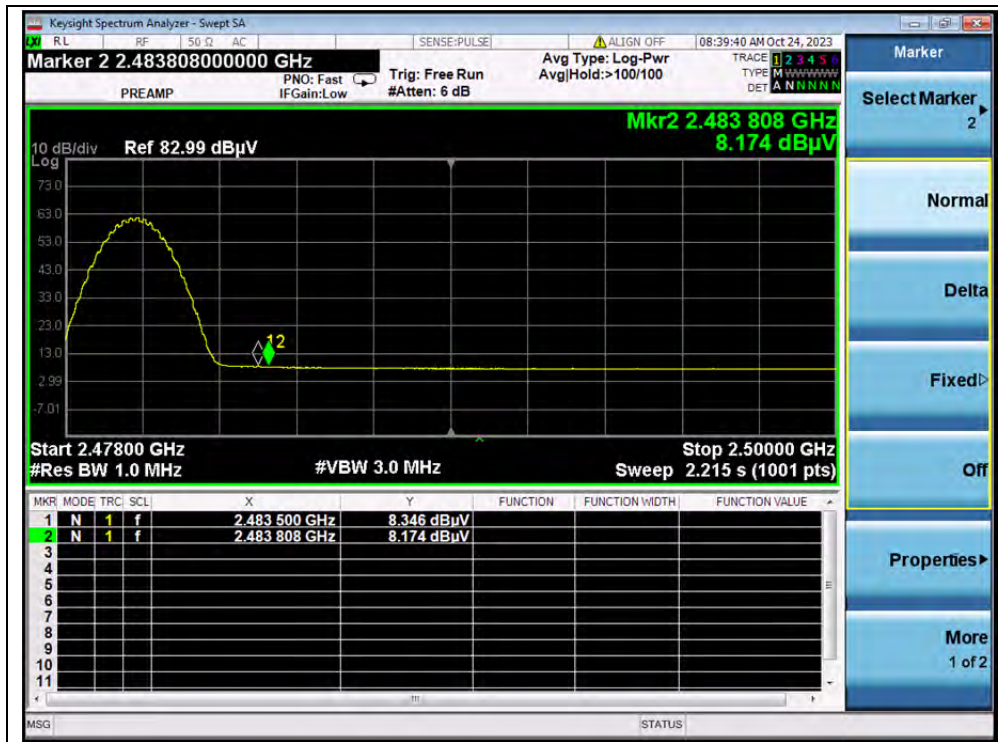


(AVERAGE, Channel 39)




2Mbps

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBμV)					
0	2387.36	PK	20.89	6.74	27.20	54.83	74	PASS
0	2390.00	AV	7.77	6.74	27.20	41.71	54	PASS
39	2484.69	PK	20.69	6.74	27.20	54.63	74	PASS
39	2483.50	AV	8.47	6.74	27.20	42.41	54	PASS

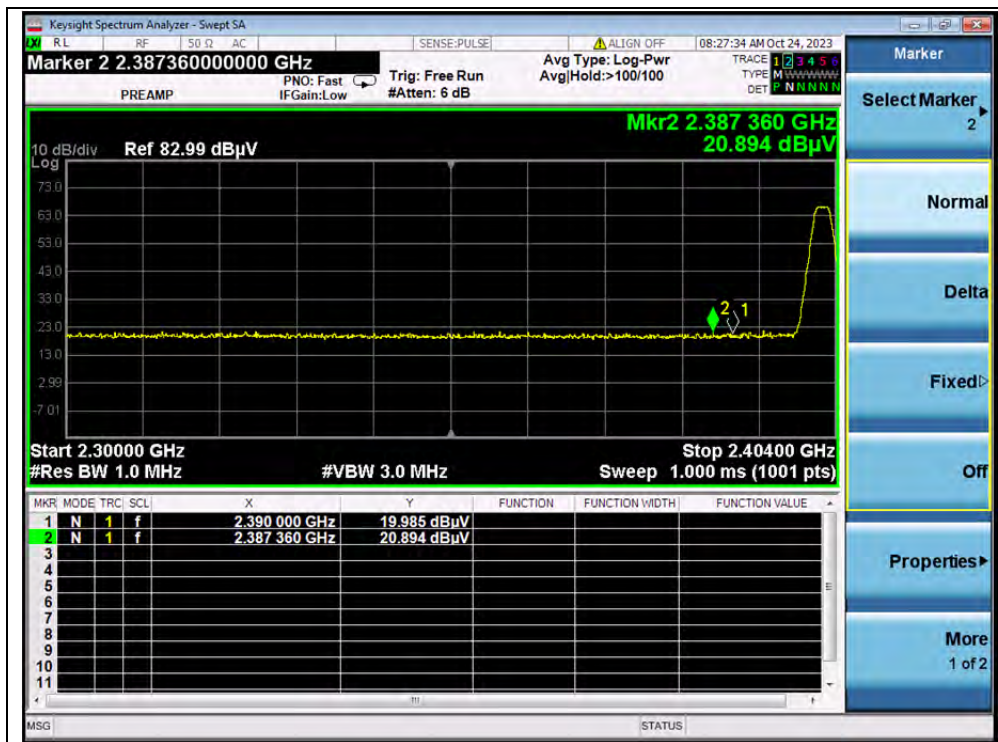


(PEAK, Channel 0)

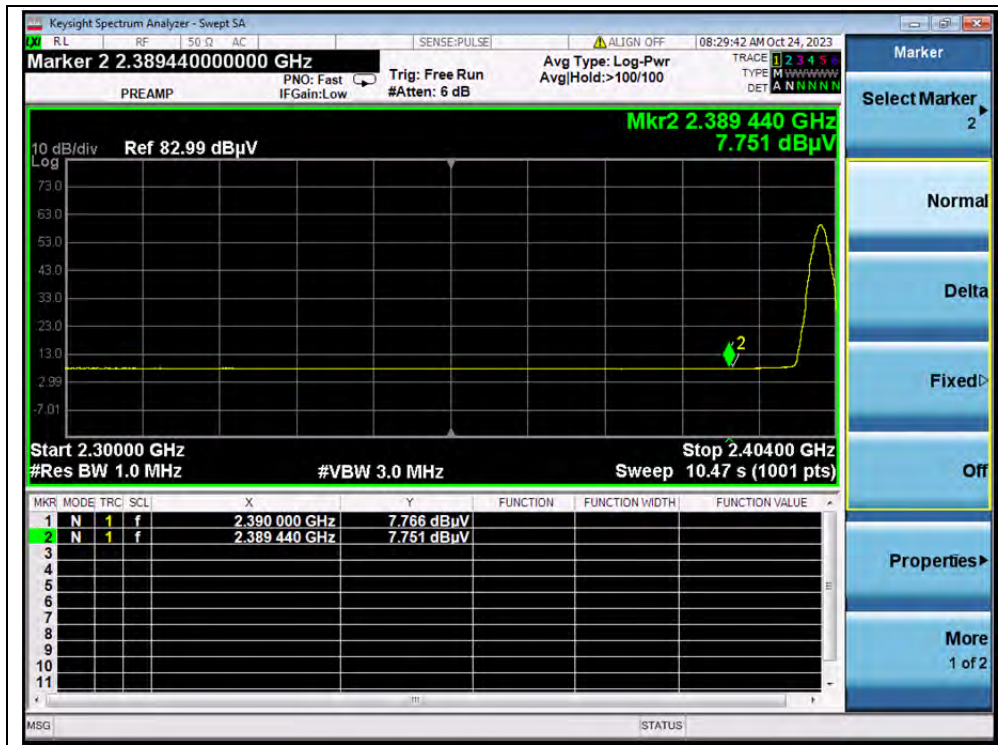

(AVERAGE, Channel 0)



(PEAK, Channel 39)

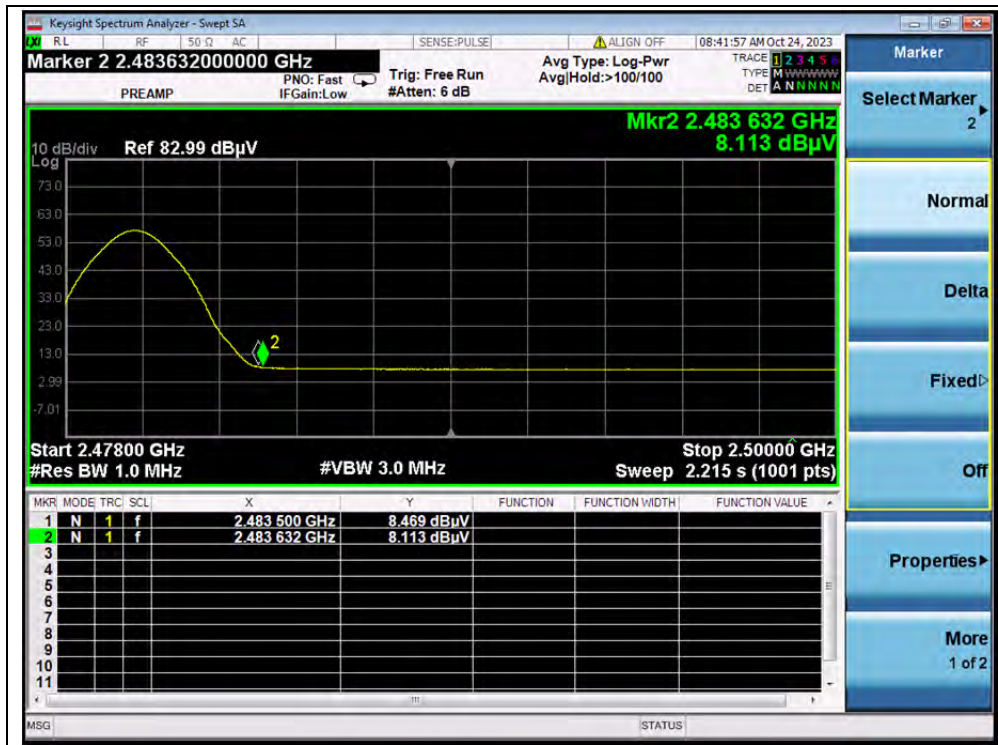

(AVERAGE, Channel 39)



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




1Mbps

Plot for Channel 0

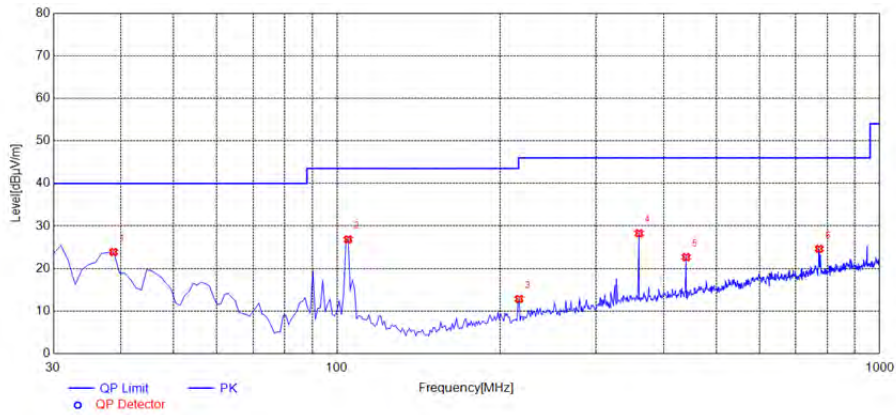


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
38.7387	23.88	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.7648	26.85	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
216.4264	12.84	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
360.1301	28.29	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
439.7498	22.68	N/A	N/A	N/A <td 46.00	N/A	Horizontal	PASS	
773.7638	24.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

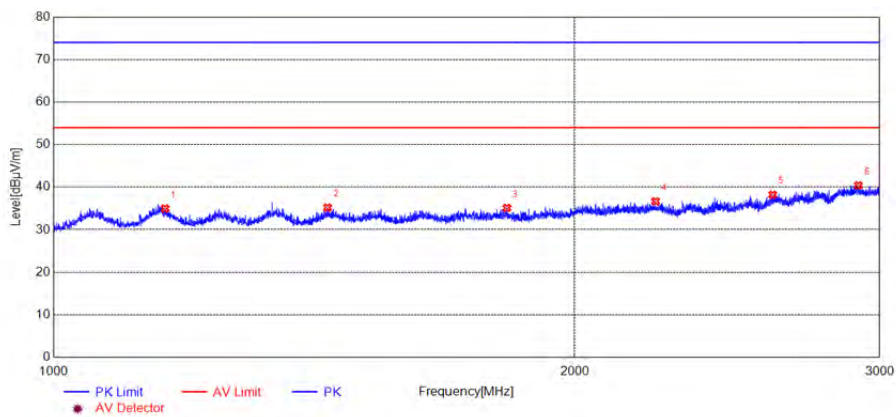


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1160.0267	34.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1439.7400	35.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1827.4712	35.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2226.8711	36.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2601.9337	38.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2915.9860	40.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 3GHz)

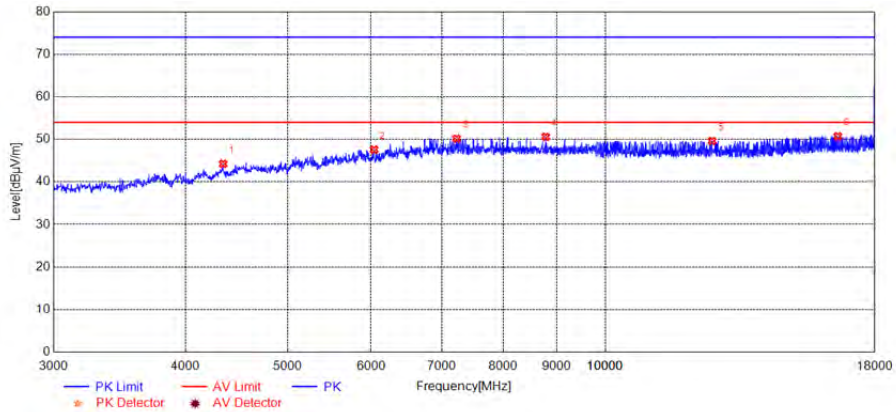


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4344.2689	44.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6039.6079	47.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7230.8462	50.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8782.1564	50.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12625.9252	49.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16610.7221	50.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

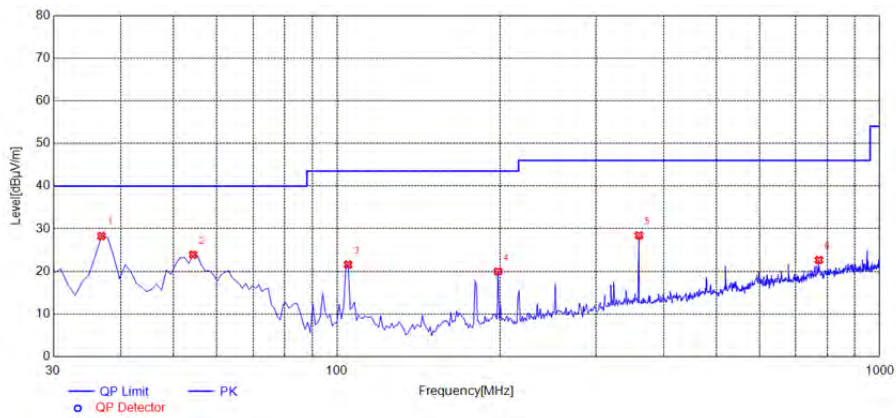


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
36.7968	28.29	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
54.2743	23.90	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	21.57	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	19.98	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	28.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
772.7928	22.66	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

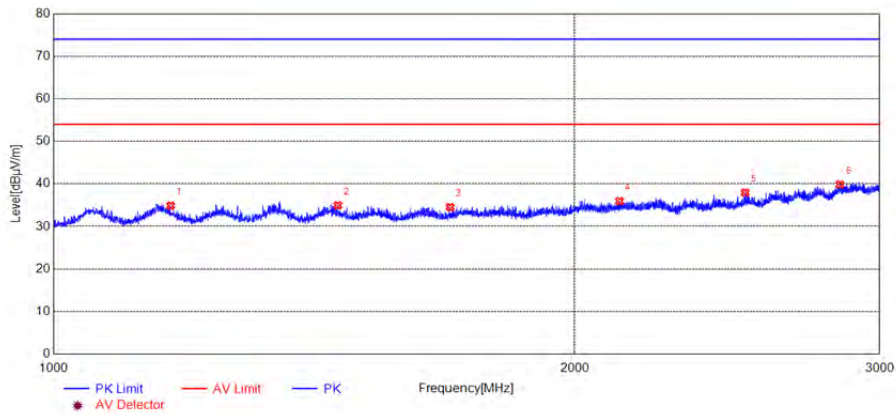

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1168.6948	34.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1459.7433	34.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1694.7825	34.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2122.5204	35.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2508.5848	37.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2845.3076	39.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

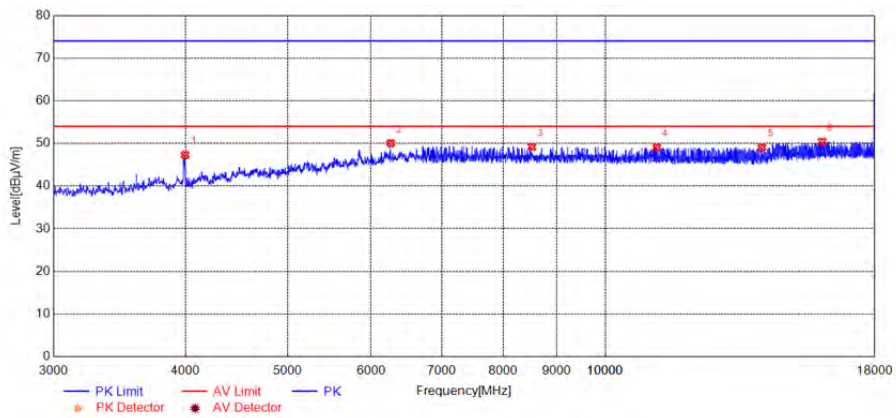


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3999.1998	47.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6261.6523	50.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8521.1042	49.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11191.6383	49.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14069.2138	49.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16046.6093	50.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 19

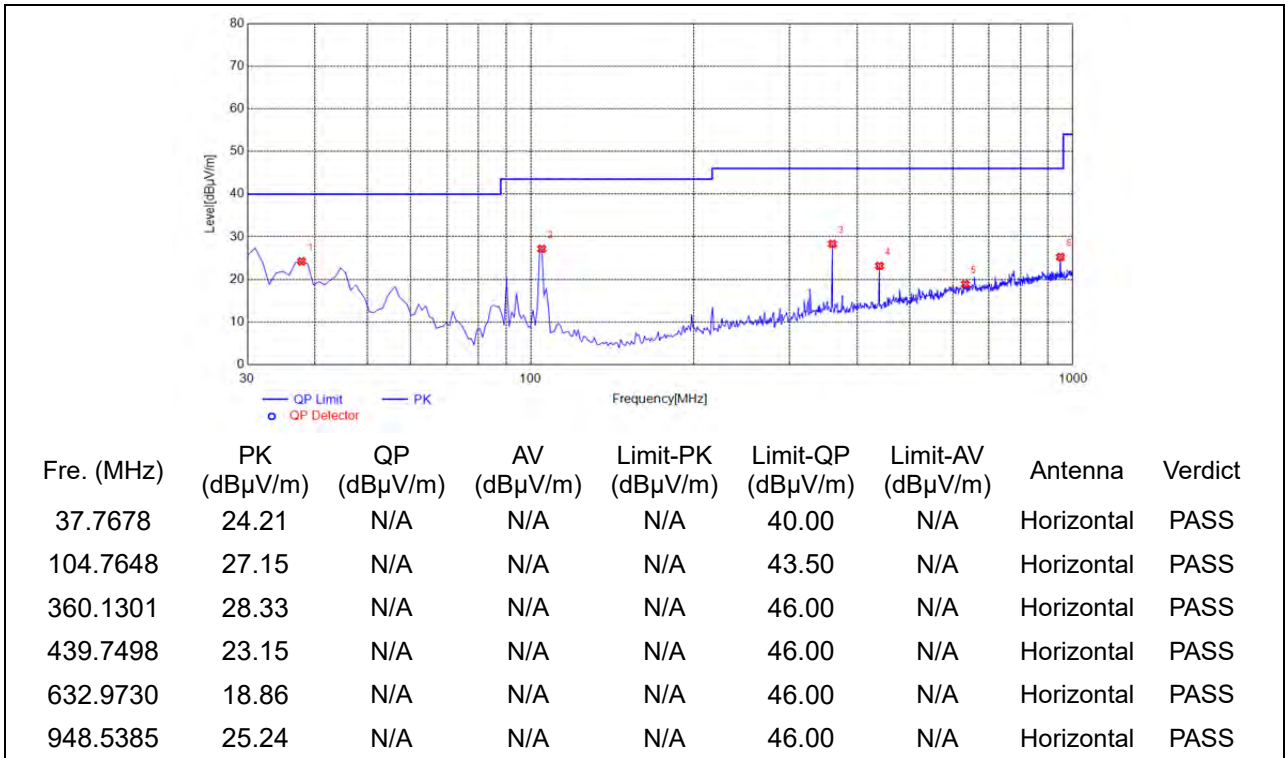

(Antenna Horizontal, 30MHz to 1GHz)

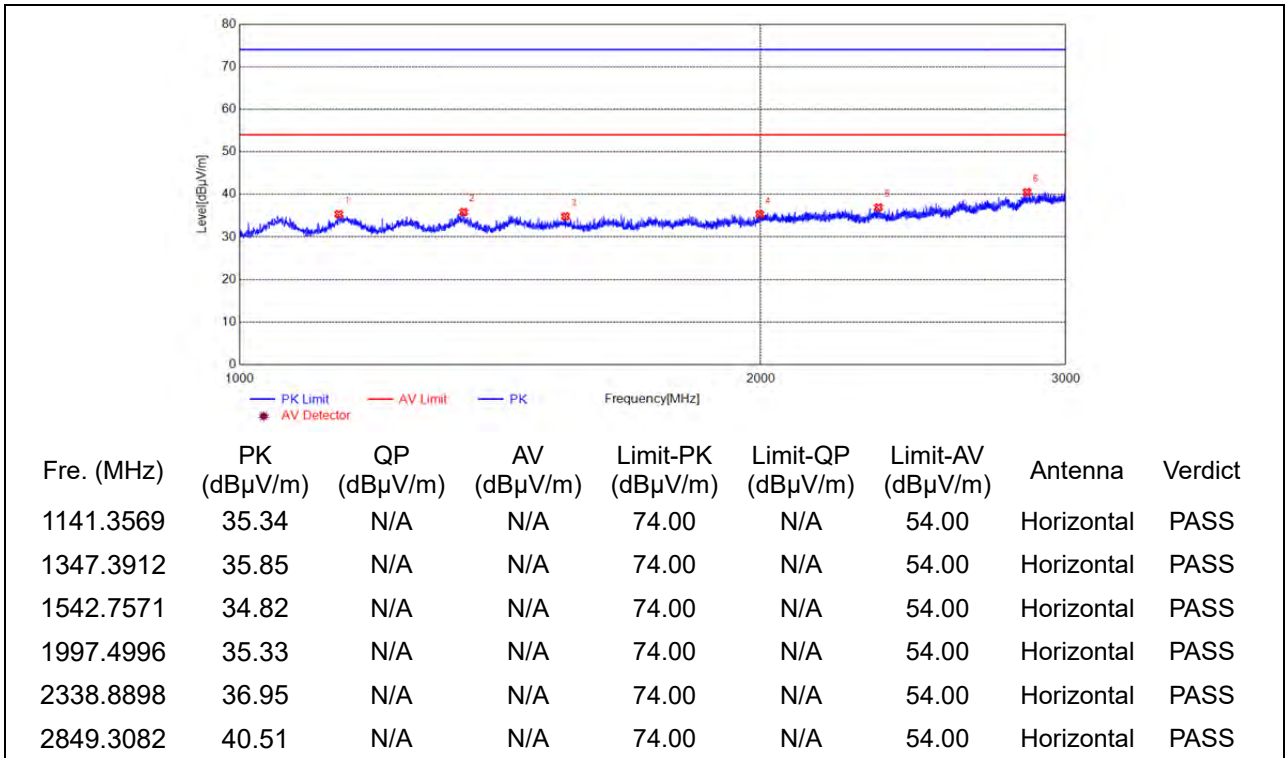


(Antenna Horizontal, 1GHz to 3GHz)

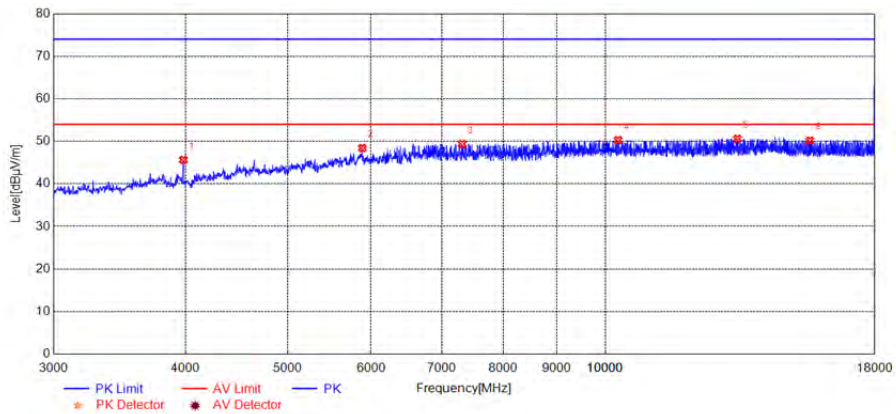


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3984.1968	45.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5886.5773	48.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7317.8636	49.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10282.4565	50.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13343.0686	50.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15623.5247	50.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

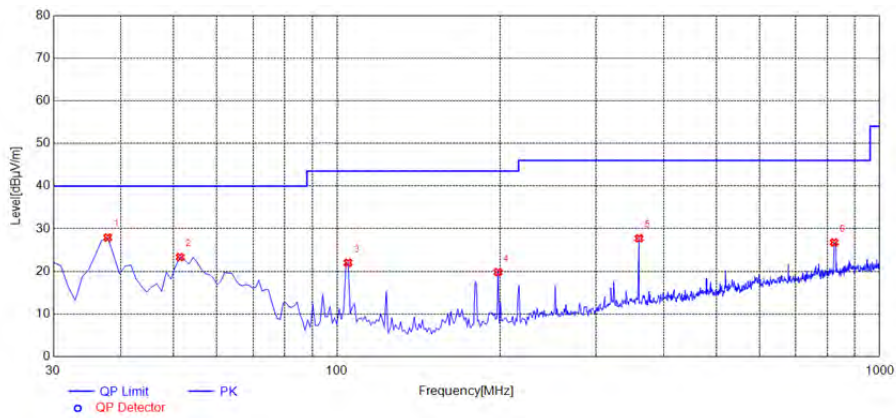


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.7678	27.92	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
51.3614	23.35	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	22.01	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	19.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	27.73	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
824.2543	26.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

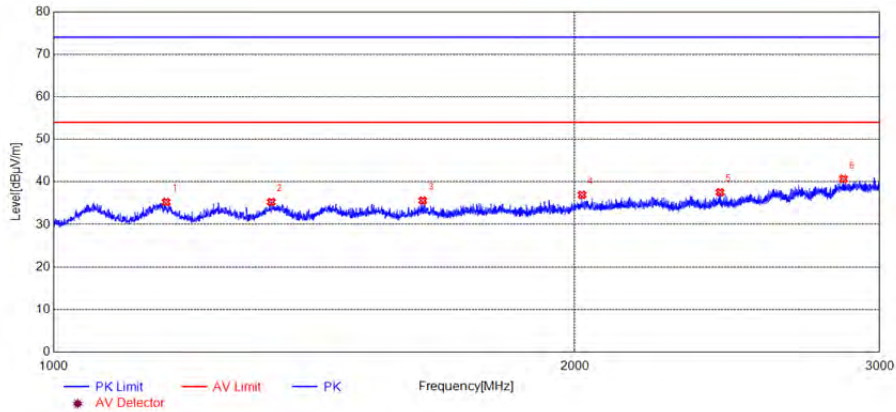

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1161.6936	35.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1336.0560	35.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1634.1057	35.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2019.5033	36.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2426.2377	37.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2858.9765	40.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 3GHz)

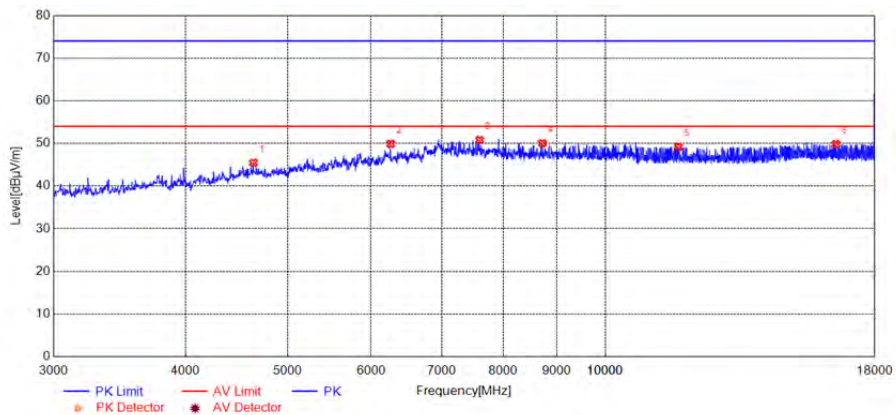


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4641.3283	45.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6261.6523	49.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7602.9206	50.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8719.1438	50.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11731.7463	49.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16541.7083	49.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 3GHz to 18GHz)




Plot for Channel 39

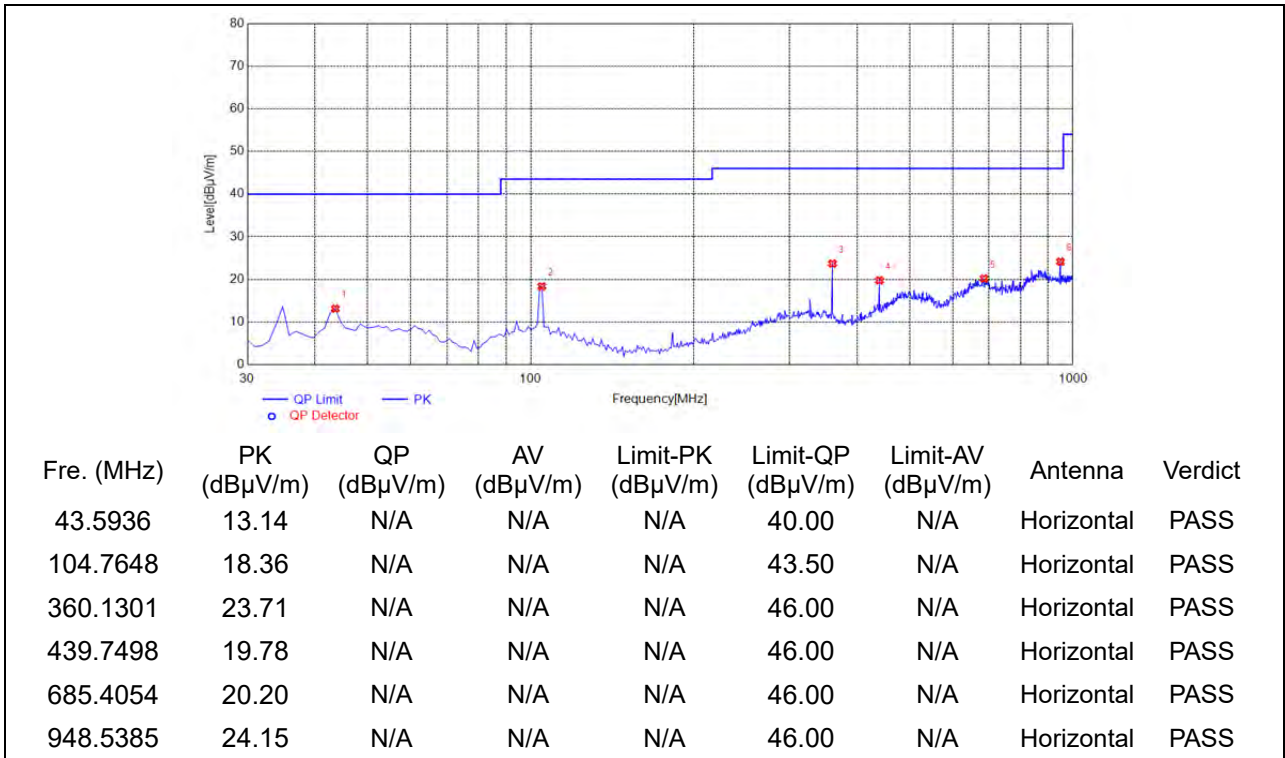

(Antenna Horizontal, 30MHz to 1GHz)

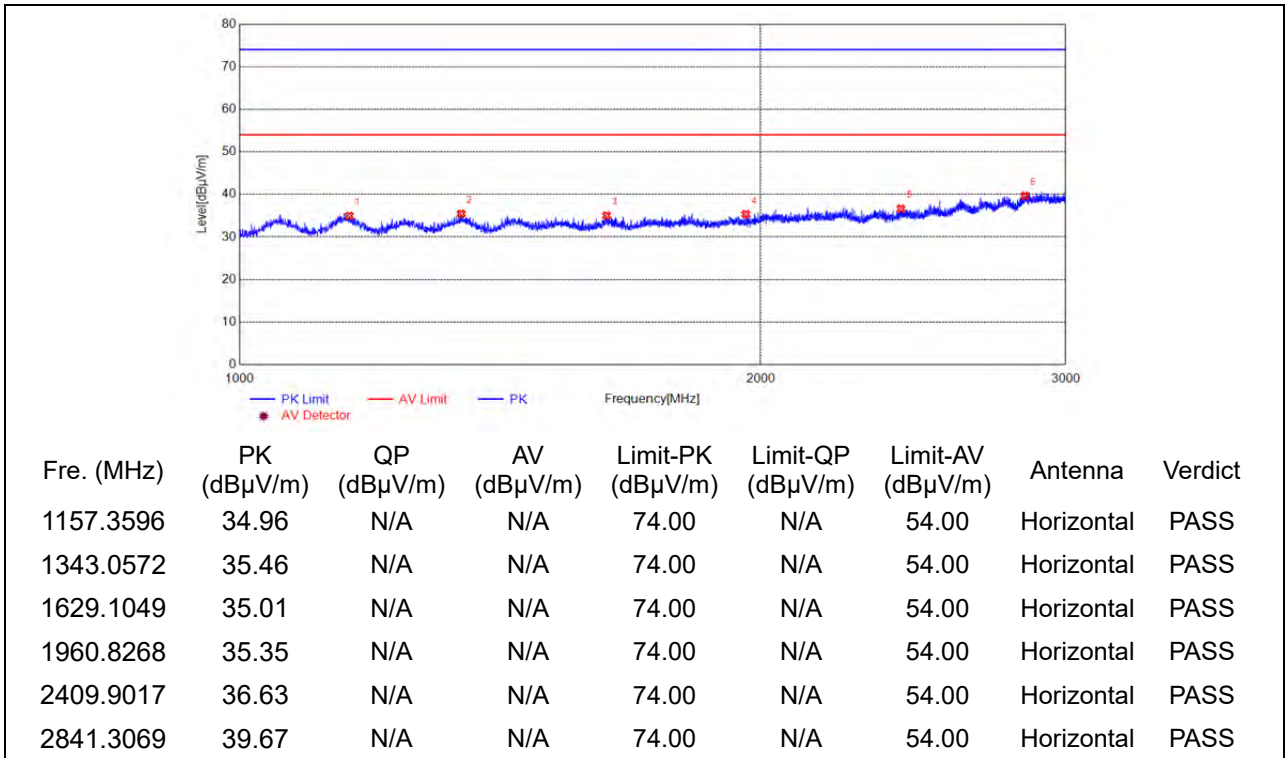


(Antenna Horizontal, 1GHz to 3GHz)

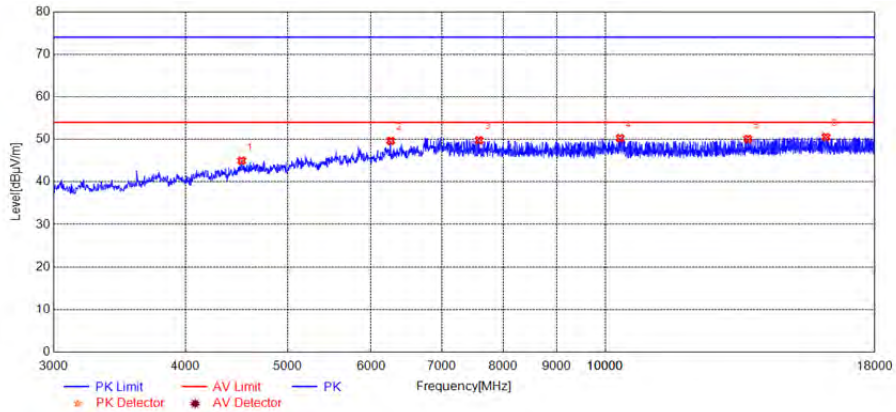


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4524.3049	44.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6261.6523	49.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7593.9188	49.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10330.4661	50.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13652.1304	50.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16184.6369	50.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

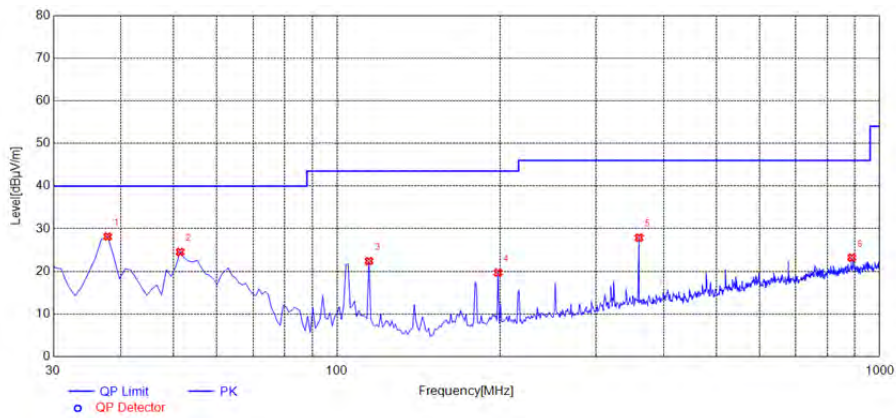


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.7678	28.16	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
51.3614	24.55	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
114.4745	22.42	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	19.70	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	27.90	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
888.3383	23.23	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

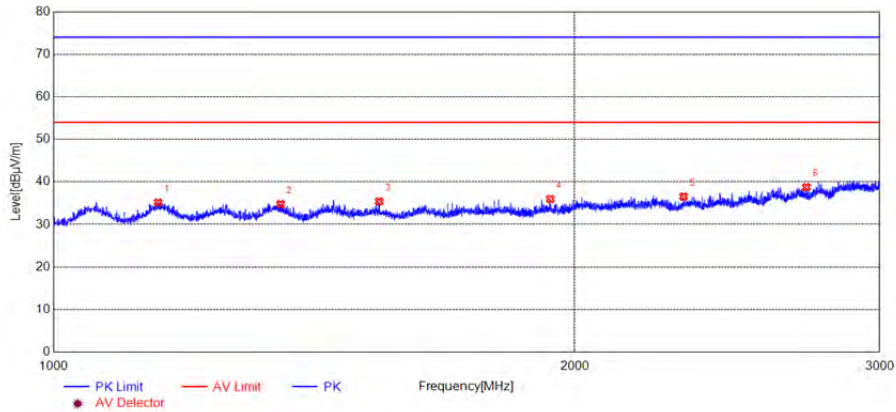

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1149.3582	35.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1352.7255	34.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1542.0903	35.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1936.1560	35.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2311.2185	36.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2721.2869	38.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 3GHz)

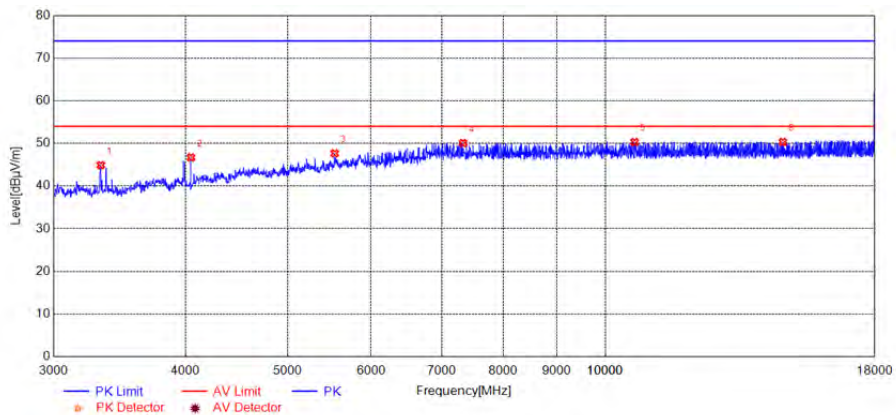


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3327.0654	44.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4050.2100	46.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5541.5083	47.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7332.8666	50.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10660.5321	50.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14729.3459	50.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)




2Mbps


Plot for Channel 0

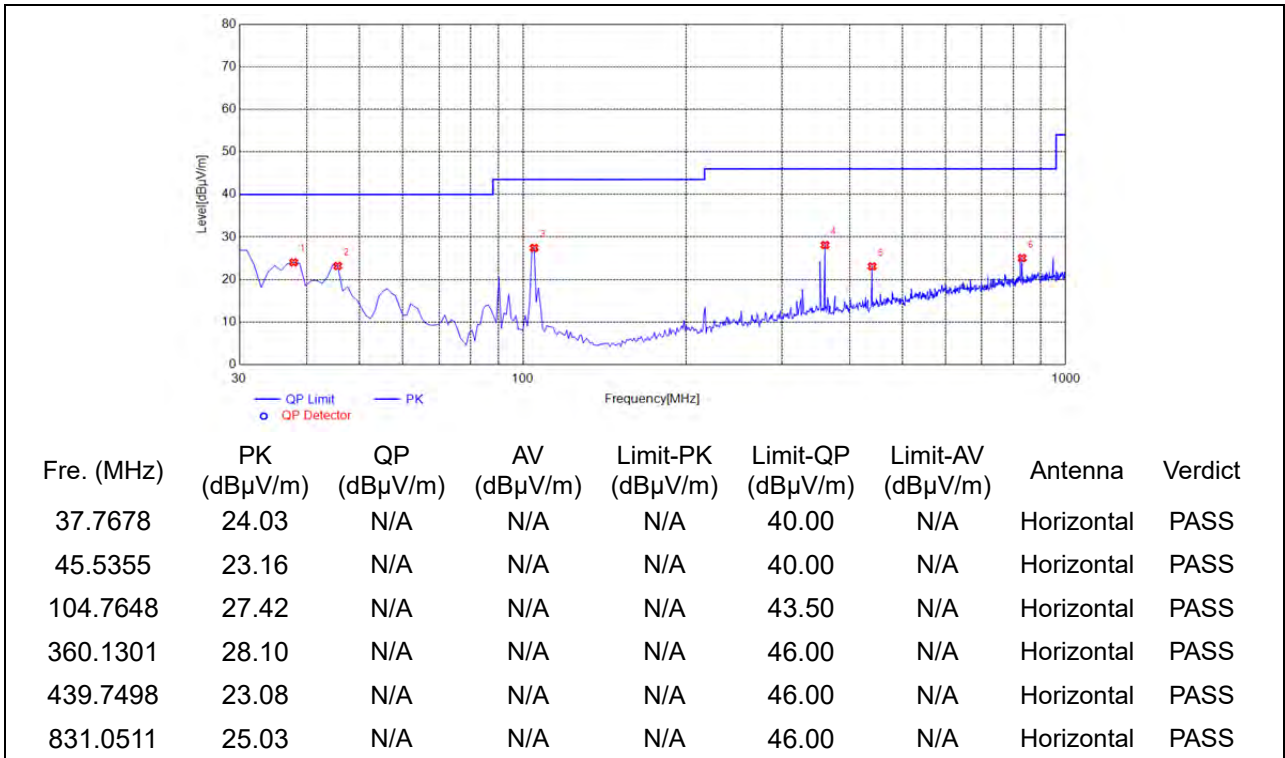

(Antenna Horizontal, 30MHz to 1GHz)

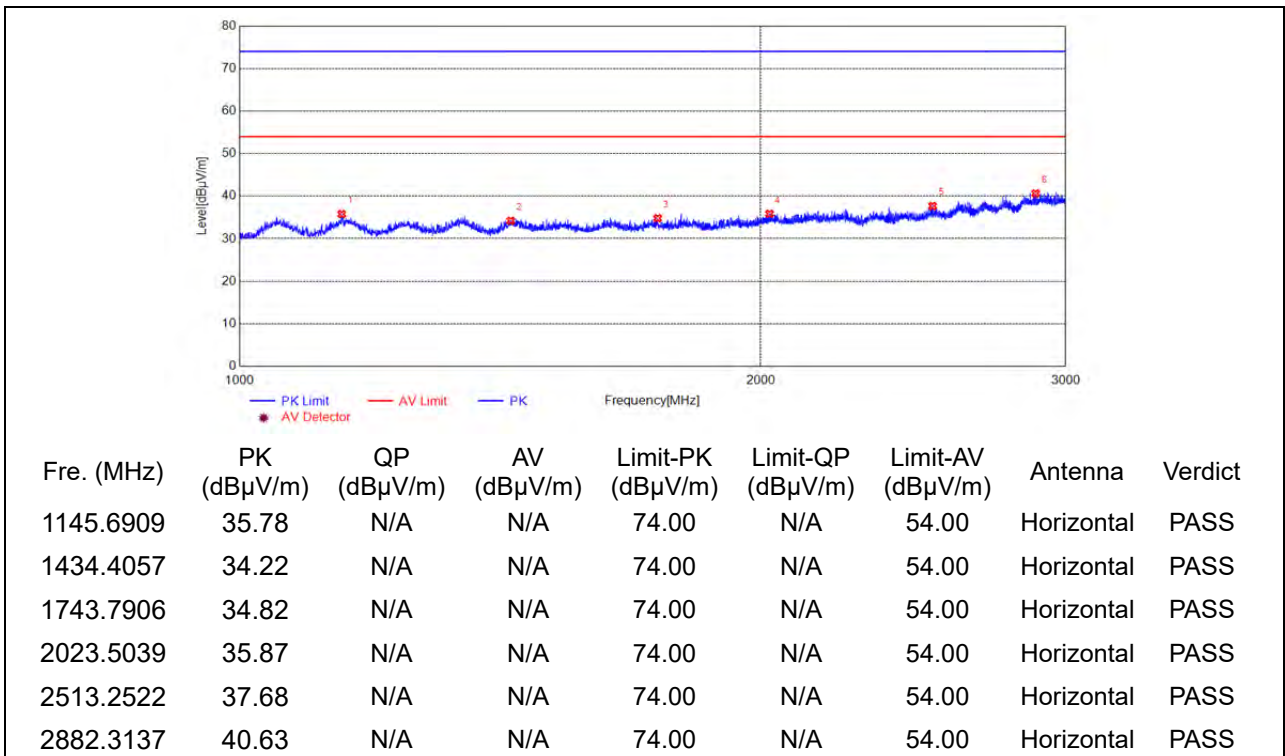


(Antenna Horizontal, 1GHz to 3GHz)

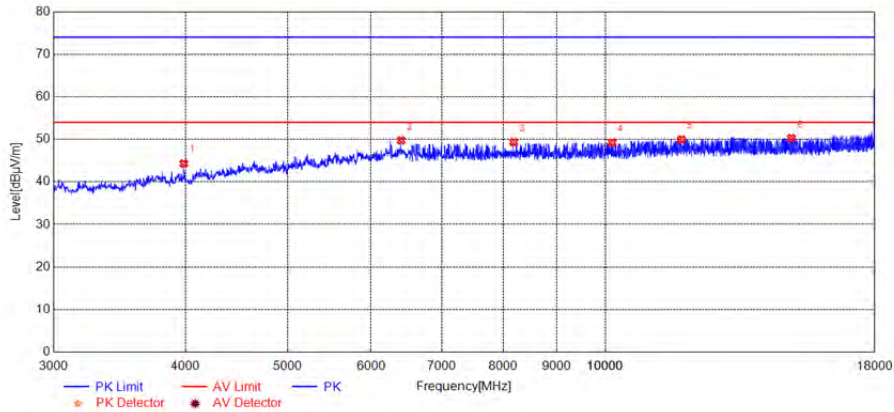


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3987.1974	44.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6405.6811	49.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8188.0376	49.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10150.4301	49.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11806.7614	49.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15008.4017	50.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

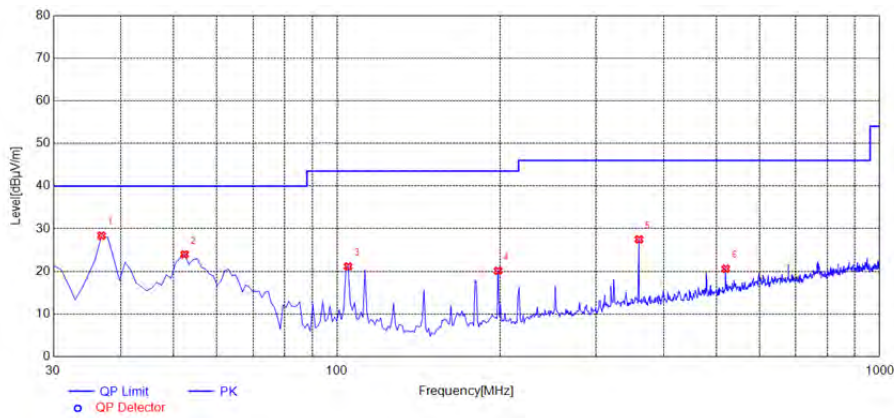


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
36.7968	28.37	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
52.3323	23.97	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	21.16	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	20.14	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	27.50	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
520.3403	20.62	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

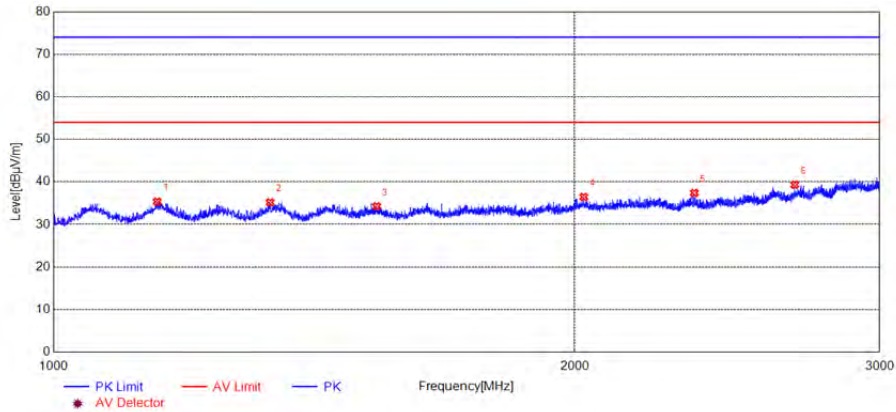

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1148.0247	35.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1334.0557	35.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1537.0895	34.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2024.1707	36.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2344.5574	37.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2679.9467	39.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

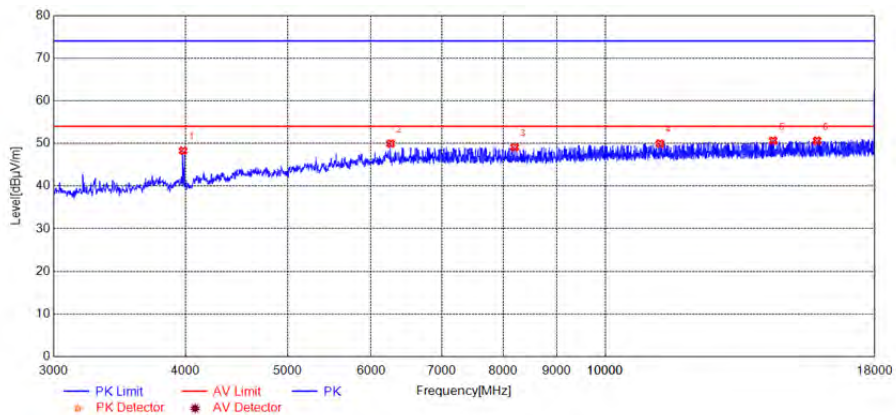


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3981.1962	48.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6261.6523	49.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8206.0412	49.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11266.6533	49.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14426.2853	50.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15872.5745	50.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 19

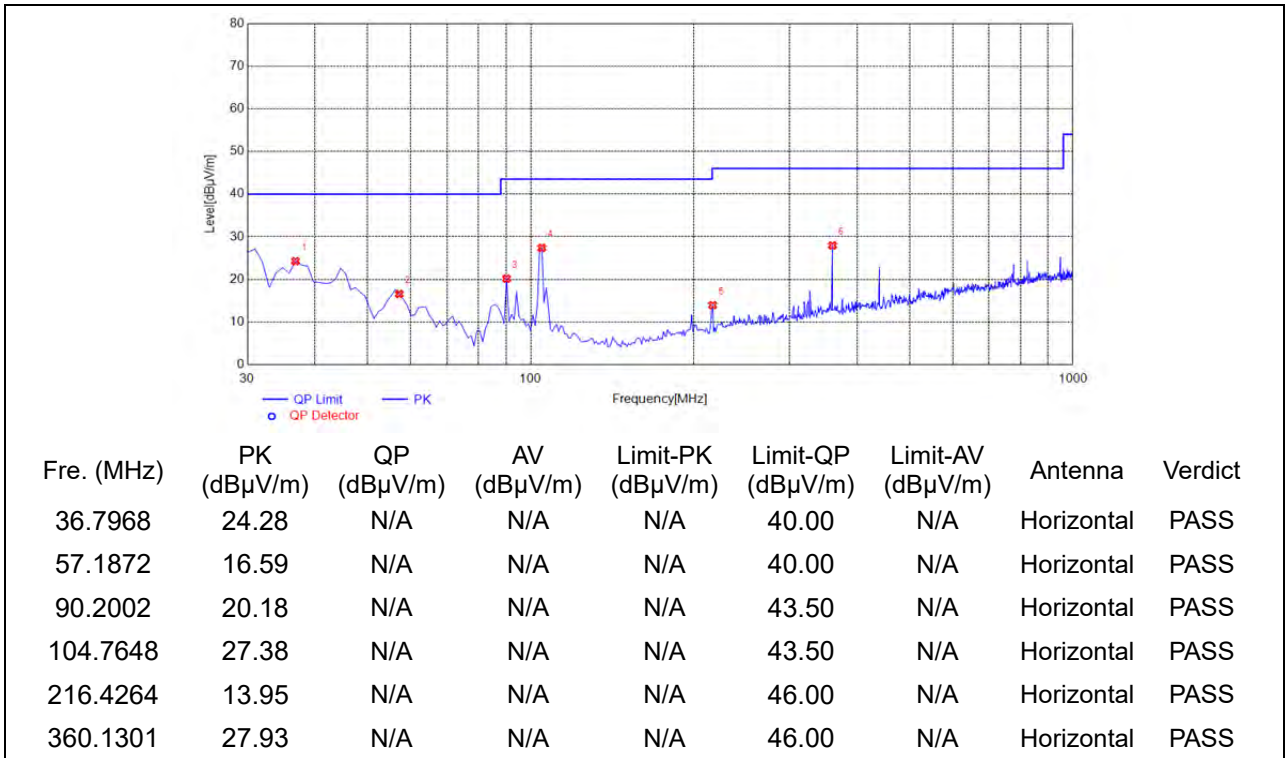

(Antenna Horizontal, 30MHz to 1GHz)

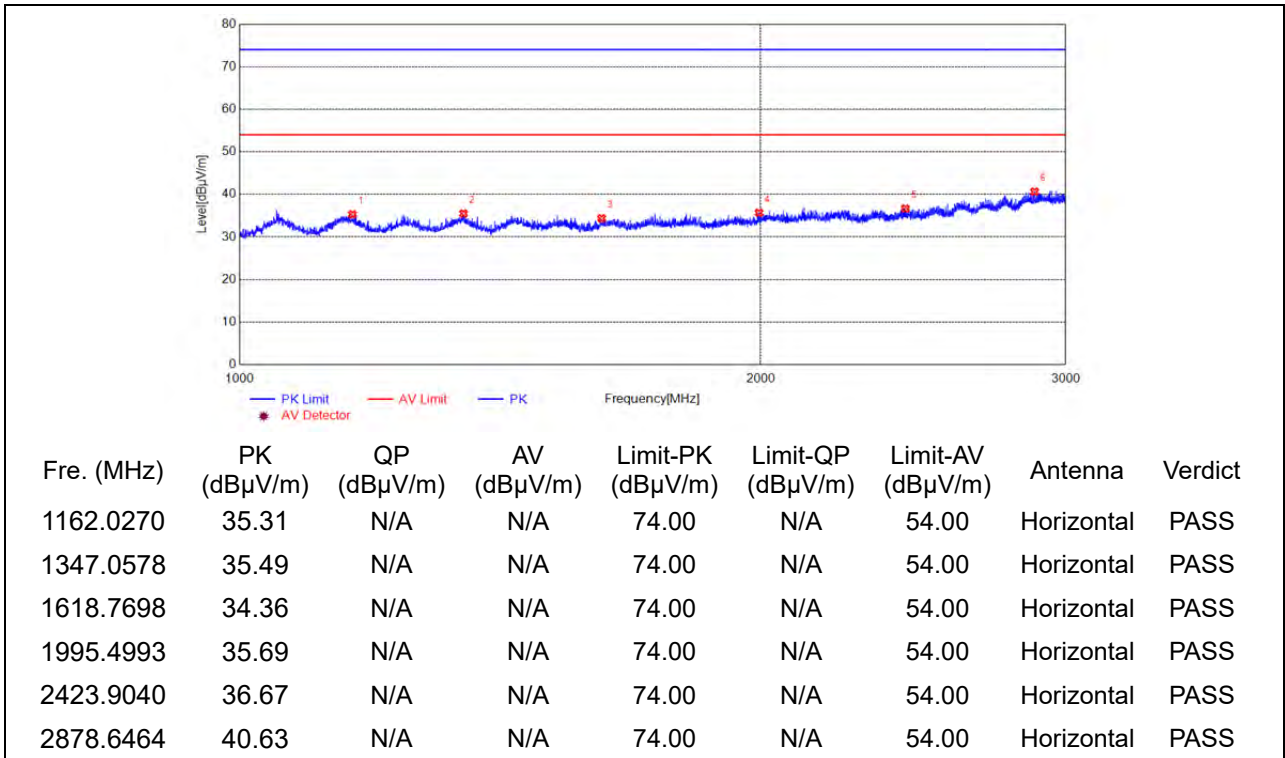


(Antenna Horizontal, 1GHz to 3GHz)

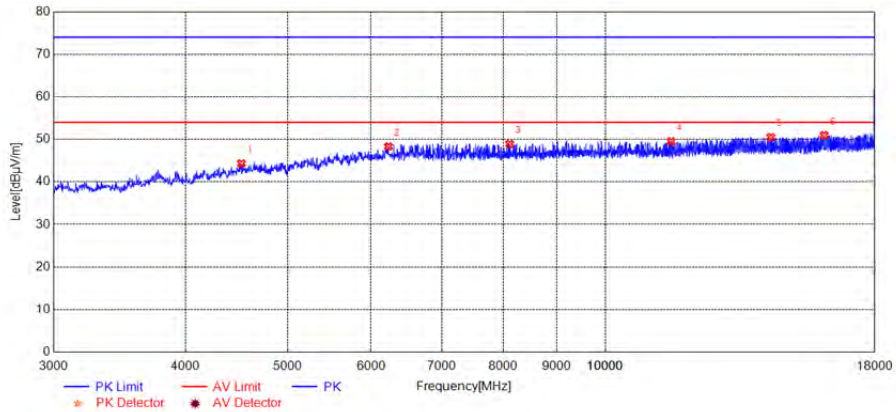


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4521.3043	44.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6231.6463	48.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8119.0238	48.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11545.7091	49.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14348.2697	50.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16118.6237	50.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

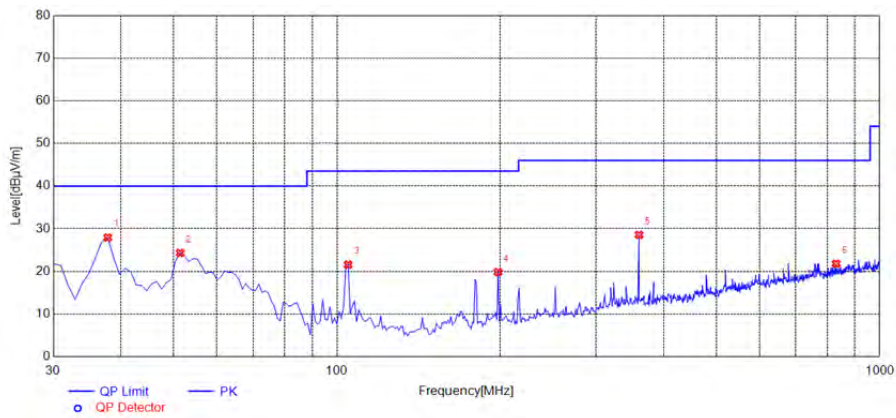


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.7678	27.92	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
51.3614	24.32	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	21.57	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	19.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	28.56	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
831.0511	21.78	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

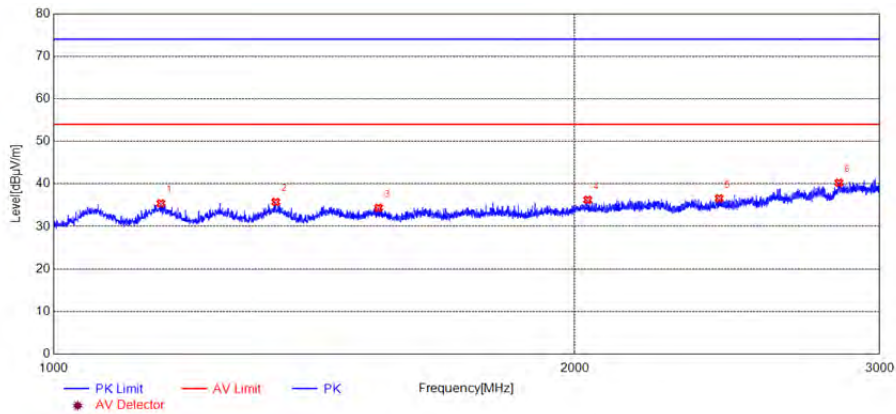

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1153.6923	35.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1344.0573	35.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1540.7568	34.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2034.8391	36.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2423.2372	36.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2841.6403	40.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 3GHz)

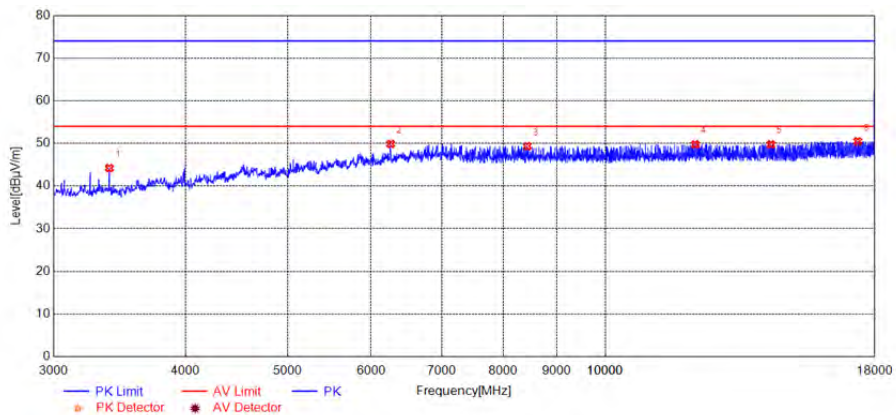


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3390.0780	44.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6261.6523	49.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8434.0868	49.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12169.8340	49.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14354.2709	49.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17348.8698	50.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)


Plot for Channel 39

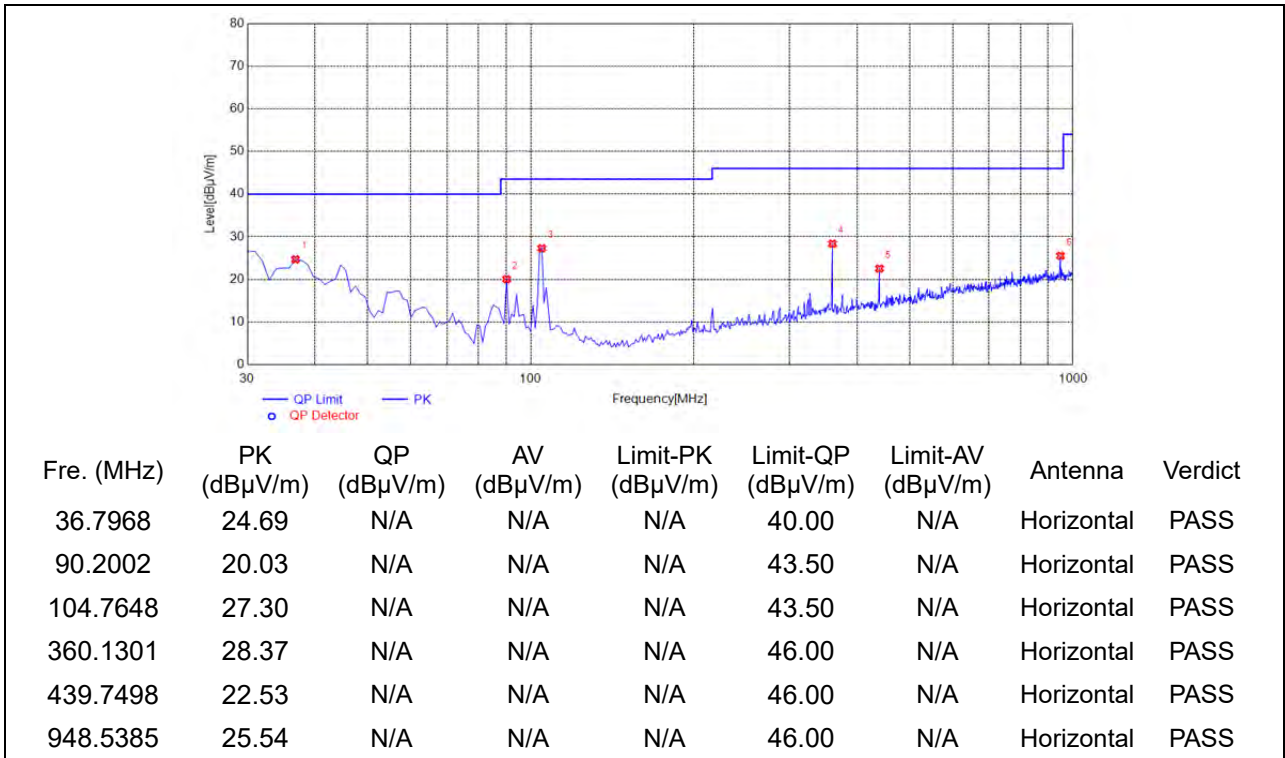

(Antenna Horizontal, 30MHz to 1GHz)

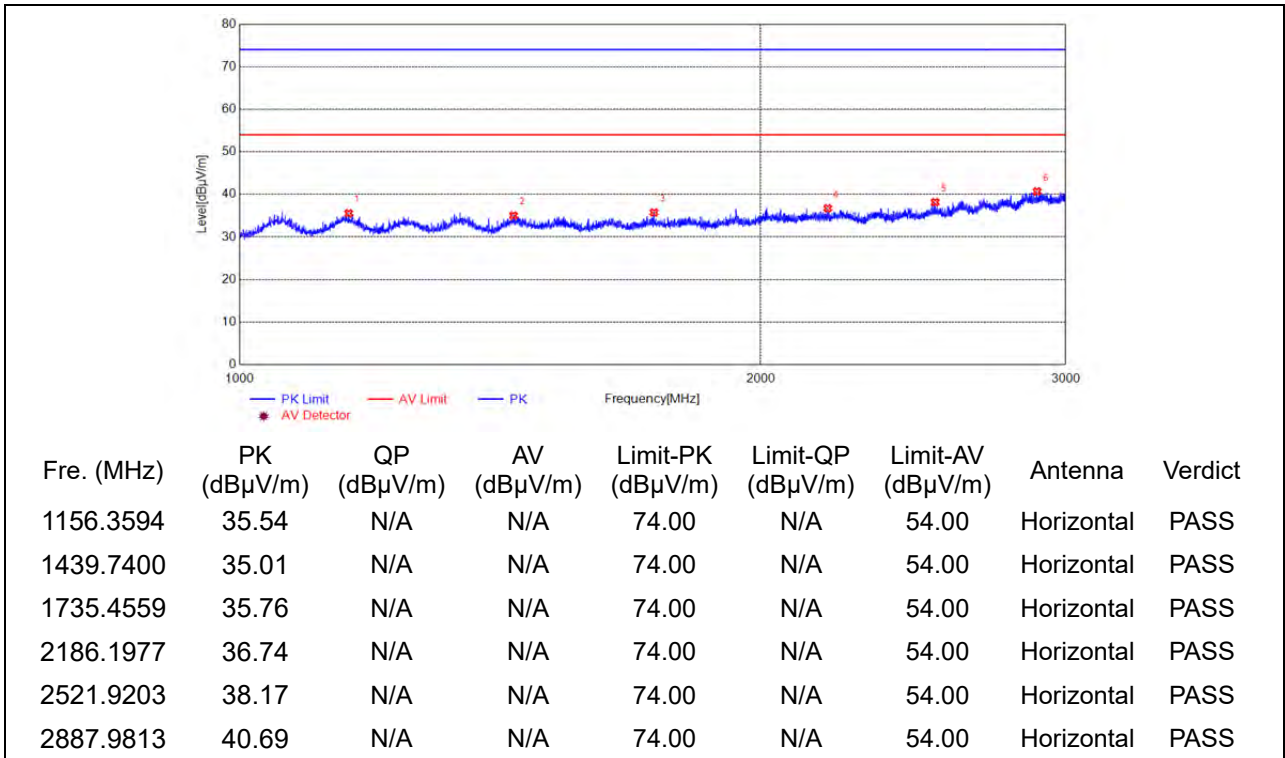


(Antenna Horizontal, 1GHz to 3GHz)

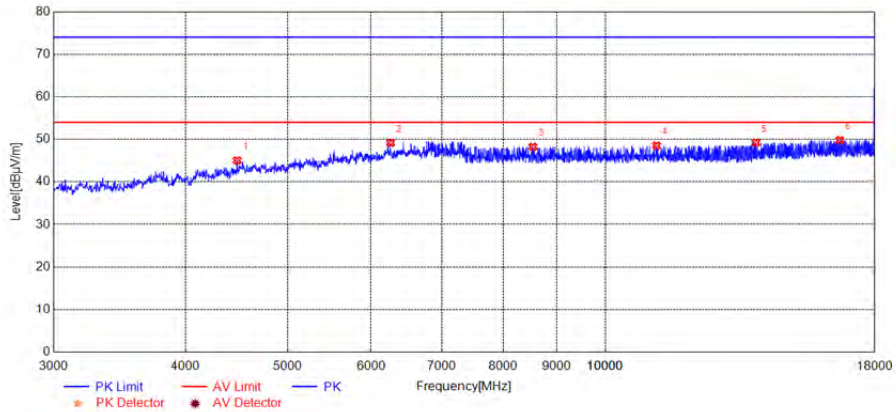


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
4479.2959	45.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6261.6523	49.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8539.1078	48.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11182.6365	48.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13892.1784	49.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16679.7359	49.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 3GHz to 18GHz)

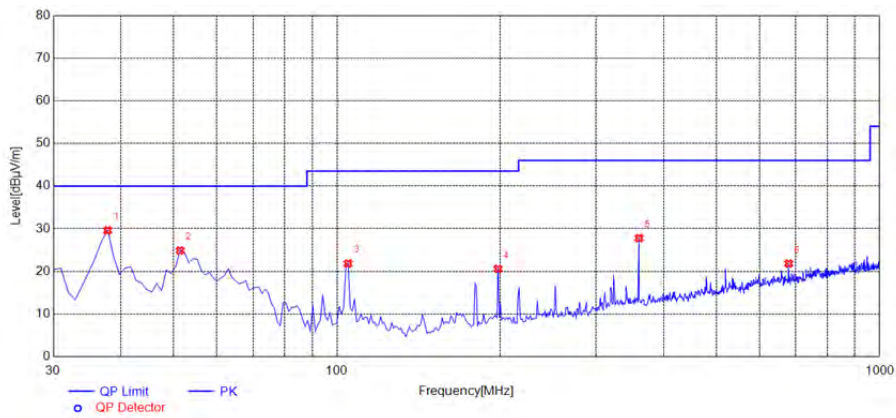


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.7678	29.62	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
51.3614	24.89	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	21.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	20.58	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	27.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
679.5796	21.83	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

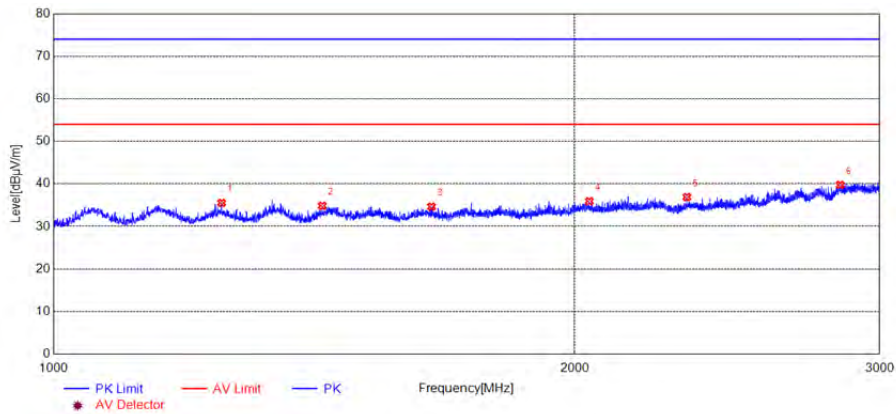

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
1250.7085	35.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1429.7383	34.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1653.1089	34.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2039.1732	35.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2321.5536	36.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2846.3077	39.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 3GHz)

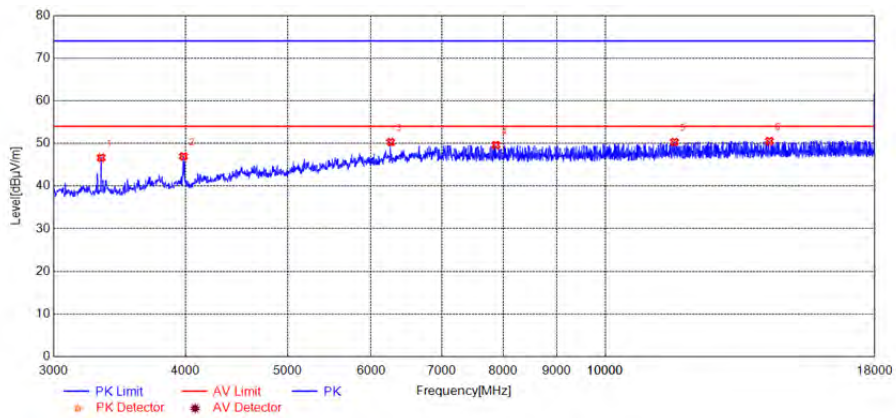

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3330.0660	46.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3984.1968	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6261.6523	50.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7878.9758	49.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11629.7259	50.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14309.2619	50.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 3GHz to 18GHz)

END OF REPORT