



REPORT No.: SZ24050279S01

TEST REPORT

APPLICANT : Vaultek Safe, Inc.

PRODUCT NAME : Smart Station

MODEL NAME : DS5i-BK, DS5i-TG, DS5i-WT, DS5i-SA,
DS5i-SB, DS5i-SD, DS5i-SR, DS5i-CN,
DS5i-DG

BRAND NAME : Vaultek

FCC ID : 2AONI-DS5I-8762C460

STANDARD(S) : FCC 47 CFR Part 2 (2.1091)

RECEIPT DATE : 2024-05-30

TEST DATE : 2024-06-19

ISSUE DATE : 2024-06-28



Edited by:

Xie Yiyun

Xie Yiyun (Rapporteur)

Approved by:

Gan Yueming

Gan Yueming (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.cn

Fax: 86-755-36698525
E-mail: service@morlab.cn





DIRECTORY

1. Technical Information.....	3
1.1. Applicant and Manufacturer Information.....	3
1.2. Equipment under Test (EUT) Description.....	3
1.3. MPE Results Summary.....	3
1.4. Photographs of the EUT.....	4
1.5. Applied Reference Documents	4
2. Device Category and RF Exposure Limit	5
3. General Information for E-Field/H-Field.....	6
3.1. Measurement Uncertainty (95% confidence levels, k=2)	6
3.2. Test Setup	6
4. RF Output Power.....	7
5. Assess Results	7
5.1. Test Equipment List.....	7
5.2. Test Results for EMF	7
5.3. RF Exposure Assessment for Bluetooth	16
5.4. Simultaneous Transmission Analysis.....	17
Annex A General Information.....	20
Annex B Test Setup Photos	

Change History		
Version	Date	Reason for change
1.0	2024-06-28	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Vaultek Safe, Inc.
Applicant Address:	624 Douglas Ave., Suite 1412, Altamonte Springs, FL32714
Manufacturer:	Jeritech Electronics, Ltd.
Manufacturer Address:	Guannanyong Industrial Estate, Shiqi Town, Panyu, GuangZhou, China

1.2. Equipment under Test (EUT) Description

Product Name:	Smart Station
EUT No.:	1#
Hardware Version:	1.2.0
Software Version:	1.0.0
Frequency Bands:	Bluetooth LE: 2402 MHz ~ 2480 MHz Wireless charging: 110 kHz ~ 150 kHz
Modulation Mode:	Bluetooth LE: GFSK (1Mbps, 2Mbps) Wireless charging: ASK
Antenna Type:	Bluetooth LE: PCB Antenna
Antenna Gain:	Bluetooth: 2.04 dBi

1.3. MPE Results Summary

Operation Frequency	Highest MPE Summary	
	E-field (V/m)	H-field (A/m)
110 kHz~ 150 kHz	22.94	0.41

Note:

- There are nine models in this report, DS5i-BK, DS5i-TG, DS5i-WT, DS5i-SA, DS5i-SB, DS5i-SD, DS5i-SR, DS5i-CN, DS5i-DGin, they are different from the model number and colors.
- When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.4. Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

1.5. Applied Reference Documents

Leading reference documents for testing:

Identity	Document Title	Method determination /Remark
FCC 47 CFR Part 2 (2.1091)	Radio Frequency Radiation Exposure Evaluation: mobile devices	No deviation
KDB 447498 D01v06	General RF Exposure Guidance	No deviation
KDB 680106 D01v04	Equipment Authorization of Wireless Power Transfer Devices	No deviation
Note 1: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.		

2. Device Category and RF Exposure Limit

Per user manual, Based on 47CFR 2.1091, this device belongs to mobile device category with General Population/Uncontrolled exposure.

Mobile Devices:

47CFR 2.1091(b)

For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeters separation requirement.

General Population/Uncontrolled Exposure:

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

Basic Restrictions Reference levels

Basic Restriction for electric, magnetic and electromagnetic fields (0Hz to 300GHz)

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

3. General Information for E-Field/H-Field


For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 20 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance.

Measurements should be made from all sides and the top of the primary/client pair, with the 0 cm and 2cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

3.1. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiated Frequency	7×10^8
Uncertainty for test site temperature and humidity	0.6 °C
	3%

3.2. Test Setup

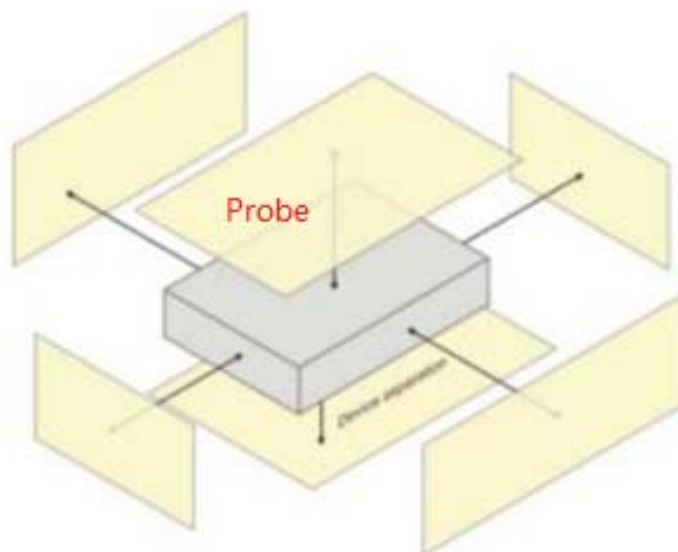



4. RF Output Power

<Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
BLE	CH 00	2402	7.04	7.14
	CH 19	2440	7.10	7.16
	CH 39	2480	6.80	6.84
Duty Cycle (%)			100	100
Tune-up Limit			8.00	8.00

Note: The output power of Bluetooth is derived from the report SZ24050279W01.

5. Assess Results

5.1. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
STT	Broadband Field meter	SEM-600	D-1044	2021.11.15	2024.11.14
STT	Probe	LF-04	I-1044	2021.11.15	2024.11.14
STT	Probe holder	TR-01	N/A	N/A	N/A
STT	Optical fiber line	L=5M	N/A	N/A	N/A

5.2. Test Results for EMF

EUT: Smart Station	Test Date: 2024.06.19
Temperature: 25±2 °C	Humidity: 20-60%



➤ E-Field Strength Result for WPT (Left Side)

E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (5W)	Front Side	0	22.94	27.681	307	PASS
		2	16.59		307	PASS
	Back Side	0	0.3	26.667	307	PASS
		2	0.22		307	PASS
	Left Side	0	0.78	29.487	307	PASS
		2	0.55		307	PASS
	Right Side	0	0.94	29.787	307	PASS
		2	0.66		307	PASS
	Top Side	0	1.45	28.966	307	PASS
		2	1.03		307	PASS
	Bottom Side	0	2.16	29.167	307	PASS
		2	1.53		307	PASS

E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (7.5W)	Front Side	0	12.69	21.434	307	PASS
		2	9.97		307	PASS
	Back Side	0	1.25	6.400	307	PASS
		2	1.17		307	PASS
	Left Side	0	1.73	13.295	307	PASS
		2	1.5		307	PASS
	Right Side	0	1.89	14.815	307	PASS
		2	1.61		307	PASS
	Top Side	0	2.4	17.500	307	PASS
		2	1.98		307	PASS
	Bottom Side	0	3.11	20.257	307	PASS
		2	2.48		307	PASS



E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (10W)	Front Side	0	7.53	29.748	307	PASS
		2	5.29		307	PASS
	Back Side	0	1.16	6.897	307	PASS
		2	1.08		307	PASS
	Left Side	0	1.64	14.024	307	PASS
		2	1.41		307	PASS
	Right Side	0	1.8	15.556	307	PASS
		2	1.52		307	PASS
	Top Side	0	2.31	18.182	307	PASS
		2	1.89		307	PASS
	Bottom Side	0	3.02	20.861	307	PASS
		2	2.39		307	PASS

E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (15W)	Front Side	0	18.08	7.246	307	PASS
		2	16.77		307	PASS
	Back Side	0	0.48	16.667	307	PASS
		2	0.4		307	PASS
	Left Side	0	0.96	23.958	307	PASS
		2	0.73		307	PASS
	Right Side	0	1.12	25.000	307	PASS
		2	0.84		307	PASS
	Top Side	0	1.63	25.767	307	PASS
		2	1.21		307	PASS
	Bottom Side	0	2.34	26.923	307	PASS
		2	1.71		307	PASS



➤ H-Field Strength Result for WPT (Left Side)

H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (5W)	Front Side	0	0.39	28.205	0.815	PASS
		2	0.28		0.815	PASS
	Back Side	0	0.01	12.500	0.815	PASS
		2	0.01		0.815	PASS
	Left Side	0	0.07	28.571	0.815	PASS
		2	0.05		0.815	PASS
	Right Side	0	0.04	22.500	0.815	PASS
		2	0.03		0.815	PASS
	Top Side	0	0.06	23.333	0.815	PASS
		2	0.05		0.815	PASS
	Bottom Side	0	0.05	12.000	0.815	PASS
		2	0.04		0.815	PASS

H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (7.5W)	Front Side	0	0.35	28.571	0.815	PASS
		2	0.25		0.815	PASS
	Back Side	0	0.01	20.000	0.815	PASS
		2	0.01		0.815	PASS
	Left Side	0	0.06	29.688	0.815	PASS
		2	0.05		0.815	PASS
	Right Side	0	0.03	26.471	0.815	PASS
		2	0.03		0.815	PASS
	Top Side	0	0.05	25.926	0.815	PASS
		2	0.04		0.815	PASS
	Bottom Side	0	0.04	13.636	0.815	PASS
		2	0.04		0.815	PASS



H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (10W)	Front Side	0	0.39	27.551	0.815	PASS
		2	0.28		0.815	PASS
	Back Side	0	0.01	10.000	0.815	PASS
		2	0.01		0.815	PASS
	Left Side	0	0.06	19.298	0.815	PASS
		2	0.05		0.815	PASS
	Right Side	0	0.03	29.032	0.815	PASS
		2	0.02		0.815	PASS
	Top Side	0	0.05	18.367	0.815	PASS
		2	0.04		0.815	PASS
	Bottom Side	0	0.04	21.622	0.815	PASS
		2	0.03		0.815	PASS

H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (15W)	Front Side	0	0.41	26.214	0.815	PASS
		2	0.30		0.815	PASS
	Back Side	0	0.03	3.333	0.815	PASS
		2	0.03		0.815	PASS
	Left Side	0	0.08	14.286	0.815	PASS
		2	0.07		0.815	PASS
	Right Side	0	0.05	17.647	0.815	PASS
		2	0.04		0.815	PASS
	Top Side	0	0.07	13.043	0.815	PASS
		2	0.06		0.815	PASS
	Bottom Side	0	0.06	14.035	0.815	PASS
		2	0.05		0.815	PASS



➤ E-Field Strength Result for WPT (Right Side)

E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (5W)	Front Side	0	22.76	27.900	307	PASS
		2	16.41		307	PASS
	Back Side	0	0.12	16.667	307	PASS
		2	0.1		307	PASS
	Left Side	0	0.6	21.667	307	PASS
		2	0.47		307	PASS
	Right Side	0	0.76	27.632	307	PASS
		2	0.55		307	PASS
	Top Side	0	1.27	27.402	307	PASS
		2	0.922		307	PASS
	Bottom Side	0	1.98	29.798	307	PASS
		2	1.39		307	PASS

E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (7.5W)	Front Side	0	12.51	21.743	307	PASS
		2	9.79		307	PASS
	Back Side	0	1.07	7.477	307	PASS
		2	0.99		307	PASS
	Left Side	0	1.55	14.839	307	PASS
		2	1.32		307	PASS
	Right Side	0	1.71	16.374	307	PASS
		2	1.43		307	PASS
	Top Side	0	2.22	18.919	307	PASS
		2	1.8		307	PASS
	Bottom Side	0	2.93	21.502	307	PASS
		2	2.3		307	PASS



E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (10W)	Front Side	0	7.35	29.932	307	PASS
		2	5.15		307	PASS
	Back Side	0	0.98	8.163	307	PASS
		2	0.9		307	PASS
	Left Side	0	1.46	15.753	307	PASS
		2	1.23		307	PASS
	Right Side	0	1.62	17.284	307	PASS
		2	1.34		307	PASS
	Top Side	0	2.13	19.718	307	PASS
		2	1.71		307	PASS
	Bottom Side	0	2.84	22.183	307	PASS
		2	2.21		307	PASS

E-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (15W)	Front Side	0	17.9	7.318	307	PASS
		2	16.59		307	PASS
	Back Side	0	0.3	26.667	307	PASS
		2	0.22		307	PASS
	Left Side	0	0.78	29.487	307	PASS
		2	0.55		307	PASS
	Right Side	0	0.94	29.787	307	PASS
		2	0.66		307	PASS
	Top Side	0	1.45	28.966	307	PASS
		2	1.03		307	PASS
	Bottom Side	0	2.16	29.167	307	PASS
		2	1.53		307	PASS



➤ H-Field Strength Result for WPT (Right Side)

H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (5W)	Front Side	0	0.37	29.730	0.815	PASS
		2	0.26		0.815	PASS
	Back Side	0	0.02	21.053	0.815	PASS
		2	0.02		0.815	PASS
	Left Side	0	0.09	21.505	0.815	PASS
		2	0.07		0.815	PASS
	Right Side	0	0.06	14.286	0.815	PASS
		2	0.05		0.815	PASS
	Top Side	0	0.08	16.867	0.815	PASS
		2	0.07		0.815	PASS
	Bottom Side	0	0.07	24.658	0.815	PASS
		2	0.06		0.815	PASS

H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (7.5W)	Front Side	0	0.40	7.500	0.815	PASS
		2	0.37		0.815	PASS
	Back Side	0	0.02	25.000	0.815	PASS
		2	0.02		0.815	PASS
	Left Side	0	0.09	22.989	0.815	PASS
		2	0.07		0.815	PASS
	Right Side	0	0.04	22.500	0.815	PASS
		2	0.03		0.815	PASS
	Top Side	0	0.08	18.182	0.815	PASS
		2	0.06		0.815	PASS
	Bottom Side	0	0.07	23.881	0.815	PASS
		2	0.05		0.815	PASS

H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (10W)	Front Side	0	0.40	12.500	0.815	PASS
		2	0.35		0.815	PASS
	Back Side	0	0.03	3.030	0.815	PASS
		2	0.03		0.815	PASS
	Left Side	0	0.08	23.750	0.815	PASS
		2	0.06		0.815	PASS
	Right Side	0	0.05	28.889	0.815	PASS
		2	0.03		0.815	PASS
	Top Side	0	0.07	12.500	0.815	PASS
		2	0.06		0.815	PASS
	Bottom Side	0	0.06	13.333	0.815	PASS
		2	0.05		0.815	PASS

H-field strength result (Test frequency range from 110 kHz to 150 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi.		
110 kHz ~150 kHz (15W)	Front Side	0	0.37	27.027	0.815	PASS
		2	0.27		0.815	PASS
	Back Side	0	0.04	15.000	0.815	PASS
		2	0.03		0.815	PASS
	Left Side	0	0.10	30.000	0.815	PASS
		2	0.07		0.815	PASS
	Right Side	0	0.06	27.273	0.815	PASS
		2	0.04		0.815	PASS
	Top Side	0	0.09	9.783	0.815	PASS
		2	0.08		0.815	PASS
	Bottom Side	0	0.08	10.000	0.815	PASS
		2	0.07		0.815	PASS

Note:

- According to the user manual, output power from each primary coil is less than or equal to 15 watts.
- According to KDB 680106 D01V04 section 5.2), the E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the

applicable MPE limit.

3. This device designed for typical desktop applications, therefore mobile exposure conditions are applied and client device is placed directly in contact with the transmitter.
4. The difference between distance 0cm and 2cm tests(E- and/or H-field) is not more than 30%.
5. The EUT test photos, please see the Annex B.

5.3.RF Exposure Assessment for Bluetooth

➤ **Standalone Transmission Assessment:**

Bands	Frequency (MHz)	Tune-up Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	PD (mW/cm ²)	Limit Value (mW/cm ²)
Bluetooth	2402	8.00	2.04	10.09	0.002	1.0

Note:

1. According to KDB 447498, SAR test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring assessment, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.
2. MPE calculate method

$$S = PG/4\pi R^2$$

Where: S= Power density (in appropriate units, e.g. mW/cm²)

P = Time-average maximum tune-up power (in appropriate units, e.g. dBm)

G = numeric gain of the antenna (in appropriate units, e.g. dBi)

R = Separation distance to the centre of radiation of the antenna (20cm)

5.4. Simultaneous Transmission Analysis

➤ Simultaneous Transmission Consideration

Simultaneous Transmission Consideration	Position	Applicable Combination
	Body	E-Field/H-Field(Left)+E-Field/H-Field(Right)+Bluetooth

Total Exposure Radio Analysis

The fields generated by the antennas can be correlated or uncorrelated. At different frequencies, fields are always uncorrelated, and the aggregate power density contributions can be summed according to spatially averaged values of corresponding sources at any point in space, r , to determine the total exposure ratio (TER). Assuming I sources, the TER at each point in space is equal to

$$TER^{uncorr}(r) = \sum_{i=1}^I ER_i = \sum_{i=1}^I \frac{S_{av,i}(r, f_i)}{S_{lim}(f_i)}$$

Where $S_{av,i}$ is the power density for the source I operating at a frequency f_i and S_{lim} is the power density limit as specified by the relevant standard.

Exposure from transmitters operating below 6GHz, where 6GHz denotes the transmission frequency where the basic restrictions change from being defined in terms of SAR to being defined in terms of power density, therefore uncorrelated and the TER is determined as

$$TER^{uncorr}(r) = \sum_{i=1}^I ER_i = \sum_{i=1}^I \frac{S_{av,i}(r, f_i)}{S_{lim}(f_i)}$$

➤ Simultaneous Transmission Analysis

The worst case of the E-Field/H-Field(Left)+E-Field/H-Field(Right)+Bluetooth mode will be calculated for transmitting simultaneously.

$$TER = \sum_{i=1}^{400kHz} \frac{E_i/H_i}{MPE_i} + \sum_{i=1}^{300GHz} \frac{S_i}{S_{limit}} < 1$$

Body	1	2	3	1+2+3
	E-Field (Left Side) (V/m)	E-Field (Right Side) (V/m)	Bluetooth (mW/cm ²)	TER
RF Exposure	22.94	22.76	0.002	0.151
Limit to Ratio	307	307	1.0	

Body	1	2	3	1+2+3
	H-Field (Left Side) (A/m)	H-Field (Right Side) (A/m)	Bluetooth (mW/cm ²)	TER
RF Exposure	0.41	0.40	0.002	0.996
Limit to Ratio	0.815	0.815	1.0	

Body	1	2	3	1+2+3
	E-Field (Left Side) (V/m)	H-Field (Right Side) (A/m)	Bluetooth (mW/cm ²)	TER
RF Exposure	22.94	0.40	0.002	0.568
Limit to Ratio	307	0.815	1.0	



Body	1	2	3	1+2+3
	H-Field (Left Side) (A/m)	E-Field (Right Side) (V/m)	Bluetooth (mW/cm ²)	TER
RF Exposure	0.41	22.76	0.002	0.579
Limit to Ratio	0.815	307	1.0	

➤ **Conclusion:**

According to 47 CFR §2.1091, this device complies with human exposure basic restrictions.



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

Note:

The main report is end here and the other Annex B will be submitted separately.

***** END OF REPORT *****