

FCC/ISED

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Rugged Tablet

ISSUED TO
Shenzhen UniStrong Science & Technology Co., Ltd.

B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

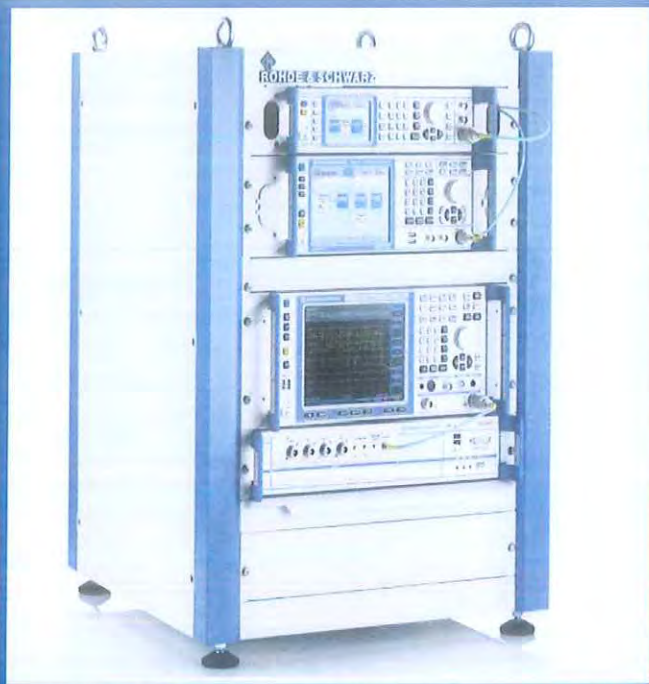

Tested by:

Zou Liu

Zou Liu

(Engineer)

Date

Jul. 09. 2018

Approved by:

Liao Jianming

Liao Jianming

(Technical Director)

Date

Jul. 09. 2018

Report No.: BL-EC1840167-601

EUT Name: Rugged Tablet

Model Name: UT30

Brand Name: UniStrong

Test Standard: 47 CFR Part 15 Subpart C

RSS-Gen (Issue 4, November 2014)

RSS-247 (Issue 2, February 2017)

FCC ID: 2AOPD-UT30

ISED Number: 11546A-UT30

Test conclusion: Pass

Test Date: May 07, 2018 ~ Jun. 25, 2018

Date of Issue: Jul. 09, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jul. 09, 2018</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Ancillary Equipment	7
2.6	Technical Information	7
2.7	Additional Instructions	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List	12
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz)	16
4.5	Measurement Results Explanation Example	17

4.5.1	For conducted test items:	17
4.5.2	For radiated band edges and spurious emission test:.....	17
5	TEST ITEMS.....	18
5.1	Antenna Requirements.....	18
5.1.1	Relevant Standards.....	18
5.1.2	Antenna Anti-Replacement Construction	18
5.1.3	Antenna Gain	18
5.2	Number of Hopping Frequencies	19
5.2.1	Limit.....	19
5.2.2	Test Setup	19
5.2.3	Test Procedure.....	19
5.2.4	Test Result	19
5.3	Peak Output Power and E.I.R.P.....	20
5.3.1	Test Limit.....	20
5.3.2	Test Setup	20
5.3.3	Test Procedure.....	20
5.3.4	Test Result	20
5.4	Occupied Bandwidth	21
5.4.1	Limit.....	21
5.4.2	Test Setup	21
5.4.3	Test Procedure.....	21
5.4.4	Test Result	21
5.5	Carrier Frequency Separation	22
5.5.1	Limit.....	22
5.5.2	Test Setup	22
5.5.3	Test Procedure.....	22
5.5.4	Test Result	22
5.6	Time of Occupancy (Dwell time)	23
5.6.1	Limit.....	23
5.6.2	Test Setup	23
5.6.3	Test Procedure.....	23
5.6.4	Test Result	23
5.7	Conducted Spurious Emission & Authorized-band band-edge	24

5.7.1	Limit.....	24
5.7.2	Test Setup.....	24
5.7.3	Test Procedure.....	24
5.7.4	Test Result.....	24
5.8	Conducted Emission.....	25
5.8.1	Limit.....	25
5.8.2	Test Setup.....	25
5.8.3	Test Procedure.....	25
5.8.4	Test Result.....	25
5.9	Radiated Spurious Emission.....	26
5.9.1	Limit.....	26
5.9.2	Test Setup.....	26
5.9.3	Test Procedure.....	26
5.9.4	Test Result.....	27
5.10	Band Edge (Restricted-band band-edge).....	28
5.10.1	Limit.....	28
5.10.2	Test Setup.....	28
5.10.3	Test Procedure.....	28
5.10.4	Test Result.....	28
ANNEX A	TEST RESULT.....	29
A.1	Number of Hopping Frequency.....	29
A.2	Peak Output Power and E.I.R.P.....	30
A.3	20 dB and 99% bandwidth.....	33
A.4	Hopping Frequency Separation.....	36
A.5	Average Time of Occupancy.....	37
A.6	Conducted Spurious Emissions & Authorized-band band-edge.....	40
A.7	Conducted Emissions.....	47
A.8	Radiated Spurious Emission.....	49
A.9	Band Edge (Restricted-band band-edge).....	84
ANNEX B	TEST SETUP PHOTOS.....	96
ANNEX C	EUT EXTERNAL PHOTOS.....	96
ANNEX D	EUT INTERNAL PHOTOS.....	96

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.8.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen UniStrong Science & Technology Co., Ltd.
Address	B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	Shenzhen UniStrong Science & Technology Co., Ltd.
Address	B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Rugged Tablet
Model Name Under Test	UT30
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	UT30_V103
Software Version	UT30_V1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	SJYEnergy
	Model No.	BA820
	Serial No.	N/A
	Capacity	8200 mAh
	Rated Voltage	3.8 V
	Limited Voltage	4.35 V
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	ASUC71W
	Serial No.	N/A
	Rated Input	100-240 V~, 50 / 60 Hz, 0.7 A
	Rated Output	5 V= 3000 mA
Ancillary Equipment 3	USB Data Cable	
	Length (Approx.)	1.0 m

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/900/1800/1900 MHz; 3G Network WCDMA/HSDPA/HSUPA Band 1/2/5/8; CDMA Band Class 0; EVDO Rel. 0/Rev. A Band Class 0 4G Network FDD LTE Band 1/2/3/4/5/7/8/12/13/17/20/25/28; TDD LTE Band 38/39/40/41 Bluetooth 4.2 (BR+EDR+BLE), WIFI 802.11a,802.11b, 802.11g and 802.11n (HT20), 802.11ac, GPS, GLONASS, NFC
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	FPC Antenna
Antenna Gain	2.05 dBi (In test items related to antenna gain, the final results reflect this figure.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-


2.7 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Bluetooth test mode loop back enabled. EUT is controlled over CBT / CMU.
	<input type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

Power level setup in software			
Test Software Version	QRCT		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

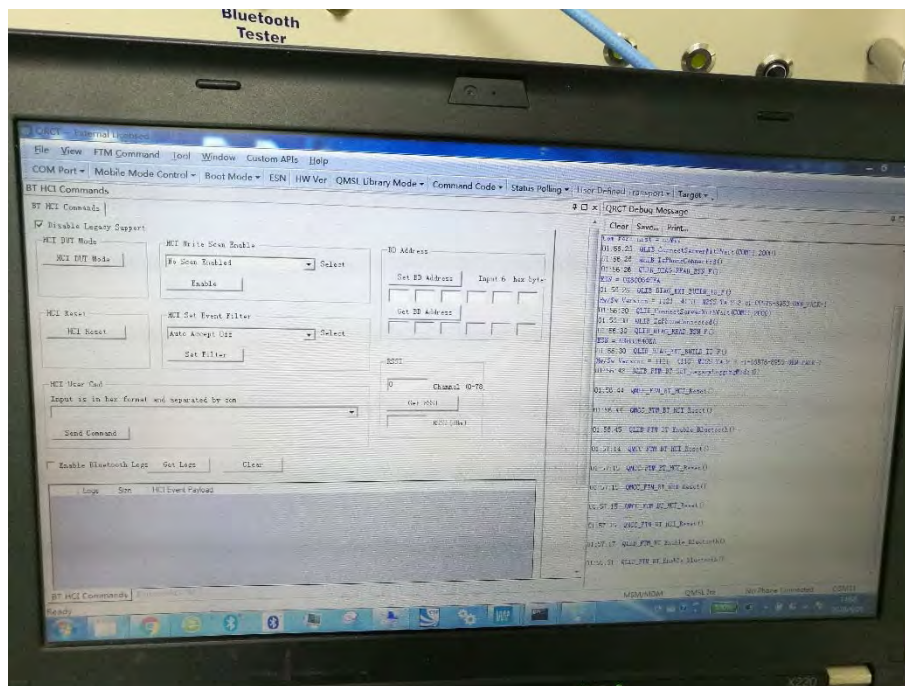

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	RSS-Gen (Issue 4, Nov. 2014)	General Requirements for Compliance of Radio Apparatus
4	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (2)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (1)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (2)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (4)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.1.2	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: Because of the modulation of $\Pi/4$ -DQPSK same as 8-DPSK, and the test results are basically the same with them, so we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.11	2019.06.10
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.11	2019.06.10
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2017.09.07	2018.09.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.21	2019.06.20
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.21	2019.06.20
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.11	2019.06.10
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.11	2019.06.10
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2018.06.21	2019.06.20
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.07	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2016.07.12	2018.07.11
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	N/A	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.11	2019.06.10
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Feld Strength Meter	Narda	EP601	511WX5112 9	2018.05.21	2019.05.20
Mouth Simulator	B&K	4227	2423931	2017.11.16	2018.11.15
Sound Calibrator	B&K	4231	2430337	2017.11.16	2018.11.15
Sound Level Meter	B&K	NL-20	00844023	2017.11.16	2018.11.15
Ear Simulator	B&K	4185	2409449	2017.11.16	2018.11.15
Ear Simulator	B&K	4195	2418189	2017.11.16	2018.11.15
Audio analyzer	B&K	UPL 16	100129	2017.11.16	2018.11.15

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

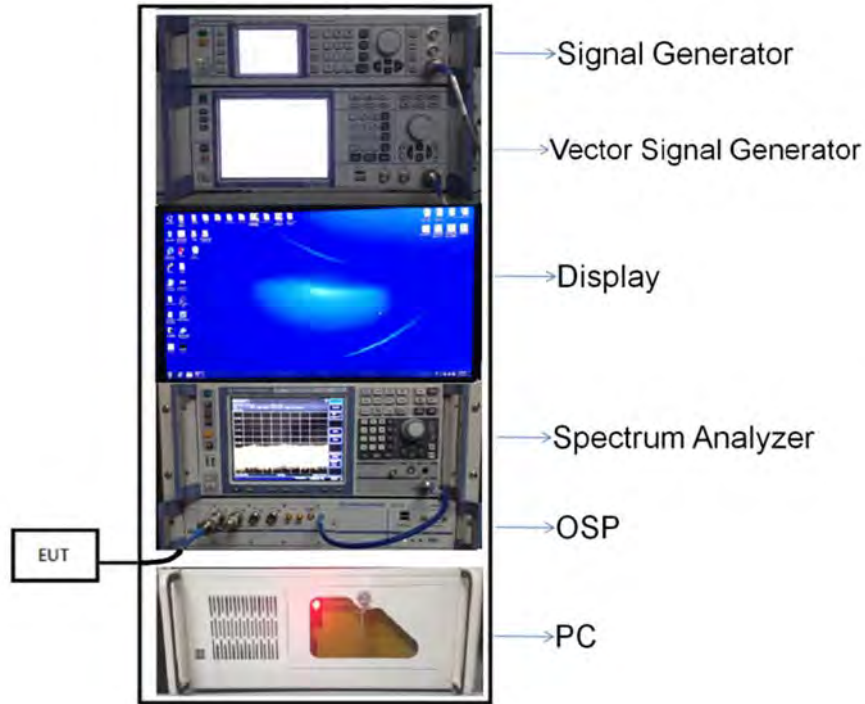


(Diagram 1)

4.4.2 For AC Power Supply Port Test

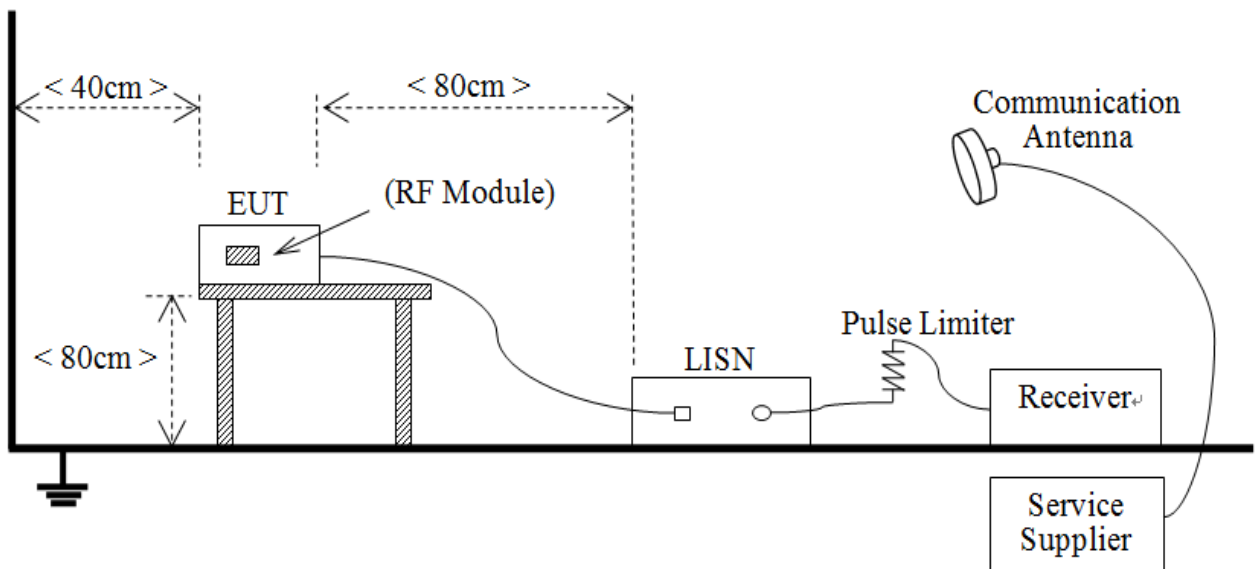


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

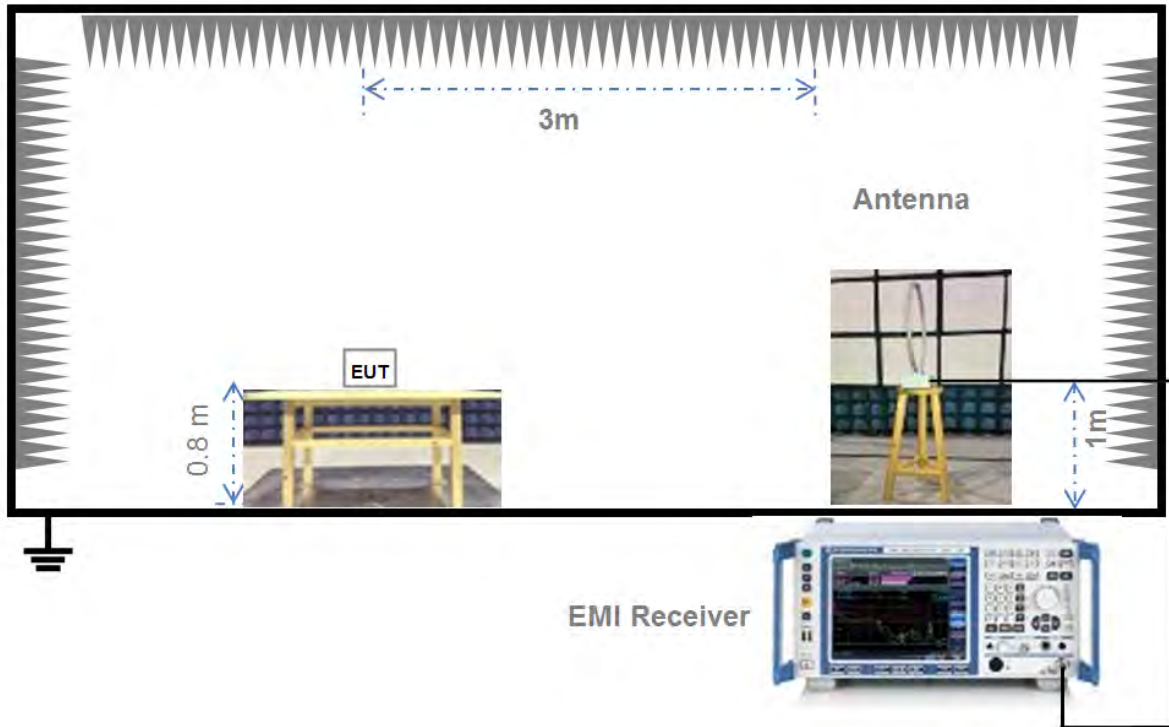


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

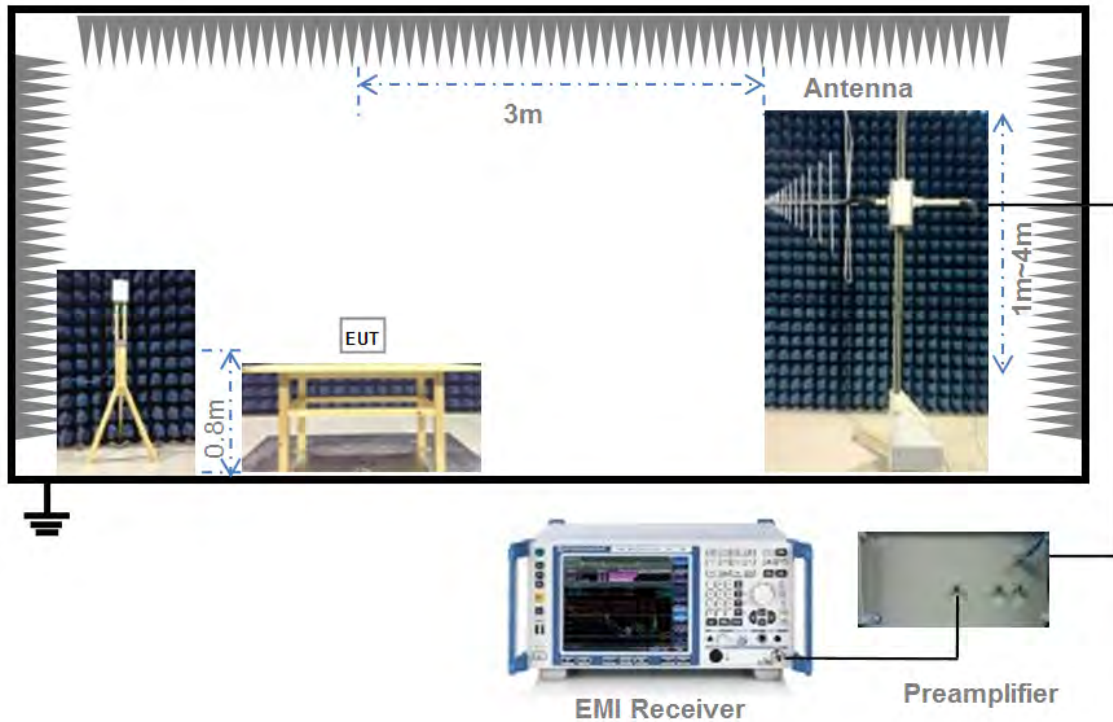

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

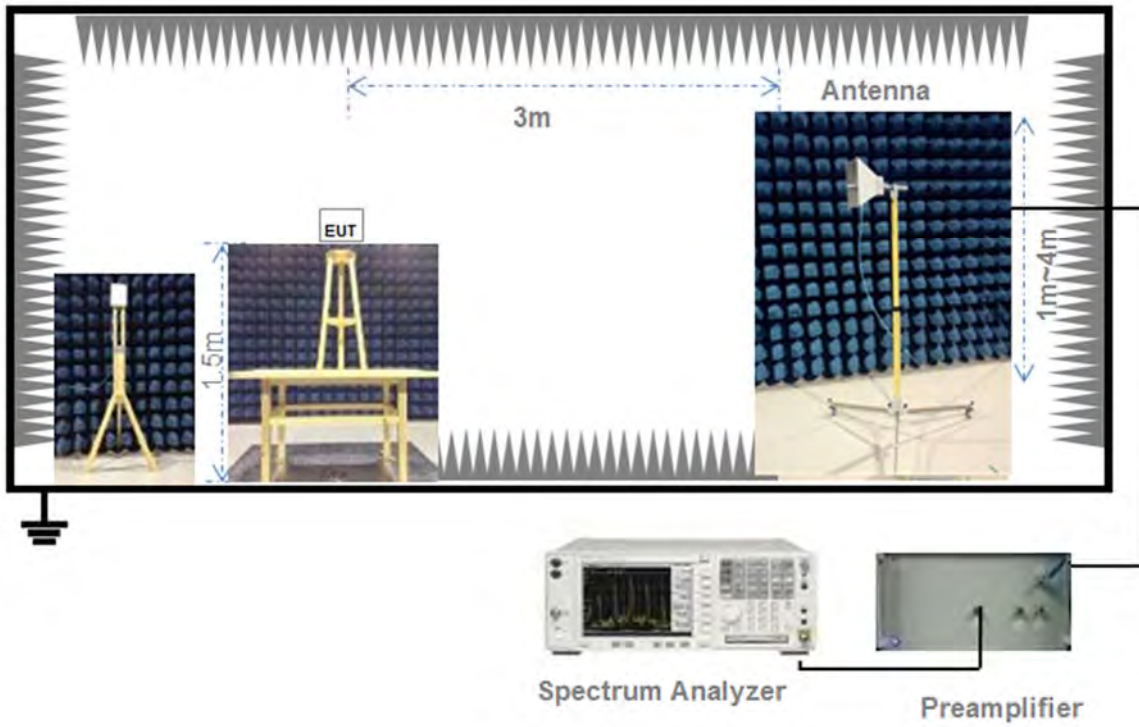

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log(\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)

= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

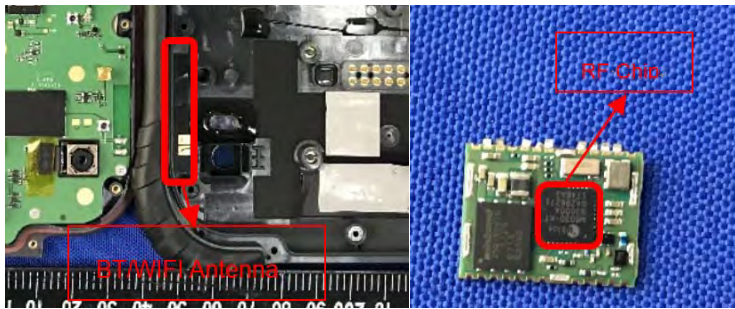Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = 20*log[Field Strength ($\mu\text{V}/\text{m}$)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}$ @3m (AV) and 74dB $\mu\text{V}/\text{m}$ @3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass


Test plots

GFSK 2.4 GHz ~ 2.4415 GHz

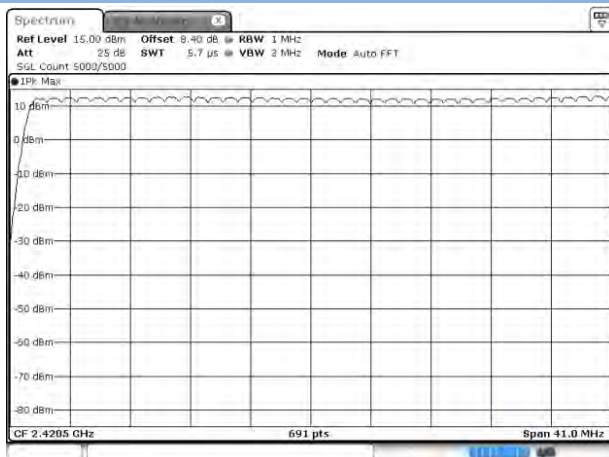


Date: 24 APR 2018 14:30:50

GFSK 2.4415 GHz ~ 2.4835 GHz

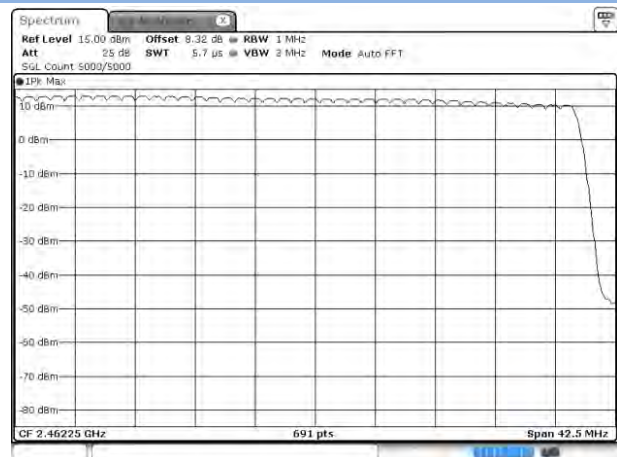


Date: 24 APR 2018 14:31:21

8-DPSK 2.4 GHz ~ 2.4415 GHz

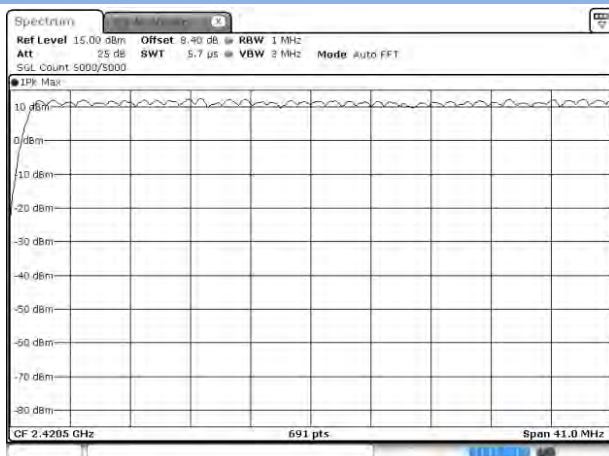

Date: 24 APR 2018 14:38:09

8-DPSK 2.4415 GHz ~ 2.4835 GHz

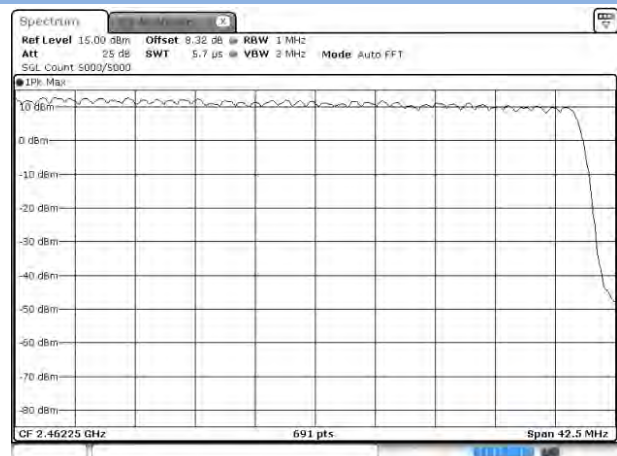

Date: 24 APR 2018 14:38:38

A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	12.41	17.42	30	1000	Pass
Middle	12.99	19.91			Pass
High	10.35	10.84			Pass


Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	12.59	18.16	12.8	19.05	21	125	Pass
Middle	13.04	20.14	13.23	21.04			Pass
High	10.4	10.96	10.58	11.43			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	14.46	27.93	14.64	29.11	14.85	30.55	36	4000	Pass
Middle	15.04	31.92	15.09	32.28	15.28	33.73			Pass
High	12.40	17.38	12.45	17.58	12.63	18.32			Pass


Test plots

GFSK LOW CHANNEL

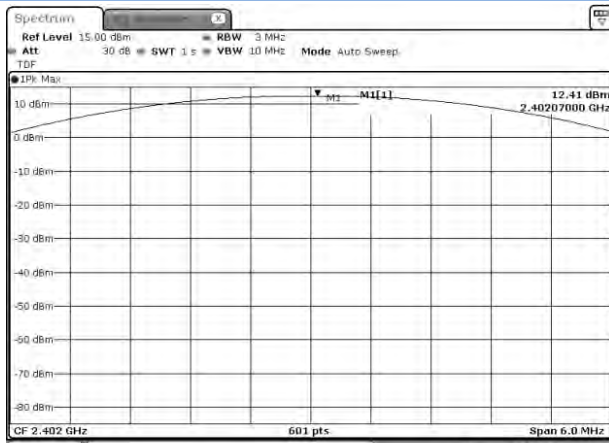


Date: 24 APR 2018 13:59:51

GFSK MIDDLE CHANNEL

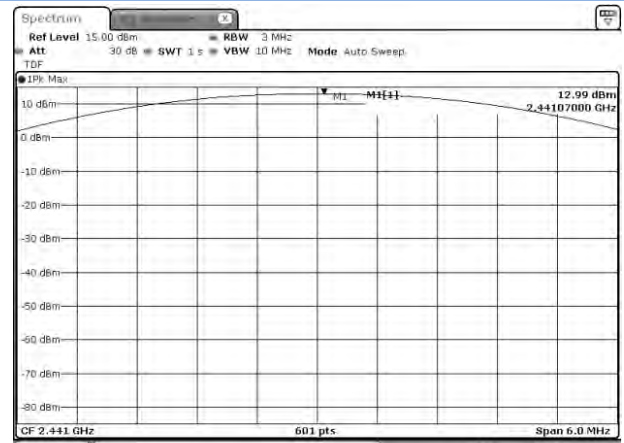


Date: 24 APR 2018 14:05:17

GFSK HIGH CHANNEL

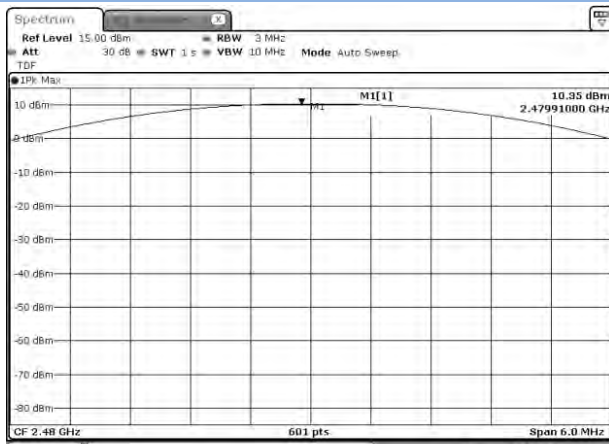


Date: 24 APR 2018 14:08:55

II/4-DQPSK LOW CHANNEL

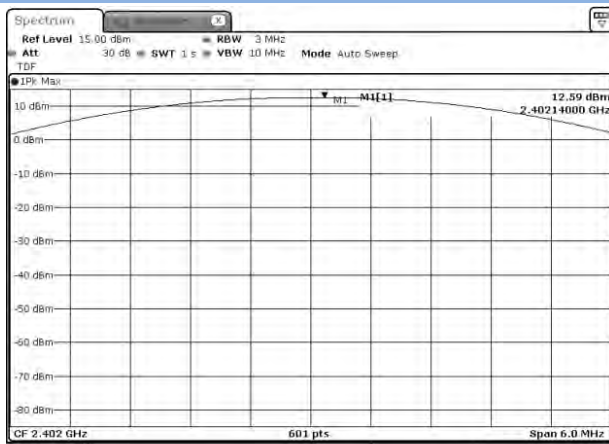


Date: 24 APR 2018 14:13:17

II/4-DQPSK MIDDLE CHANNEL

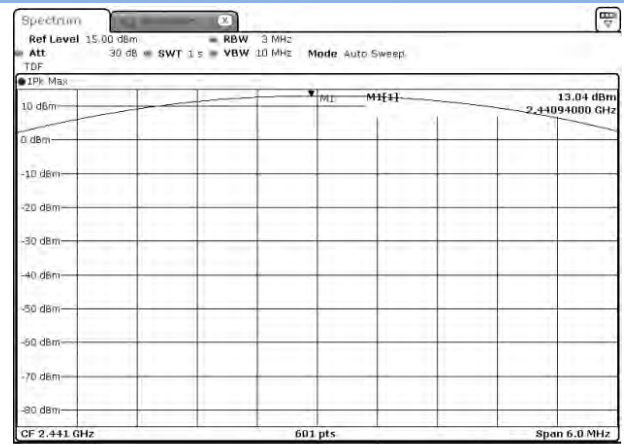


Date: 24 APR 2018 14:13:35

11/4-DQPSK HIGH CHANNEL

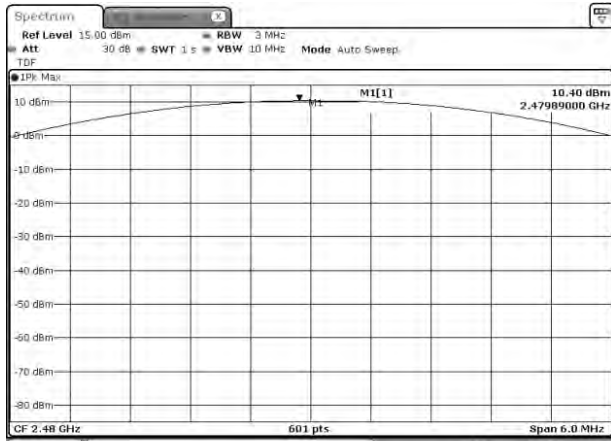


Date: 24 APR 2018 14:13:52

8-DPSK LOW CHANNEL

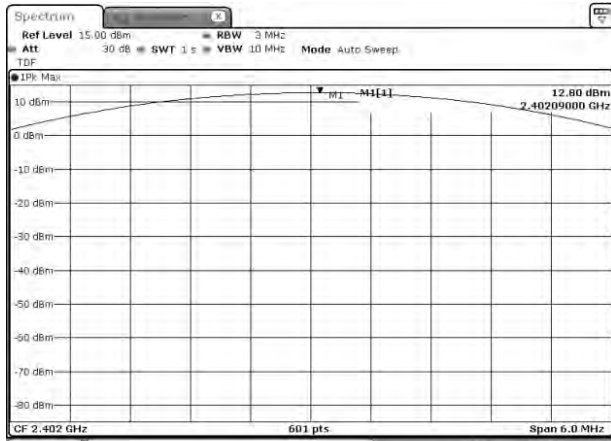


Date: 24 APR 2018 14:14:28

8-DPSK MIDDLE CHANNEL

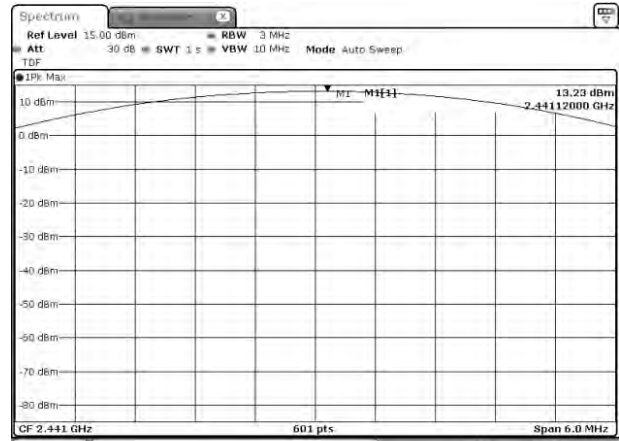

Date: 24 APR 2018 14:21:21

8-DPSK HIGH CHANNEL

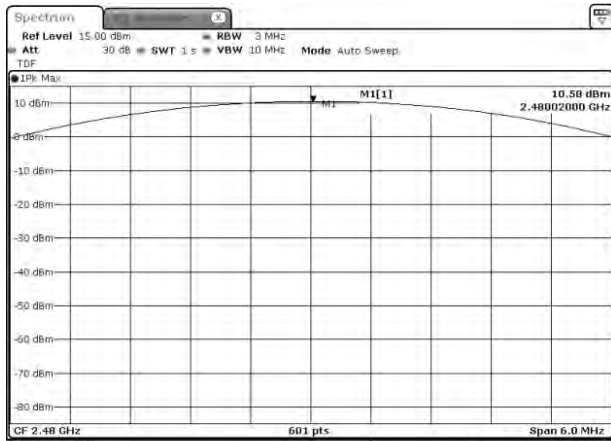

Date: 24 APR 2018 14:25:29

A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.991455	0.898698
Middle	0.995605	0.903039
High	1.013184	0.911722
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.308594	1.176556
Middle	1.308594	1.172214
High	1.308594	1.172214


Test plots

20 dB Bandwidth


GFSK LOW CHANNEL

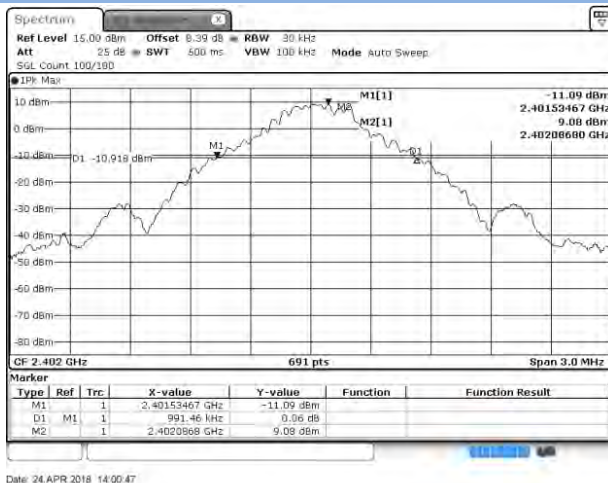


GFSK MIDDLE CHANNEL

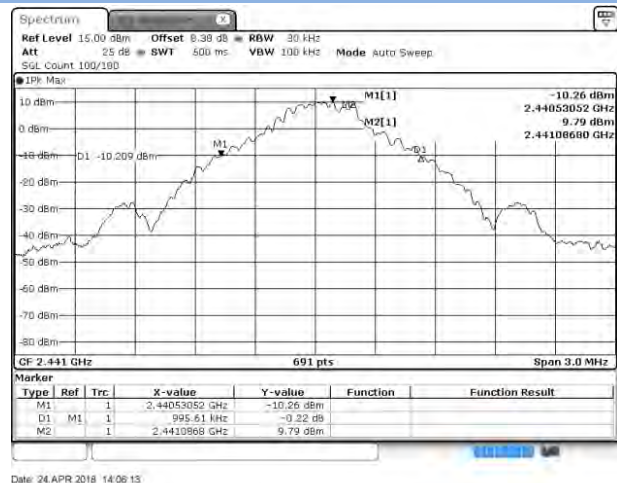

GFSK HIGH CHANNEL

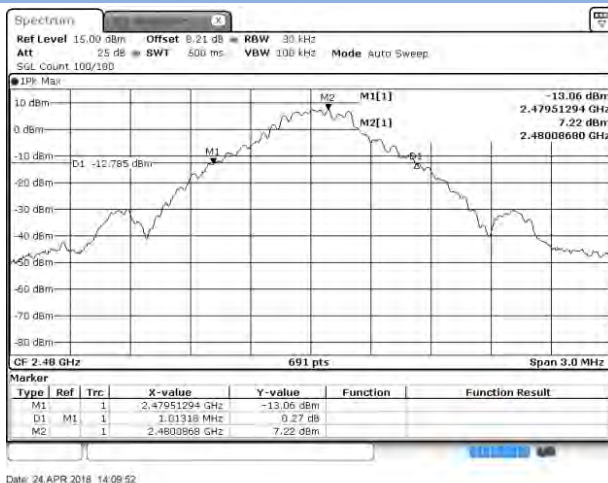


8-DPSK LOW CHANNEL

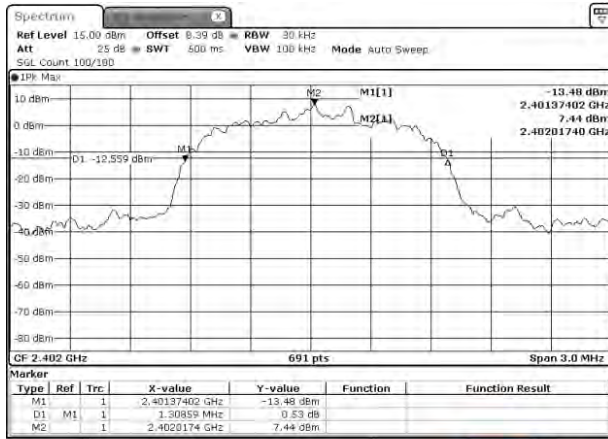


Date: 24 APR 2018 14:15:25

8-DPSK MIDDLE CHANNEL

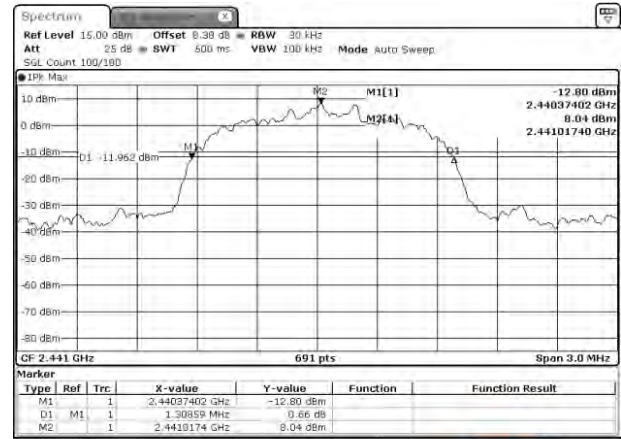

Date: 24 APR 2018 14:22:17


8-DPSK HIGH CHANNEL

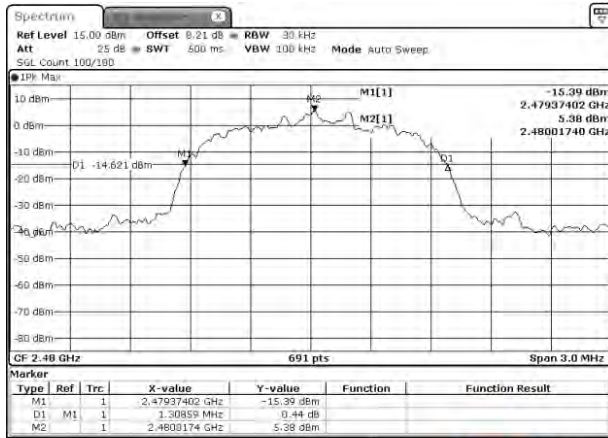

Date: 24 APR 2018 14:26:26


99% Bandwidth

GFSK LOW CHANNEL

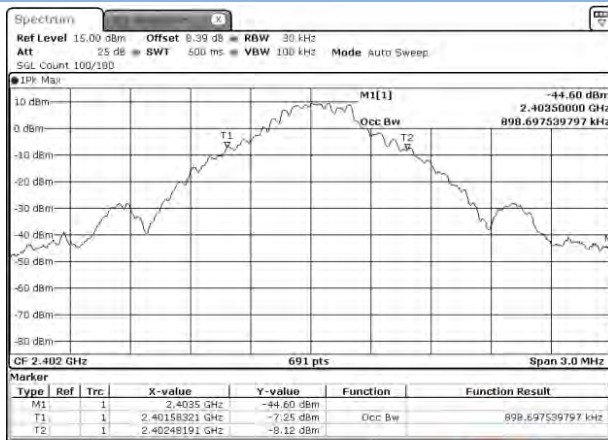


Date: 24 APR 2018 14:01:44

GFSK MIDDLE CHANNEL

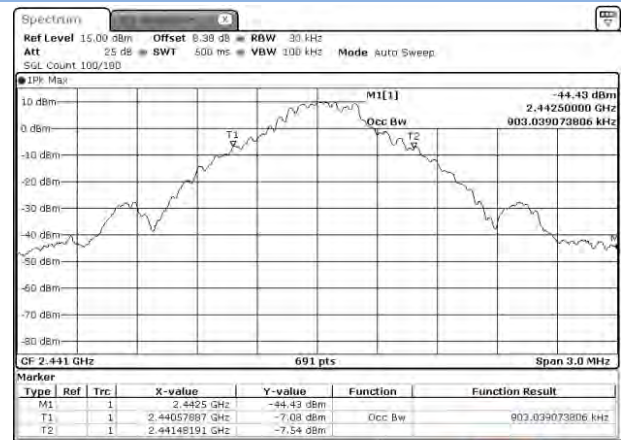


Date: 24 APR 2018 14:07:10

GFSK HIGH CHANNEL

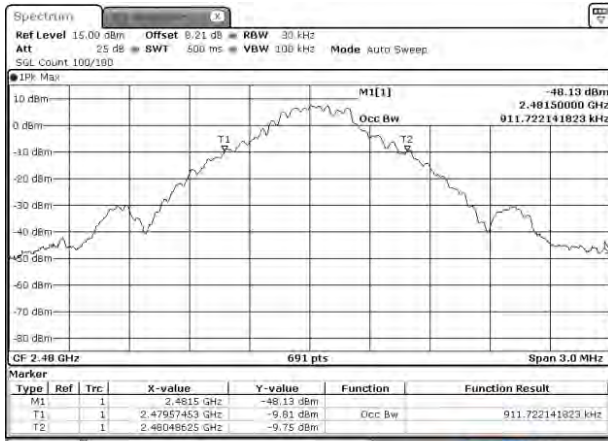


Date: 24 APR 2018 14:10:48

8-DPSK LOW CHANNEL

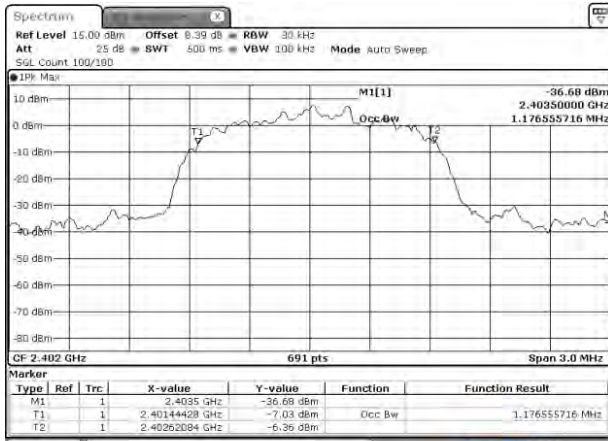


Date: 24 APR 2018 14:16:21

8-DPSK MIDDLE CHANNEL

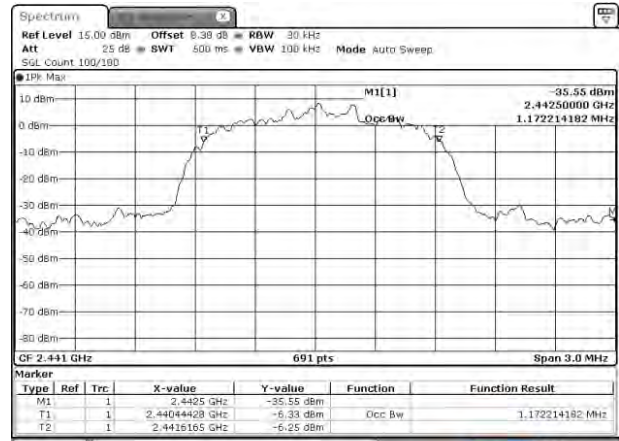

Date: 24 APR 2018 14:23:14

8-DPSK HIGH CHANNEL

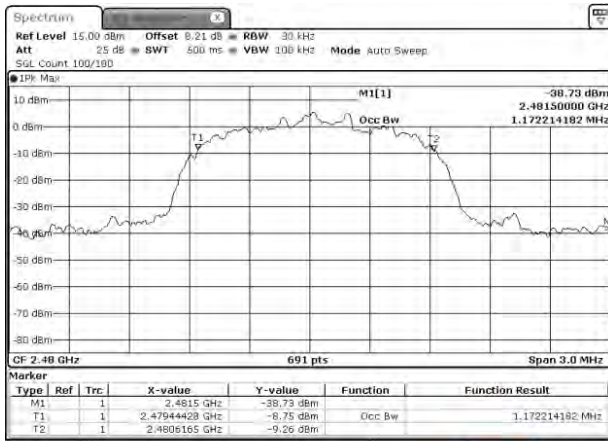

Date: 24 APR 2018 14:27:22

A.4 Hopping Frequency Separation


Test Data

Note: The systems operate with an output power no greater than 125 mw, The data provided in the section A.2.

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	1.003	1.013	0.675	Pass
8-DPSK	1.003	1.309	0.872	Pass


Test Plots

GFSK

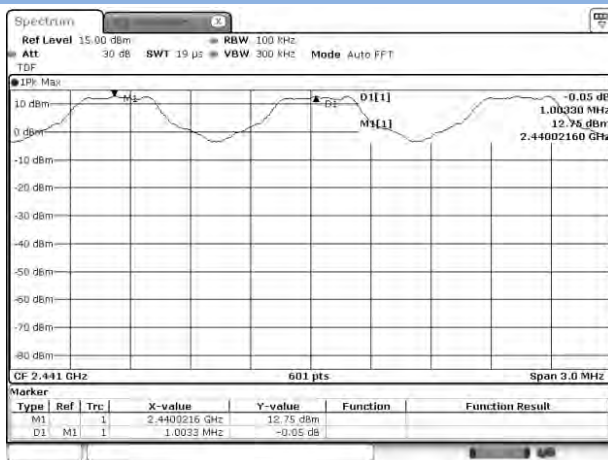

Date: 24 APR 2018 14:33:32

8-DPSK

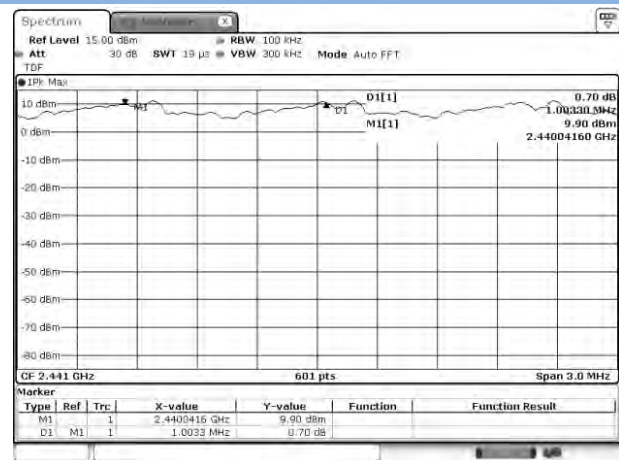

Date: 24 APR 2018 14:39:27


A.5 Average Time of Occupancy

Test Data

GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37883	121.229	0.4	Pass
DH 3	1.6225	259.608	0.4	Pass
DH 5	2.865	305.610	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.383	122.564	0.4	Pass
DH 3	1.61875	259.008	0.4	Pass
DH 5	2.8797	307.178	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.3652	58.432	0.4	Pass
DH 3	1.6121	128.968	0.4	Pass
DH 5	2.8693	153.029	0.4	Pass


Test Plots

GFSK DH1

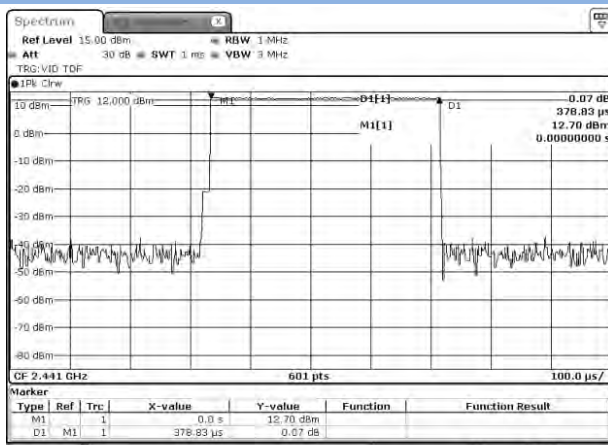


Date: 24 APR 2018 14:46:27

GFSK DH3

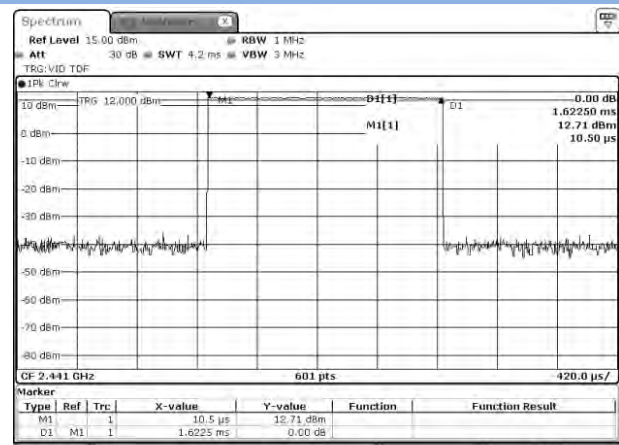


Date: 24 APR 2018 14:47:20

GFSK DH5

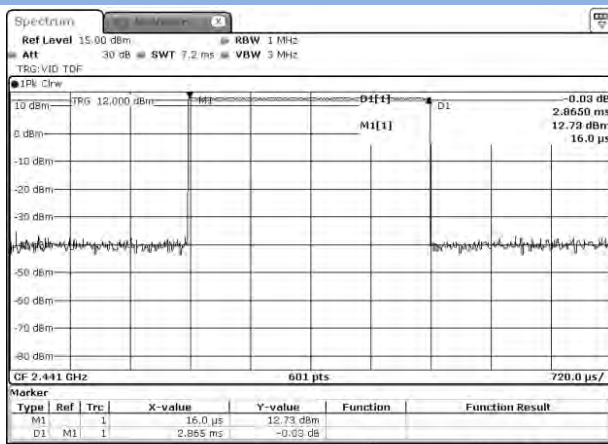


Date: 24 APR 2018 14:47:48

8-DPSK DH1

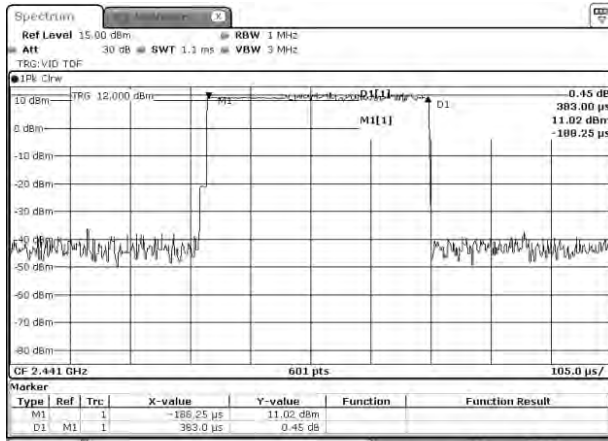


Date: 24.APR.2018 14:49:12

8-DPSK DH3

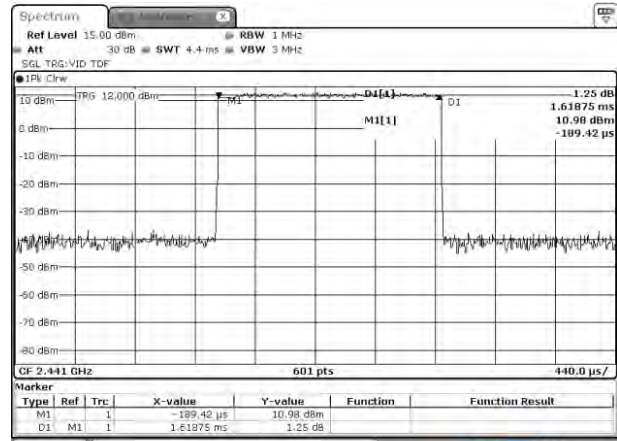


Date: 24.APR.2018 14:50:13

8-DPSK DH5

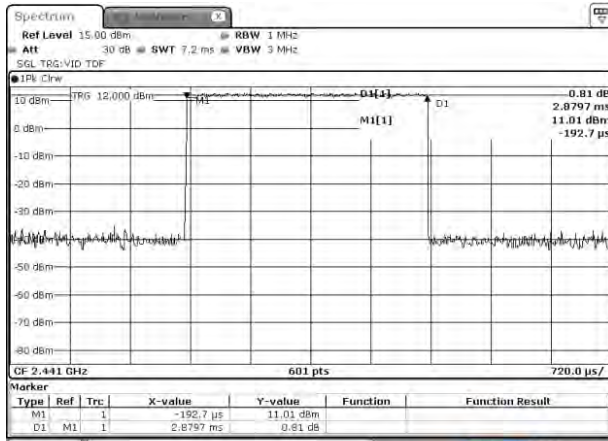


Date: 24.APR.2018 14:51:23

AFH Mode DH1

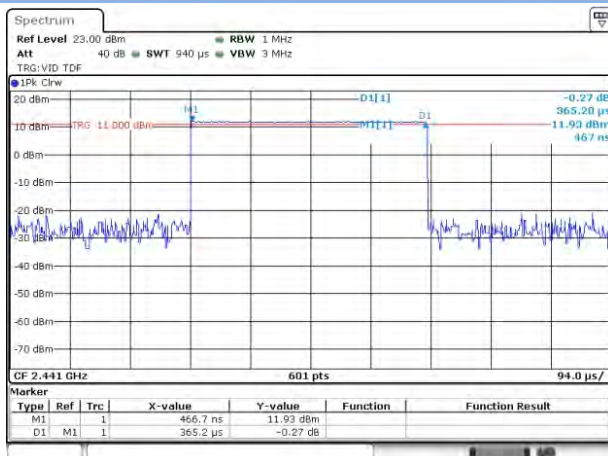


Date: 4.JUL.2018 16:06:42

AFH Mode DH3

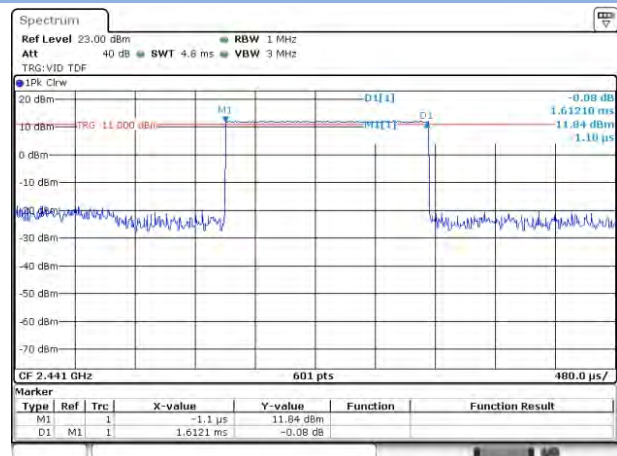

Date: 4.JUL.2018 16:07:15

AFH Mode DH5

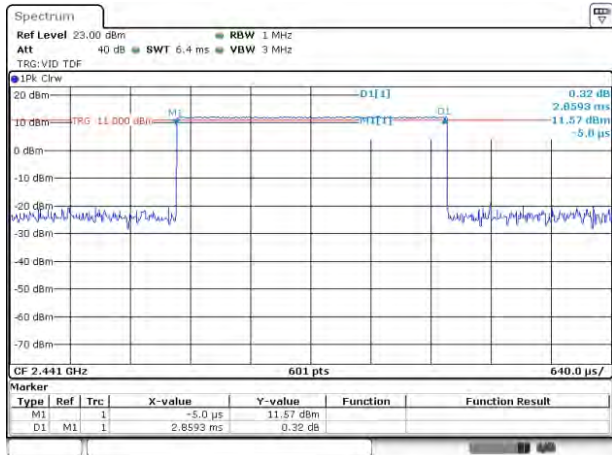

Date: 4 JUL 2018 16:07:35


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.70	12.40	-7.60	Pass
Middle	-40.83	12.80	-7.20	Pass
High	-40.54	10.12	-9.88	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-41.22	10.67	-9.33	Pass
Middle	-40.98	11.14	-8.86	Pass
High	-40.96	8.43	-11.57	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-40.37	12.39	-7.61	Pass
8-DPSK	-40.84	10.89	-9.11	Pass


Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

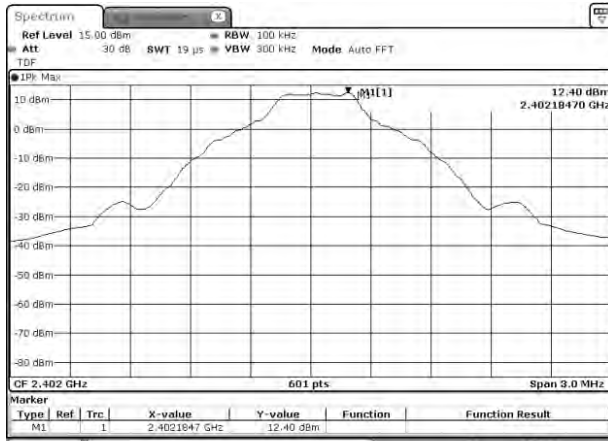


Date: 24 APR 2018 14:02:00

GFSK LOW CHANNEL, BAND EDGE

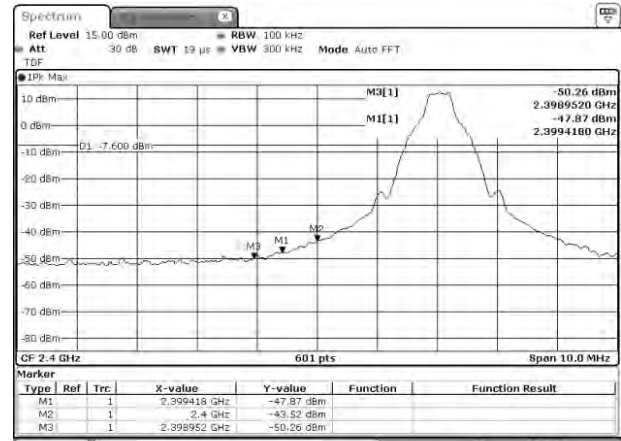


Date: 24 APR 2018 14:04:30

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

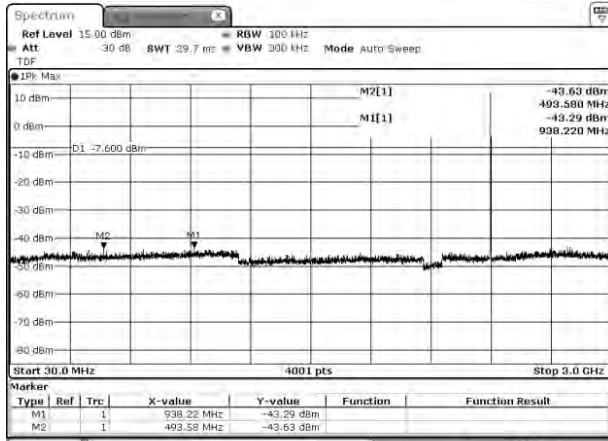


Date: 24 APR 2018 14:03:24

GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

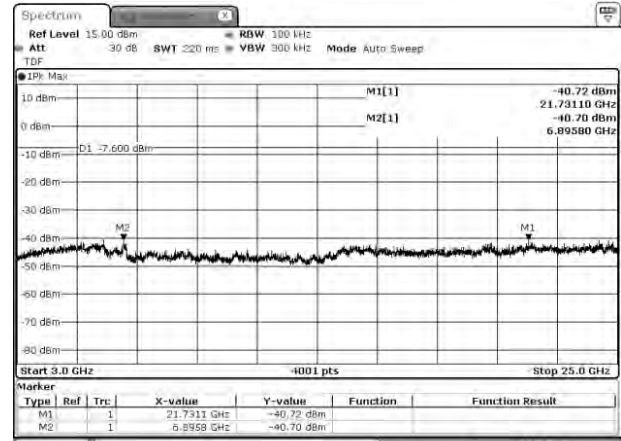


Date: 24 APR 2018 14:03:39

GFSK MIDDLE CHANNEL, CARRIER LEVEL

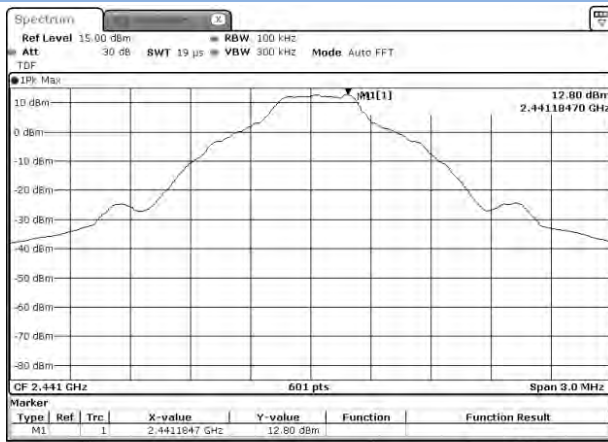


Date: 24 APR 2018 14:07:20

GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

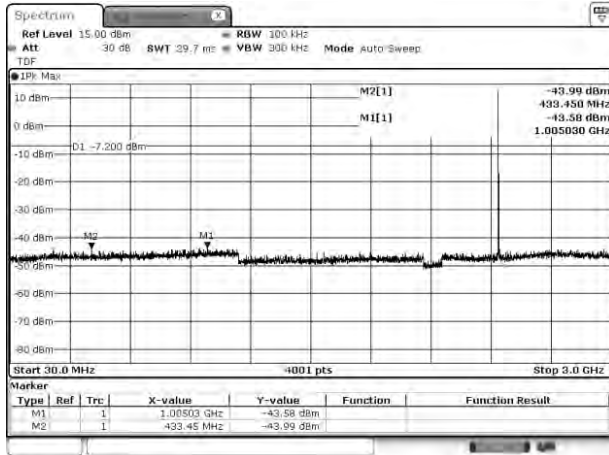


Date: 24 APR 2018 14:08:17

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

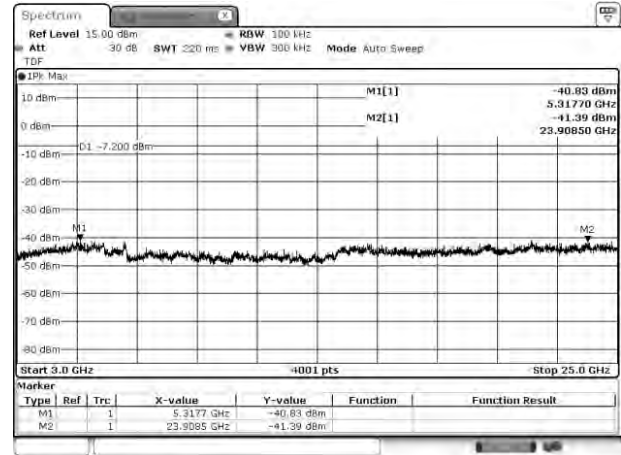


Date: 24 APR 2018 14:08:30

GFSK HIGH CHANNEL, CARRIER LEVEL

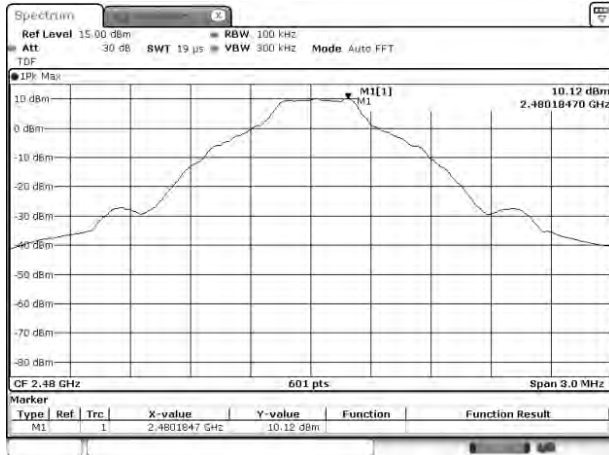


Date: 24 APR 2018 14:11:06

GFSK HIGH CHANNEL , BAND EDGE

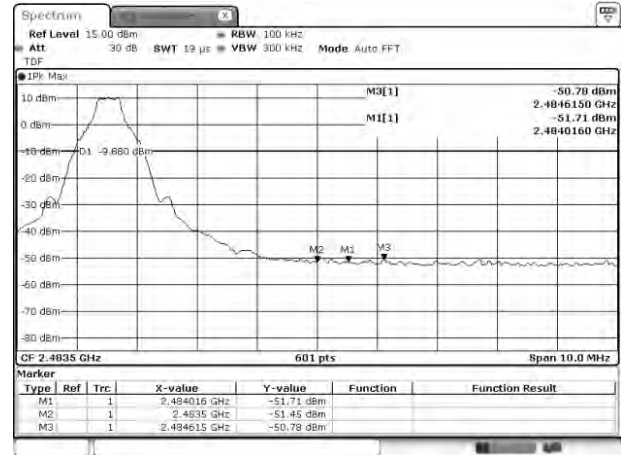


Date: 24 APR 2018 14:12:43

GFSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

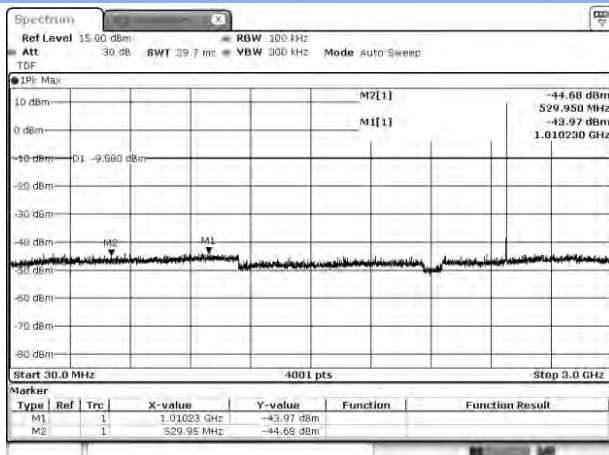

Date: 24 APR 2018 14:11:55

GFSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

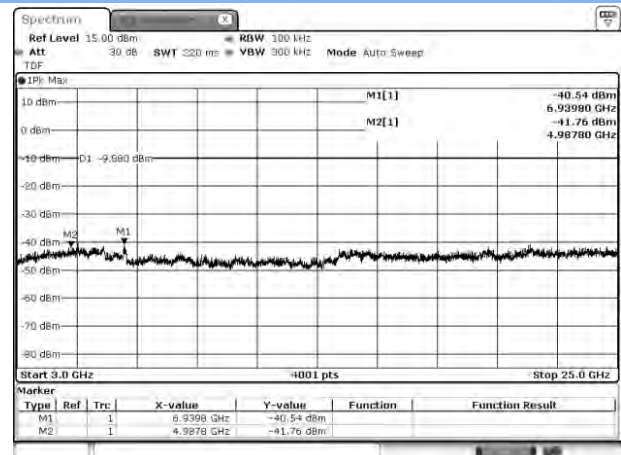


Date: 24 APR 2018 14:12:07

8-DPSK LOW CHANNEL, CARRIER LEVEL




Date: 24 APR 2018 14:19:01

8-DPSK LOW CHANNEL, BAND EDGE

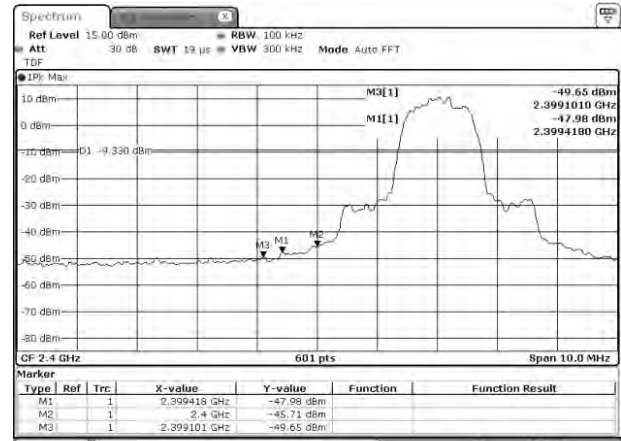


Date: 24 APR 2018 14:20:58

8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

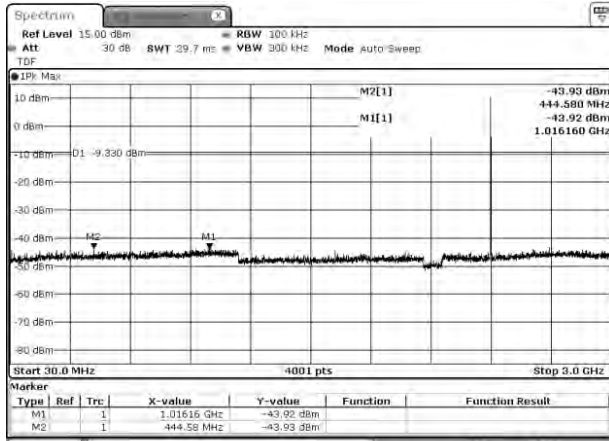


Date: 24 APR 2018 14:19:49

8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

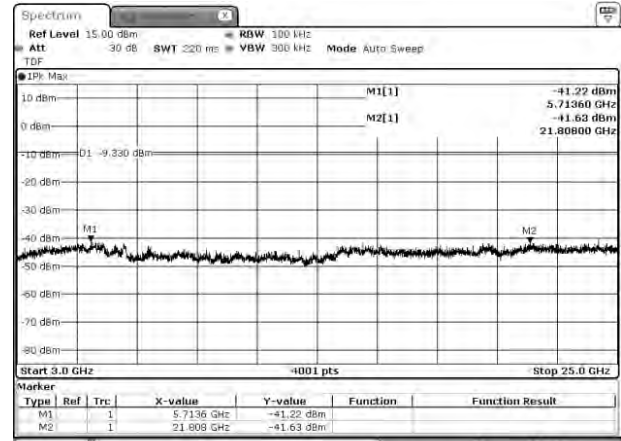


Date: 24 APR 2018 14:20:12

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

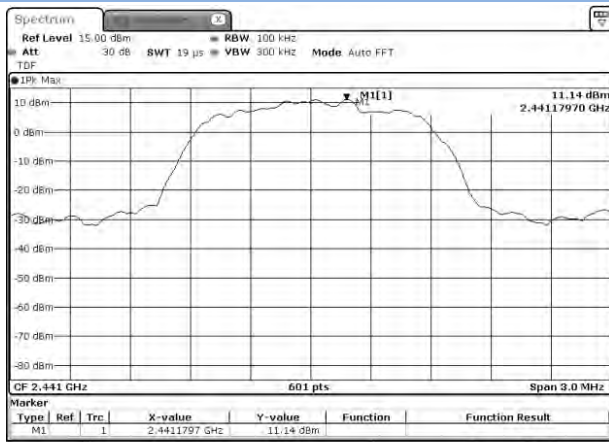


Date: 24 APR 2018 14:23:58

8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

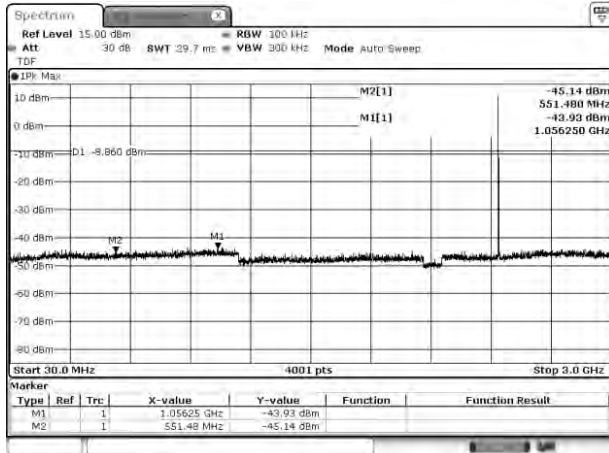


Date: 24 APR 2018 14:24:55

8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

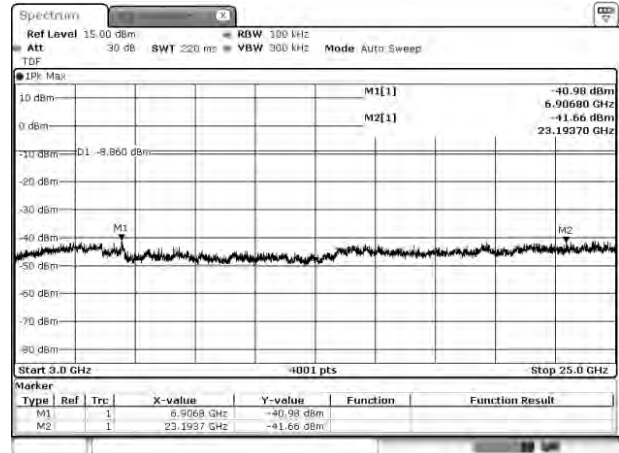


Date: 24 APR 2018 14:25:07

8-DPSK HIGH CHANNEL , CARRIER LEVEL

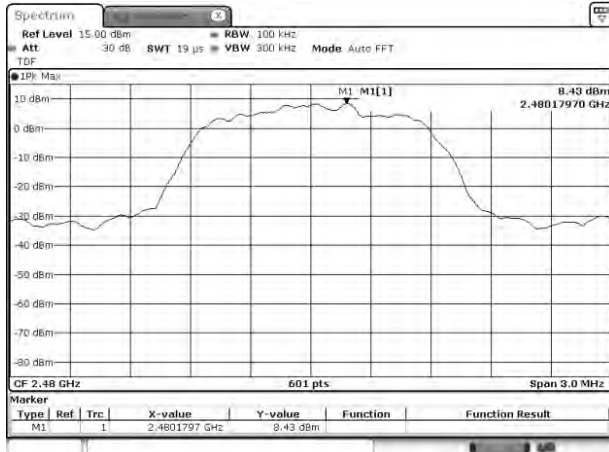


Date: 24 APR 2018 14:27:40

8-DPSK HIGH CHANNEL , BAND EDGE

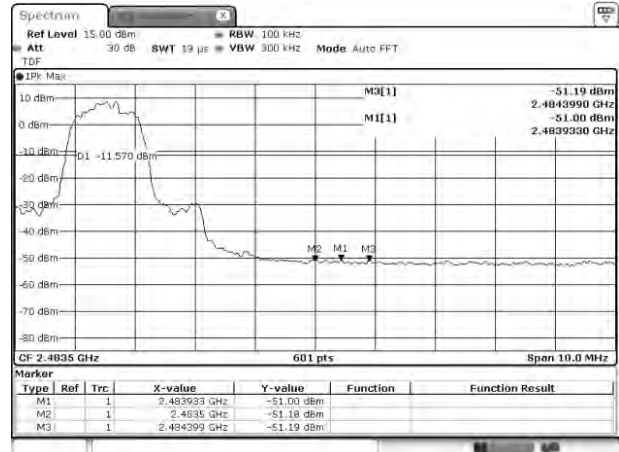


Date: 24 APR 2018 14:28:27

8-DPSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

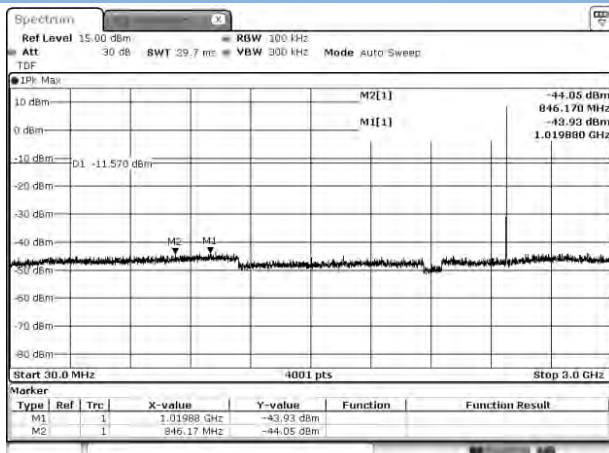


Date: 24 APR 2018 14:28:19

8-DPSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

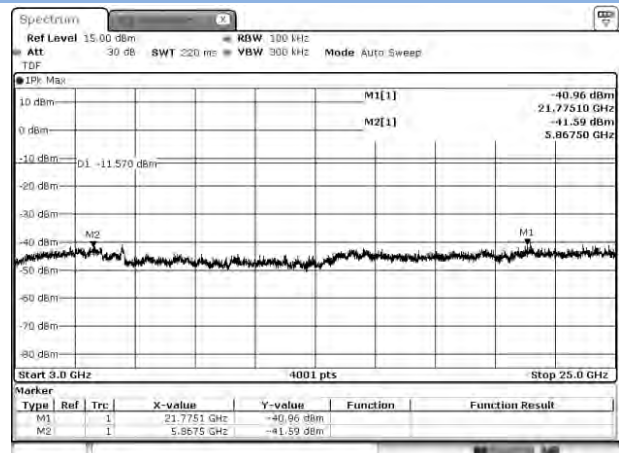


Date: 24 APR 2018 14:28:30

GFSK HOPPING, CARRIER LEVEL

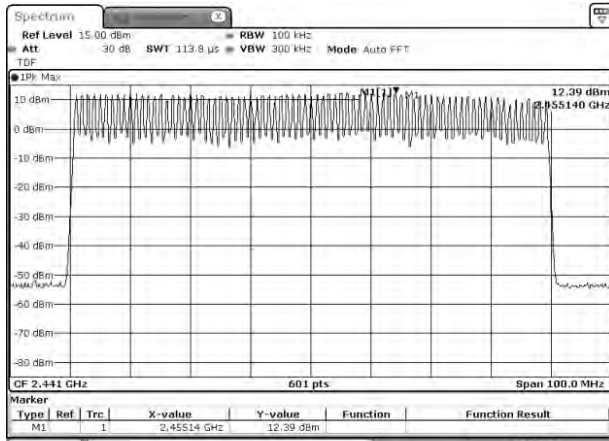


Date: 24 APR 2018 14:33:47

GFSK HOPPING BAND EDGE (LOW)

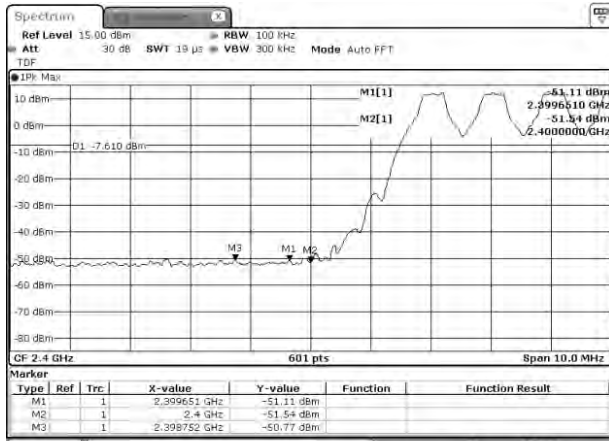


Date: 24 APR 2018 14:35:16

GFSK HOPPING BAND EDGE (HIGH)

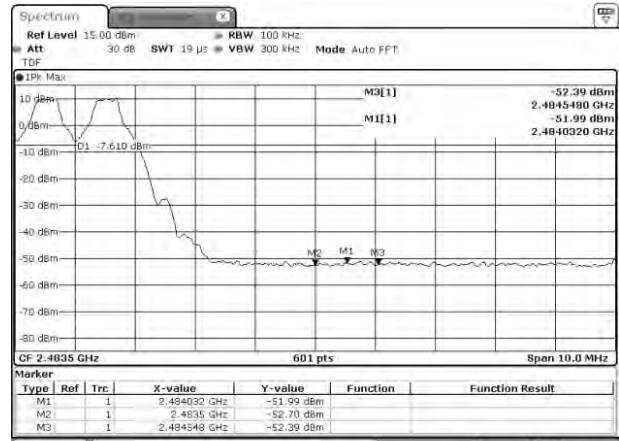


Date: 24 APR 2018 14:37:01

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

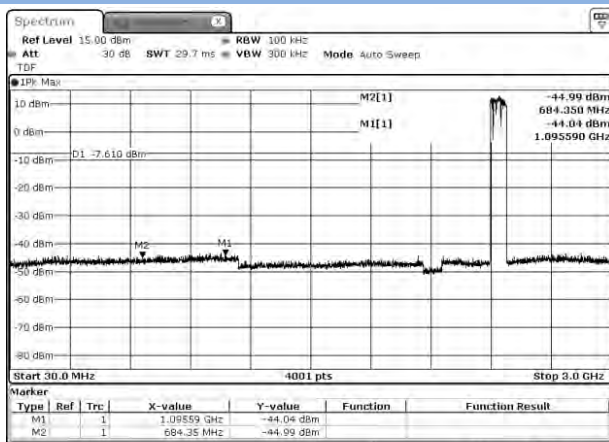


Date: 24 APR 2018 14:34:58

GFSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

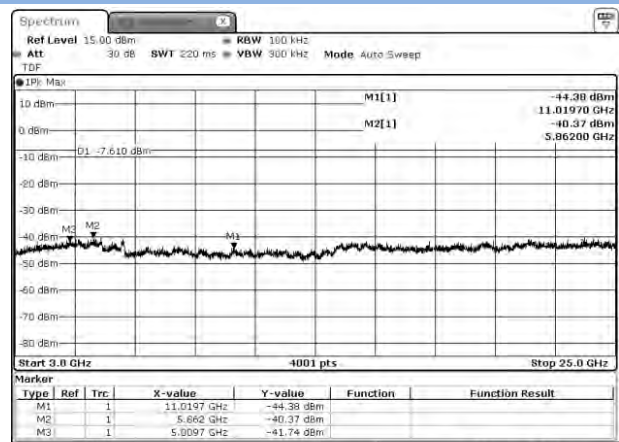


Date: 24 APR 2018 14:35:32

8-DPSK HOPPING, CARRIER LEVEL

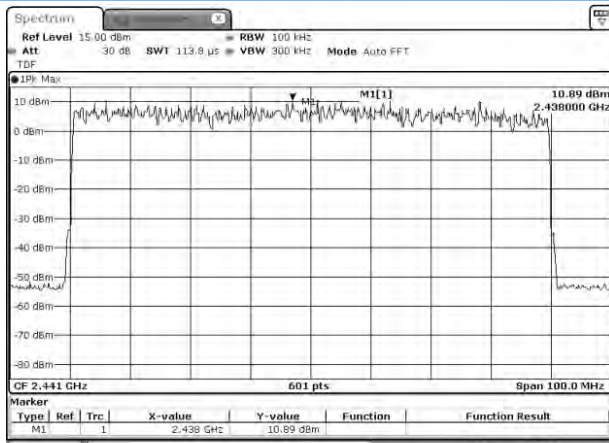


Date: 24 APR 2018 14:39:45

8-DPSK Hopping BAND EDGE (LOW)

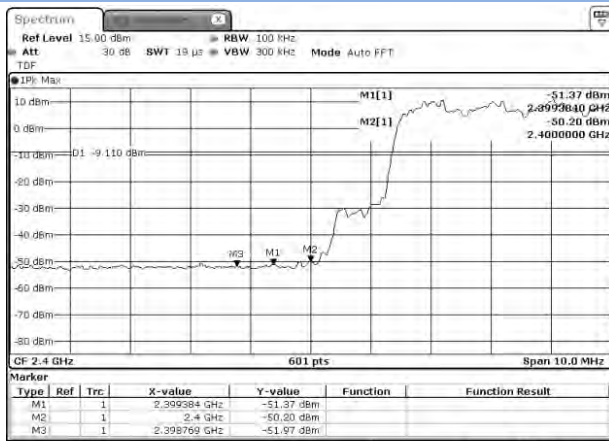


Date: 24 APR 2018 14:42:10

8-DPSK Hopping BAND EDGE (HIGH)

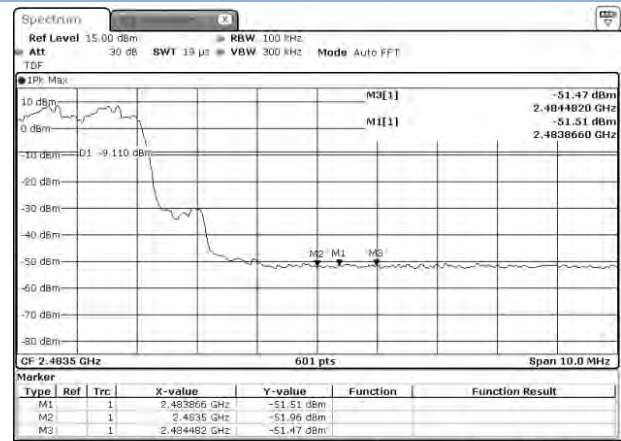


Date: 24 APR 2018 14:44:14

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

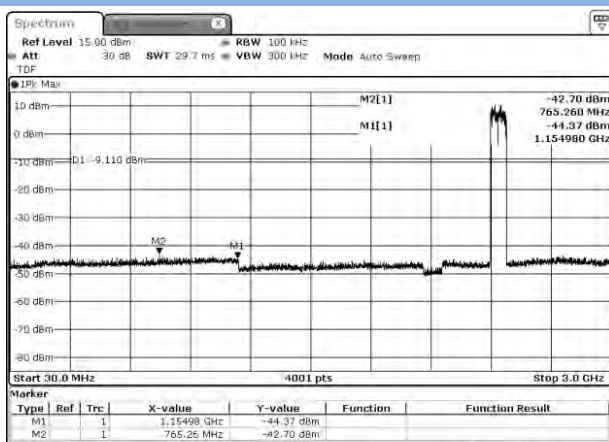

Date: 24 APR 2018 14:40:48

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

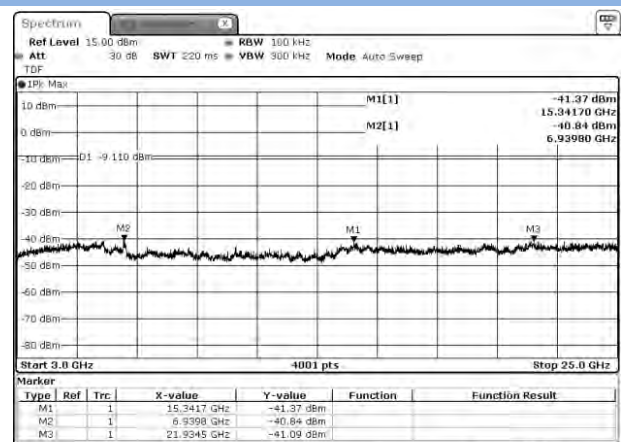


Date: 24 APR 2018 14:41:20

A.7 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.


Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

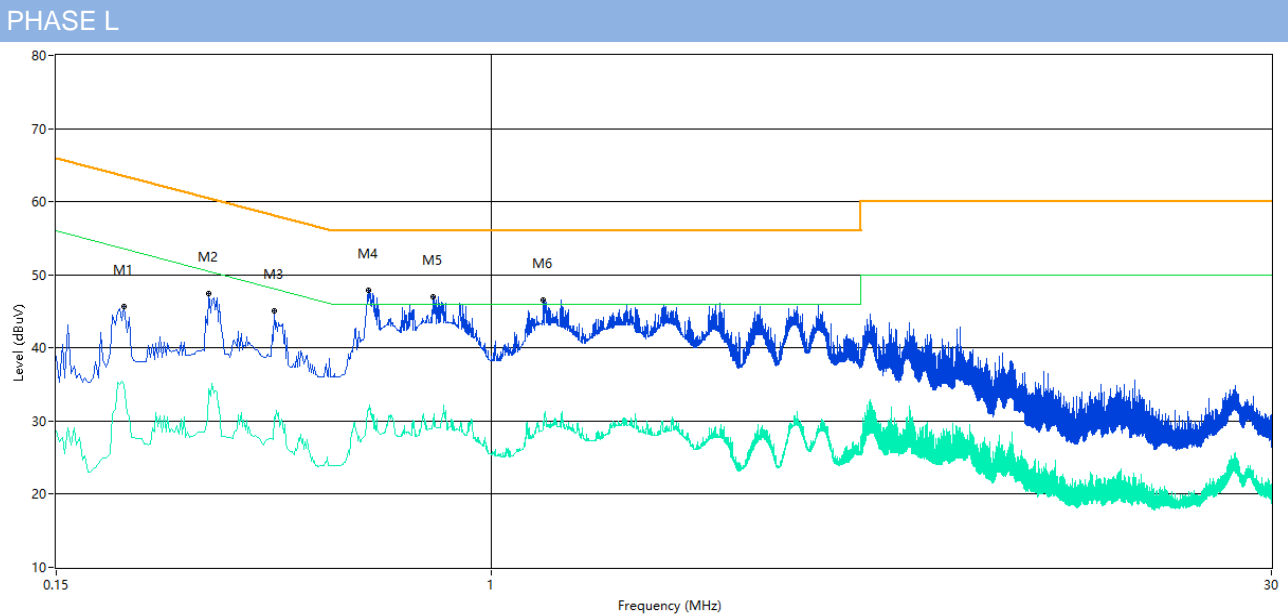

Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor (dB)	QP Limit (dBuV)	AV Limit (dBuV)	Margin (dB)	Line	Verdict
0.202	48.42	43.44	34.34	10.01	63.5	53.5	19.16	L Line	Pass
0.292	47.82	44.32	33.58	10.01	60.5	50.5	16.18	L Line	Pass
0.388	45.98	41.80	29.90	10.01	58.1	48.1	16.30	L Line	Pass
0.584	48.91	44.94	31.98	10.02	56.0	46.0	11.06	L Line	Pass
0.774	48.10	43.29	29.81	10.03	56.0	46.0	12.71	L Line	Pass
1.256	46.72	40.81	29.57	10.04	56.0	46.0	15.19	L Line	Pass

PHASE N

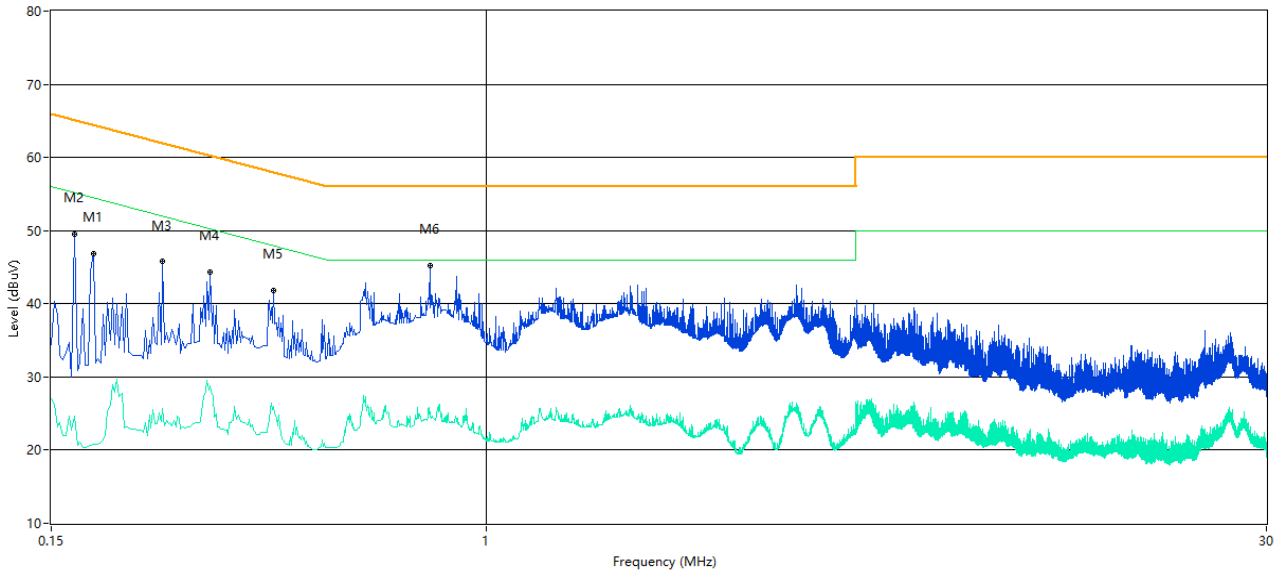

Frequency (MHz)	Peak Level (dBuV)	Q-peak Level (dBuV)	Average Level (dBuV)	Factor (dB)	QP Limit (dBuV)	AV Limit (dBuV)	Margin (dB)	Line	Verdict
0.180	51.45	33.47	19.42	10.01	64.5	54.5	31.03	N Line	Pass
0.166	57.85	39.15	22.80	10.01	65.2	55.2	26.05	N Line	Pass
0.244	48.83	34.62	24.48	10.01	62.0	52.0	27.38	N Line	Pass
0.300	51.20	38.37	28.33	10.01	60.2	50.2	21.83	N Line	Pass
0.396	45.89	36.25	25.64	10.01	57.9	47.9	21.65	N Line	Pass
0.782	45.47	38.09	25.27	10.03	56.0	46.0	17.91	N Line	Pass


A.8 Radiated Spurious Emission

Duty cycle correction factor for average measurement.


Note:

1. Duty cycle = on time/100 milliseconds = $3 * 2.8797 / 100 = 8.64 \%$
2. Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -21.27 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.

DH5 on time/100 ms (One Pulse) Plot on Channel 39

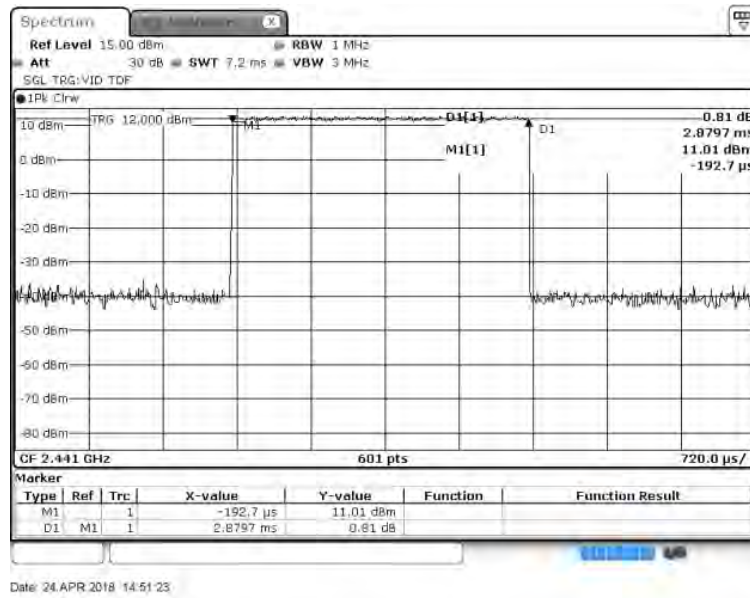

DH5 on time/100 ms (Count Pulses) Plot on Channel 39

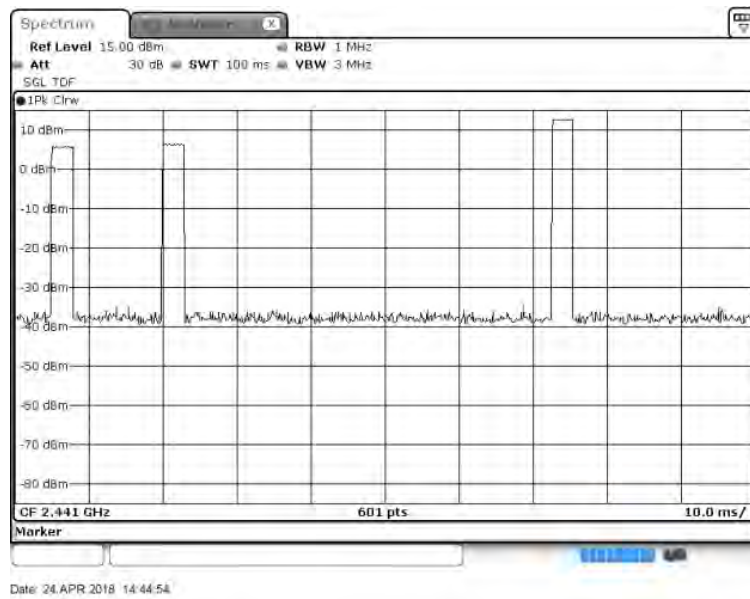

Test Data and Plots

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The EUT is working in the Normal link mode below 1 GHz.

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

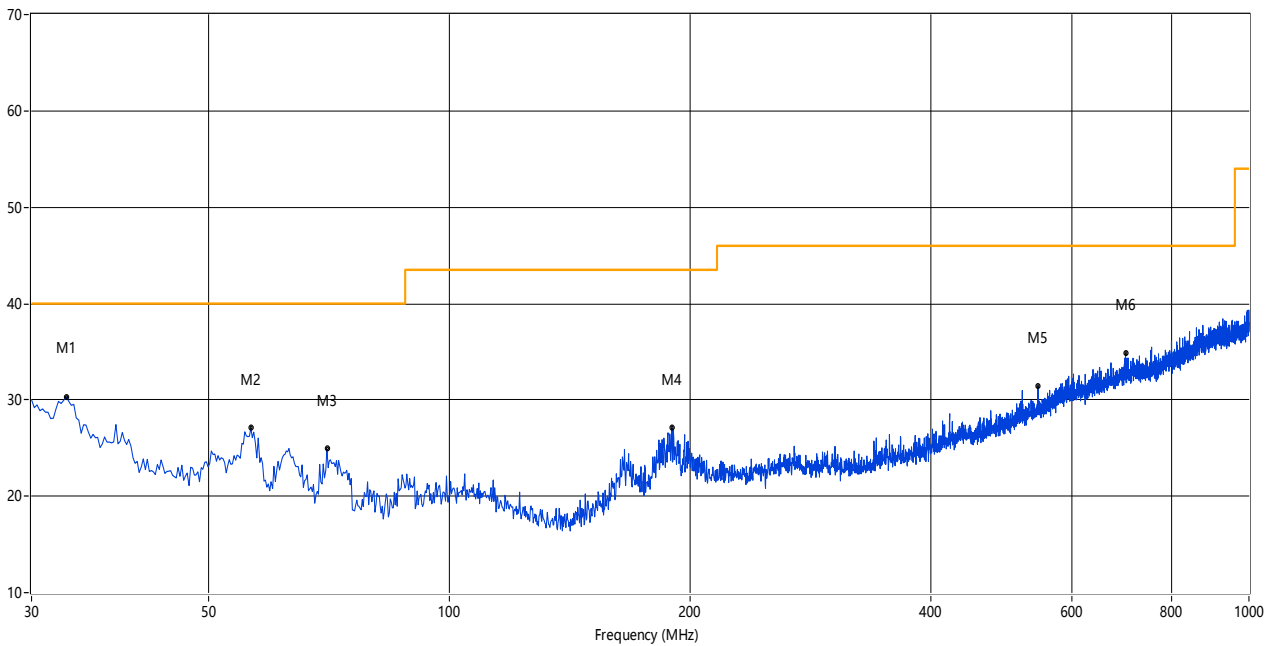

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
33.152	30.31	--	--	-28.60	--	40.0	--	9.69	349.20	100	Vertical	Pass
56.426	27.10	--	--	-27.56	--	40.0	--	12.90	10.90	100	Vertical	Pass
70.245	24.92	--	--	-31.06	--	40.0	--	15.08	359.40	100	Vertical	Pass
189.768	27.11	--	--	-29.57	--	43.5	--	16.39	135.90	100	Vertical	Pass
544.456	31.41	--	--	-20.71	--	46.0	--	14.59	217.00	100	Vertical	Pass
700.830	34.84	--	--	-17.42	--	46.0	--	11.16	360.00	200	Vertical	Pass

30 MHz to 1 GHz, ANT H

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

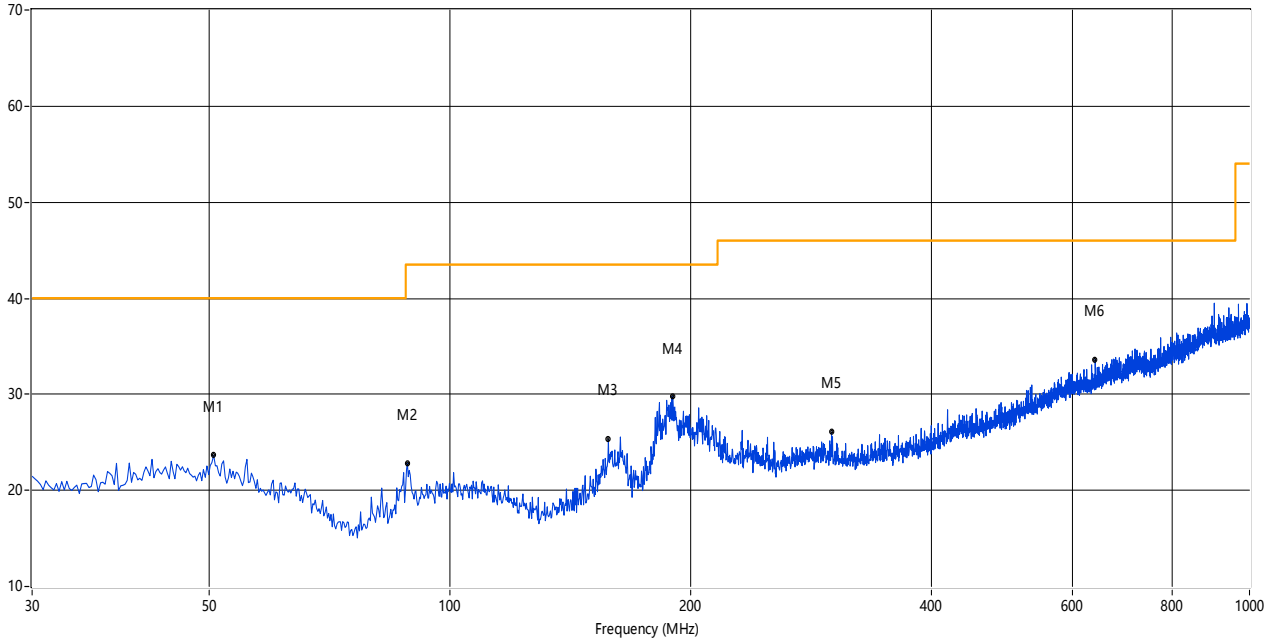


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
50.607	23.66	--	--	-26.63	--	40.0	--	16.34	111.60	100	Horizontal	Pass
88.428	22.82	--	--	-30.81	--	43.5	--	20.68	16.90	200	Horizontal	Pass
157.766	25.29	--	--	-31.64	--	43.5	--	18.21	360.00	100	Horizontal	Pass
189.768	29.79	--	--	-29.57	--	43.5	--	13.71	360.00	200	Horizontal	Pass
300.077	26.08	--	--	-26.69	--	46.0	--	19.92	360.00	200	Horizontal	Pass
641.190	33.64	--	--	-18.25	--	46.0	--	12.36	360.00	200	Horizontal	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

GFSK LOW CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

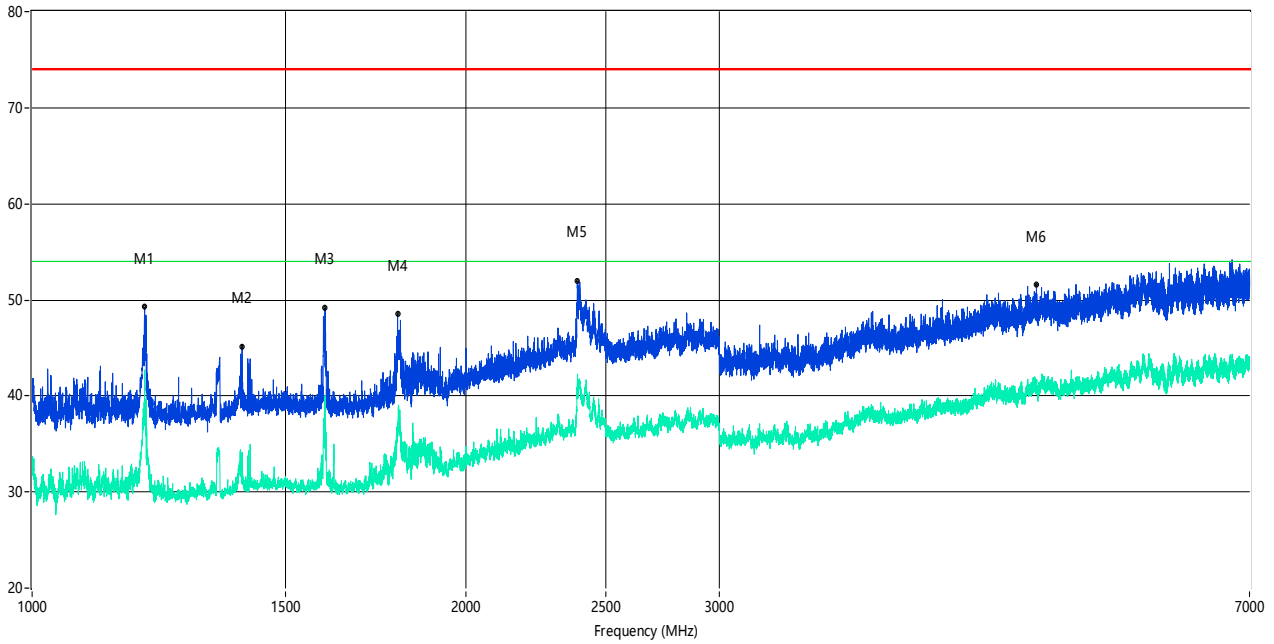

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1196.975	49.25	--	40.1	-12.17	74.0	--	54.0	13.90	134.00	100	Vertical	Pass
1398.700	45.17	--	34.1	-11.79	74.0	--	54.0	19.90	199.00	100	Vertical	Pass
1597.425	49.18	--	38.2	-12.41	74.0	--	54.0	15.80	174.00	100	Vertical	Pass
1793.401	48.58	--	35.9	-11.09	74.0	--	54.0	18.10	193.00	100	Vertical	Pass
2391.826	51.91	--	41.0	-0.25	74.0	--	54.0	13.00	25.00	100	Vertical	Pass
4980.127	51.61	--	41.1	1.64	74.0	--	54.0	12.90	280.00	100	Vertical	Pass

GFSK LOW CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

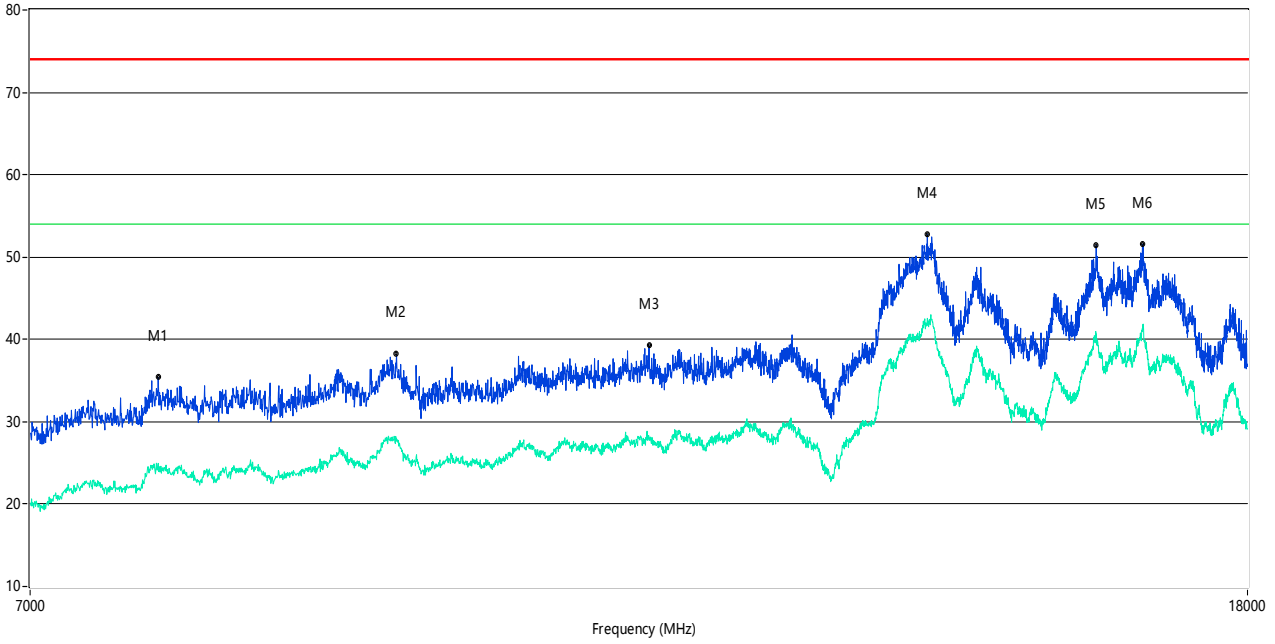

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7731.317	35.38	--	24.9	-7.88	74.0	--	54.0	29.10	112.00	100	Vertical	Pass
9301.175	38.19	--	28.0	-4.05	74.0	--	54.0	26.00	110.00	100	Vertical	Pass
11313.672	39.26	--	28.2	-1.61	74.0	--	54.0	25.80	242.00	100	Vertical	Pass
14040.990	52.73	--	42.5	14.29	74.0	--	54.0	11.50	111.00	100	Vertical	Pass
16006.748	51.43	--	40.7	10.53	74.0	--	54.0	13.30	147.00	100	Vertical	Pass
16592.352	51.55	--	41.1	11.91	74.0	--	54.0	12.90	81.00	100	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

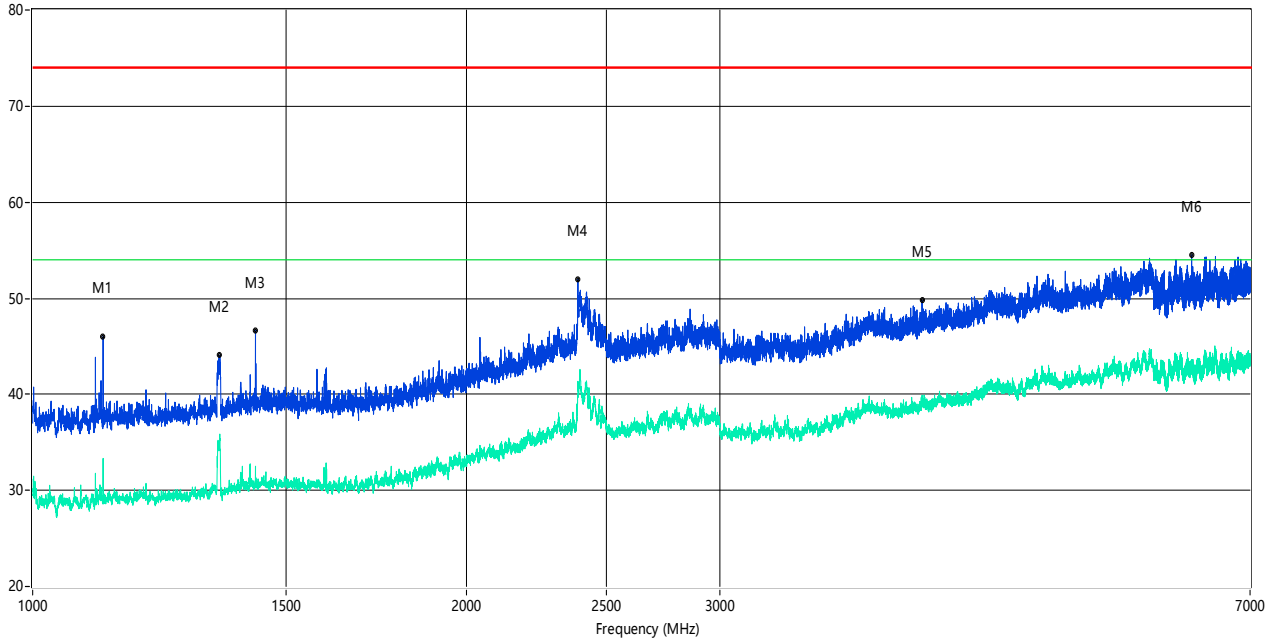

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1119.235	46.03	--	33.3	-12.12	74.0	--	54.0	20.70	337.00	100	Horizontal	Pass
1347.207	44.05	--	35.1	-12.28	74.0	--	54.0	18.90	111.00	100	Horizontal	Pass
1427.697	46.66	--	32.5	-11.88	74.0	--	54.0	21.50	4.00	100	Horizontal	Pass
2390.576	51.96	--	41.3	-1.02	74.0	--	54.0	12.70	218.00	100	Horizontal	Pass
4143.232	49.77	--	39.0	-2.01	74.0	--	54.0	15.00	217.00	100	Horizontal	Pass
6376.078	54.49	--	42.9	3.66	74.0	--	54.0	11.10	310.00	100	Horizontal	Pass

GFSK LOW CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

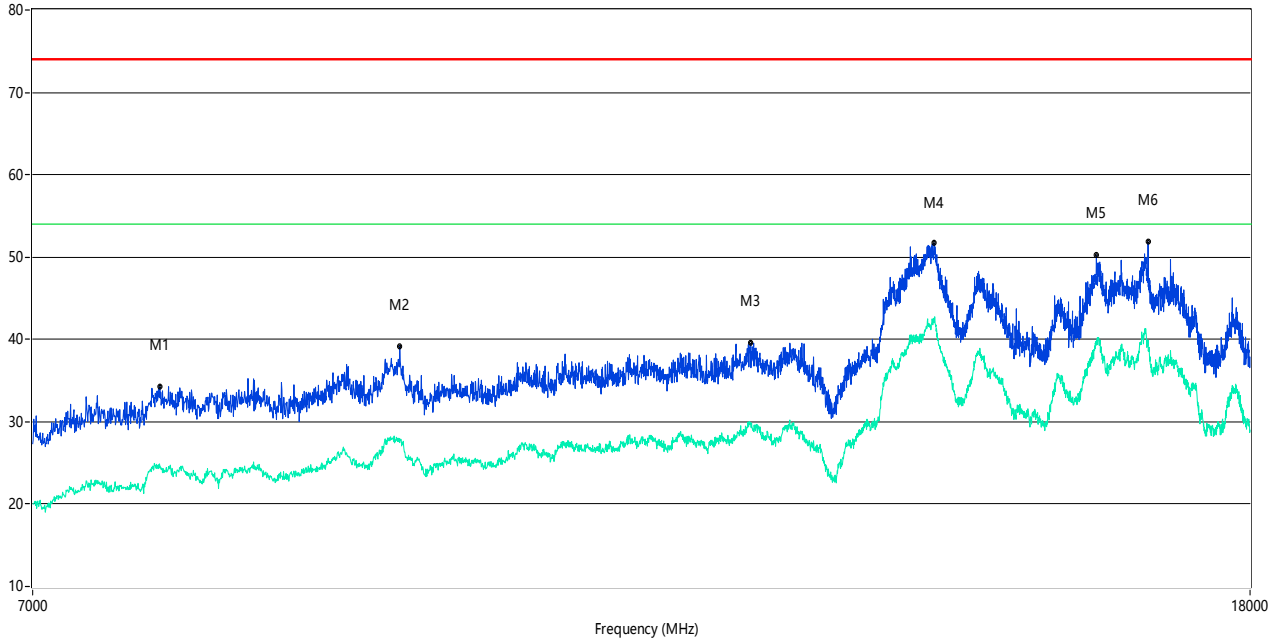

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7725.819	34.27	--	24.7	-7.74	74.0	--	54.0	29.30	16.00	100	Horizontal	Pass
9306.673	39.20	--	27.5	-4.18	74.0	--	54.0	26.50	2.00	100	Horizontal	Pass
12218.195	39.53	--	29.7	-0.38	74.0	--	54.0	24.30	199.00	100	Horizontal	Pass
14084.979	51.72	--	42.6	14.84	74.0	--	54.0	11.40	236.00	100	Horizontal	Pass
15976.506	50.25	--	39.4	9.93	74.0	--	54.0	14.60	123.00	100	Horizontal	Pass
16630.842	51.84	--	39.9	11.08	74.0	--	54.0	14.10	219.00	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

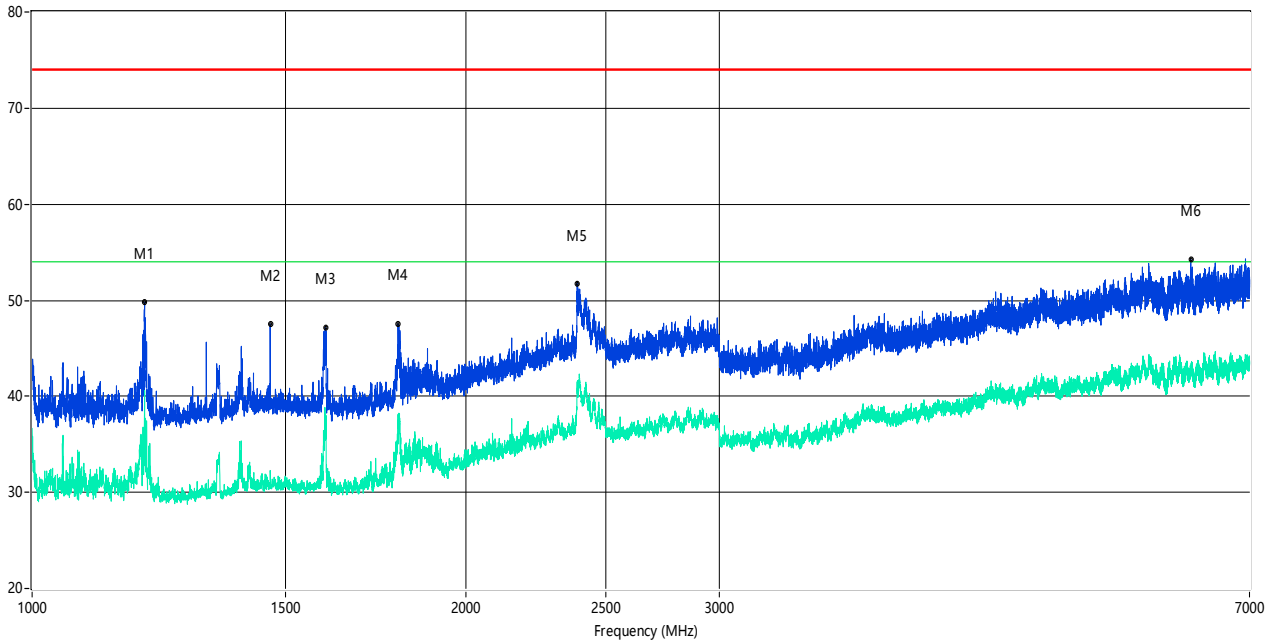

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1196.975	49.75	--	40.6	-12.17	74.0	--	54.0	13.40	7.00	100	Vertical	Pass
1463.192	47.52	--	32.3	-11.71	74.0	--	54.0	21.70	64.00	100	Vertical	Pass
1598.175	47.18	--	36.9	-12.50	74.0	--	54.0	17.10	68.00	100	Vertical	Pass
1794.901	47.55	--	38.1	-10.97	74.0	--	54.0	15.90	3.00	100	Vertical	Pass
2390.076	51.76	--	41.2	-1.32	74.0	--	54.0	12.80	41.00	100	Vertical	Pass
6372.953	54.24	--	43.2	3.55	74.0	--	54.0	10.80	159.00	100	Vertical	Pass

GFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

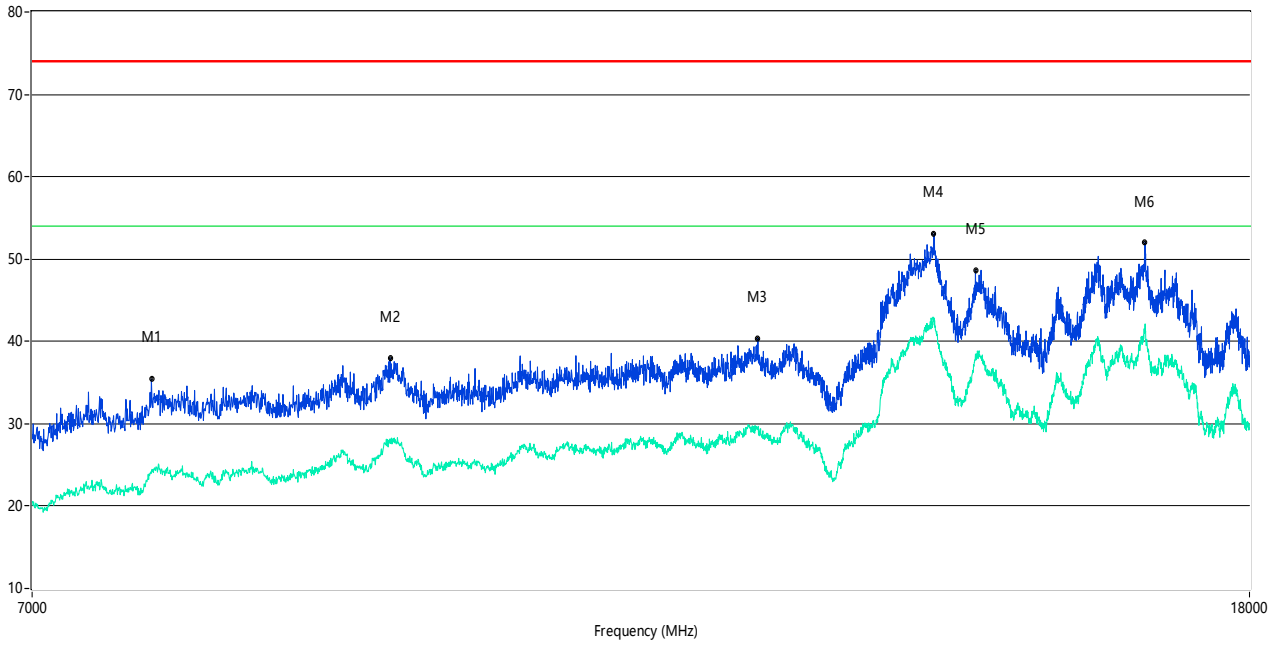

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7679.080	35.43	--	24.1	-8.16	74.0	--	54.0	29.90	141.00	100	Vertical	Pass
9240.690	37.97	--	28.2	-4.57	74.0	--	54.0	25.80	272.00	100	Vertical	Pass
12292.427	40.37	--	29.5	-0.36	74.0	--	54.0	24.50	169.00	100	Vertical	Pass
14087.728	53.03	--	42.5	14.85	74.0	--	54.0	11.50	352.00	100	Vertical	Pass
14552.362	48.59	--	38.5	9.60	74.0	--	54.0	15.50	173.00	100	Vertical	Pass
16597.851	51.99	--	41.9	12.09	74.0	--	54.0	12.10	237.00	100	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

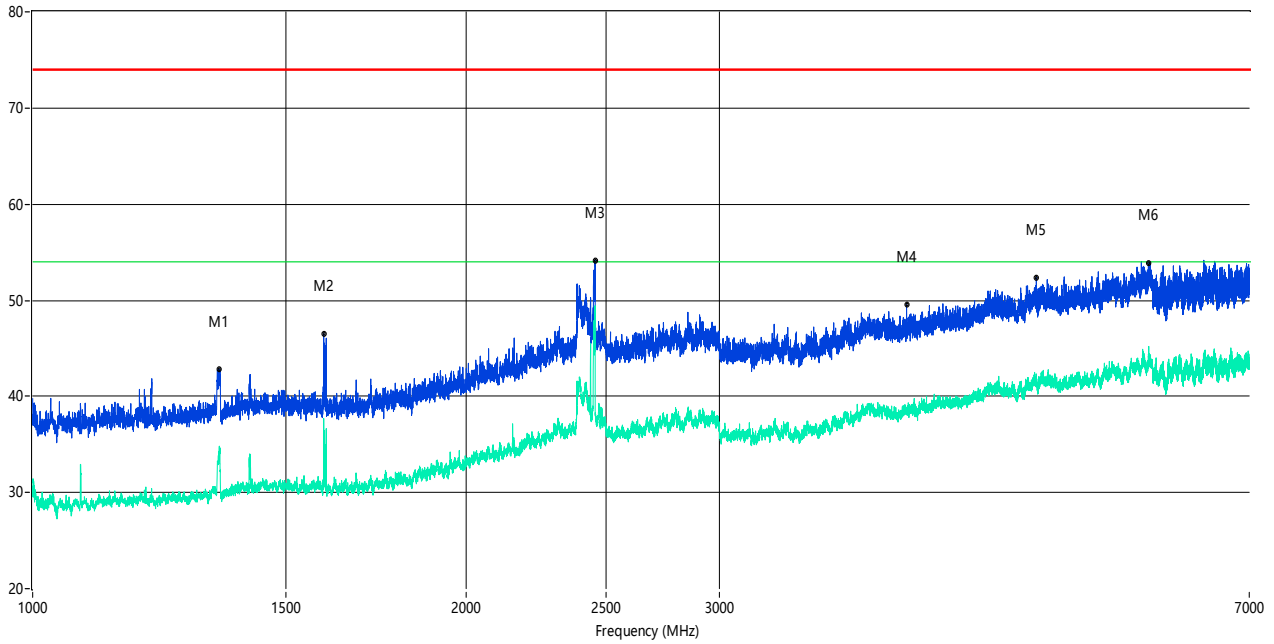

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1347.457	42.88	--	33.5	-12.26	74.0	--	54.0	20.50	115.00	100	Horizontal	Pass
1592.926	46.53	--	37.7	-11.98	74.0	--	54.0	16.30	163.00	100	Horizontal	Pass
2440.318	54.15	--	49.4	-2.21	74.0	--	54.0	4.60	155.00	100	Horizontal	N.A
4046.119	49.54	--	38.3	-2.99	74.0	--	54.0	15.70	20.00	100	Horizontal	Pass
4979.378	52.37	--	41.6	1.56	74.0	--	54.0	12.40	333.00	100	Horizontal	Pass
5956.880	53.91	--	44.1	3.63	74.0	--	54.0	9.90	248.00	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

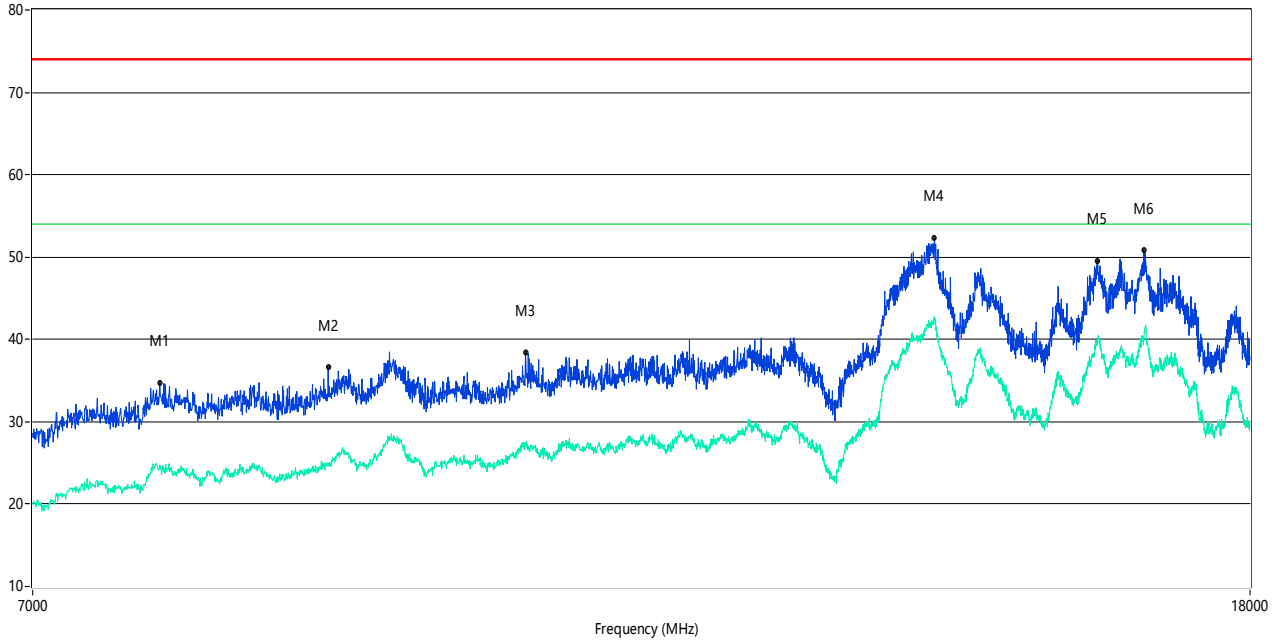

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7725.819	34.72	--	24.8	-7.74	74.0	--	54.0	29.20	147.00	100	Horizontal	Pass
8803.549	36.65	--	25.0	-6.34	74.0	--	54.0	29.00	213.00	100	Horizontal	Pass
10260.685	38.40	--	27.5	-2.12	74.0	--	54.0	26.50	292.00	100	Horizontal	Pass
14090.477	52.38	--	42.5	14.83	74.0	--	54.0	11.50	172.00	100	Horizontal	Pass
15987.503	49.45	--	39.8	10.25	74.0	--	54.0	14.20	123.00	100	Horizontal	Pass
16573.107	50.91	--	39.8	11.42	74.0	--	54.0	14.20	120.00	100	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

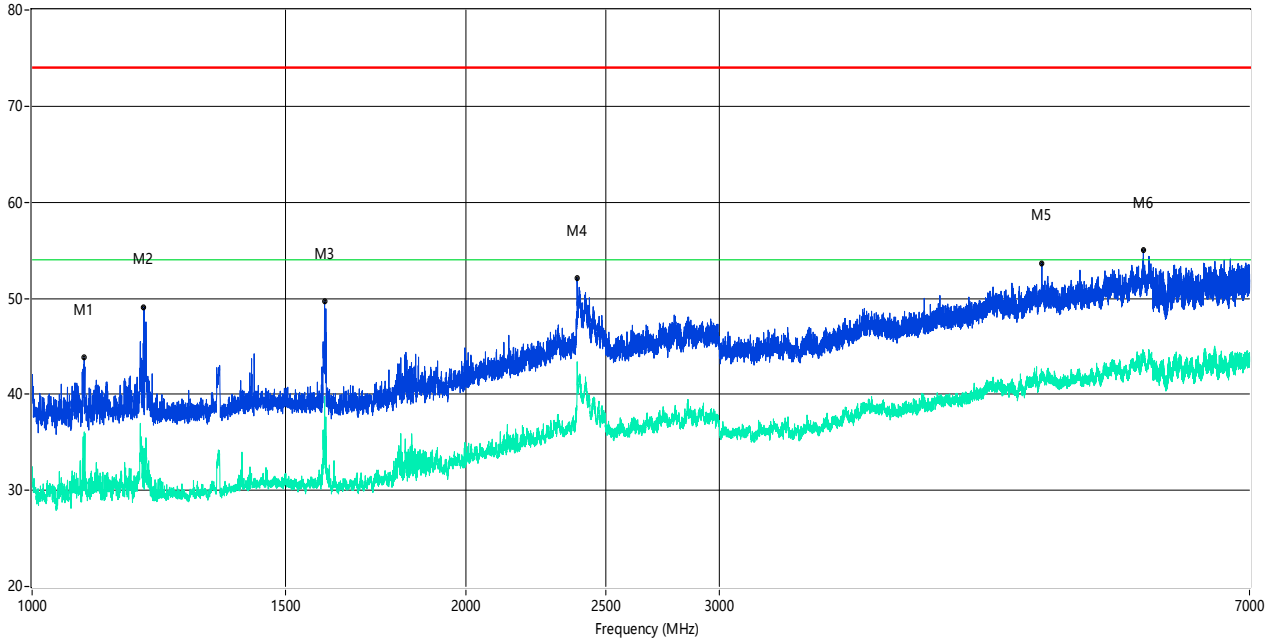

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1086.739	43.80	--	36.0	-11.28	74.0	--	54.0	18.00	36.00	100	Vertical	Pass
1195.726	49.06	--	34.4	-12.16	74.0	--	54.0	19.60	141.00	100	Vertical	Pass
1595.926	49.72	--	39.8	-12.24	74.0	--	54.0	14.20	164.00	100	Vertical	Pass
2389.576	52.14	--	41.8	-1.63	74.0	--	54.0	12.20	176.00	100	Vertical	Pass
5022.122	53.59	--	42.3	1.04	74.0	--	54.0	11.70	249.00	100	Vertical	Pass
5907.387	55.00	--	44.3	3.42	74.0	--	54.0	9.70	75.00	100	Vertical	Pass

GFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

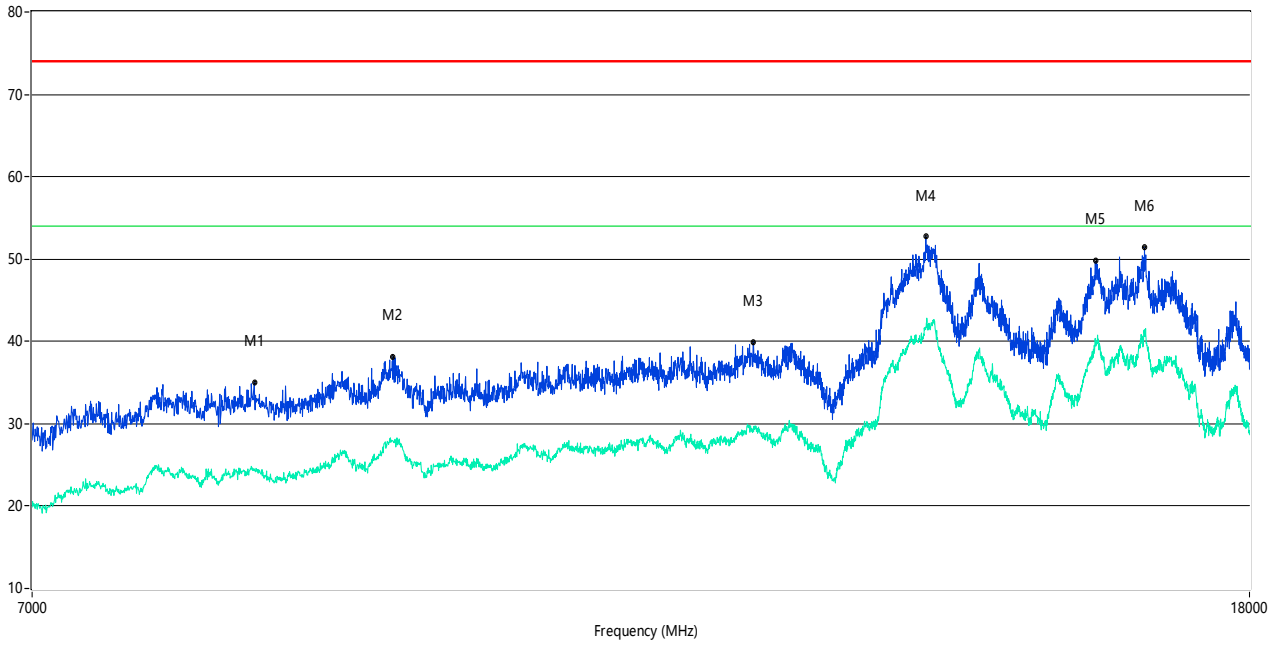

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8316.921	35.05	--	24.5	-6.92	74.0	--	54.0	29.50	228.00	100	Vertical	Pass
9262.684	38.17	--	27.9	-4.23	74.0	--	54.0	26.10	296.00	100	Vertical	Pass
12248.438	39.95	--	29.2	-0.44	74.0	--	54.0	24.80	237.00	100	Vertical	Pass
14002.499	52.72	--	41.7	14.20	74.0	--	54.0	12.30	27.00	100	Vertical	Pass
15982.004	49.77	--	39.7	10.09	74.0	--	54.0	14.30	7.00	100	Vertical	Pass
16592.352	51.36	--	41.2	11.91	74.0	--	54.0	12.80	201.00	100	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

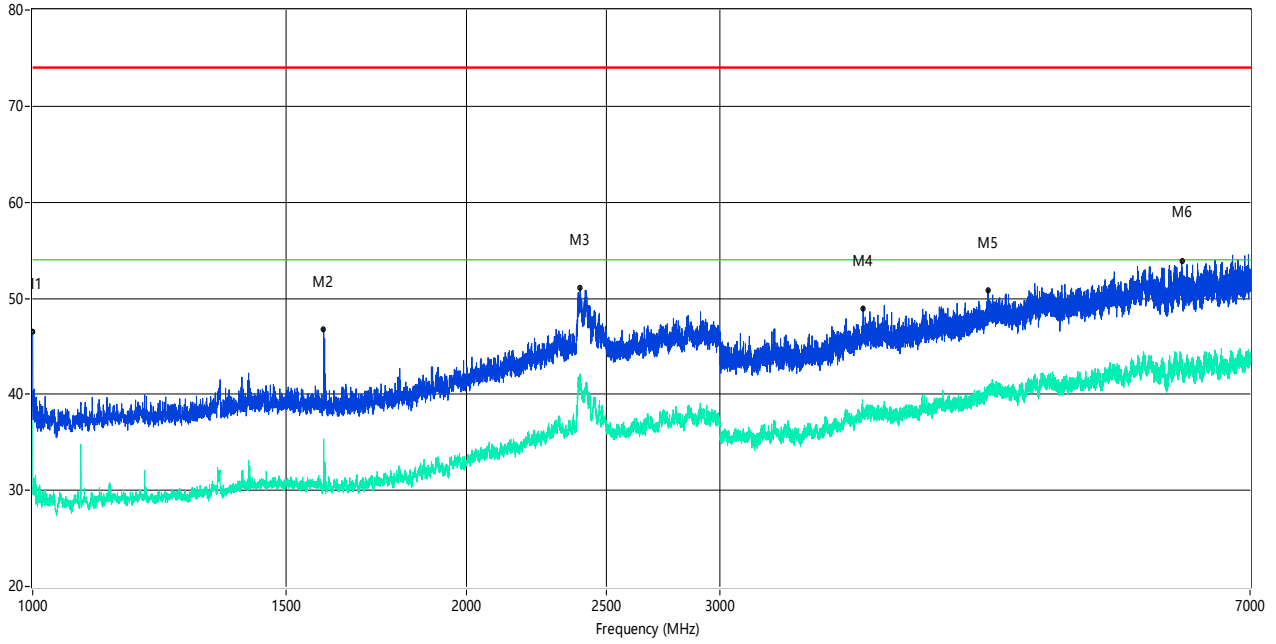

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1000.000	46.46	--	37.2	-11.35	74.0	--	54.0	16.80	181.00	100	Horizontal	Pass
1592.426	46.73	--	35.4	-12.01	74.0	--	54.0	18.60	155.00	100	Horizontal	Pass
2399.075	51.09	--	41.6	-0.06	74.0	--	54.0	12.40	172.00	100	Horizontal	Pass
3770.904	48.93	--	38.5	-2.51	74.0	--	54.0	15.50	219.00	100	Horizontal	Pass
4604.799	50.83	--	40.8	0.35	74.0	--	54.0	13.20	85.00	100	Horizontal	Pass
6275.466	53.90	--	42.7	4.53	74.0	--	54.0	11.30	7.00	100	Horizontal	Pass

GFSK HIGH CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

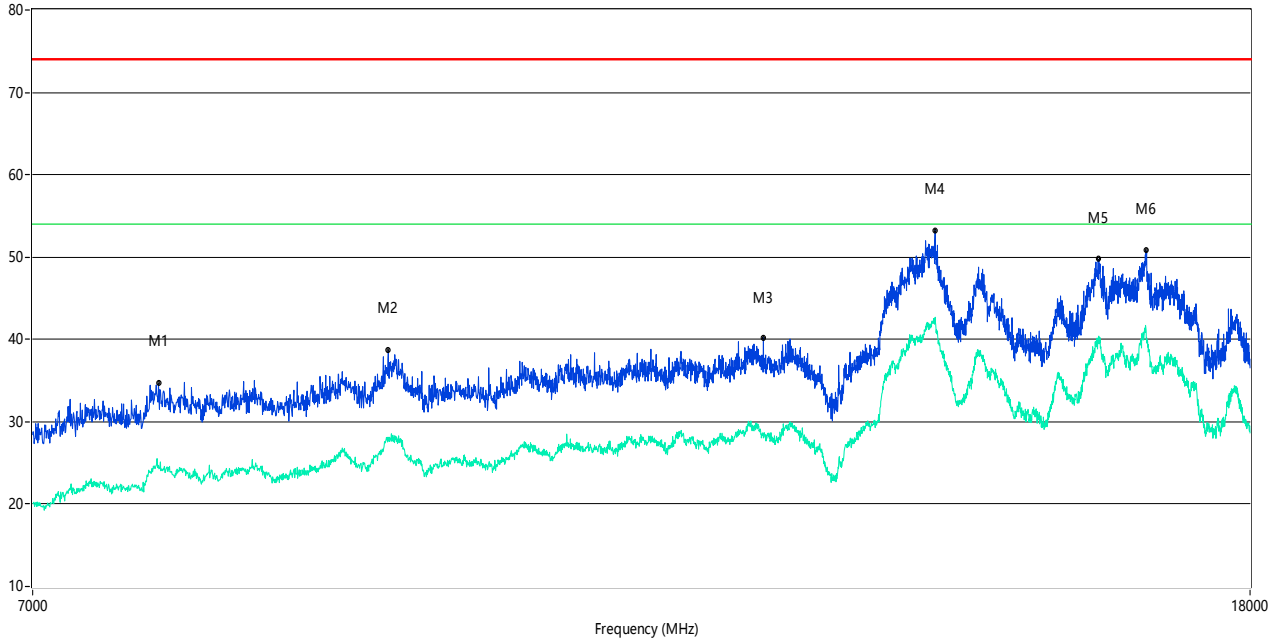

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7717.571	34.65	--	24.7	-7.89	74.0	--	54.0	29.30	332.00	100	Horizontal	Pass
9224.194	38.64	--	28.1	-4.69	74.0	--	54.0	25.90	197.00	100	Horizontal	Pass
12339.165	40.21	--	28.0	-0.58	74.0	--	54.0	26.00	326.00	100	Horizontal	Pass
14098.725	53.24	--	42.7	14.80	74.0	--	54.0	11.30	132.00	100	Horizontal	Pass
16006.748	49.74	--	40.4	10.53	74.0	--	54.0	13.60	252.00	100	Horizontal	Pass
16600.600	50.81	--	41.6	12.12	74.0	--	54.0	12.40	239.00	100	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

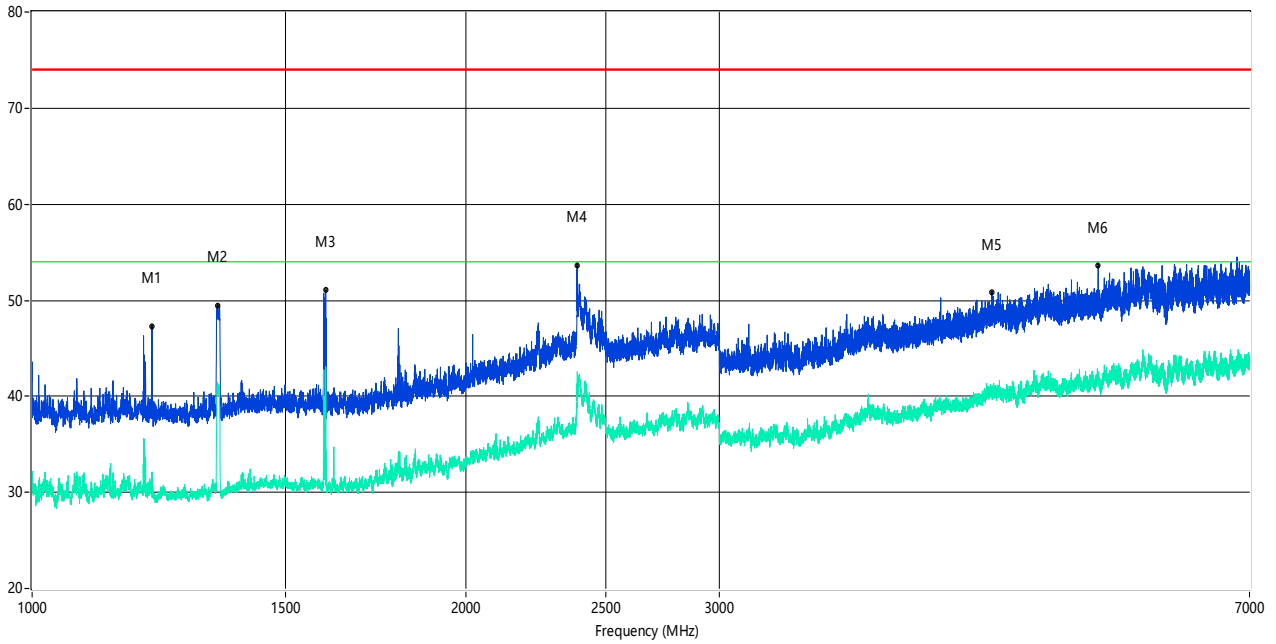

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1211.224	47.32	--	32.1	-12.19	74.0	--	54.0	21.90	2.00	100	Vertical	Pass
1344.707	49.45	--	41.4	-12.48	74.0	--	54.0	12.60	340.00	100	Vertical	Pass
1598.925	51.03	--	43.1	-12.51	74.0	--	54.0	10.90	4.00	100	Vertical	Pass
2390.326	53.58	--	42.5	-1.17	74.0	--	54.0	11.50	47.00	100	Vertical	Pass
4636.295	50.83	--	40.6	0.16	74.0	--	54.0	13.40	82.00	100	Vertical	Pass
5495.688	53.59	--	42.5	1.82	74.0	--	54.0	11.50	224.00	100	Vertical	Pass

8-DPSK LOW CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

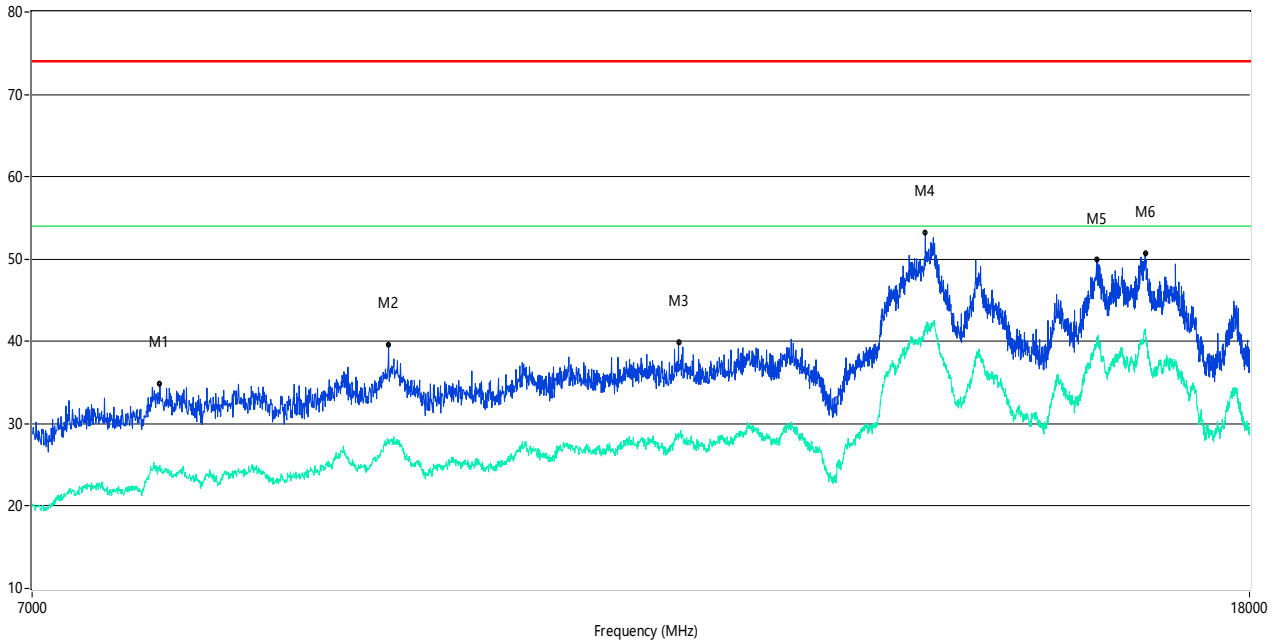

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7728.568	34.82	--	25.0	-7.78	74.0	--	54.0	29.00	300.00	100	Vertical	Pass
9229.693	39.62	--	27.8	-4.64	74.0	--	54.0	26.20	92.00	100	Vertical	Pass
11558.360	39.89	--	28.0	-0.83	74.0	--	54.0	26.00	13.00	100	Vertical	Pass
13997.001	53.27	--	41.8	14.10	74.0	--	54.0	12.20	56.00	100	Vertical	Pass
15990.252	49.91	--	39.4	10.35	74.0	--	54.0	14.60	132.00	100	Vertical	Pass
16600.600	50.76	--	41.5	12.12	74.0	--	54.0	12.50	316.00	100	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

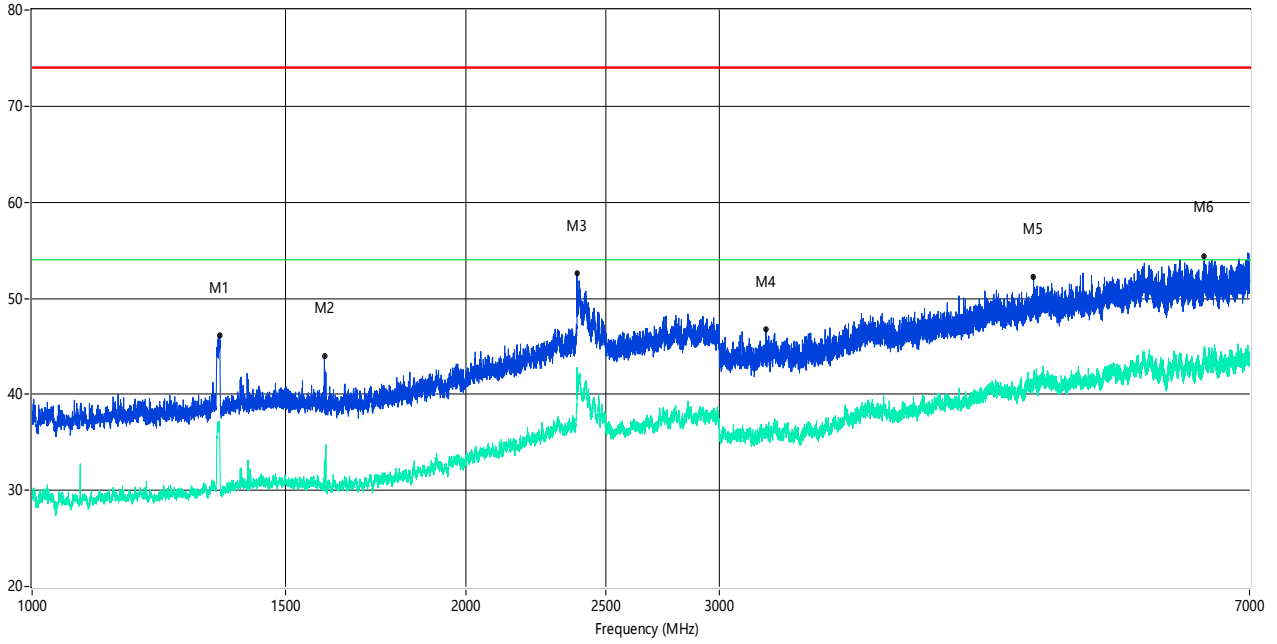

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1349.706	46.11	--	35.4	-12.26	74.0	--	54.0	18.60	303.00	100	Horizontal	Pass
1595.426	43.95	--	32.8	-12.18	74.0	--	54.0	21.20	328.00	100	Horizontal	Pass
2389.326	52.60	--	42.8	-1.78	74.0	--	54.0	11.20	123.00	100	Horizontal	Pass
3231.721	46.77	--	36.3	-5.54	74.0	--	54.0	17.70	230.00	100	Horizontal	Pass
4956.130	52.28	--	41.3	0.63	74.0	--	54.0	12.70	306.00	100	Horizontal	Pass
6512.936	54.41	--	43.9	5.67	74.0	--	54.0	10.10	146.00	100	Horizontal	Pass

8-DPSK LOW CHANNEL 7 GHz to 18 GHz, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

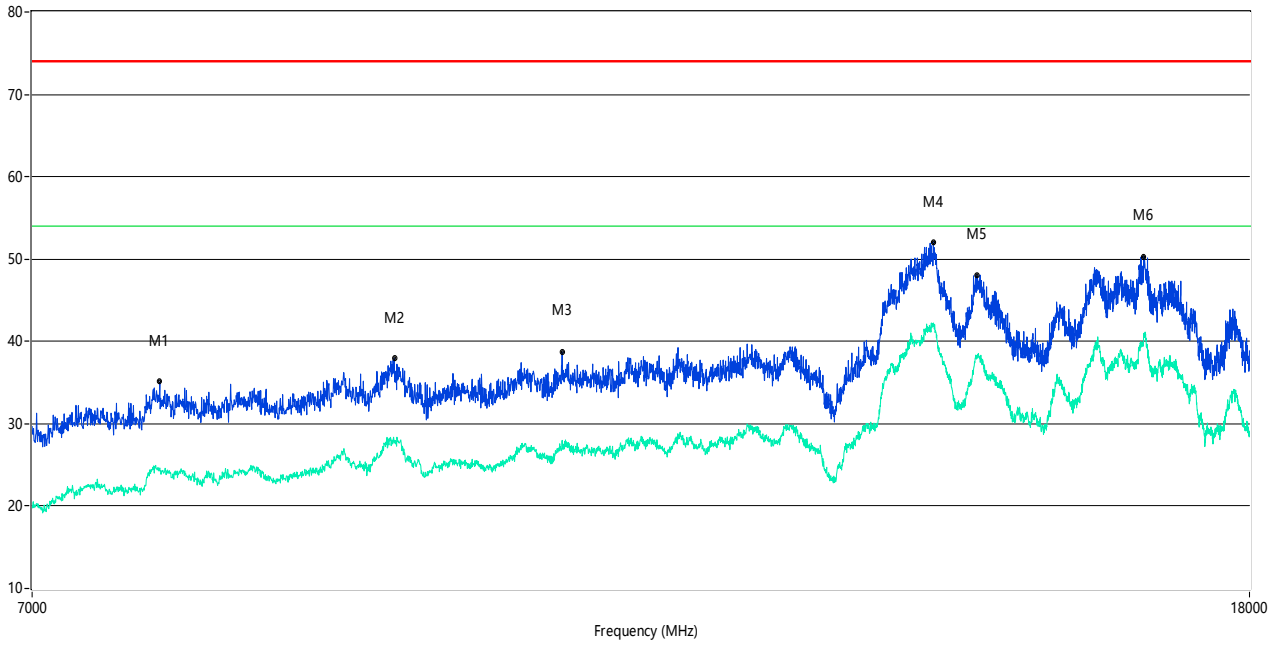

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7728.568	35.09	--	24.6	-7.78	74.0	--	54.0	29.40	193.00	100	Horizontal	Pass
9270.932	37.94	--	27.7	-4.09	74.0	--	54.0	26.30	142.00	100	Horizontal	Pass
10560.360	38.71	--	28.0	-2.12	74.0	--	54.0	26.00	183.00	100	Horizontal	Pass
14084.979	52.00	--	42.2	14.84	74.0	--	54.0	11.80	3.00	100	Horizontal	Pass
14571.607	47.97	--	38.2	10.02	74.0	--	54.0	15.80	290.00	100	Horizontal	Pass
16581.355	50.32	--	41.0	11.66	74.0	--	54.0	13.00	153.00	100	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

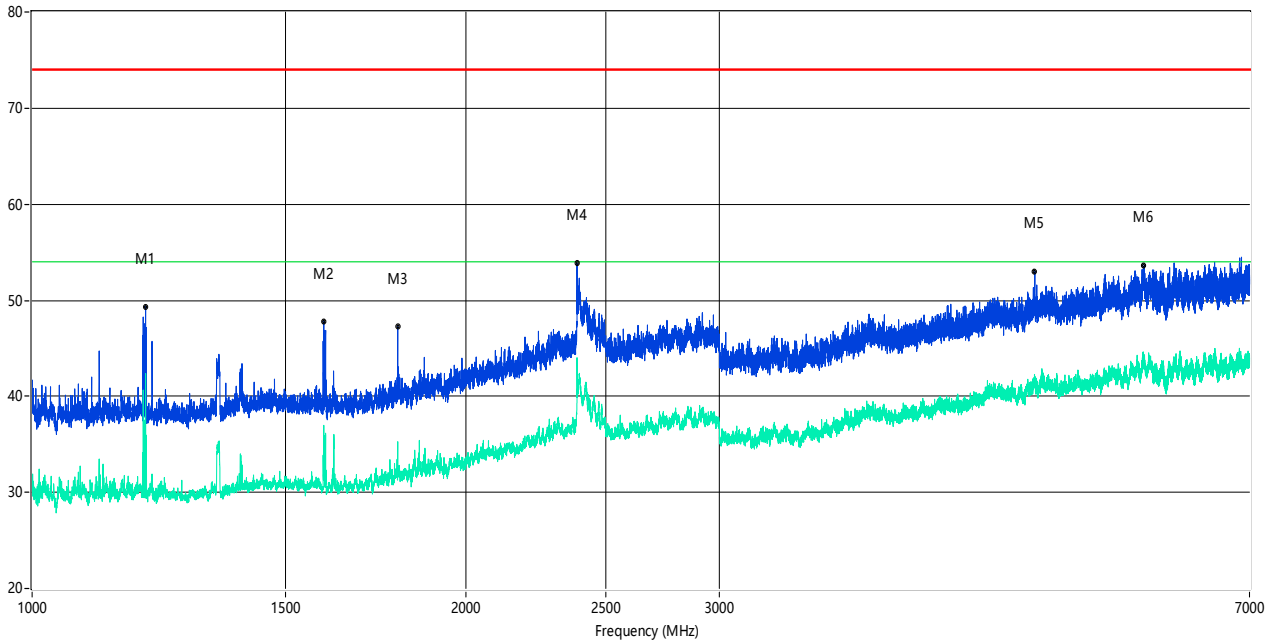

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1198.975	49.34	--	42.4	-12.19	74.0	--	54.0	11.60	201.00	100	Vertical	Pass
1593.926	47.81	--	37.0	-12.01	74.0	--	54.0	17.00	303.00	100	Vertical	Pass
1793.651	47.32	--	35.3	-11.07	74.0	--	54.0	18.70	111.00	100	Vertical	Pass
2389.576	53.85	--	44.0	-1.63	74.0	--	54.0	10.00	90.00	100	Vertical	Pass
4965.879	53.02	--	42.0	1.36	74.0	--	54.0	12.00	241.00	100	Vertical	Pass
5913.011	53.58	--	43.5	3.23	74.0	--	54.0	10.50	136.00	100	Vertical	Pass

8-DPSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT V


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

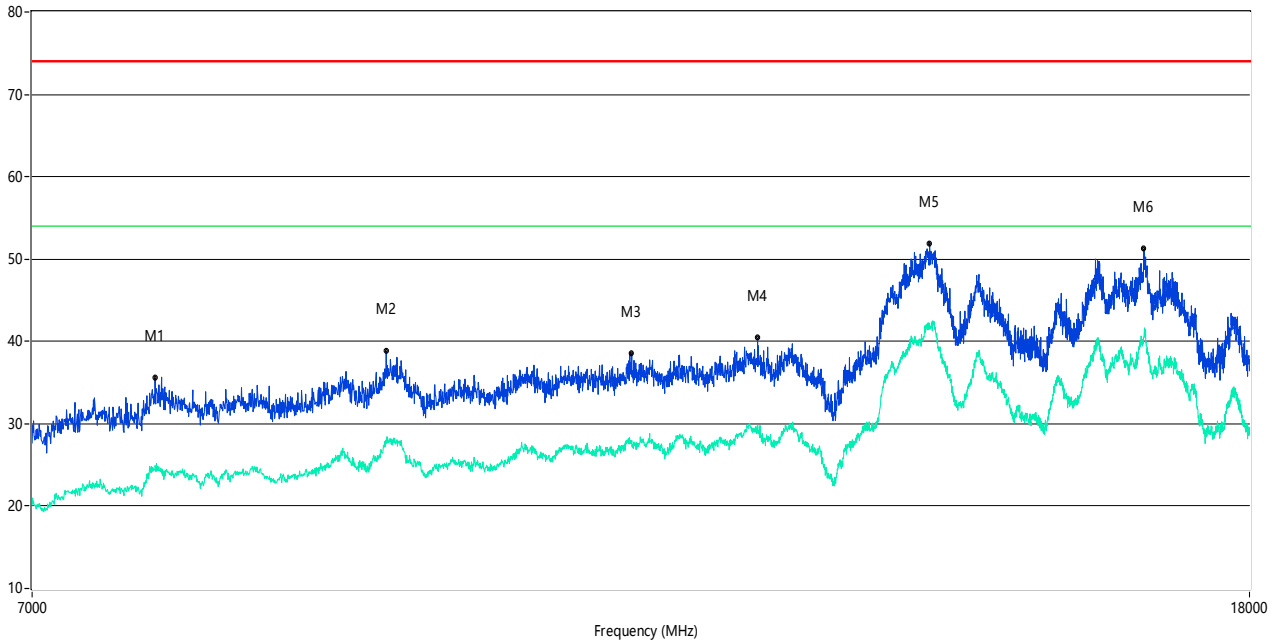

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7701.075	35.58	--	24.9	-7.75	74.0	--	54.0	29.10	353.00	100	Vertical	Pass
9213.197	38.80	--	27.7	-4.71	74.0	--	54.0	26.30	65.00	100	Vertical	Pass
11145.964	38.59	--	28.0	-2.02	74.0	--	54.0	26.00	329.00	100	Vertical	Pass
12289.678	40.42	--	29.8	-0.37	74.0	--	54.0	24.20	43.00	100	Vertical	Pass
14043.739	51.93	--	41.9	14.32	74.0	--	54.0	12.10	191.00	100	Vertical	Pass
16584.104	51.26	--	40.5	11.73	74.0	--	54.0	13.50	236.00	100	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

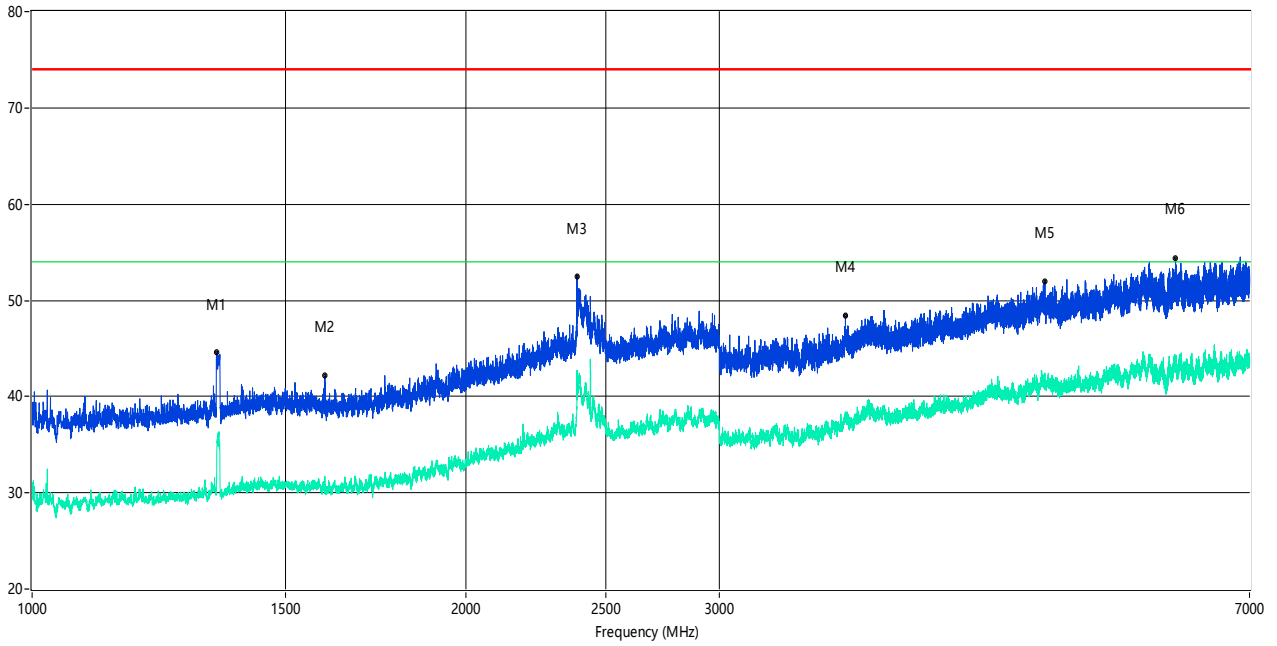

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1343.707	44.59	--	34.8	-12.56	74.0	--	54.0	19.20	221.00	100	Horizontal	Pass
1596.675	42.17	--	31.7	-12.33	74.0	--	54.0	22.30	236.00	100	Horizontal	Pass
2389.076	52.50	--	42.7	-1.93	74.0	--	54.0	11.30	359.00	100	Horizontal	Pass
3669.291	48.36	--	38.1	-3.17	74.0	--	54.0	15.90	223.00	100	Horizontal	Pass
5047.244	51.95	--	42.4	1.03	74.0	--	54.0	11.60	57.00	100	Horizontal	Pass
6218.723	54.35	--	43.4	4.46	74.0	--	54.0	10.60	177.00	100	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

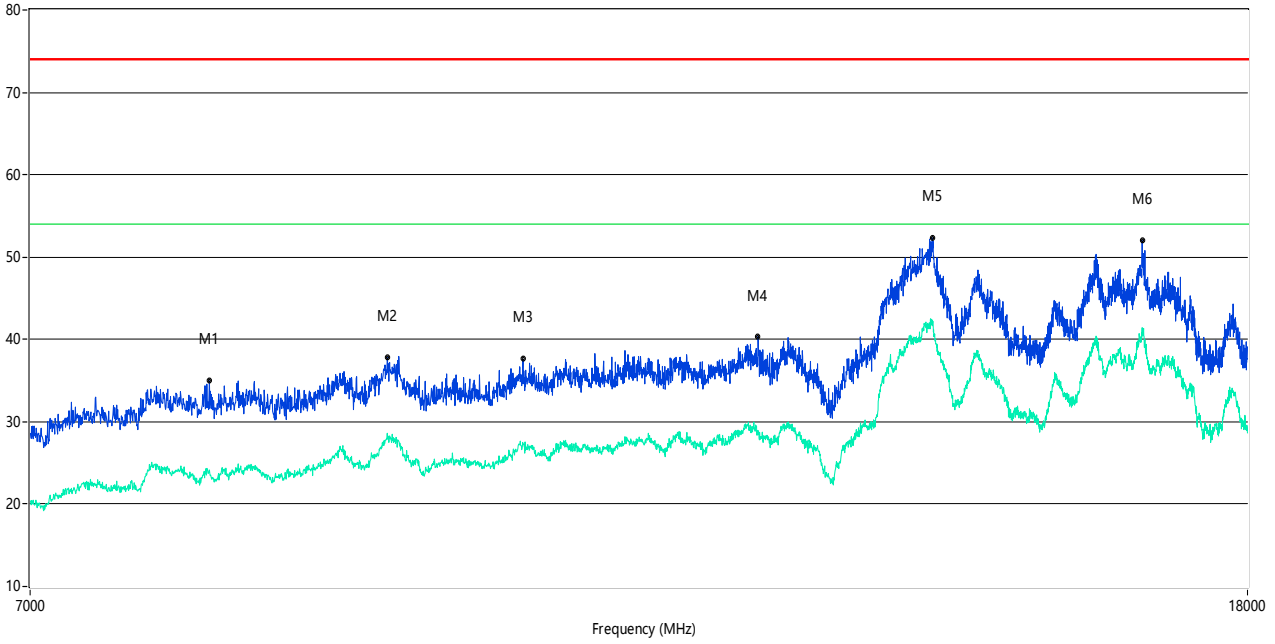

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8044.739	34.97	--	24.2	-8.41	74.0	--	54.0	29.80	28.00	100	Horizontal	Pass
9235.191	37.79	--	28.6	-4.58	74.0	--	54.0	25.40	342.00	100	Horizontal	Pass
10260.685	37.61	--	27.3	-2.12	74.0	--	54.0	26.70	118.00	100	Horizontal	Pass
12311.672	40.35	--	28.9	-0.50	74.0	--	54.0	25.10	13.00	100	Horizontal	Pass
14095.976	52.32	--	41.7	14.77	74.0	--	54.0	12.30	196.00	100	Horizontal	Pass
16586.853	52.00	--	41.4	11.78	74.0	--	54.0	12.60	111.00	100	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

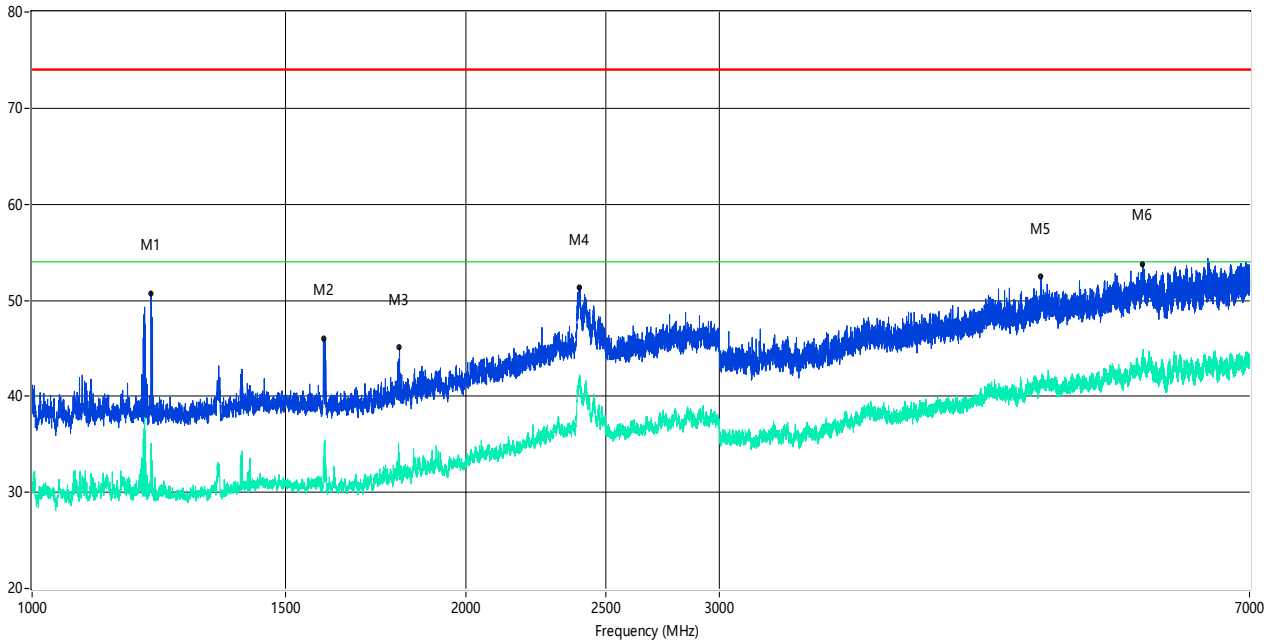

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1209.474	50.75	--	35.1	-12.00	74.0	--	54.0	18.90	148.00	100	Vertical	Pass
1592.926	46.03	--	33.8	-11.98	74.0	--	54.0	20.20	236.00	100	Vertical	Pass
1799.150	45.14	--	34.2	-10.75	74.0	--	54.0	19.80	317.00	100	Vertical	Pass
2398.575	51.29	--	42.2	-0.05	74.0	--	54.0	11.80	107.00	100	Vertical	Pass
5015.748	52.43	--	41.8	0.77	74.0	--	54.0	12.20	255.00	100	Vertical	Pass
5902.512	53.70	--	44.3	3.56	74.0	--	54.0	9.70	209.00	100	Vertical	Pass

8-DPSK HIGH CHANNEL 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

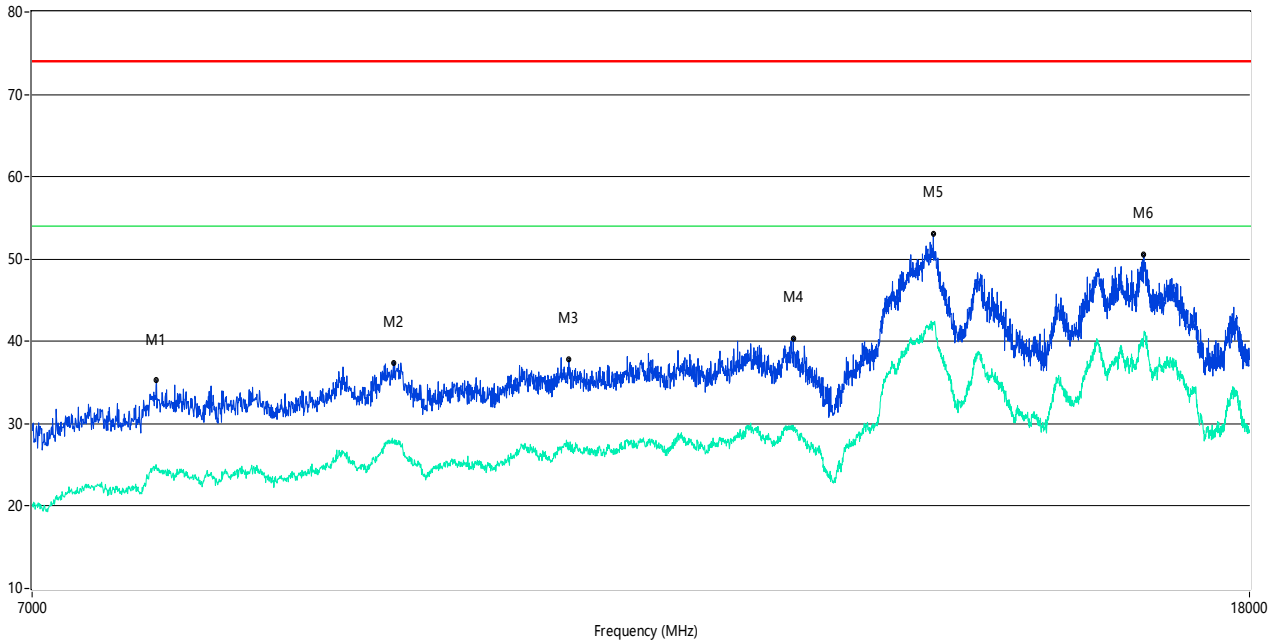

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7709.323	35.24	--	24.7	-7.77	74.0	--	54.0	29.30	209.00	100	Vertical	Pass
9265.434	37.41	--	27.9	-4.17	74.0	--	54.0	26.10	112.00	100	Vertical	Pass
10615.346	37.77	--	26.8	-1.61	74.0	--	54.0	27.20	13.00	100	Vertical	Pass
12633.342	40.36	--	29.8	0.17	74.0	--	54.0	24.20	219.00	100	Vertical	Pass
14084.979	52.99	--	42.3	14.84	74.0	--	54.0	11.70	36.00	100	Vertical	Pass
16581.355	50.51	--	40.5	11.66	74.0	--	54.0	13.50	75.00	100	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

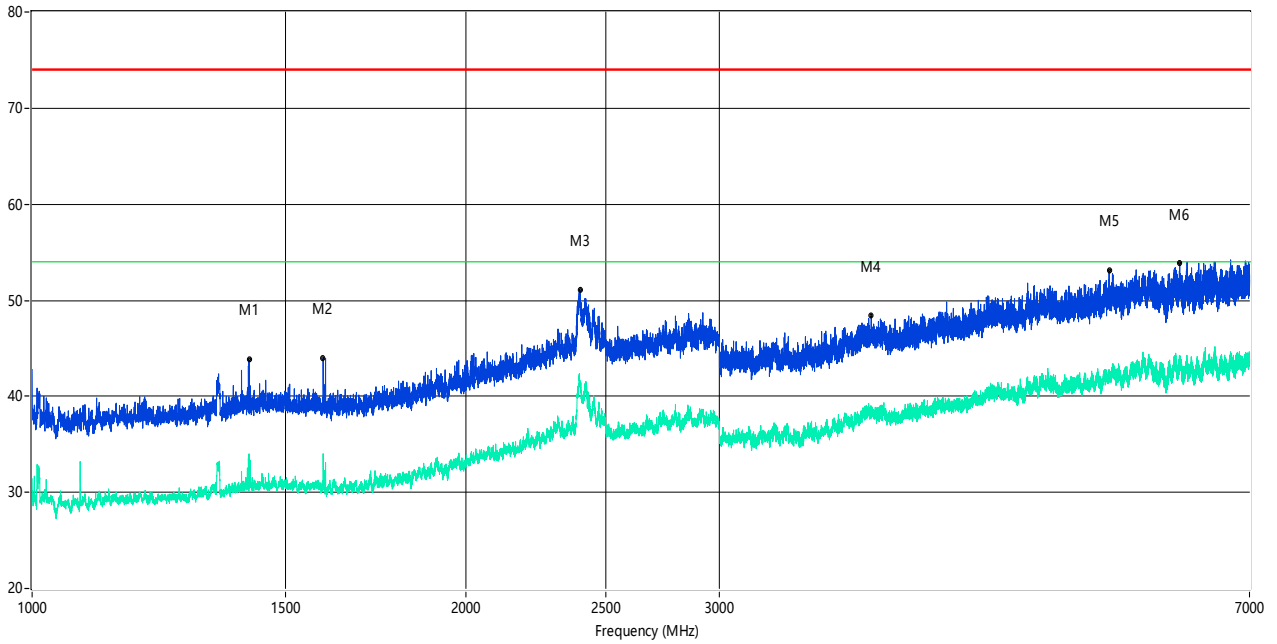

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1414.448	43.84	--	34.0	-12.13	74.0	--	54.0	20.00	324.00	100	Horizontal	Pass
1592.426	43.97	--	34.0	-12.01	74.0	--	54.0	20.00	344.00	100	Horizontal	Pass
2400.575	51.12	--	41.6	-0.10	74.0	--	54.0	12.40	99.00	100	Horizontal	Pass
3823.397	48.47	--	38.1	-2.92	74.0	--	54.0	15.90	29.00	100	Horizontal	Pass
5592.426	53.12	--	42.1	2.53	74.0	--	54.0	11.90	17.00	100	Horizontal	Pass
6259.968	53.91	--	44.2	4.62	74.0	--	54.0	9.80	256.00	100	Horizontal	Pass

8-DPSK HIGH CHANNEL 7 GHz to 18 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

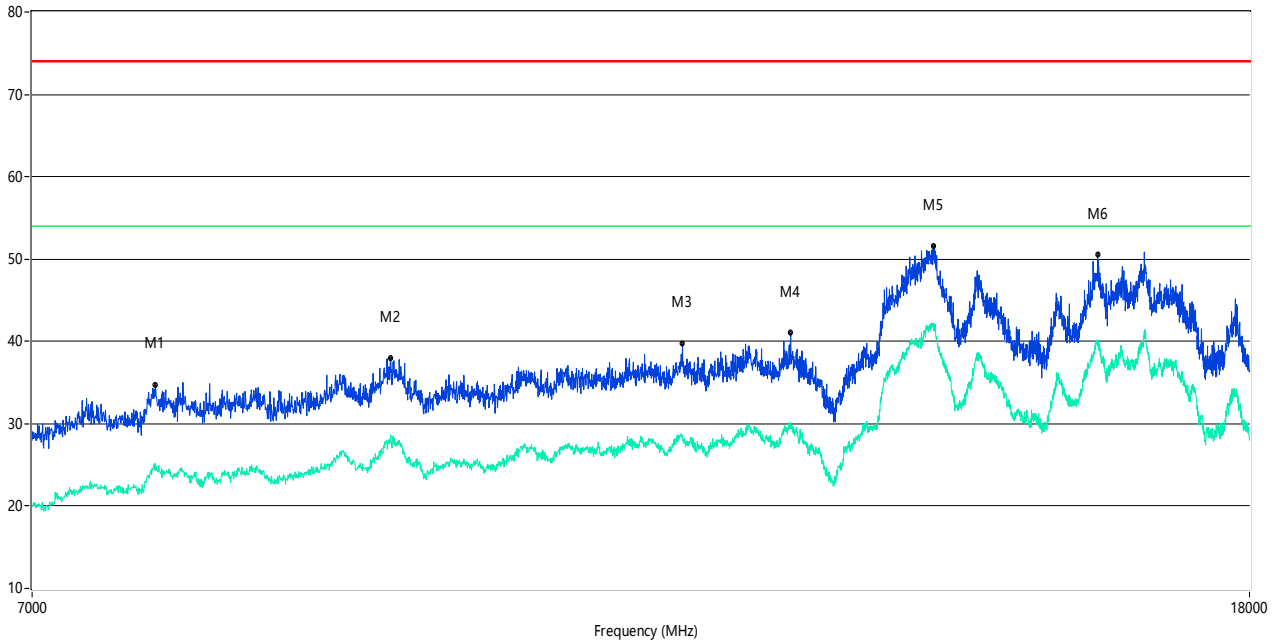


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7703.824	34.69	--	24.3	-7.74	74.0	--	54.0	29.70	102.00	100	Horizontal	Pass
9243.439	38.01	--	28.3	-4.53	74.0	--	54.0	25.70	259.00	100	Horizontal	Pass
11594.101	39.68	--	28.4	-0.88	74.0	--	54.0	25.60	220.00	100	Horizontal	Pass
12608.598	41.03	--	29.6	0.30	74.0	--	54.0	24.40	264.00	100	Horizontal	Pass
14084.979	51.57	--	42.2	14.84	74.0	--	54.0	11.80	20.00	100	Horizontal	Pass
15998.500	50.49	--	40.0	10.69	74.0	--	54.0	14.00	109.00	100	Horizontal	Pass

Hopping Mode:

GFSK MODE 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

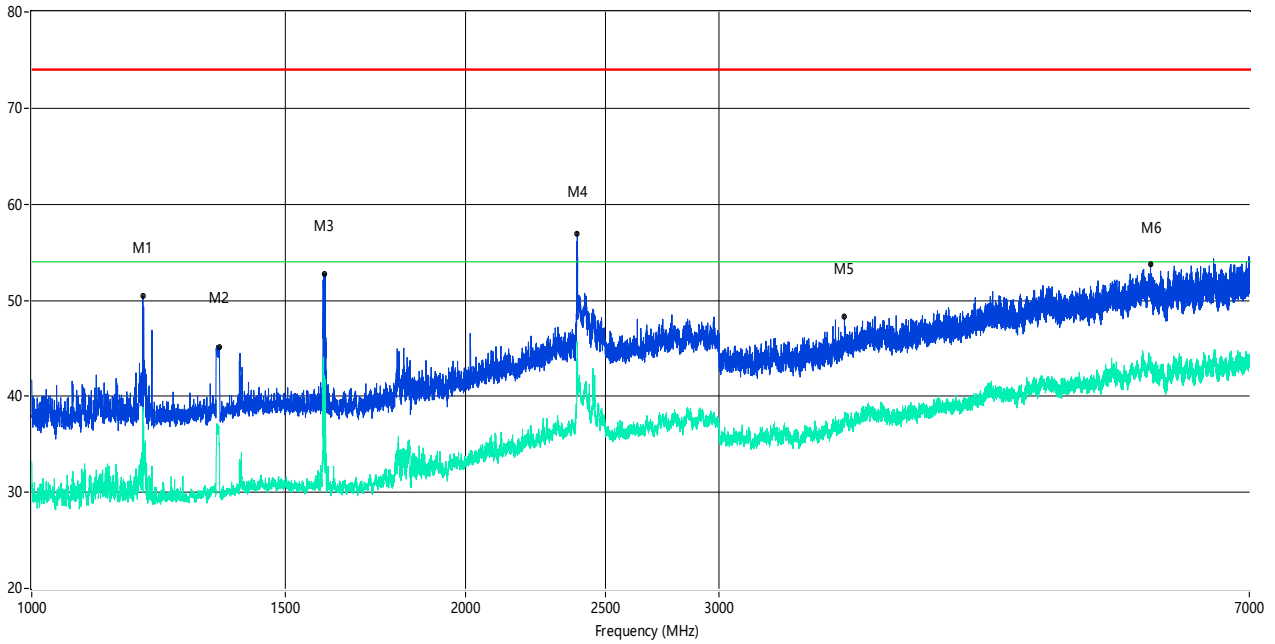

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1194.476	50.41	--	38.9	-12.15	74.0	--	54.0	15.10	120.00	100	Vertical	Pass
1349.456	45.10	--	35.1	-12.24	74.0	--	54.0	18.90	202.00	100	Vertical	Pass
1595.676	52.75	--	40.0	-12.21	74.0	--	54.0	14.00	60.00	100	Vertical	Pass
2391.326	56.92	--	45.7	-0.56	74.0	--	54.0	8.30	75.00	100	Vertical	Pass
3665.542	48.24	--	38.3	-3.30	74.0	--	54.0	15.70	3.00	100	Vertical	Pass
5976.753	53.70	--	42.9	3.82	74.0	--	54.0	11.10	242.00	100	Vertical	Pass

GFSK MODE 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

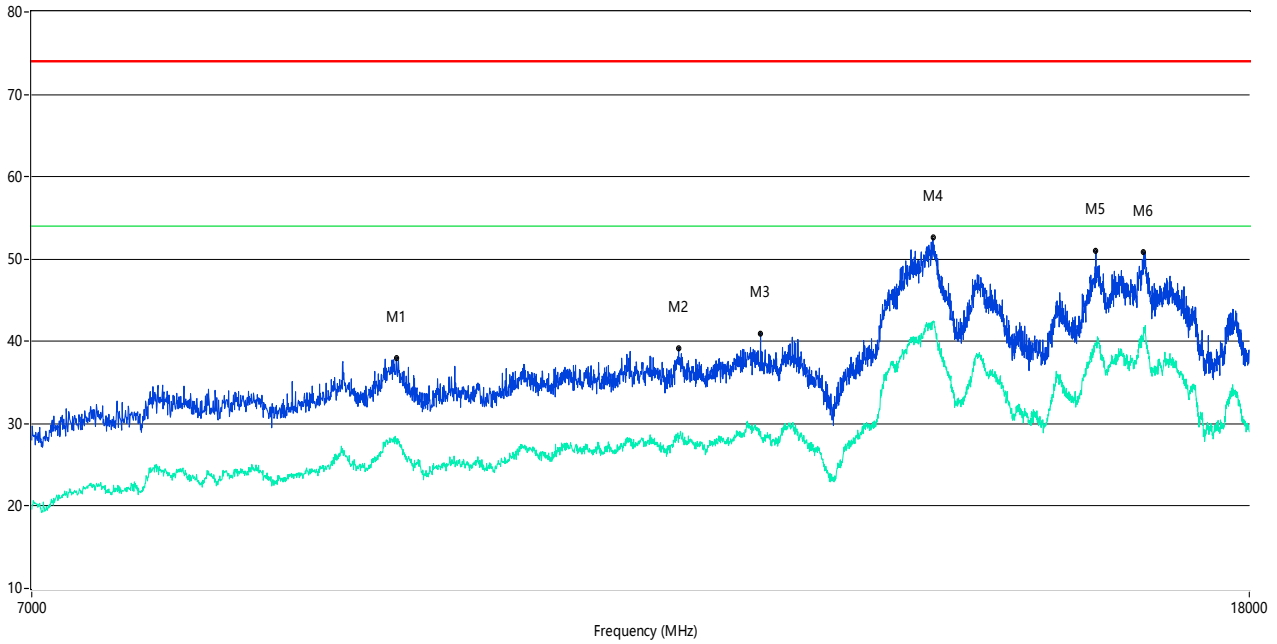

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9287.428	38.03	--	27.8	-4.06	74.0	--	54.0	26.20	28.00	100	Vertical	Pass
11561.110	39.20	--	28.4	-0.88	74.0	--	54.0	25.60	305.00	100	Vertical	Pass
12319.920	40.97	--	29.1	-0.56	74.0	--	54.0	24.90	128.00	100	Vertical	Pass
14082.229	52.55	--	42.4	14.79	74.0	--	54.0	11.60	33.00	100	Vertical	Pass
15979.255	51.01	--	39.5	10.02	74.0	--	54.0	14.50	99.00	100	Vertical	Pass
16584.104	50.88	--	41.4	11.73	74.0	--	54.0	12.60	184.00	100	Vertical	Pass

GFSK MODE 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

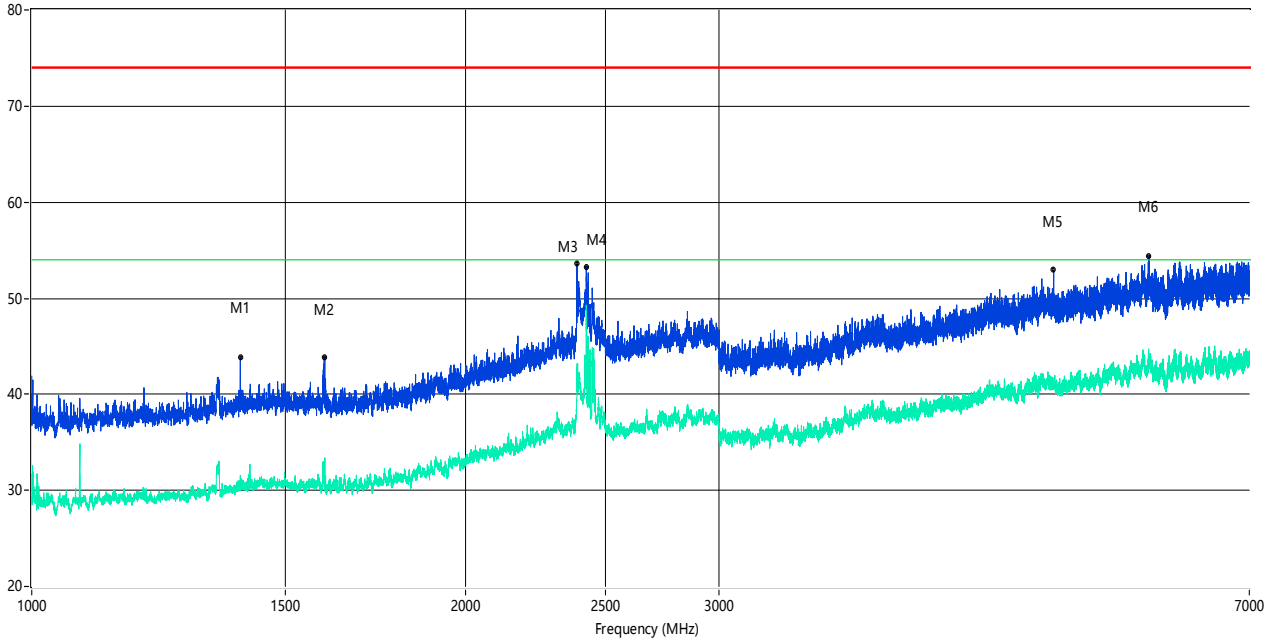

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1395.451	43.83	--	31.6	-12.02	74.0	--	54.0	22.40	350.00	100	Horizontal	Pass
1597.425	43.91	--	33.4	-12.41	74.0	--	54.0	20.60	276.00	100	Horizontal	Pass
2390.076	53.57	--	42.8	-1.32	74.0	--	54.0	11.20	160.00	100	Horizontal	Pass
2425.822	53.28	--	49.3	-1.00	74.0	--	54.0	4.70	230.00	100	Horizontal	Pass
5119.985	52.92	--	41.3	0.67	74.0	--	54.0	12.70	248.00	100	Horizontal	Pass
5961.755	54.39	--	44.2	3.85	74.0	--	54.0	9.80	232.00	100	Horizontal	Pass

GFSK MODE 7 GHz to 18 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

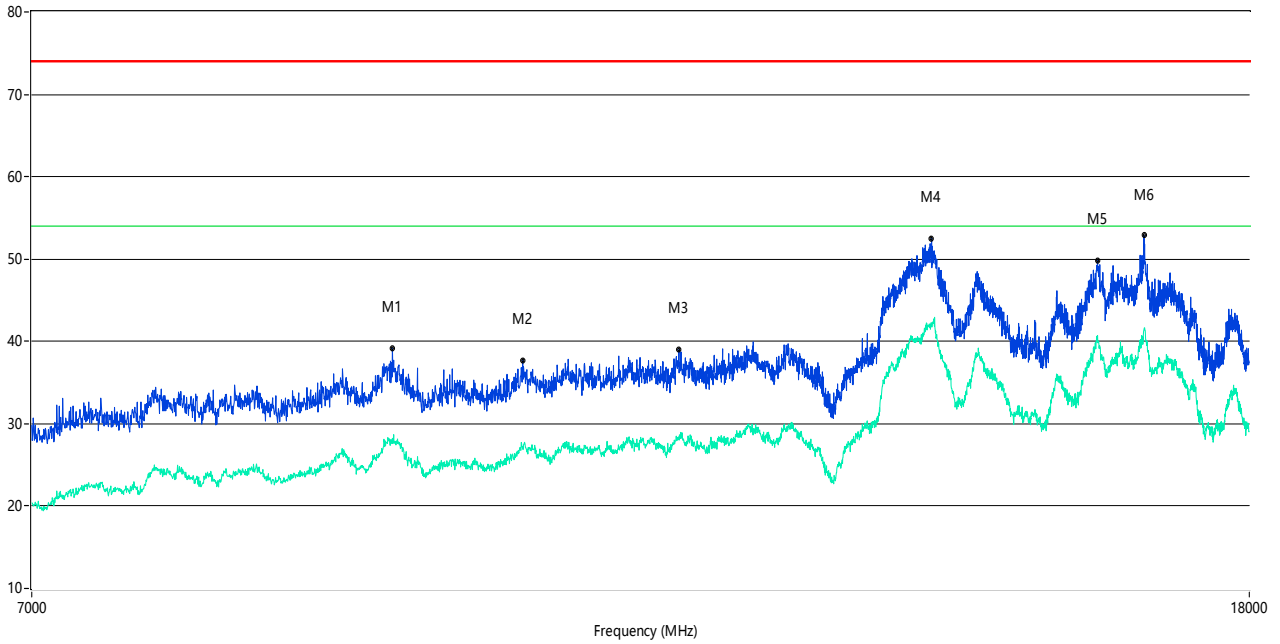

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9259.935	39.18	--	28.2	-4.28	74.0	--	54.0	25.80	308.00	100	Horizontal	Pass
10244.189	37.72	--	27.2	-2.22	74.0	--	54.0	26.80	293.00	100	Horizontal	Pass
11563.859	38.99	--	28.3	-0.93	74.0	--	54.0	25.70	265.00	100	Horizontal	Pass
14068.483	52.52	--	41.8	14.56	74.0	--	54.0	12.20	46.00	100	Horizontal	Pass
16001.250	49.81	--	40.7	10.71	74.0	--	54.0	13.30	310.00	100	Horizontal	Pass
16586.853	52.87	--	41.4	11.78	74.0	--	54.0	12.60	222.00	100	Horizontal	Pass

8-DPSK MODE 1 GHz to 7 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

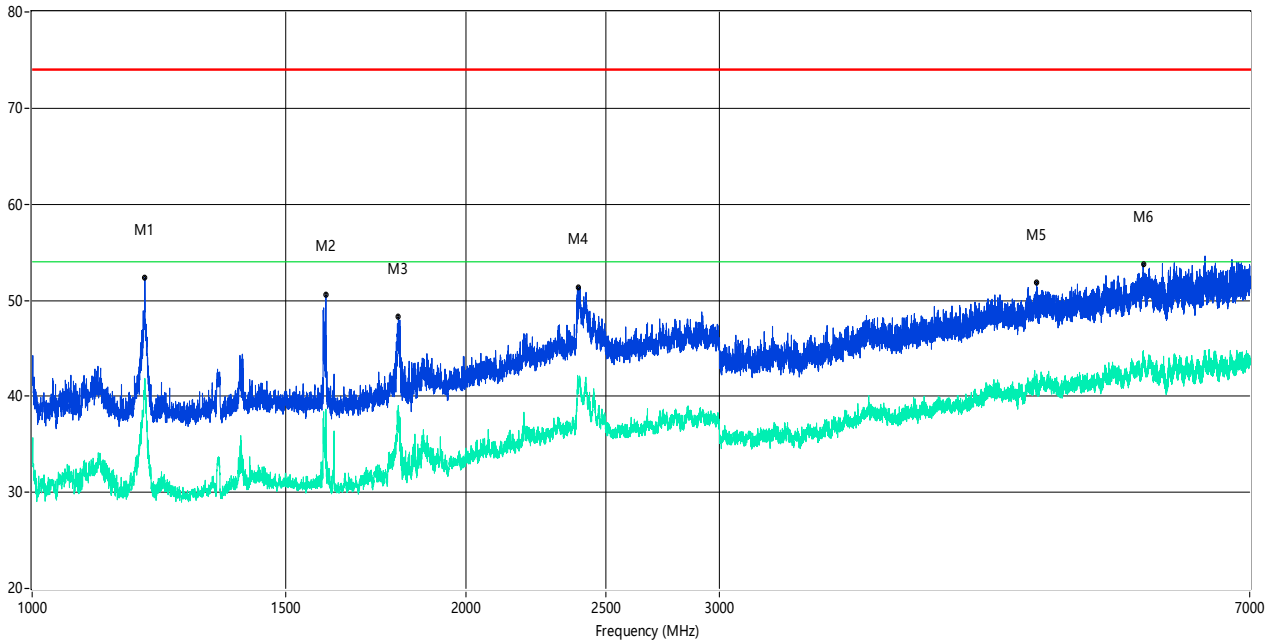

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1197.475	52.34	--	41.9	-12.17	74.0	--	54.0	12.10	345.00	100	Vertical	Pass
1598.925	50.57	--	35.1	-12.51	74.0	--	54.0	18.90	330.00	100	Vertical	Pass
1795.901	48.27	--	38.6	-10.90	74.0	--	54.0	15.40	122.00	100	Vertical	Pass
2392.076	51.36	--	41.1	-0.10	74.0	--	54.0	12.90	227.00	100	Vertical	Pass
4979.378	51.85	--	41.4	1.56	74.0	--	54.0	12.60	256.00	100	Vertical	Pass
5904.012	53.80	--	44.7	3.75	74.0	--	54.0	9.30	187.00	100	Vertical	Pass

8-DPSK MODE 7 GHz to 18 GHz, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

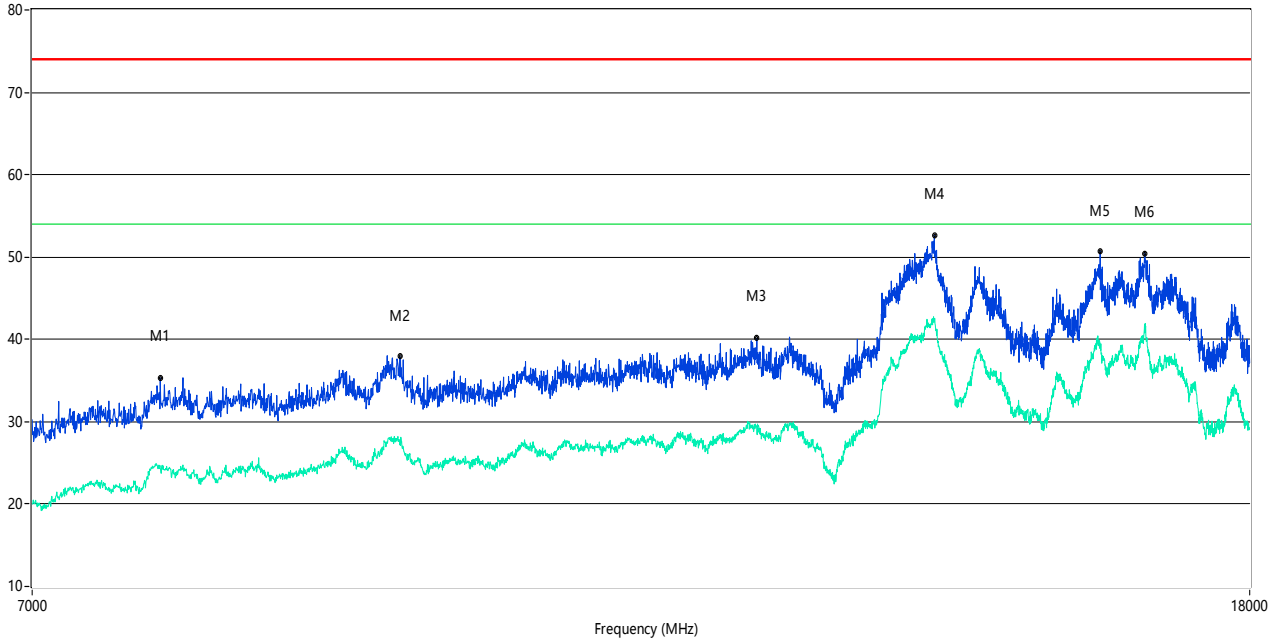

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7731.317	35.29	--	24.4	-7.88	74.0	--	54.0	29.60	268.00	100	Vertical	Pass
9309.423	37.95	--	27.2	-4.25	74.0	--	54.0	26.80	236.00	100	Vertical	Pass
12281.430	40.12	--	29.3	-0.28	74.0	--	54.0	24.70	165.00	100	Vertical	Pass
14093.227	52.65	--	42.3	14.80	74.0	--	54.0	11.70	347.00	100	Vertical	Pass
16028.743	50.67	--	39.3	9.83	74.0	--	54.0	14.70	106.00	100	Vertical	Pass
16592.352	50.42	--	40.8	11.91	74.0	--	54.0	13.20	311.00	100	Vertical	Pass

8-DPSK MODE 1 GHz to 7 GHz, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

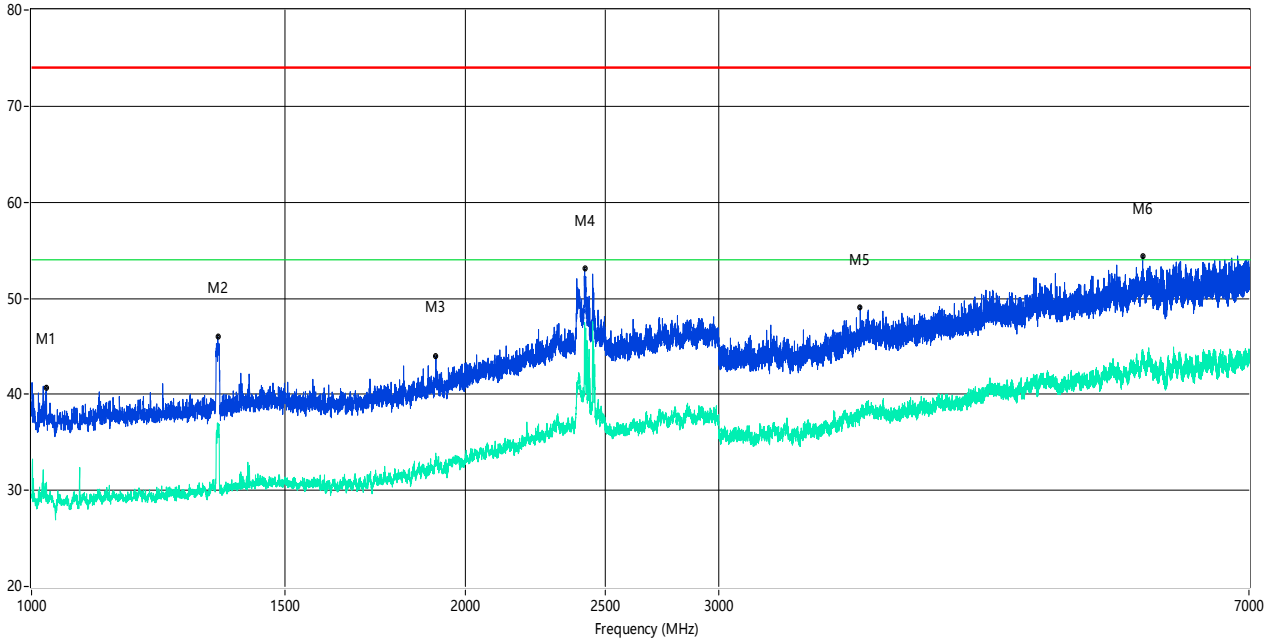

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1024.247	40.67	--	30.8	-11.39	74.0	--	54.0	23.20	220.00	100	Horizontal	Pass
1346.707	46.03	--	37.0	-12.32	74.0	--	54.0	17.00	2.00	100	Horizontal	Pass
1908.386	43.96	--	33.2	-8.78	74.0	--	54.0	20.80	48.00	100	Horizontal	Pass
2420.822	53.08	--	47.5	-0.79	74.0	--	54.0	6.50	298.00	100	Horizontal	N.A
3760.405	49.07	--	38.3	-3.28	74.0	--	54.0	15.70	153.00	100	Horizontal	Pass
5905.137	54.39	--	44.7	3.65	74.0	--	54.0	9.30	162.00	100	Horizontal	Pass

8-DPSK MODE 7 GHz to 18 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

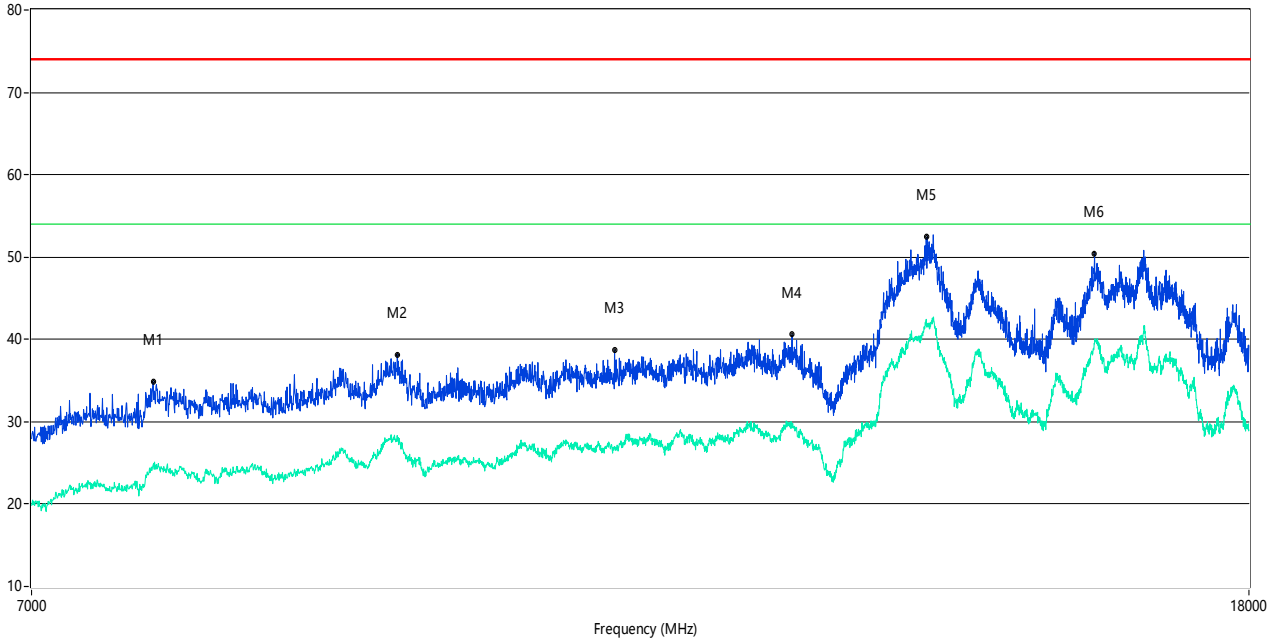

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7692.827	34.85	--	24.8	-7.86	74.0	--	54.0	29.20	98.00	100	Horizontal	Pass
9295.676	38.18	--	28.3	-4.02	74.0	--	54.0	25.70	231.00	100	Horizontal	Pass
11002.999	38.72	--	26.7	-1.72	74.0	--	54.0	27.30	113.00	100	Horizontal	Pass
12627.843	40.58	--	29.3	0.16	74.0	--	54.0	24.70	84.00	100	Horizontal	Pass
14021.745	52.46	--	41.8	14.23	74.0	--	54.0	12.20	260.00	100	Horizontal	Pass
15968.258	50.46	--	39.6	9.57	74.0	--	54.0	14.40	360.00	100	Horizontal	Pass

A.9 Band Edge (Restricted-band band-edge)


Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

1 GHz to 25 GHz, ANT V GFSK Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

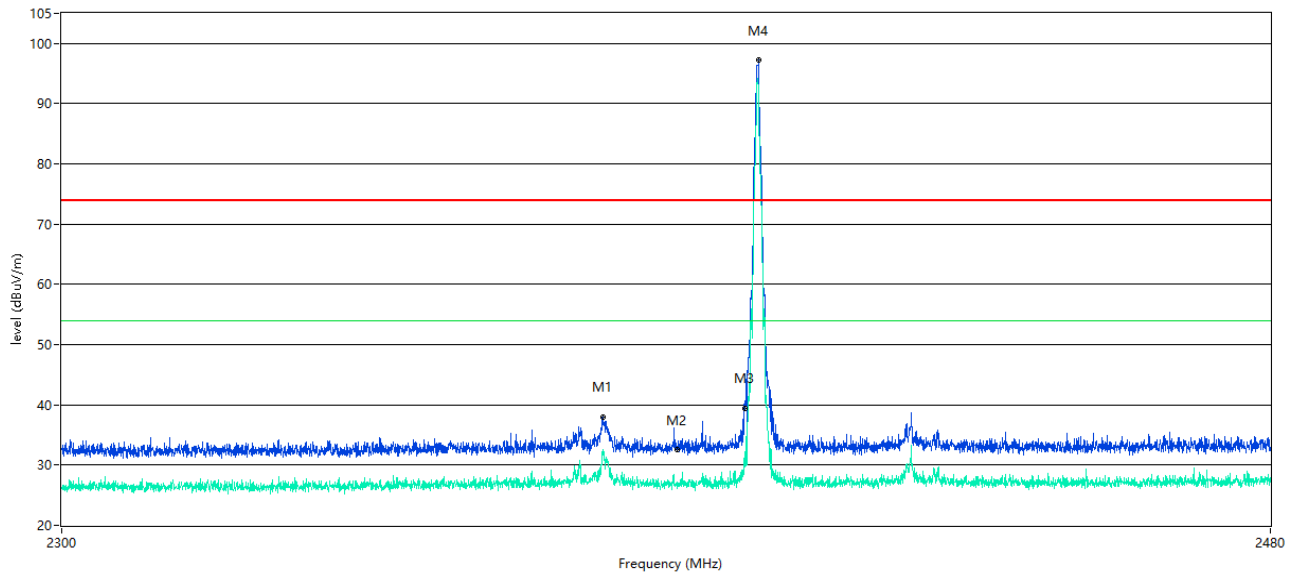

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2378.930	32.1	2.07	54.0	21.90	AV	360.00	100	Vertical	Pass
1	2378.930	38.02	2.07	74.0	35.98	Peak	360.00	100	Vertical	Pass
2**	2390.000	26.8	2.02	54.0	27.20	AV	316.82	100	Vertical	Pass
2	2390.000	32.50	2.02	74.0	41.50	Peak	316.82	100	Vertical	Pass
3**	2400.000	30.5	1.85	54.0	23.50	AV	162.20	100	Vertical	Pass
3	2400.000	39.03	1.85	74.0	34.97	Peak	162.20	100	Vertical	Pass
4**	2402.124	92.5	1.91	54.0	-38.50	AV	0.00	100	Vertical	N.A
4	2402.124	97.19	1.91	74.0	-23.19	Peak	0.00	100	Vertical	N.A


1 GHz to 25 GHz, ANT H GFSK Low Channel

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

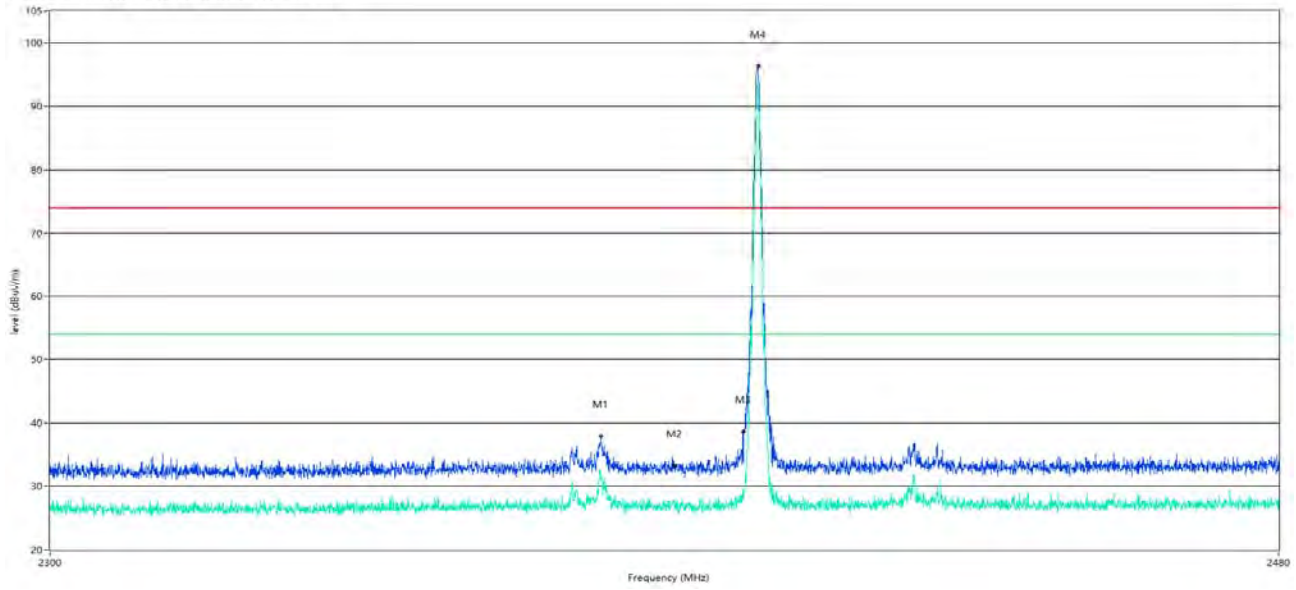

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2379.080	32.1	2.07	54.0	21.90	AV	0.00	100	Horizontal	Pass
1	2379.080	37.96	2.07	74.0	36.04	Peak	0.00	100	Horizontal	Pass
2**	2390.000	27.6	2.02	54.0	26.40	AV	191.68	100	Horizontal	Pass
2	2390.000	33.22	2.02	74.0	40.78	Peak	191.68	100	Horizontal	Pass
3**	2400.000	29.2	1.85	54.0	24.80	AV	310.25	100	Horizontal	Pass
3	2400.000	38.69	1.85	74.0	35.31	Peak	310.25	100	Horizontal	Pass
4**	2402.174	92.0	1.92	54.0	-38.00	AV	330.60	100	Horizontal	N.A
4	2402.174	96.36	1.92	74.0	-22.36	Peak	330.60	100	Horizontal	N.A


1 GHz to 25 GHz, ANT V GFSK HIGH Channel

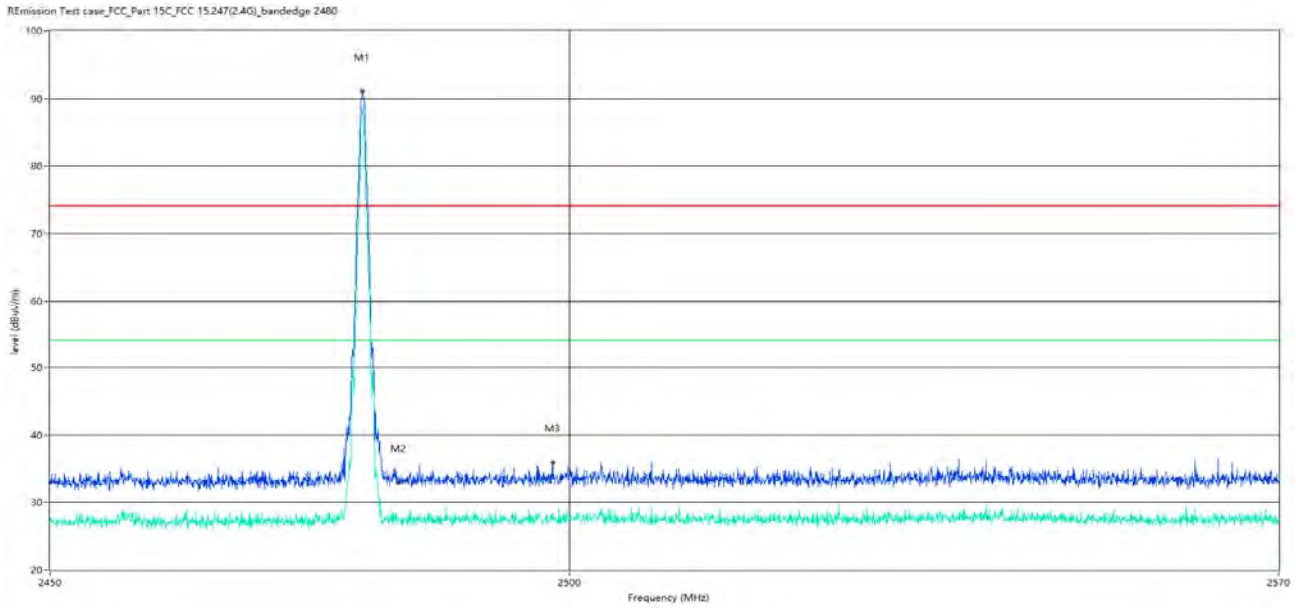

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2479.965	87.7	2.70	54.0	-33.70	AV	21.80	100	Vertical	N.A
1	2479.965	91.11	2.70	74.0	-17.11	Peak	21.80	100	Vertical	N.A
2**	2483.500	27.3	2.71	54.0	26.70	AV	32.58	100	Vertical	Pass
2	2483.500	33.07	2.71	74.0	40.93	Peak	32.58	100	Vertical	Pass
3**	2498.405	28.6	2.73	54.0	25.40	AV	56.90	100	Vertical	Pass
3	2498.405	35.95	2.73	74.0	38.05	Peak	56.90	100	Vertical	Pass

1 GHz to 25 GHz, ANT H GFSK HIGH Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

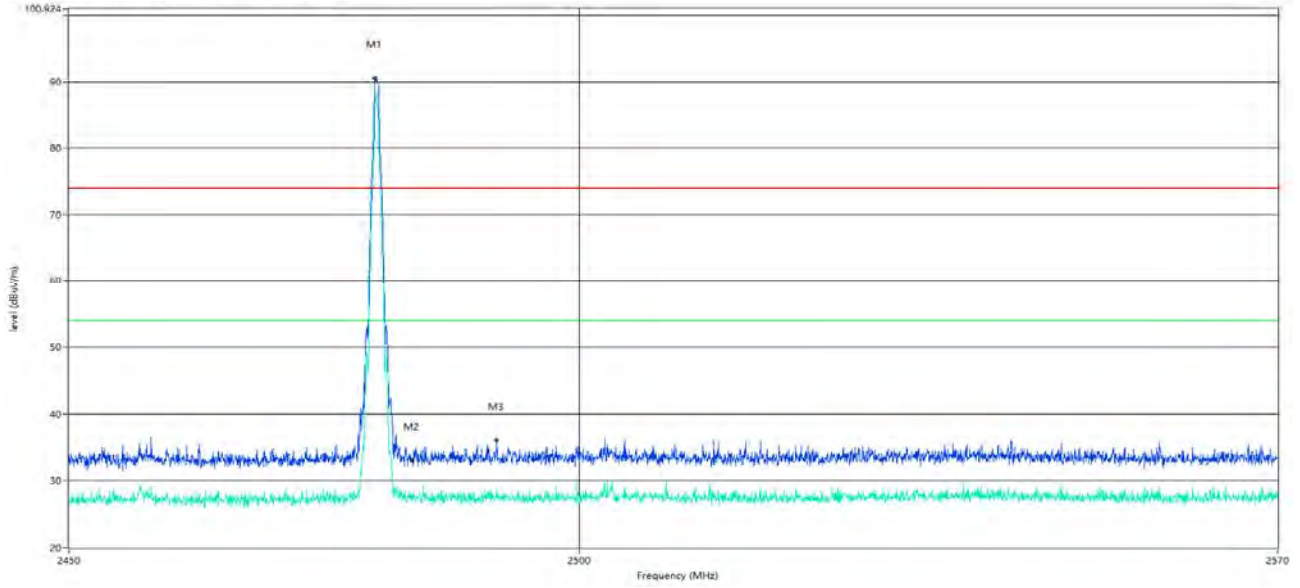

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2479.838	85.7	2.69	54.0	-31.70	AV	20.10	100	Horizontal	N.A
1	2479.838	90.51	2.69	74.0	-16.51	Peak	20.10	100	Horizontal	N.A
2**	2483.500	27.2	2.71	54.0	26.80	AV	308.53	100	Horizontal	Pass
2	2483.500	33.13	2.71	74.0	40.87	Peak	308.53	100	Horizontal	Pass
3**	2491.820	28.9	2.71	54.0	25.10	AV	29.40	100	Horizontal	Pass
3	2491.820	36.13	2.71	74.0	37.87	Peak	29.40	100	Horizontal	Pass

1 GHz to 25 GHz, ANT V GFSK (Hopping)


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

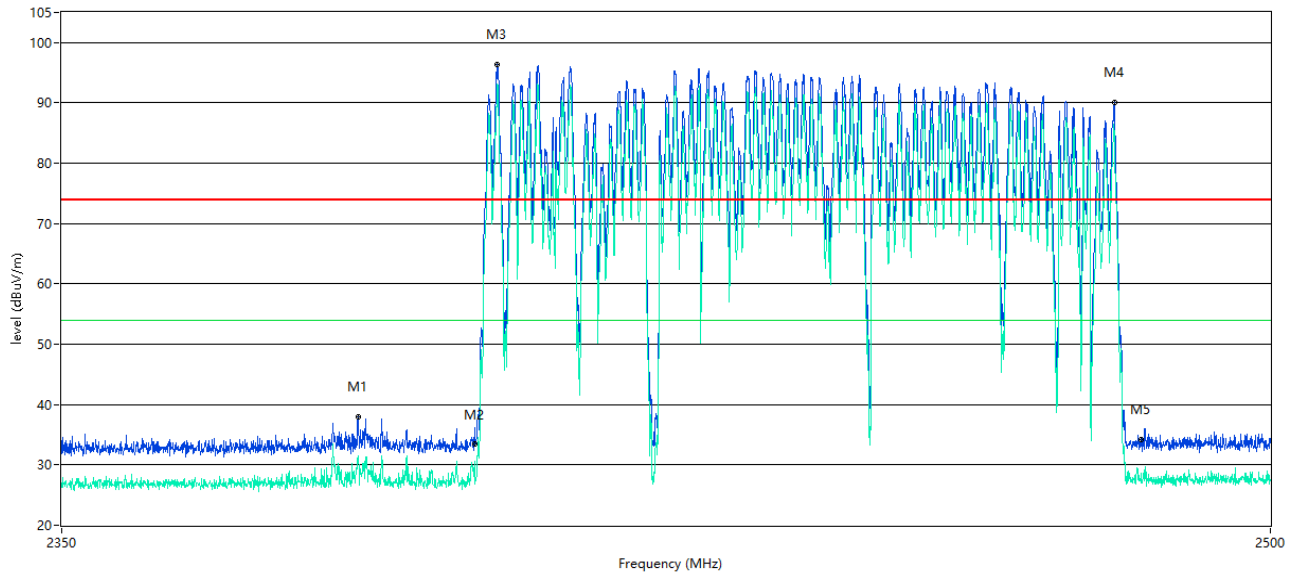

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2385.929	31.4	2.08	54.0	22.60	AV	329.60	100	Vertical	Pass
1	2385.929	38.05	2.08	74.0	35.95	Peak	329.60	100	Vertical	Pass
2**	2400.000	29.8	1.85	54.0	24.20	AV	171.60	100	Vertical	Pass
2	2400.000	33.40	1.85	74.0	40.60	Peak	171.60	100	Vertical	Pass
3**	2402.974	93.2	1.94	54.0	-39.20	AV	332.50	100	Vertical	N.A
3	2402.974	96.32	1.94	74.0	-22.32	Peak	332.50	100	Vertical	N.A
4**	2480.105	85.2	2.70	54.0	-31.20	AV	304.90	100	Vertical	N.A
4	2480.105	90.01	2.70	74.0	-16.01	Peak	304.90	100	Vertical	N.A
5**	2483.500	28.6	2.71	54.0	25.40	AV	31.74	100	Vertical	Pass
5	2483.500	34.20	2.71	74.0	39.80	Peak	31.74	100	Vertical	Pass

1 GHz to 25 GHz, ANT H GFSK (Hopping)


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

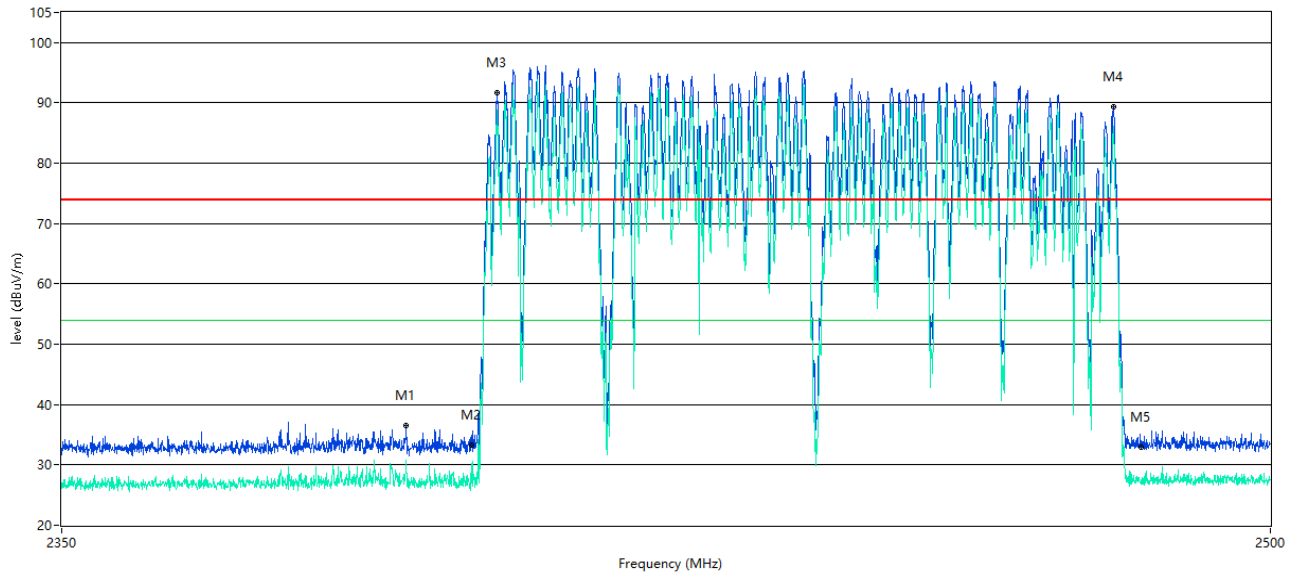

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2391.777	29.7	1.98	54.0	24.30	AV	180.40	100	Horizontal	Pass
1	2391.777	35.45	1.98	74.0	38.55	Peak	180.40	100	Horizontal	Pass
2**	2400.000	27.4	1.85	54.0	26.60	AV	194.15	100	Horizontal	Pass
2	2400.000	33.15	1.85	74.0	40.85	Peak	194.15	100	Horizontal	Pass
3**	2403.024	87.8	1.94	54.0	-33.80	AV	16.30	100	Horizontal	N.A
3	2403.024	91.63	1.94	74.0	-17.63	Peak	16.30	100	Horizontal	N.A
4**	2479.955	85.6	2.70	54.0	-31.60	AV	22.80	100	Horizontal	N.A
4	2479.955	89.45	2.70	74.0	-15.45	Peak	22.80	100	Horizontal	N.A
5**	2483.500	27.4	2.71	54.0	26.60	AV	170.07	100	Horizontal	Pass
5	2483.500	32.99	2.71	74.0	41.01	Peak	170.07	100	Horizontal	Pass

1 GHz to 25 GHz, ANT V 8-DPSK Low Channel


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

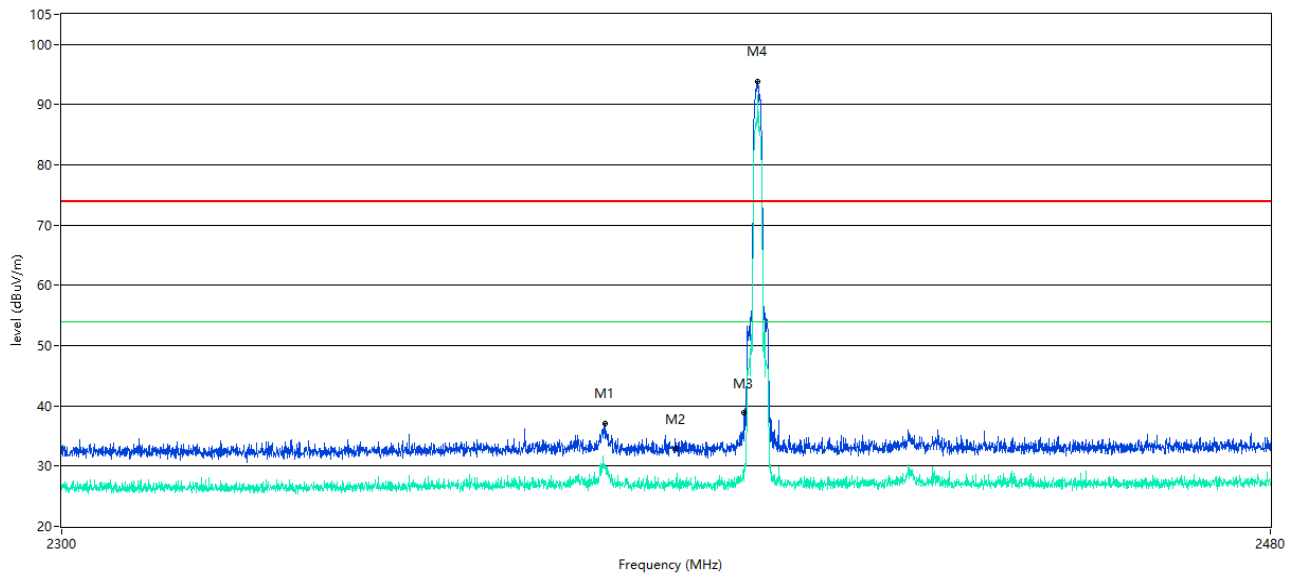

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2379.330	30.0	2.07	54.0	24.00	AV	336.60	100	Vertical	Pass
1	2379.330	37.07	2.07	74.0	36.93	Peak	336.60	100	Vertical	Pass
2**	2390.000	26.5	2.02	54.0	27.50	AV	73.83	100	Vertical	Pass
2	2390.000	32.88	2.02	74.0	41.12	Peak	73.83	100	Vertical	Pass
3**	2400.000	29.6	1.85	54.0	24.40	AV	312.75	100	Vertical	Pass
3	2400.000	38.60	1.85	74.0	35.40	Peak	312.75	100	Vertical	Pass
4**	2402.024	90.8	1.91	54.0	-36.80	AV	304.90	100	Vertical	N.A
4	2402.024	93.86	1.91	74.0	-19.86	Peak	304.90	100	Vertical	N.A

1 GHz to 25 GHz, ANT H 8-DPSK Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

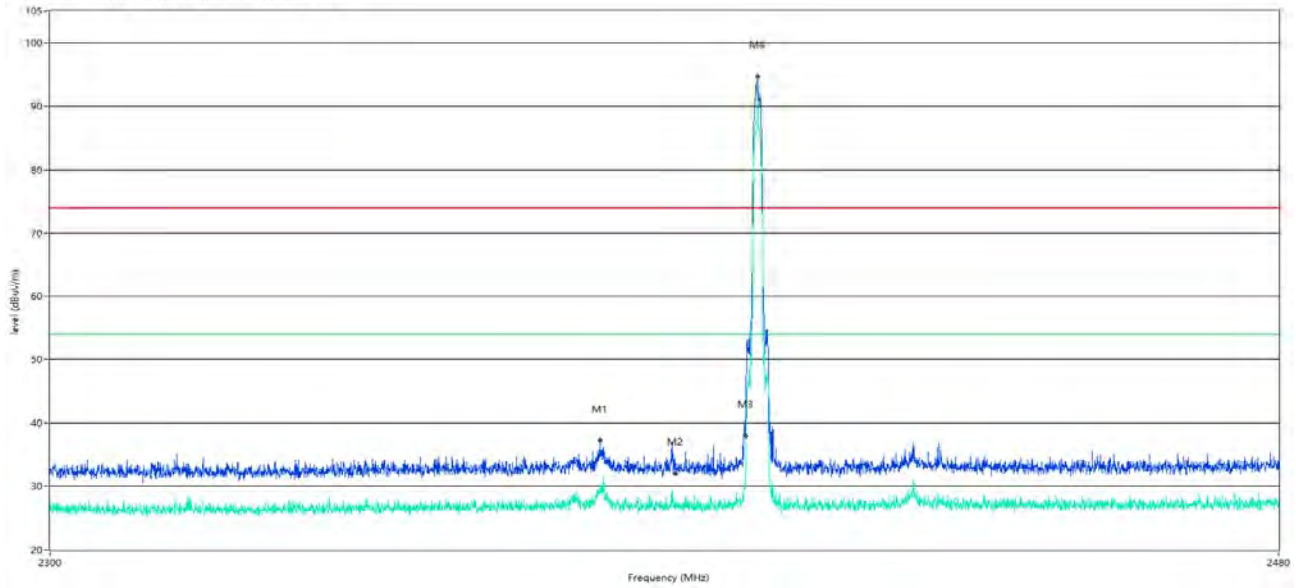

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2378.880	30.3	2.07	54.0	23.70	AV	355.80	100	Horizontal	Pass
1	2378.880	37.25	2.07	74.0	36.75	Peak	355.80	100	Horizontal	Pass
2**	2390.000	26.9	2.02	54.0	27.10	AV	133.63	100	Horizontal	Pass
2	2390.000	31.94	2.02	74.0	42.06	Peak	133.63	100	Horizontal	Pass
3**	2400.000	29.4	1.85	54.0	24.60	AV	335.20	100	Horizontal	Pass
3	2400.000	38.20	1.85	74.0	35.80	Peak	335.20	100	Horizontal	Pass
4**	2401.975	92.1	1.91	54.0	-38.10	AV	305.20	100	Horizontal	N.A
4	2401.975	94.69	1.91	74.0	-20.69	Peak	305.20	100	Horizontal	N.A

1 GHz to 25 GHz, ANT V 8-DPSK HIGH Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

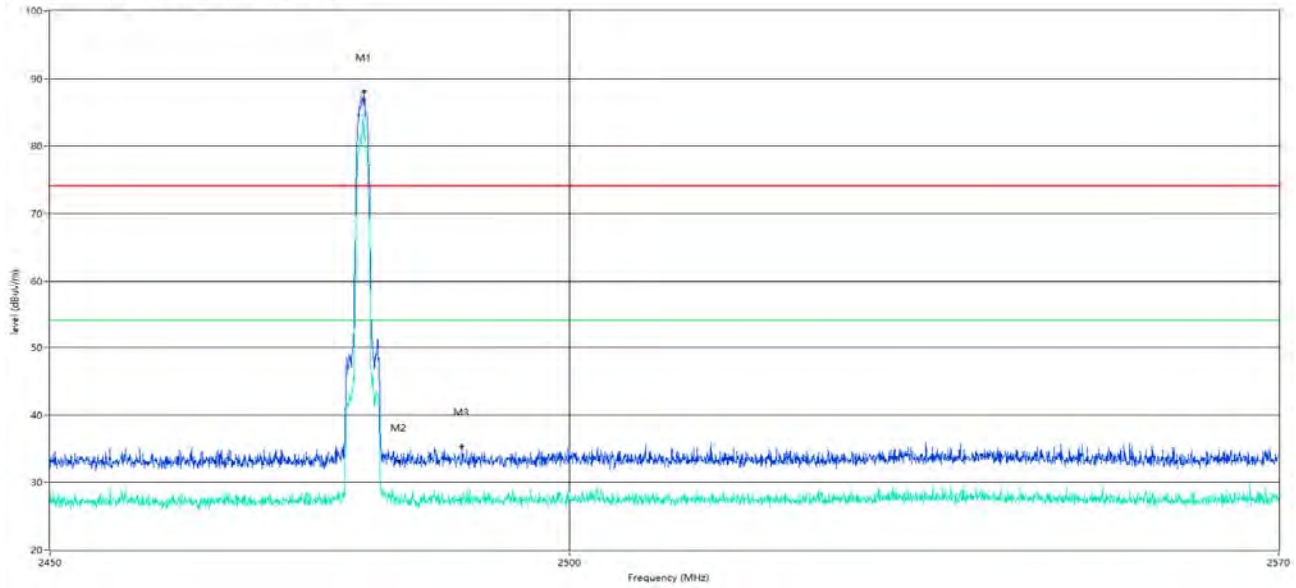

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2480.135	83.1	2.70	54.0	-29.10	AV	98.30	100	Vertical	N.A
1	2480.135	88.07	2.70	74.0	-14.07	Peak	98.30	100	Vertical	N.A
2**	2483.500	28.0	2.71	54.0	26.00	AV	194.97	100	Vertical	Pass
2	2483.500	33.01	2.71	74.0	40.99	Peak	194.97	100	Vertical	Pass
3**	2489.610	27.8	2.71	54.0	26.20	AV	188.70	100	Vertical	Pass
3	2489.610	35.33	2.71	74.0	38.67	Peak	188.70	100	Vertical	Pass

1 GHz to 25 GHz, ANT H 8-DPSK HIGH Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

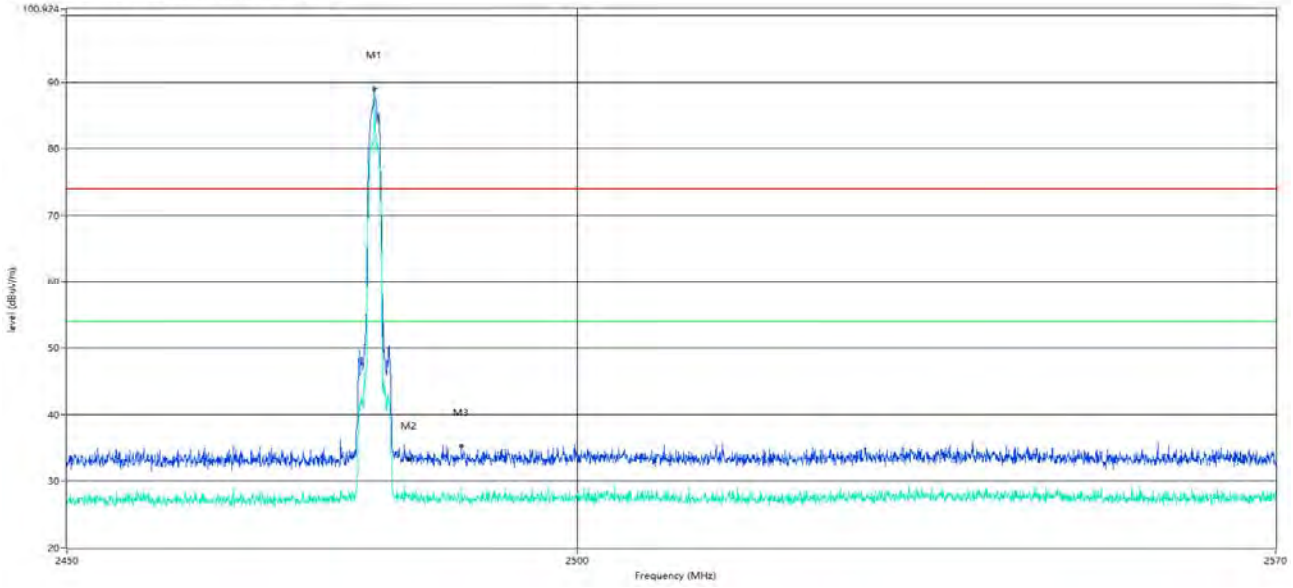

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2479.965	83.6	2.70	54.0	-29.60	AV	92.40	100	Horizontal	N.A
1	2479.965	89.02	2.70	74.0	-15.02	Peak	92.40	100	Horizontal	N.A
2**	2483.500	27.7	2.71	54.0	26.30	AV	173.70	100	Horizontal	Pass
2	2483.500	33.39	2.71	74.0	40.61	Peak	173.70	100	Horizontal	Pass
3**	2488.548	29.2	2.71	54.0	24.80	AV	272.00	100	Horizontal	Pass
3	2488.548	35.36	2.71	74.0	38.64	Peak	272.00	100	Horizontal	Pass

1 GHz to 25 GHz, ANT V 8-DPSK (Hopping)


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

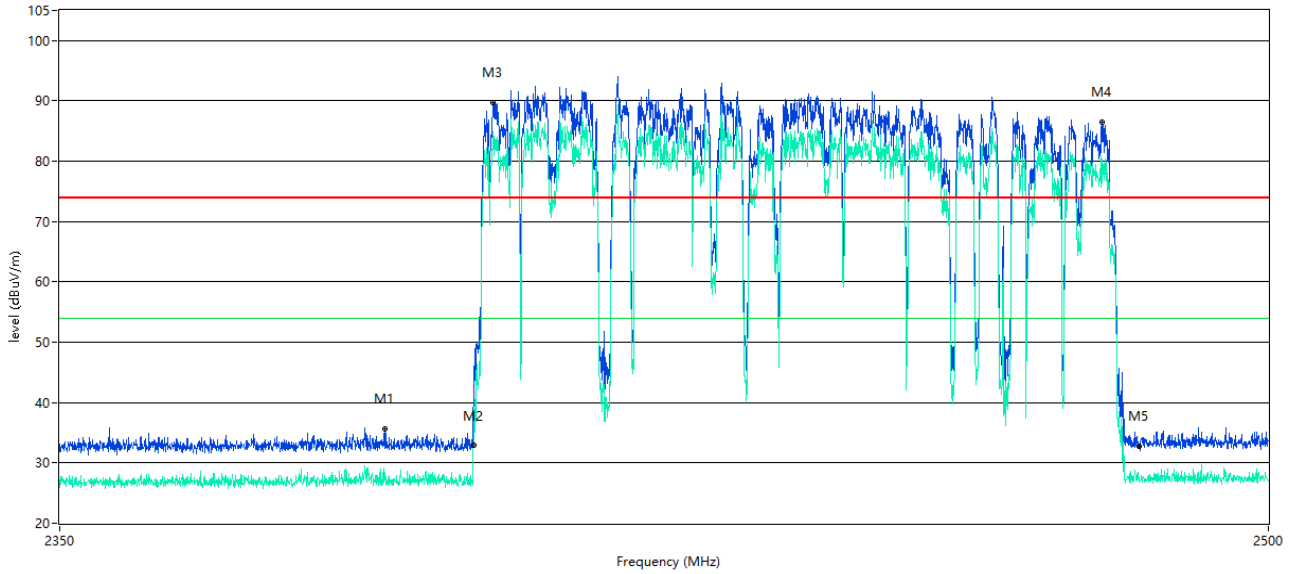

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2389.428	28.1	2.04	54.0	25.90	AV	137.20	100	Vertical	Pass
1	2389.428	35.65	2.04	74.0	38.35	Peak	137.20	100	Vertical	Pass
2**	2400.000	27.0	1.85	54.0	27.00	AV	188.80	100	Vertical	Pass
2	2400.000	32.69	1.85	74.0	41.31	Peak	188.80	100	Vertical	Pass
3**	2402.724	84.9	1.93	54.0	-30.90	AV	285.90	100	Vertical	N.A
3	2402.724	89.67	1.93	74.0	-15.67	Peak	285.90	100	Vertical	N.A
4**	2478.805	80.4	2.67	54.0	-26.40	AV	23.20	100	Vertical	N.A
4	2478.805	86.55	2.67	74.0	-12.55	Peak	23.20	100	Vertical	N.A
5**	2483.500	27.4	2.71	54.0	26.60	AV	237.81	100	Vertical	Pass
5	2483.500	32.78	2.71	74.0	41.22	Peak	237.81	100	Vertical	Pass

1 GHz to 25 GHz, ANT H 8-DPSK (Hopping)

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

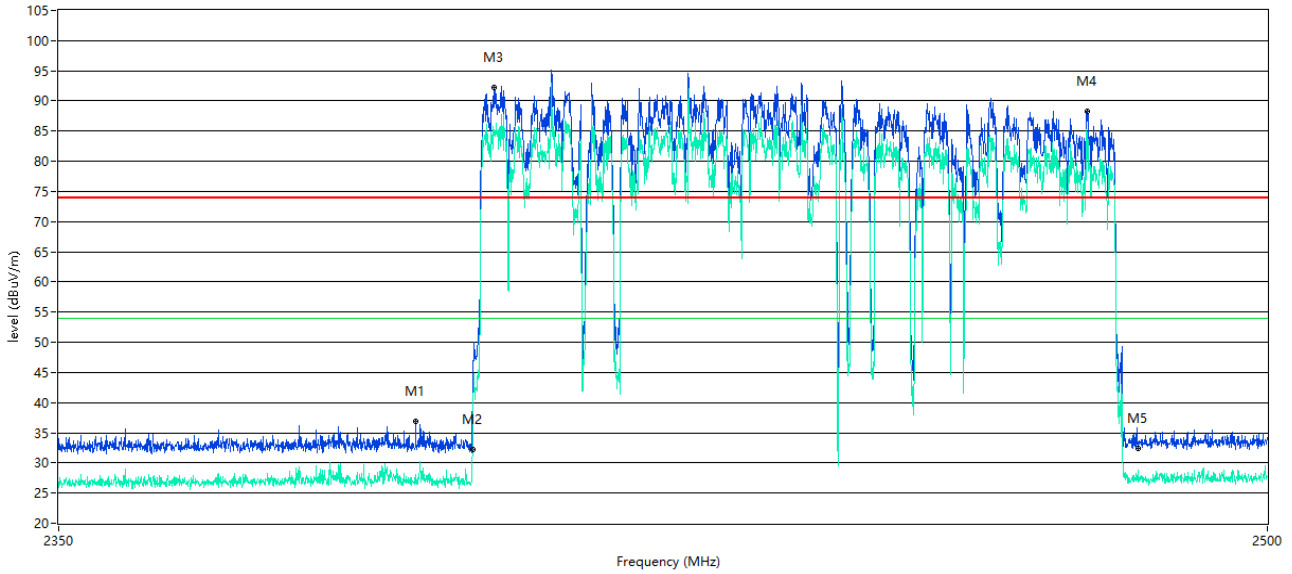

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2393.327	28.1	1.94	54.0	25.90	AV	183.80	100	Horizontal	Pass
1	2393.327	36.84	1.94	74.0	37.16	Peak	183.80	100	Horizontal	Pass
2**	2400.000	26.6	1.85	54.0	27.40	AV	101.75	100	Horizontal	Pass
2	2400.000	32.43	1.85	74.0	41.57	Peak	101.75	100	Horizontal	Pass
3**	2402.974	85.1	1.94	54.0	-31.10	AV	304.40	100	Horizontal	N.A
3	2402.974	92.17	1.94	74.0	-18.17	Peak	304.40	100	Horizontal	N.A
4**	2477.006	84.7	2.63	54.0	-30.70	AV	26.20	100	Horizontal	N.A
4	2477.006	88.26	2.63	74.0	-14.26	Peak	26.20	100	Horizontal	N.A
5**	2483.500	27.0	2.71	54.0	27.00	AV	166.82	100	Horizontal	Pass
5	2483.500	32.55	2.71	74.0	41.45	Peak	166.82	100	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-EC1840167-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-EC1840167-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-EC1840167-AI.PDF".

--END OF REPORT--