

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 1 of 59

Applicant : Shenzhen UniStrong Science & Technology Co.,Ltd.
Address of Applicant : B,4-4Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen, China

Product Name : Rugged Smart Tablet
Model No. : UT30H
Sample No. : E19020010-05#02
FCC ID : 2AOPD-UT30P
ISED Number : 11546A-UT30P

Standards : FCC CFR47 Part 2
(Others refer to chapter 1.4)

Date of Receipt : 2020-2-10
Date of Test : 2020-2-10 ~ 2020-5-27
Date of Issue : 2020-5-27

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Jennifer Zhou
(Jennifer Zhou)

Reviewed by: jesse
(Jesse)

Approved by: Guoyou Chi
(Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 2 of 59

Revision Record

Version	Date	Revisions	Revised By
1.0	2020-04-18	Original	--

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 3 of 59

Contents

1	GENERAL INFORMATION.....	5
1.1	TESTING LABORATORY	5
1.2	DETAILS OF APPLICATION	5
1.3	DETAILS OF EUT	5
1.4	DOCUMENT REVISION HISTORY	6
1.5	TEST METHODOLOGY	6
1.6	TEST VERDICT	7
2	TEST CONDITION.....	9
2.1	ENVIRONMENTAL CONDITIONS	9
2.2	TEST ENVIRONMENTS	9
2.3	EQUIPMENT LIST	9
3	TEST SET-UP AND OPERATION MODES.....	10
3.1	DETAILS OF TEST MODE	10
3.2	TEST SETUP DIAGRAM.....	14
4	TEST ITEMS.....	17
4.1	TRANSMITTER RADIATED POWER (EIRP/ERP)	17
4.1.1	Limit.....	17
4.1.2	Test Procedures	17
4.1.3	Test Result.....	18
4.2	PEAK-TO-AVERAGE RATIO	19
4.2.1	Limit.....	19
4.2.2	Test Procedures	19
4.2.3	Test Result.....	19
4.3	OCCUPIED BANDWIDTH.....	20
4.3.1	Limit.....	20
4.3.2	Test Procedures	20
4.3.3	Test Result.....	20
4.4	FREQUENCY STABILITY	21
4.4.1	Limit.....	21
4.4.2	Test Procedures	22
4.4.3	Test Result.....	22
4.5	SPURIOUS EMISSION AT ANTENNA TERMINALS	23
4.5.1	Limit.....	23
4.5.2	Test Procedures	24
4.5.3	Test Result.....	25
4.6	BAND EDGE	26
4.6.1	Limit.....	26

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 4 of 59

4.6.2	Test Procedures	27
4.6.3	Test Result.....	28
4.7	FIELD STRENGTH OF SPURIOUS RADIATION.....	29
4.7.1	Limit.....	29
4.7.2	Test Procedures	30
4.7.3	Test Result.....	31
5	APPENDIXES	32
5.1	TEST RESULT	32
5.1.1	Transmitter Radiated Power (EIRP/ERP).....	32
5.1.2	Field Strength of Spurious Radiation	59

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 5 of 59

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	155 Pingbei Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Company Name	Shenzhen UniStrong Science & Technology Co.,Ltd
Address	B,4-4Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen, China
Contact Person	Lily Zheng
Telephone	+86-21-54467182
Email	ll.zheng@unistrong.com

1.3 Details of EUT

Product Name	Rugged Smart Tablet
Brand Name	Unistrong
Model No.	UT30H
FCC ID	2AOPD-UT30P
Mode of Operation	GSM/GPRS/EDGE 850/1900; WCDMA/HSDPA/HSUPA Band II/V; CDMA2000 1xRTT/1xEv-Do BC0; LTE FDD Band 2/4/5/7/12/13/17/25; LTE TDD Band 41;
Modulation Type	GMSK for GSM/GPRS and 8PSK for EGPRS; QPSK for WCDMA/CDMA 1x; QPSK/8PSK/16QAM for EvDo; QPSK/16QAM for HSDPA/HSUPA/LTE;
Power Class	GSM/GPRS 850: 4 GSM/GPRS 1900: 1 EDGE 850/1900: E2 WCDMA/HSDPA/HSUPA Band II: 3 WCDMA/HSDPA/HSUPA Band V: 3 CDMA2000 1xRTT/1xEv-Do BC0: 3 LTE FDD Band 2: 3 LTE FDD Band 4: 3 LTE FDD Band 5: 3 LTE FDD Band 7: 3 LTE FDD Band 17: 3 LTE TDD Band 41: 3 LTE band 12/13/25 : 1

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 6 of 59

Multislot Class	GPRS/EDGE: 12
Antenna Type	Internal Antenna
Antenna Gain	Peak gain 2.5dBi
Extreme Temperature Range	-20°C ~ +55°C

1.4 DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Issue
1	SHE19020010-03AE	Original Report	2020-5-15
2	SHE19020010-05IE	Amended Report	2020-5-27

They have the same electric circuit ,PCB layout ,RF chip, component.

Except : the differences description of UT30H and UT30P as below:

- 1 LCD screen of UT30H is different with UT30P
- 2 The key position of UT30H is different with UT30P
- 3 the antenna gain of UT30H is different with UT30P

1.5 Test Methodology

47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
47 CFR Part 22 Subpart H	Public Mobile Services
47 CFR Part 24 Subpart E	Personal Communications Services
47 CFR Part 27	Miscellaneous Wireless Communications Services
ANSI/TIA-603-E 2016	March Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.26:2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 971168 D01 v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 7 of 59

1.6 Test Verdict

No.	FCC Part No.	ISED Part No.	Description	Test Result	Verdict
1	2.1046	RSS-Gen 6.12 RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Conducted RF Output Power	Reporting Only Clause 5.1.1	PASS
2	2.1046 22.913 24.232 27.50	RSS-Gen 6.12 RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Effective (Isotropic) Radiated Power	Clause 5.1.1	PASS
3	2.1046 24.232(d) 27.50(d)	RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Peak to Average Ratio	Clause 5.1.2	PASS
4	2.1049 22.917 24.238 27.53	RSS-Gen 6.6	Occupied Bandwidth	Clause 5.1.3	PASS
5	2.1055 22.355 24.235 27.54	RSS-Gen 6.11 RSS-130 4.3 RSS-132 5.3 RSS-133 6.3 RSS-139 6.4 RSS-199 4.3	Frequency Stability	Clause 5.1.4	PASS
6	2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Spurious Emission at Antenna Terminals	Clause 5.1.5	PASS
7	2.1051 22.917 24.238 27.53	RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Band Edge	Clause 5.1.6	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 8 of 59

8	2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Field Strength of Spurious Radiation	Clause 5.1.7	PASS
9	N/A	RSS-Gen 7.1 RSS-132 5.6 RSS-133 6.6	Receiver Spurious Emissions	Clause 5.1.8	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 9 of 59

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Test Voltage	NV (Normal Voltage)	3.80 V
	LV (Low Voltage)	2.8 V
	HV (High Voltage)	4.35 V
Test Temperature	NT (Normal Temperature)	+23 °C
	LT (Low Temperature)	-20 °C
	HT (High Temperature)	+55 °C

2.3 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Spectrum Analyzer	Keysight	N9020B	MY59260184	2020-07-28
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2020-06-24
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2020-06-19
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2020-06-19
V-network	SCHWARZBECK	NSLK 8127	8127-902	2021-02-20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2020-08-22
DC Power Supply	ACPOWER	ADC-0800025-15	D215010003	2021-03-19
Temperature Chamber	Muni	M/THP400L	M/161227-01	2020-05-08
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2020-06-06
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2020-06-06
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2021-03-19
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2020-07-26
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2020-06-26
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2020-08-28
Test Software	BL	BL410_E	N/A	N/A
Test Software	BL	BL410_R	N/A	N/A

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 10 of 59

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Test Item	Test Mode	Test Channel		
		LCH	MCH	HCH
Effective (Isotropic) Radiated Power	GSM 850	v	v	v
	GSM 1900	v	v	v
	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band V	v	v	v
	HSDPA Band II	v	v	v
	HSDPA Band V	v	v	v
	HSUPA Band II	v	v	v
	HSUPA Band V	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
Peak to Average Ratio	WCDMA Band II	v	v	v
Occupied Bandwidth	GSM 850	v	v	v
	GSM 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band V	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
Frequency Stability	GSM 850	v	v	v
	GSM 1900	v	v	v
	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band V	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 11 of 59

Spurious Emission at Antenna Terminals	GSM 850	v	v	v
	GSM 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band V	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
Band Edge	GSM 850	v	v	v
	GSM 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band V	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
Field Strength of Spurious Radiation	GSM 850	v	v	v
	GSM 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band V	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
Receiver Spurious Emissions	GSM 850	v	v	v
	GSM 1900	--	--	--
	EDGE 850	--	--	--
	EDGE 1900	--	--	--
	WCDMA Band II	--	--	--
	WCDMA Band V	--	--	--
	CDMA BC0	--	--	--
	EVDO BC0	--	--	--

Note(s):

The mark 'v' means that this configuration is chosen for testing.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 12 of 59

Test Item	LTE Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	LCH	MCH	HCH
Effective (Isotropic) Radiated Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	n	n	v	v	v	v	v	v	v	v
	7	n	n	v	v	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	n	n	v	v	v	v	v	v	v	v
	13	n	n	v	v	n	n	v	v	v	v	v	v	v	v
	17	n	n	v	v	n	n	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak to Average Radio	2	--	--	--	--	--	v	v	v	v	--	v	v	v	v
	4	--	--	--	--	--	v	v	v	v	--	v	v	v	v
	5	--	--	--	v	n	n	v	v	v	--	v	v	v	v
	7	n	n	--	--	--	v	v	v	v	--	v	v	v	v
	12	n	n	--	v	n	n	v	v	v	--	v	v	v	v
	13	n	n	--	v	n	n	v	v	v	--	v	v	v	v
	17	n	n	--	v	n	n	v	v	v	--	v	v	v	v
	25	--	--	--	--	--	v	v	v	v	--	v	v	v	v
	41	--	--	--	--	--	v	v	v	v	--	v	v	v	v
Occupied Bandwidth	2	v	v	v	v	v	v	v	v	--	--	v	v	v	v
	4	v	v	v	v	v	v	v	v	--	--	v	v	v	v
	5	v	v	v	v	n	n	v	v	--	--	v	v	v	v
	7	n	n	v	v	v	v	v	v	--	--	v	v	v	v
	12	v	v	v	v	n	n	v	v	--	--	v	v	v	v
	13	n	n	v	v	n	n	v	v	--	--	v	v	v	v
	17	n	n	v	v	n	n	v	v	--	--	v	v	v	v
	25	v	v	v	v	v	v	v	v	--	--	v	v	v	v
	41	v	v	v	v	v	v	v	v	--	--	v	v	v	v
Frequency Stability	2	--	--	--	v	--	--	v	v	--	--	v	--	v	--
	4	--	--	--	v	--	--	v	v	--	--	v	--	v	--
	5	--	--	--	v	n	n	v	v	--	--	v	--	v	--
	7	n	n	--	v	--	--	v	v	--	--	v	--	v	--
	12	n	n	--	v	n	n	v	v	--	--	v	--	v	--
	13	n	n	--	v	n	n	v	v	--	--	v	--	v	--
	17	n	n	--	v	n	n	v	v	--	--	v	--	v	--
	25	--	--	--	v	--	--	v	v	--	--	v	--	v	--
	41	--	--	--	v	--	--	v	v	--	--	v	--	v	--

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 13 of 59

Spurious Emission at Antenna Terminals	2	v	v	v	v	v	v	v	v	v	--	--	v	v	v
	4	v	v	v	v	v	v	v	v	v	--	--	v	v	v
	5	v	v	v	v	n	n	v	v	v	--	--	v	v	v
	7	n	n	v	v	v	v	v	v	v	--	--	v	v	v
	12	v	v	v	v	n	n	v	v	v	--	--	v	v	v
	12	n	n	v	v	n	n	v	v	v	--	--	v	v	v
	17	n	n	v	v	n	n	v	v	v	--	--	v	v	v
	25	v	v	v	v	v	v	v	v	v	--	--	v	v	v
	41	v	v	v	v	v	v	v	v	v	--	--	v	v	v
Band Edge	2	v	v	v	v	v	v	v	v	v	--	v	v	--	v
	4	v	v	v	v	v	v	v	v	v	--	v	v	--	v
	5	v	v	v	v	n	n	v	v	v	--	v	v	--	v
	7	n	n	v	v	v	v	v	v	v	--	v	v	--	v
	12	v	v	v	v	n	n	v	v	v	--	v	v	--	v
	13	n	n	v	v	n	n	v	v	v	--	v	v	--	v
	17	n	n	v	v	n	n	v	v	v	--	v	v	--	v
	25	v	v	v	v	v	v	v	v	v	--	v	v	--	v
41	v	v	v	v	v	v	v	v	v	--	v	v	--	v	
Field Strength of Spurious Radiation	2	v	v	v	v	v	v	v	--	v	--	--	--	v	--
	4	v	v	v	v	v	v	v	--	v	--	--	--	v	--
	5	v	v	v	v	n	n	v	--	v	--	--	--	v	--
	7	n	n	v	v	v	v	v	--	v	--	--	--	v	--
	12	v	v	v	v	n	n	v	--	v	--	--	--	v	--
	12	n	n	v	v	n	n	v	--	v	--	--	--	v	--
	17	n	n	v	v	n	n	v	--	v	--	--	--	v	--
	25	v	v	v	v	v	v	v	--	v	--	--	--	v	--
41	v	v	v	v	v	v	v	--	v	--	--	--	v	--	

Note(s):

1. The mark 'v' means that this configuration is chosen for testing.
2. The mark 'n' means that this bandwidth is not supported.

TEST REPORT


Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 14 of 59

3.2 Test Setup Diagram

Diagram of Measurement Equipment Configuration for Antenna Port Test

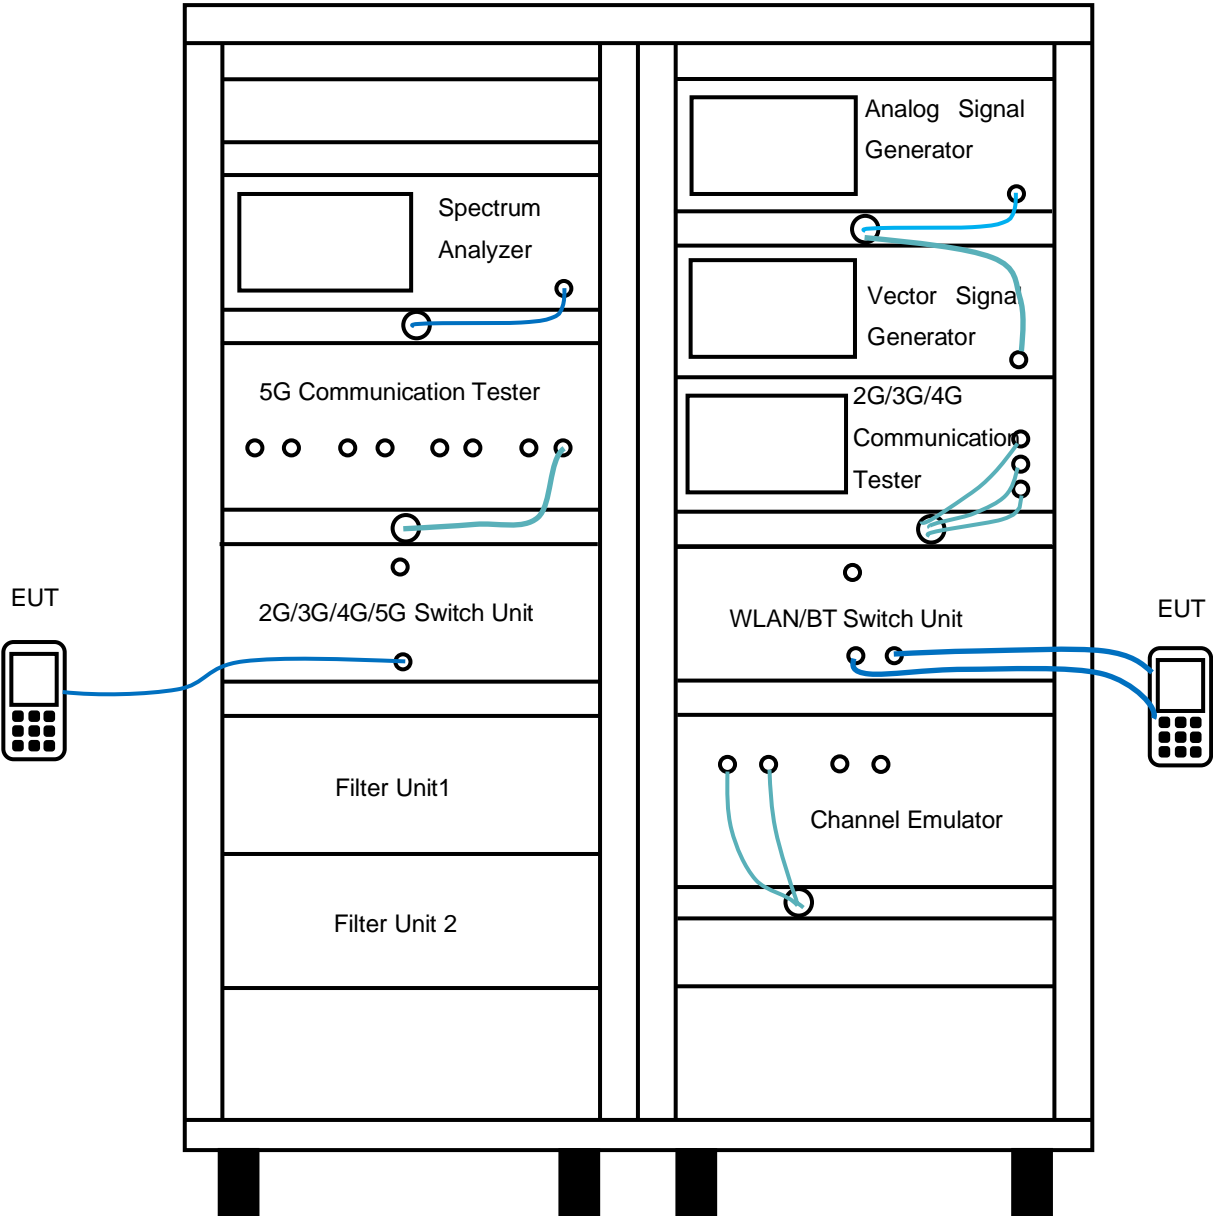


TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27


Page 15 of 59

Diagram of Measurement Configuration for Radiation Test

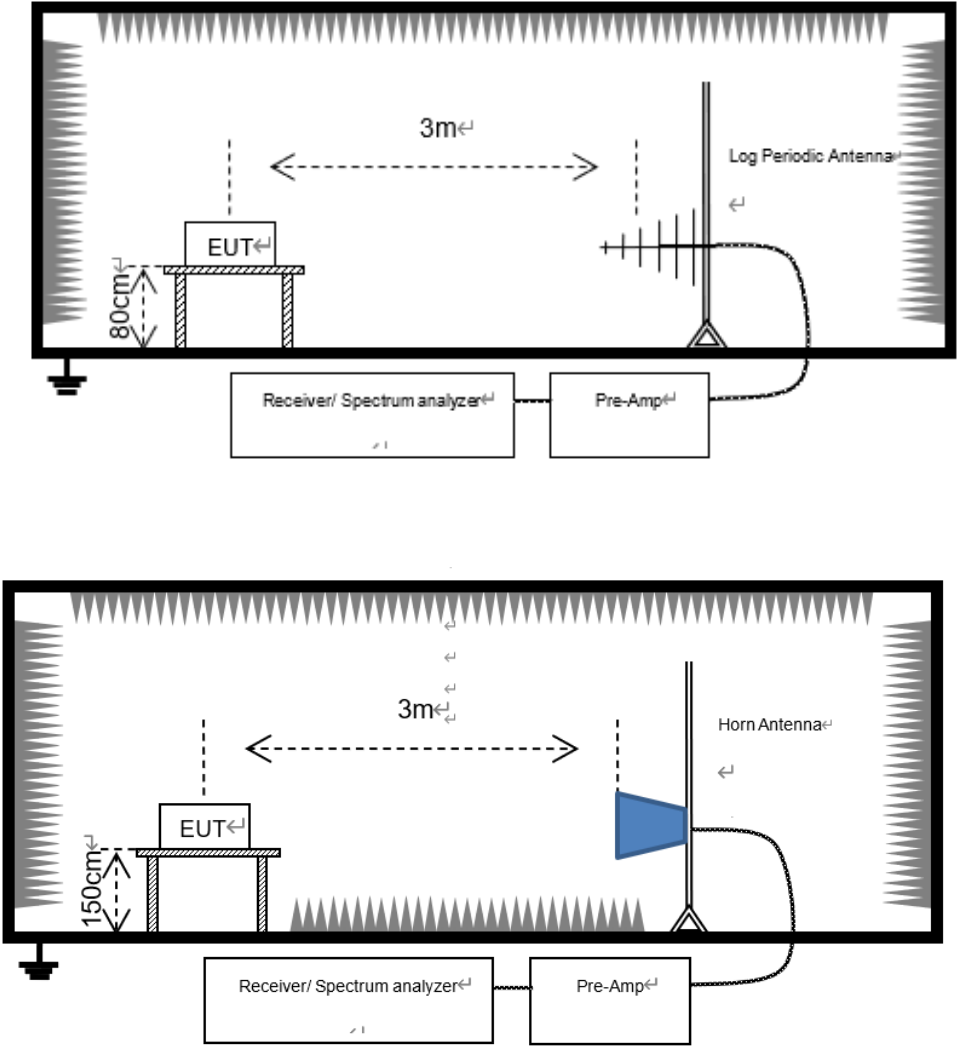

Note: Measurements below 1GHz are done with a table height of 0.8m and above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Configuration for Frequency Stability

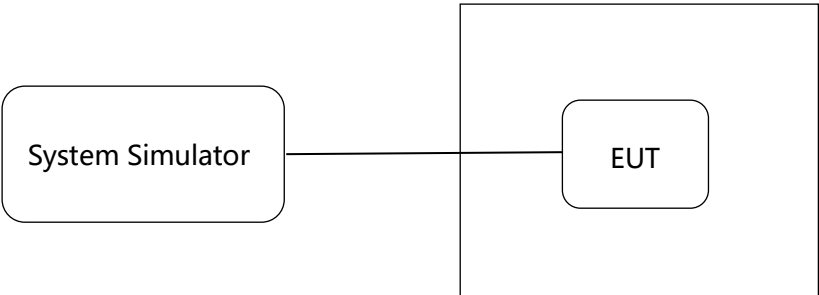

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 16 of 59

Thermal Chamber

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 17 of 59

4 Test Items

4.1 Transmitter Radiated Power (EIRP/ERP)

4.1.1 Limit

FCC § 2.1046(a) & 22.913(a) & 24.232(c) & 27.50(b) & 27.50(c) & 27.50(d) & 27.50(h)

According to FCC section 22.913(a) (2), the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232(c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC section 27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 698-746MHz band are limited to 3 watts ERP.

FCC section 27.50(d) (4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2 watts EIRP. All user stations are limited to 2 watts transmitter output power.

RSS-132 § 5.4 & RSS-133 § 6.4 & RSS-139 § 6.5 & RSS-199 § 4.4

According to RSS-132 § 5.4, the Effective Radiated Power (ERP) for mobile equipment shall not exceed 11.5 watts.

According to RSS-133 § 6.4 (SRSP 510), mobile stations and hand-held portables are limited to 2 watts maximum EIRP.

According to RSS-139 § 6.5, the EIRP for mobile and portable transmitters shall not exceed 1 watt.

According to RSS-199 § 4.4, for mobile subscriber equipment, the EIRP shall not exceed 2 watts.

4.1.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 18 of 59

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{EIRP} = P_T + G_T - L_C$$

$$\text{ERP} = \text{EIRP} - 2.15$$

Where:

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP} = \text{SA Read Value} + \text{Correction Factor}$$

where:

ERP/EIRP = effective or equivalent radiated power in dBm

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer in dBm

Correction Factor = total correction factor including cable loss in dB

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

4.1.3 Test Result

Please refer to 5.1.1.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 19 of 59

4.2 Peak-to-Average Ratio

4.2.1 Limit

FCC § 2.1046 & 24.232(d) & 27.50(d)

RSS-132 § 5.4 & RSS-133 § 6.4 & RSS-139 § 6.5 & RSS-199 § 4.4

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

For FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an RMS equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

4.2.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

4.2.3 Test Result

Please refer to 5.1.2.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 20 of 59

4.3 Occupied Bandwidth

4.3.1 Limit

FCC § 2.1049

RSS-Gen § 6.6

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

4.3.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

4.3.3 Test Result

Please refer to 5.1.3.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 21 of 59

4.4 Frequency Stability

4.4.1 Limit

FCC § 2.1055 & 22.355 & 24.235 & 27.54

RSS-Gen § 6.11 & RSS-132 § 5.3 & RSS-133 § 6.3 & RSS-139 § 6.4 & RSS-199 § 4.3

FCC § 2.1055

The frequency stability shall be measured with variation of ambient temperature as follows:

(1) The temperature is varied from -30°C to +50°C.

(2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range. The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacture.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in table as below.

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 22 of 59

4.4.2 Test Procedures

For Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4.4.3 Test Result

Please refer to 5.1.4.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 23 of 59

4.5 Spurious Emission at Antenna Terminals

4.5.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-Gen § 6.13 & RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 24 of 59

power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

4.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$$

$$= -13 \text{ dBm.}$$

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 25 of 59

11. For Band 7/41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P (Watts)
= P (W) - $[55 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
= -25dBm.

4.5.3 Test Result

Please refer to 5.1.5.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 26 of 59

4.6 Band Edge

4.6.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 27 of 59

power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

4.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)} = -13 \text{ dBm.}$$

9. For LTE Band 7/41, the other 40 dB, and 55 dB have additionally applied same calculation above.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 28 of 59

4.6.3 Test Result

Please refer to 5.1.6.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 29 of 59

4.7 Field Strength of Spurious Radiation

4.7.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-Gen § 6.13 & RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 30 of 59

and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

4.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log(P)] \text{ (dB)}$
 $= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$
 $= -13 \text{ dBm.}$
13. For Band 7/41: The limit line is derived from $55 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10 \log(P)] \text{ (dB)}$

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 31 of 59

$$\begin{aligned} &= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)} \\ &= -25\text{dBm}. \end{aligned}$$

4.7.3 Test Result

Please refer to 5.1.7.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 32 of 59

5 Appendixes

5.1 Test Result

5.1.1 Transmitter Radiated Power (EIRP/ERP)

Conducted Power Measurement Results for GSM/GPRS/EDGE

Conducted Power (dBm)							
Band		GSM 850			GSM 1900		
Channel		128	190	251	512	661	810
GSM		31.95	32.05	31.92	28.53	28.62	28.84
GPRS	1 TX slot	28.31	28.39	24.52	24.30	24.34	26.96
	2 TX slot	28.25	28.35	24.45	24.23	24.27	26.46
	3 TX slot	28.21	28.31	24.39	24.17	24.21	26.35
	4 TX slot	28.17	28.27	24.34	24.13	24.16	26.30
EDGE	1 TX slot	22.36	21.43	20.33	19.04	18.99	21.49
	2 TX slot	21.04	21.23	19.12	19.12	19.00	21.21
	3 TX slot	21.02	21.29	19.13	18.91	19.04	21.16
	4 TX slot	21.00	21.32	19.03	19.00	19.01	20.96

Conducted Power Measurement Results for WCDMA/HSDPA/HSPUA

Conducted Power (dBm)							
Band		WCDMA Band II			WCDMA Band V		
Channel		9262	9400	9538	4132	4182	4233
RMC	12.2 kbps	22.05	22.49	22.38	22.00	22.05	21.91
HSDPA	Sub - Test 1	21.13	21.46	21.38	20.92	20.84	20.84
	Sub - Test 2	21.20	21.52	21.41	21.10	20.91	20.89
	Sub - Test 3	20.82	20.94	20.95	20.62	20.44	20.32
	Sub - Test 4	20.81	20.94	20.96	20.52	20.45	20.33
HSUPA	Sub - Test 1	21.19	21.33	21.29	21.00	20.89	20.90
	Sub - Test 2	19.10	19.32	19.33	19.04	19.02	18.97
	Sub - Test 3	20.21	20.37	20.34	20.08	19.95	19.99
	Sub - Test 4	19.23	19.44	19.34	19.17	19.04	18.99
	Sub - Test 5	20.99	21.43	21.15	20.92	20.88	20.72

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 33 of 59

Conducted Power Measurement Results for CDMA/EVDO

Conducted Power (dBm)							
Band		BC0			--		
Channel		1013	384	777	--	--	--
CDMA	F1R1	24.02	24.05	24.01	--	--	--
	F3R3	23.96	24.02	24.02	--	--	--
EVDO	Release 0	23.25	23.65	23.35	--	--	--
	Revision A	23.09	23.25	23.17	--	--	--

Conducted power measurement results for LTE

FDD LTE Band 2							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18700	18900	19100	18700	18900	19100
20MHz	1 (RB_Pos:0)	22.22	21.38	20.86	21.34	20.82	20.26
	1 (RB_Pos:49)	22.01	22.81	21.76	21.55	21.29	21.23
	1 (RB_Pos:99)	21.27	21.85	21.76	20.80	20.98	21.19
	50 (RB_Pos:0)	21.51	21.57	21.17	20.35	20.46	20.20
	50 (RB_Pos:24)	21.56	21.50	21.51	20.44	20.36	20.45
	50 (RB_Pos:49)	21.53	21.42	21.48	20.42	20.35	20.40
	1 (RB_Pos:0)	21.42	21.48	21.56	20.32	20.41	20.51
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18675	18900	19125	18675	18900	19125
15MHz	1 (RB_Pos:0)	22.41	21.95	20.89	21.32	21.37	19.63
	1 (RB_Pos:37)	22.20	22.61	22.41	21.13	21.37	21.35
	1 (RB_Pos:74)	20.75	22.40	21.57	19.69	21.04	20.94
	36 (RB_Pos:0)	21.45	21.68	21.36	20.39	20.83	20.40
	36 (RB_Pos:18)	21.53	21.57	21.55	20.41	20.77	20.58
	36 (RB_Pos:37)	21.62	21.47	21.63	20.47	20.49	20.35
	75 (RB_Pos:0)	21.42	21.49	21.49	20.31	20.36	20.48
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18650	18900	19150	18650	18900	19150
10MHz	1 (RB_Pos:0)	22.36	22.63	21.22	21.28	21.36	20.30
	1 (RB_Pos:24)	22.52	22.68	22.86	21.52	21.30	21.61
	1 (RB_Pos:49)	21.35	22.46	21.76	20.28	20.84	20.79
	25 (RB_Pos:0)	21.38	21.56	21.70	20.33	20.51	20.88
	25 (RB_Pos:12)	21.53	21.57	21.68	20.38	20.54	20.76
	25 (RB_Pos:24)	21.44	21.56	21.62	20.38	20.54	20.54

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 34 of 59

Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
		Channel					
	50 (RB_Pos:0)	21.47	21.58	21.59	20.51	20.52	20.59
5MHz	1 (RB_Pos:0)	22.31	22.49	22.32	20.96	21.47	21.02
	1 (RB_Pos:12)	22.17	22.60	22.63	20.92	21.35	21.24
	1 (RB_Pos:24)	22.16	22.32	21.89	20.96	21.14	20.99
	12 (RB_Pos:0)	21.31	21.57	21.71	20.20	20.33	20.65
	12 (RB_Pos:6)	21.32	21.60	21.60	20.32	20.36	20.42
	12 (RB_Pos:11)	21.31	21.53	21.64	20.32	20.60	20.43
	25 (RB_Pos:0)	21.37	21.47	21.68	20.49	20.57	20.73
3MHz	1 (RB_Pos:0)	22.37	22.71	22.68	21.26	21.31	21.55
	1 (RB_Pos:7)	22.37	22.49	22.52	21.21	21.38	21.51
	1 (RB_Pos:14)	22.37	22.47	22.14	21.30	21.39	21.10
	8 (RB_Pos:0)	21.52	21.65	21.62	20.39	20.45	20.73
	8 (RB_Pos:4)	21.37	21.55	21.63	20.49	20.36	20.47
	8 (RB_Pos:7)	21.46	21.57	21.66	20.41	20.57	20.37
	15 (RB_Pos:0)	21.50	21.56	21.63	20.35	20.61	20.52
1.4MHz	1 (RB_Pos:0)	22.53	22.35	22.64	21.68	21.34	21.57
	1 (RB_Pos:3)	22.56	22.58	22.68	21.64	21.29	21.71
	1 (RB_Pos:5)	22.44	22.38	22.33	21.27	21.18	21.31
	3 (RB_Pos:0)	22.54	22.53	22.87	20.60	20.08	20.60
	3 (RB_Pos:2)	22.52	22.74	22.65	20.58	20.55	20.88
	3 (RB_Pos:3)	22.52	22.72	22.47	20.60	20.46	20.69
	6 (RB_Pos:0)	21.49	21.63	21.84	20.67	20.25	20.66

FDD LTE Band 4							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
		Channel					
20MHz	1 (RB_Pos:0)	22.64	22.72	22.56	21.51	21.45	21.78
	1 (RB_Pos:49)	22.84	22.62	22.72	21.84	21.52	21.43
	1 (RB_Pos:99)	22.19	22.81	22.32	21.03	21.45	21.20
	50 (RB_Pos:0)	21.63	21.61	21.69	20.59	20.35	20.60

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 35 of 59

	50 (RB_Pos:24)	21.58	21.47	21.54	20.51	20.31	20.45
	50 (RB_Pos:49)	21.59	21.57	21.50	20.49	20.52	20.38
	100 (RB_Pos:0)	21.62	21.56	21.53	20.66	20.48	20.47
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20025	20175	20325	20025	20175	20325
15MHz	1 (RB_Pos:0)	22.58	22.33	22.29	21.31	21.32	22.28
	1 (RB_Pos:37)	22.78	22.24	22.55	21.49	21.25	22.14
	1 (RB_Pos:74)	22.56	22.43	22.40	21.45	21.18	21.69
	36 (RB_Pos:0)	21.51	21.52	21.51	20.70	20.59	20.40
	36 (RB_Pos:18)	21.60	21.49	21.45	20.49	20.56	20.56
	36 (RB_Pos:37)	21.55	21.56	21.46	20.50	20.52	20.36
	75 (RB_Pos:0)	21.52	21.55	21.49	20.54	20.36	20.57
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20000	20175	20350	20000	20175	20350
10MHz	1 (RB_Pos:0)	22.49	22.48	22.89	21.49	21.10	21.61
	1 (RB_Pos:24)	22.52	22.49	22.84	21.57	21.22	21.33
	1 (RB_Pos:49)	22.50	22.30	22.56	21.35	21.23	21.42
	25 (RB_Pos:0)	21.57	21.57	21.53	20.48	20.52	20.76
	25 (RB_Pos:12)	21.71	21.52	21.55	20.52	20.48	20.79
	25 (RB_Pos:24)	21.57	21.45	21.50	20.56	20.49	20.54
	50 (RB_Pos:0)	21.63	21.52	21.46	20.49	20.45	20.42
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19975	20175	20375	19975	20175	20375
5MHz	1 (RB_Pos:0)	22.65	22.47	22.38	21.56	21.49	21.28
	1 (RB_Pos:12)	22.59	22.38	22.54	21.21	21.59	21.24
	1 (RB_Pos:24)	22.56	22.36	22.53	21.13	21.47	20.95
	12 (RB_Pos:0)	21.53	21.55	21.47	20.51	20.52	20.46
	12 (RB_Pos:6)	21.75	21.60	21.54	20.50	20.52	20.71
	12 (RB_Pos:11)	21.60	21.49	21.58	20.57	20.46	20.46
	25 (RB_Pos:0)	21.64	21.54	21.38	20.67	20.60	20.37
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19965	20175	20385	19965	20175	20385
3MHz	1 (RB_Pos:0)	22.69	22.82	22.40	22.00	21.45	21.38
	1 (RB_Pos:7)	22.76	22.75	22.31	22.16	21.47	21.38
	1 (RB_Pos:14)	22.72	22.82	22.31	21.94	21.43	21.51
	8 (RB_Pos:0)	21.90	21.76	21.59	20.58	20.71	20.47

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 36 of 59

	8 (RB_Pos:4)	21.79	21.75	21.49	20.56	20.63	20.32
	8 (RB_Pos:7)	21.86	21.62	21.50	20.61	20.71	20.46
	15 (RB_Pos:0)	21.70	21.77	21.49	20.81	20.82	20.10
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19957	20175	20393	19957	20175	20393
1.4MHz	1 (RB_Pos:0)	23.10	22.71	22.70	21.58	21.60	21.64
	1 (RB_Pos:3)	23.05	22.80	22.74	21.57	21.58	21.61
	1 (RB_Pos:5)	23.00	22.87	22.61	21.52	21.49	21.51
	3 (RB_Pos:0)	22.86	22.74	22.70	21.59	21.59	21.90
	3 (RB_Pos:2)	22.92	22.84	22.61	21.56	21.58	21.69
	3 (RB_Pos:3)	22.69	22.77	22.60	21.53	21.60	21.77
	6 (RB_Pos:0)	21.94	21.86	21.58	20.46	20.46	20.71

FDD LTE Band 5							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20450	20525	20600	20450	20525	20600
10MHz	1 (RB_Pos:0)	22.35	22.66	22.45	21.37	21.31	21.44
	1 (RB_Pos:24)	22.37	22.51	22.41	21.49	21.25	21.15
	1 (RB_Pos:49)	22.31	22.29	22.31	21.83	21.35	21.32
	25 (RB_Pos:0)	21.39	21.46	21.29	20.40	20.36	20.40
	25 (RB_Pos:12)	21.40	21.42	21.39	20.43	20.39	20.30
	25 (RB_Pos:24)	21.37	21.46	21.36	20.41	20.51	20.33
	50 (RB_Pos:0)	21.46	21.37	21.40	20.44	20.60	20.38
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20425	20525	20625	20425	20525	20625
5MHz	1 (RB_Pos:0)	22.45	22.30	22.25	21.04	21.13	21.25
	1 (RB_Pos:12)	22.31	22.48	22.42	20.91	20.93	21.31
	1 (RB_Pos:24)	22.19	22.33	22.31	20.94	20.93	20.58
	12 (RB_Pos:0)	21.43	21.40	21.33	20.43	20.36	20.24
	12 (RB_Pos:6)	21.35	21.35	21.39	20.27	20.34	20.26
	12 (RB_Pos:11)	21.41	21.36	21.27	20.40	20.26	20.30
	25 (RB_Pos:0)	21.46	21.34	21.36	20.52	20.35	20.36
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20415	20525	20635	20415	20525	20635
3MHz	1 (RB_Pos:0)	22.48	22.38	22.37	21.26	21.09	21.39
	1 (RB_Pos:7)	22.52	22.44	22.26	20.99	21.13	21.21

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 37 of 59

	1 (RB_Pos:14)	22.37	22.31	22.33	21.55	20.93	21.53
	8 (RB_Pos:0)	21.50	21.43	21.41	20.26	20.43	20.51
	8 (RB_Pos:4)	21.35	21.38	21.29	20.21	20.47	20.47
	8 (RB_Pos:7)	21.41	21.37	21.30	20.10	20.46	20.49
	15 (RB_Pos:0)	21.45	21.31	21.35	20.43	20.37	20.43
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20407	20525	20643	20407	20525	20643
1.4MHz	1 (RB_Pos:0)	22.61	22.37	22.25	21.64	21.25	21.32
	1 (RB_Pos:3)	22.69	22.54	22.31	21.21	21.19	21.40
	1 (RB_Pos:5)	22.69	22.45	22.19	21.71	21.11	21.33
	3 (RB_Pos:0)	21.75	21.81	21.83	20.68	21.05	20.51
	3 (RB_Pos:2)	21.62	21.73	21.77	20.71	20.78	20.55
	3 (RB_Pos:3)	21.79	21.82	21.65	20.45	20.83	20.63
	6 (RB_Pos:0)	21.45	21.26	21.36	20.36	20.02	20.42

FDD LTE Band 7							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20850	21100	21350	20850	21100	21350
20MHz	1 (RB_Pos:0)	21.98	22.40	21.95	21.46	21.23	20.84
	1 (RB_Pos:49)	22.61	22.49	22.16	21.59	21.14	20.86
	1 (RB_Pos:99)	22.05	22.10	21.55	20.90	20.78	20.53
	50 (RB_Pos:0)	21.50	21.42	21.17	20.39	20.30	20.13
	50 (RB_Pos:24)	21.50	21.31	20.99	20.63	20.36	20.01
	50 (RB_Pos:49)	21.49	21.24	20.96	20.66	20.21	19.63
	100 (RB_Pos:0)	21.51	21.33	21.01	20.51	20.25	20.08
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20825	21100	21375	20825	21100	21375
15MHz	1 (RB_Pos:0)	22.30	22.38	22.08	21.25	21.36	21.59
	1 (RB_Pos:37)	22.32	22.31	21.96	22.07	21.19	21.50
	1 (RB_Pos:74)	22.33	22.08	21.79	21.65	20.91	21.28
	36 (RB_Pos:0)	21.37	21.37	21.10	20.42	20.42	20.05
	36 (RB_Pos:18)	21.46	21.32	21.06	20.52	20.54	20.01
	36 (RB_Pos:37)	21.42	21.26	20.96	20.49	20.40	19.92
	75 (RB_Pos:0)	21.39	21.30	21.06	20.47	20.41	20.13
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20800	21100	21400	20800	21100	21400

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 38 of 59

10MHz	1 (RB_Pos:0)	22.27	22.21	22.07	21.22	21.15	20.95
	1 (RB_Pos:24)	22.45	22.76	22.23	21.87	21.10	21.10
	1 (RB_Pos:49)	22.27	22.26	21.77	21.29	20.95	20.82
	25 (RB_Pos:0)	21.44	21.37	21.08	20.49	20.40	20.37
	25 (RB_Pos:12)	21.42	21.33	21.02	20.58	20.39	20.31
	25 (RB_Pos:24)	21.46	21.34	20.97	20.44	20.33	20.29
	50 (RB_Pos:0)	21.48	21.30	21.05	20.52	20.29	20.01
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20775	21100	21425	20775	21100	21425
5MHz	1 (RB_Pos:0)	22.14	22.12	21.89	21.03	21.21	20.69
	1 (RB_Pos:12)	22.20	22.45	21.82	20.72	21.25	20.68
	1 (RB_Pos:24)	22.30	22.12	21.59	20.72	20.64	20.36
	12 (RB_Pos:0)	21.45	21.22	20.90	20.19	20.15	20.01
	12 (RB_Pos:6)	21.49	21.30	20.87	20.43	20.23	20.07
	12 (RB_Pos:11)	21.43	21.30	20.82	20.39	20.12	20.03
	25 (RB_Pos:0)	21.49	21.31	20.88	20.58	20.44	19.79

FDD LTE Band 12							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23060	23095	23130	23060	23095	23130
10MHz	1 (RB_Pos:0)	22.62	22.57	22.61	21.40	21.33	21.53
	1 (RB_Pos:24)	22.62	23.06	23.00	21.70	21.27	21.76
	1 (RB_Pos:49)	22.31	22.54	22.43	21.13	20.90	21.40
	25 (RB_Pos:0)	21.63	21.60	21.62	20.60	20.56	20.60
	25 (RB_Pos:12)	21.58	21.55	21.61	20.56	20.70	20.62
	25 (RB_Pos:24)	21.59	21.54	21.69	20.48	20.64	20.53
	50 (RB_Pos:0)	21.61	21.59	21.62	20.58	20.51	20.53
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23035	23095	23155	23035	23095	23155
5MHz	1 (RB_Pos:0)	22.42	22.64	22.64	21.25	21.70	21.49
	1 (RB_Pos:12)	22.48	22.47	22.71	21.23	21.55	21.42
	1 (RB_Pos:24)	22.56	22.52	22.44	20.99	21.12	20.70
	12 (RB_Pos:0)	21.69	21.67	21.69	20.63	20.44	20.43
	12 (RB_Pos:6)	21.61	21.57	21.71	20.54	20.52	20.46
	12 (RB_Pos:11)	21.68	21.57	21.64	20.35	20.52	20.58
	25 (RB_Pos:0)	21.65	21.54	21.64	20.75	20.49	20.51
Bandwidth	RB Set	Power (dBm)					

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 39 of 59

(MHz)	Channel	QPSK			16QAM		
		23025	23095	23165	23025	23095	23165
3MHz	1 (RB_Pos:0)	22.51	22.61	22.62	21.37	21.60	21.62
	1 (RB_Pos:7)	22.73	22.53	22.78	21.55	21.19	21.60
	1 (RB_Pos:14)	22.63	22.44	22.61	21.32	21.11	21.41
	8 (RB_Pos:0)	21.80	21.64	21.72	20.67	20.60	20.68
	8 (RB_Pos:4)	21.82	21.59	21.69	20.47	20.67	20.57
	8 (RB_Pos:7)	21.62	21.61	21.65	20.38	20.58	20.40
	15 (RB_Pos:0)	21.74	21.52	21.68	20.67	20.45	20.21
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
Channel	23017	23095	23173	23017	23095	23173	
1.4MHz	1 (RB_Pos:0)	22.71	22.36	22.65	21.36	21.49	21.71
	1 (RB_Pos: 2)	22.88	22.51	22.66	21.51	21.35	21.64
	1 (RB_Pos:5)	22.81	22.50	22.61	21.50	21.16	21.63
	3 (RB_Pos:0)	21.66	21.42	21.54	20.42	20.34	20.88
	3 (RB_Pos:1)	21.69	21.54	21.73	20.54	20.39	20.80
	3 (RB_Pos:2)	21.72	21.61	21.69	20.61	20.82	20.72
	6 (RB_Pos:0)	20.68	20.44	20.69	20.44	20.75	20.70

FDD LTE Band 13							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
Channel	--	23230	--	--	23230	--	
10MHz	1 (RB_Pos:0)	--	22.40	--	--	21.29	--
	1 (RB_Pos:24)	--	22.66	--	--	22.01	--
	1 (RB_Pos:49)	--	22.39	--	--	21.30	--
	25 (RB_Pos:0)	--	21.58	--	--	20.58	--
	25 (RB_Pos:12)	--	21.57	--	--	20.55	--
	25 (RB_Pos:24)	--	21.54	--	--	20.41	--
	50 (RB_Pos:0)	--	21.57	--	--	20.54	--
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
Channel	23205	23230	23255	23205	23230	23255	
5MHz	1 (RB_Pos:0)	22.32	22.49	22.51	21.10	21.37	21.36
	1 (RB_Pos:12)	22.39	22.46	22.74	21.59	21.57	21.45
	1 (RB_Pos:24)	22.44	22.46	22.45	20.95	21.21	20.73
	12 (RB_Pos:0)	21.52	21.57	21.60	20.46	20.39	20.43
	12 (RB_Pos:6)	21.63	21.61	21.63	20.57	20.53	20.55
	12 (RB_Pos:11)	21.59	21.63	21.51	20.52	20.63	20.36

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 40 of 59

	25 (RB_Pos:0)	21.61	21.59	21.62	20.39	20.54	20.55
--	---------------	-------	-------	-------	-------	-------	-------

FDD LTE Band 17							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23780	23790	23800	23780	23790	23800
10MHz	1 (RB_Pos:0)	22.71	22.52	22.57	21.59	21.39	21.59
	1 (RB_Pos:24)	22.64	22.96	22.81	22.01	21.30	21.43
	1 (RB_Pos:49)	22.47	22.34	22.11	21.45	20.70	21.26
	25 (RB_Pos:0)	21.77	21.55	21.58	20.77	20.59	20.54
	25 (RB_Pos:12)	21.67	21.56	21.60	20.57	20.83	20.75
	25 (RB_Pos:24)	21.59	21.57	21.64	20.50	20.73	20.67
	50 (RB_Pos:0)	21.65	21.57	21.57	20.53	20.49	20.54
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23755	23790	23825	23755	23790	23825
5MHz	1 (RB_Pos:0)	22.62	22.44	22.40	21.95	21.22	21.65
	1 (RB_Pos:12)	22.69	22.41	22.77	21.18	21.19	21.65
	1 (RB_Pos:24)	22.41	22.37	22.14	21.02	21.00	20.87
	12 (RB_Pos:0)	21.61	21.49	21.57	20.50	20.27	20.51
	12 (RB_Pos:6)	21.56	21.53	21.58	20.60	20.54	20.52
	12 (RB_Pos:11)	21.59	21.53	21.31	20.57	20.48	20.35
	25 (RB_Pos:0)	21.64	21.53	21.50	20.68	20.64	20.49

FDD LTE Band 25							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	26140	26365	26590	26140	26365	26590
20MHz	1 (RB_Pos:0)	22.00	22.28	21.55	21.17	21.19	21.00
	1 (RB_Pos:49)	22.22	22.56	22.50	21.47	21.09	20.97
	1 (RB_Pos:99)	21.82	22.10	21.78	21.19	20.80	20.74
	50 (RB_Pos:0)	21.13	21.28	21.37	20.11	20.30	20.43
	50 (RB_Pos:24)	21.14	21.30	21.34	20.25	20.20	20.39
	50 (RB_Pos:49)	21.07	21.28	21.36	20.23	20.16	20.26
	100 (RB_Pos:0)	21.11	21.32	21.35	20.14	20.25	20.39
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	26115	26365	26615	26115	26365	26615
15MHz	1 (RB_Pos:0)	21.92	22.15	22.10	21.14	20.92	21.92
	1 (RB_Pos:37)	21.83	22.29	22.10	21.10	21.09	21.73

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 41 of 59

	1 (RB_Pos:74)	21.89	22.05	21.22	21.07	20.62	20.91
	36 (RB_Pos:0)	21.15	21.23	21.43	20.13	20.34	20.19
	36 (RB_Pos:18)	21.11	21.25	21.42	20.04	20.28	20.23
	36 (RB_Pos:37)	21.01	21.27	21.33	19.98	20.17	20.38
	75 (RB_Pos:0)	21.12	21.24	21.48	20.05	20.22	20.37
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	26090	26365	26640	26090	26365	26640
10MHz	1 (RB_Pos:0)	22.20	22.25	22.34	21.01	21.02	21.53
	1 (RB_Pos:24)	22.16	22.28	22.26	21.23	21.07	20.78
	1 (RB_Pos:49)	22.07	22.09	21.66	20.89	21.13	20.76
	25 (RB_Pos:0)	21.20	21.23	21.40	20.21	20.53	20.35
	25 (RB_Pos:12)	21.20	21.29	21.30	20.20	20.47	20.35
	25 (RB_Pos:24)	21.07	21.29	21.41	20.07	20.37	20.53
	50 (RB_Pos:0)	21.06	21.26	21.38	20.06	20.25	20.24
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	26065	26365	26665	26065	26365	26665
5MHz	1 (RB_Pos:0)	21.92	22.38	22.20	20.79	21.72	21.17
	1 (RB_Pos:12)	21.95	22.45	21.74	20.85	21.19	20.92
	1 (RB_Pos:24)	21.89	21.99	21.04	20.72	21.61	20.74
	12 (RB_Pos:0)	21.06	21.20	21.36	19.94	20.22	20.33
	12 (RB_Pos:6)	21.16	21.21	21.34	19.97	20.23	20.29
	12 (RB_Pos:11)	21.13	21.19	21.34	19.91	20.11	20.41
	25 (RB_Pos:0)	21.20	21.20	21.46	20.30	20.25	20.26
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	26055	26365	26675	26055	26365	26675
3MHz	1 (RB_Pos:0)	21.94	22.22	21.78	20.98	21.61	20.82
	1 (RB_Pos:7)	21.95	22.19	21.53	20.93	21.69	20.60
	1 (RB_Pos:14)	22.01	22.34	21.56	20.99	21.67	20.56
	8 (RB_Pos:0)	21.24	21.31	21.57	20.49	20.30	20.74
	8 (RB_Pos:4)	21.06	21.18	21.49	20.49	20.13	20.65
	8 (RB_Pos:7)	21.15	21.24	21.40	19.87	20.46	20.56
	15 (RB_Pos:0)	21.12	21.20	21.50	20.02	20.22	20.58
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	26047	26365	26683	26047	26365	26683
1.4MHz	1 (RB_Pos:0)	21.98	22.10	21.49	20.82	21.06	20.55
	1 (RB_Pos: 2)	22.24	22.12	21.57	20.84	20.97	20.66

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 42 of 59

	1 (RB_Pos:5)	21.94	21.93	21.58	20.84	20.98	20.71
	3 (RB_Pos:0)	21.67	21.60	21.45	20.65	20.71	20.70
	3 (RB_Pos:1)	21.50	21.30	21.54	20.73	20.72	20.79
	3 (RB_Pos:2)	21.70	21.50	21.53	20.29	20.64	20.77
	6 (RB_Pos:0)	21.05	21.26	21.45	20.07	19.87	20.63

FDD LTE Band 41							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40340	40740	41140	40340	40740	41140
20MHz	1 (RB_Pos:0)	21.93	21.94	22.01	21.15	20.94	21.06
	1 (RB_Pos:49)	21.97	21.93	22.14	21.46	20.95	21.67
	1 (RB_Pos:99)	21.85	21.44	22.42	20.84	20.74	21.34
	50 (RB_Pos:0)	21.17	20.85	20.96	20.21	19.78	19.94
	50 (RB_Pos:24)	21.08	20.81	21.05	20.07	19.74	20.04
	50 (RB_Pos:49)	21.15	20.73	21.05	20.10	19.66	19.99
	100 (RB_Pos:0)	21.13	20.84	21.01	20.32	19.80	19.96
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40315	40740	41165	40315	40740	41165
15MHz	1 (RB_Pos:0)	22.34	22.05	21.79	21.56	20.44	20.89
	1 (RB_Pos:37)	22.04	21.98	21.16	21.48	20.29	21.16
	1 (RB_Pos:74)	22.02	21.98	22.06	21.50	20.25	20.96
	36 (RB_Pos:0)	21.22	20.99	20.73	19.95	19.78	19.73
	36 (RB_Pos:18)	21.15	20.89	20.94	20.06	19.75	19.94
	36 (RB_Pos:37)	21.16	20.77	20.67	19.84	19.72	20.05
	75 (RB_Pos:0)	21.15	20.84	20.68	20.28	19.78	19.98
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40290	40740	41190	40290	40740	41190
10MHz	1 (RB_Pos:0)	22.24	22.00	21.88	21.47	20.09	21.34
	1 (RB_Pos:24)	22.18	22.12	22.21	21.62	20.24	21.18
	1 (RB_Pos:49)	22.05	21.92	22.03	21.42	20.20	21.45
	25 (RB_Pos:0)	21.22	20.83	21.08	20.32	19.58	19.87
	25 (RB_Pos:12)	21.20	20.83	21.10	20.31	19.57	20.10
	25 (RB_Pos:24)	21.21	20.81	21.15	20.24	19.56	20.07
	50 (RB_Pos:0)	21.26	20.82	21.11	19.93	19.69	20.12
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40265	40740	41215	40265	40740	41215

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 43 of 59

5MHz	1 (RB_Pos:0)	21.87	21.73	21.99	21.01	20.39	20.58
	1 (RB_Pos:12)	21.95	21.75	22.10	21.02	20.32	20.60
	1 (RB_Pos:24)	21.96	21.72	22.08	20.54	20.52	20.49
	12 (RB_Pos:0)	21.25	20.84	21.12	19.96	19.83	20.24
	12 (RB_Pos:6)	21.22	20.81	21.18	19.98	19.76	20.21
	12 (RB_Pos:11)	21.17	20.80	21.12	19.96	19.66	20.13
	25 (RB_Pos:0)	21.21	20.81	21.07	20.10	19.78	20.16

Effective (Isotropic) Radiated Power Measurement Results for GSM/GPRS/EDGE

Test Band	Channel	Measured ERP				Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)		
GSM 850	Low	16.45	9.83	26.28	0.42	7	PASS
	Middle	16.48	9.83	26.31	0.43		PASS
	High	16.45	9.83	26.28	0.42		PASS
GPRS 850	Low	14.52	9.83	24.35	0.27		PASS
	Middle	15.15	9.83	24.98	0.31		PASS
	High	15.27	9.83	25.10	0.32		PASS
EDGE 850	Low	14.64	9.83	24.47	0.28		PASS
	Middle	15.66	9.83	25.49	0.35		PASS
	High	14.93	9.83	24.76	0.30		PASS

Test Band	Channel	Measured EIRP				Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)		
GSM 1900	Low	12.07	17.8	29.87	0.97	2	PASS
	Middle	11.80	17.8	29.60	0.91		PASS
	High	11.64	17.8	29.44	0.88		PASS
GPRS 1900	Low	11.73	17.8	29.53	0.90		PASS
	Middle	11.55	17.8	29.35	0.86		PASS
	High	11.92	17.8	29.72	0.94		PASS
EDGE 1900	Low	11.72	17.8	29.52	0.90		PASS
	Middle	11.85	17.8	29.65	0.92		PASS
	High	11.31	17.8	29.11	0.81		PASS

Note(s):For GPRS and EGPRS mode, all the slots were tested and just the worst data were recorded in this table

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 44 of 59

Effective (Isotropic) Radiated Power Measurement Results for WCDMA/HSDPA/HSUPA

Test Band	Channel	Measured EIRP				Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)		
WCDMA Band II	Low	0.77	17.8	18.57	0.07	2	PASS
	Middle	0.49	17.8	18.29	0.07		PASS
	High	0.68	17.8	18.48	0.07		PASS
HSDPA Band II	Low	1.16	17.8	18.96	0.08		PASS
	Middle	0.6	17.8	18.40	0.07		PASS
	High	0.63	17.8	18.43	0.07		PASS
HSUPA Band II	Low	0.51	17.8	18.31	0.07		PASS
	Middle	0.52	17.8	18.32	0.07		PASS
	High	0.99	17.8	18.79	0.08		PASS

Test Band	Channel	Measured ERP				Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)		
WCDMA Band V	Low	9.28	9.83	19.11	0.08	7	PASS
	Middle	9.32	9.83	19.15	0.08		PASS
	High	9.34	9.83	19.17	0.08		PASS
HSDPA Band V	Low	8.25	9.83	18.08	0.06		PASS
	Middle	7.84	9.83	17.67	0.06		PASS
	High	8.35	9.83	18.18	0.07		PASS
HSUPA Band V	Low	7.02	9.83	16.85	0.05		PASS
	Middle	7.11	9.83	16.94	0.05		PASS
	High	7.29	9.83	17.12	0.05		PASS

Note(s):

For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this table.

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 45 of 59

Effective (Isotropic) Radiated Power Measurement Results for CDMA/EVDO

Test Band	Channel	Measured ERP				Limit (W)	Verdict
		SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)		
CDMA BC0 F1R1	Low	8.21	9.83	18.04	0.06	7	PASS
	Middle	8.1	9.83	17.93	0.06		PASS
	High	8.4	9.83	18.23	0.07		PASS
CDMA BC0 F3R3	Low	7.9	9.83	17.73	0.06		PASS
	Middle	7.97	9.83	17.80	0.06		PASS
	High	8	9.83	17.83	0.06		PASS
EVDO BC0 Rel. 0	Low	8.64	9.83	18.47	0.07		PASS
	Middle	8.32	9.83	18.15	0.07		PASS
	High	8.4	9.83	18.23	0.07		PASS
EVDO BC0 Rev. A	Low	8.23	9.83	18.06	0.06		PASS
	Middle	7.88	9.83	17.71	0.06		PASS
	High	8.14	9.83	17.97	0.06		PASS

Effective (Isotropic) Radiated Power Measurement Results for LTE

FDD LTE Band 2									
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)		
1.4 MHz	Low	QPSK	RB1#0	0.91	17.8	18.71	0.07	2	PASS
			RB6#0	0	17.8	17.80	0.06	2	PASS
		16QAM	RB1#0	0.91	17.8	18.71	0.07	2	PASS
			RB6#0	0.18	17.8	17.98	0.06	2	PASS
	Middle	QPSK	RB1#0	0.48	17.8	18.28	0.07	2	PASS
			RB6#0	-0.17	17.8	17.63	0.06	2	PASS
		16QAM	RB1#0	-0.33	17.8	17.47	0.06	2	PASS
			RB6#0	-0.26	17.8	17.54	0.06	2	PASS
	High	QPSK	RB1#0	0.81	17.8	18.61	0.07	2	PASS
			RB6#0	-0.04	17.8	17.76	0.06	2	PASS
		16QAM	RB1#0	1.07	17.8	18.87	0.08	2	PASS
			RB6#0	0.37	17.8	18.17	0.07	2	PASS
3 MHz	Low	QPSK	RB1#0	1.4	17.8	19.20	0.08	2	PASS
			RB15#0	-0.13	17.8	17.67	0.06	2	PASS
		16QAM	RB1#0	0.66	17.8	18.46	0.07	2	PASS
			RB15#0	0.29	17.8	18.09	0.06	2	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 46 of 59

	Middle	QPSK	RB1#0	0.64	17.8	18.44	0.07	2	PASS
			RB15#0	0.35	17.8	18.15	0.07	2	PASS
		16QAM	RB1#0	0.67	17.8	18.47	0.07	2	PASS
			RB15#0	-0.23	17.8	17.57	0.06	2	PASS
	High	QPSK	RB1#0	1.03	17.8	18.83	0.08	2	PASS
			RB15#0	-0.03	17.8	17.77	0.06	2	PASS
		16QAM	RB1#0	0.58	17.8	18.38	0.07	2	PASS
			RB15#0	0.66	17.8	18.46	0.07	2	PASS
5 MHz	Low	QPSK	RB1#0	1.45	17.8	19.25	0.08	2	PASS
			RB25#0	0.27	17.8	18.07	0.06	2	PASS
		16QAM	RB1#0	0.78	17.8	18.58	0.07	2	PASS
			RB25#0	-0.17	17.8	17.63	0.06	2	PASS
	Middle	QPSK	RB1#0	0.88	17.8	18.68	0.07	2	PASS
			RB25#0	0.04	17.8	17.84	0.06	2	PASS
		16QAM	RB1#0	0.23	17.8	18.03	0.06	2	PASS
			RB25#0	-0.44	17.8	17.36	0.05	2	PASS
	High	QPSK	RB1#0	0.92	17.8	18.72	0.07	2	PASS
			RB25#0	0.44	17.8	18.24	0.07	2	PASS
		16QAM	RB1#0	1.51	17.8	19.31	0.09	2	PASS
			RB25#0	0.39	17.8	18.19	0.07	2	PASS
10 MHz	Low	QPSK	RB1#0	1.24	17.8	19.04	0.08	2	PASS
			RB50#0	0.38	17.8	18.18	0.07	2	PASS
		16QAM	RB1#0	0.34	17.8	18.14	0.07	2	PASS
			RB50#0	0.55	17.8	18.35	0.07	2	PASS
	Middle	QPSK	RB1#0	0.86	17.8	18.66	0.07	2	PASS
			RB50#0	0.39	17.8	18.19	0.07	2	PASS
		16QAM	RB1#0	0.22	17.8	18.02	0.06	2	PASS
			RB50#0	-0.52	17.8	17.28	0.05	2	PASS
	High	QPSK	RB1#0	1.31	17.8	19.11	0.08	2	PASS
			RB50#0	0.23	17.8	18.03	0.06	2	PASS
		16QAM	RB1#0	0.84	17.8	18.64	0.07	2	PASS
			RB50#0	0.83	17.8	18.63	0.07	2	PASS
15 MHz	Low	QPSK	RB1#0	1.06	17.8	18.86	0.08	2	PASS
			RB75#0	-0.03	17.8	17.77	0.06	2	PASS
		16QAM	RB1#0	0.51	17.8	18.31	0.07	2	PASS
			RB75#0	0.2	17.8	18.00	0.06	2	PASS
	Middle	QPSK	RB1#0	1.01	17.8	18.81	0.08	2	PASS
			RB75#0	0.43	17.8	18.23	0.07	2	PASS
		16QAM	RB1#0	0.73	17.8	18.53	0.07	2	PASS
			RB75#0	-0.7	17.8	17.10	0.05	2	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 47 of 59

	High	QPSK	RB1#0	0.74	17.8	18.54	0.07	2	PASS	
			RB75#0	0.28	17.8	18.08	0.06	2	PASS	
		16QAM	RB1#0	1.18	17.8	18.98	0.08	2	PASS	
			RB75#0	0.69	17.8	18.49	0.07	2	PASS	
	20MHz	Low	QPSK	RB1#0	1.12	17.8	18.92	0.08	2	PASS
				RB100#0	-0.34	17.8	17.46	0.06	2	PASS
			16QAM	RB1#0	0.68	17.8	18.48	0.07	2	PASS
				RB100#0	-0.72	17.8	17.08	0.05	2	PASS
Middle		QPSK	RB1#0	1.21	17.8	19.01	0.08	2	PASS	
			RB100#0	0.17	17.8	17.97	0.06	2	PASS	
		16QAM	RB1#0	0.72	17.8	18.52	0.07	2	PASS	
			RB100#0	-0.55	17.8	17.25	0.05	2	PASS	
High	QPSK	RB1#0	0.83	17.8	18.63	0.07	2	PASS		
		RB100#0	0.53	17.8	18.33	0.07	2	PASS		
	16QAM	RB1#0	1.12	17.8	18.92	0.08	2	PASS		
		RB100#0	0.67	17.8	18.47	0.07	2	PASS		

FDD LTE Band 4									
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)		
1.4 MHz	Low	QPSK	RB1#0	5.29	14.4	19.69	0.09	1	PASS
			RB6#0	4.72	14.4	19.12	0.08	1	PASS
		16QAM	RB1#0	5.03	14.4	19.43	0.09	1	PASS
			RB6#0	4.37	14.4	18.77	0.08	1	PASS
	Middle	QPSK	RB1#0	5.66	14.4	20.06	0.10	1	PASS
			RB6#0	4.77	14.4	19.17	0.08	1	PASS
		16QAM	RB1#0	5.4	14.4	19.80	0.10	1	PASS
			RB6#0	4.07	14.4	18.47	0.07	1	PASS
	High	QPSK	RB1#0	5.04	14.4	19.44	0.09	1	PASS
			RB6#0	3.82	14.4	18.22	0.07	1	PASS
		16QAM	RB1#0	5.31	14.4	19.71	0.09	1	PASS
			RB6#0	3.98	14.4	18.38	0.07	1	PASS
3 MHz	Low	QPSK	RB1#0	5.28	14.4	19.68	0.09	1	PASS
			RB15#0	4.49	14.4	18.89	0.08	1	PASS
		16QAM	RB1#0	4.94	14.4	19.34	0.09	1	PASS
			RB15#0	4.57	14.4	18.97	0.08	1	PASS
	Middle	QPSK	RB1#0	5.54	14.4	19.94	0.10	1	PASS
			RB15#0	4.96	14.4	19.36	0.09	1	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 48 of 59

	16QAM	RB1#0	4.83	14.4	19.23	0.08	1	PASS	
		RB15#0	4.2	14.4	18.60	0.07	1	PASS	
	High	QPSK	RB1#0	5.45	14.4	19.85	0.10	1	PASS
			RB15#0	4.26	14.4	18.66	0.07	1	PASS
	16QAM	RB1#0	5.21	14.4	19.61	0.09	1	PASS	
		RB15#0	3.92	14.4	18.32	0.07	1	PASS	
5 MHz	Low	QPSK	RB1#0	5.84	14.4	20.24	0.11	1	PASS
			RB25#0	4.75	14.4	19.15	0.08	1	PASS
		16QAM	RB1#0	5.64	14.4	20.04	0.10	1	PASS
			RB25#0	4.18	14.4	18.58	0.07	1	PASS
	Middle	QPSK	RB1#0	5.24	14.4	19.64	0.09	1	PASS
			RB25#0	5.08	14.4	19.48	0.09	1	PASS
		16QAM	RB1#0	5.78	14.4	20.18	0.10	1	PASS
			RB25#0	4.6	14.4	19.00	0.08	1	PASS
	High	QPSK	RB1#0	5.4	14.4	19.80	0.10	1	PASS
			RB25#0	4.05	14.4	18.45	0.07	1	PASS
		16QAM	RB1#0	5.07	14.4	19.47	0.09	1	PASS
			RB25#0	4.25	14.4	18.65	0.07	1	PASS
10 MHz	Low	QPSK	RB1#0	5.44	14.4	19.84	0.10	1	PASS
			RB50#0	4.78	14.4	19.18	0.08	1	PASS
		16QAM	RB1#0	5.63	14.4	20.03	0.10	1	PASS
			RB50#0	4.37	14.4	18.77	0.08	1	PASS
	Middle	QPSK	RB1#0	5.78	14.4	20.18	0.10	1	PASS
			RB50#0	4.54	14.4	18.94	0.08	1	PASS
		16QAM	RB1#0	4.99	14.4	19.39	0.09	1	PASS
			RB50#0	4.64	14.4	19.04	0.08	1	PASS
	High	QPSK	RB1#0	5.45	14.4	19.85	0.10	1	PASS
			RB50#0	4.69	14.4	19.09	0.08	1	PASS
		16QAM	RB1#0	5.44	14.4	19.84	0.10	1	PASS
			RB50#0	4.19	14.4	18.59	0.07	1	PASS
15 MHz	Low	QPSK	RB1#0	5.31	14.4	19.71	0.09	1	PASS
			RB75#0	4.7	14.4	19.10	0.08	1	PASS
		16QAM	RB1#0	5	14.4	19.40	0.09	1	PASS
			RB75#0	4.31	14.4	18.71	0.07	1	PASS
	Middle	QPSK	RB1#0	5.71	14.4	20.11	0.10	1	PASS
			RB75#0	4.69	14.4	19.09	0.08	1	PASS
		16QAM	RB1#0	5.38	14.4	19.78	0.10	1	PASS
			RB75#0	3.96	14.4	18.36	0.07	1	PASS
	High	QPSK	RB1#0	5.42	14.4	19.82	0.10	1	PASS
			RB75#0	4.6	14.4	19.00	0.08	1	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 49 of 59

		16QAM	RB1#0	5.15	14.4	19.55	0.09	1	PASS
			RB75#0	4.05	14.4	18.45	0.07	1	PASS
20MHz	Low	QPSK	RB1#0	5.66	14.4	20.06	0.10	1	PASS
			RB100#0	4.73	14.4	19.13	0.08	1	PASS
		16QAM	RB1#0	5.65	14.4	20.05	0.10	1	PASS
			RB100#0	4.29	14.4	18.69	0.07	1	PASS
	Middle	QPSK	RB1#0	5.14	14.4	19.54	0.09	1	PASS
			RB100#0	4.51	14.4	18.91	0.08	1	PASS
		16QAM	RB1#0	5.03	14.4	19.43	0.09	1	PASS
			RB100#0	4.18	14.4	18.58	0.07	1	PASS
	High	QPSK	RB1#0	5.42	14.4	19.82	0.10	1	PASS
			RB100#0	3.92	14.4	18.32	0.07	1	PASS
		16QAM	RB1#0	5.29	14.4	19.69	0.09	1	PASS
			RB100#0	4.43	14.4	18.83	0.08	1	PASS

FDD LTE Band 5									
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured ERP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)		
1.4 MHz	Low	QPSK	RB1#0	8.17	9.83	18.00	0.06	7	PASS
			RB6#0	7.2	9.83	17.03	0.05	7	PASS
		16QAM	RB1#0	7.62	9.83	17.45	0.06	7	PASS
			RB6#0	7.46	9.83	17.29	0.05	7	PASS
	Middle	QPSK	RB1#0	7.68	9.83	17.51	0.06	7	PASS
			RB6#0	6.67	9.83	16.50	0.04	7	PASS
		16QAM	RB1#0	6.68	9.83	16.51	0.04	7	PASS
			RB6#0	8.12	9.83	17.95	0.06	7	PASS
	High	QPSK	RB1#0	8.38	9.83	18.21	0.07	7	PASS
			RB6#0	7.25	9.83	17.08	0.05	7	PASS
		16QAM	RB1#0	7.62	9.83	17.45	0.06	7	PASS
			RB6#0	7.75	9.83	17.58	0.06	7	PASS
3 MHz	Low	QPSK	RB1#0	8.32	9.83	18.15	0.07	7	PASS
			RB15#0	7.35	9.83	17.18	0.05	7	PASS
		16QAM	RB1#0	7.81	9.83	17.64	0.06	7	PASS
			RB15#0	7.52	9.83	17.35	0.05	7	PASS
	Middle	QPSK	RB1#0	8.16	9.83	17.99	0.06	7	PASS
			RB15#0	6.72	9.83	16.55	0.05	7	PASS
		16QAM	RB1#0	7.55	9.83	17.38	0.05	7	PASS
			RB15#0	8.05	9.83	17.88	0.06	7	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 50 of 59

	High	QPSK	RB1#0	7.59	9.83	17.42	0.06	7	PASS	
			RB15#0	6.94	9.83	16.77	0.05	7	PASS	
		16QAM	RB1#0	8.3	9.83	18.13	0.07	7	PASS	
			RB15#0	7.63	9.83	17.46	0.06	7	PASS	
	5 MHz	Low	QPSK	RB1#0	7.93	9.83	17.76	0.06	7	PASS
				RB25#0	7.02	9.83	16.85	0.05	7	PASS
			16QAM	RB1#0	7.68	9.83	17.51	0.06	7	PASS
				RB25#0	7.21	9.83	17.04	0.05	7	PASS
Middle		QPSK	RB1#0	7.6	9.83	17.43	0.06	7	PASS	
			RB25#0	7.57	9.83	17.40	0.05	7	PASS	
		16QAM	RB1#0	7.33	9.83	17.16	0.05	7	PASS	
			RB25#0	7.26	9.83	17.09	0.05	7	PASS	
High		QPSK	RB1#0	7.88	9.83	17.71	0.06	7	PASS	
			RB25#0	7.82	9.83	17.65	0.06	7	PASS	
		16QAM	RB1#0	8.12	9.83	17.95	0.06	7	PASS	
			RB25#0	7.31	9.83	17.14	0.05	7	PASS	
10 MHz	Low	QPSK	RB1#0	8.08	9.83	17.91	0.06	7	PASS	
			RB50#0	7.21	9.83	17.04	0.05	7	PASS	
		16QAM	RB1#0	7.81	9.83	17.64	0.06	7	PASS	
			RB50#0	7.37	9.83	17.20	0.05	7	PASS	
	Middle	QPSK	RB1#0	7.95	9.83	17.78	0.06	7	PASS	
			RB50#0	7.51	9.83	17.34	0.05	7	PASS	
		16QAM	RB1#0	7.11	9.83	16.94	0.05	7	PASS	
			RB50#0	7.97	9.83	17.80	0.06	7	PASS	
	High	QPSK	RB1#0	8.12	9.83	17.95	0.06	7	PASS	
			RB50#0	7.5	9.83	17.33	0.05	7	PASS	
		16QAM	RB1#0	7.5	9.83	17.33	0.05	7	PASS	
			RB50#0	7.52	9.83	17.35	0.05	7	PASS	

FDD LTE Band 7									
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)		
5 MHz	Low	QPSK	RB1#0	1.29	19.5	20.79	0.12	2	PASS
			RB25#0	-0.11	19.5	19.39	0.09	2	PASS
		16QAM	RB1#0	1.01	19.5	20.51	0.11	2	PASS
			RB25#0	-0.44	19.5	19.06	0.08	2	PASS
	Middle	QPSK	RB1#0	0.76	19.5	20.26	0.11	2	PASS
			RB25#0	-0.11	19.5	19.39	0.09	2	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 51 of 59

	16QAM	RB1#0	0.69	19.5	20.19	0.10	2	PASS	
		RB25#0	-0.79	19.5	18.71	0.07	2	PASS	
	High	QPSK	RB1#0	0.97	19.5	20.47	0.11	2	PASS
			RB25#0	0.48	19.5	19.98	0.10	2	PASS
	16QAM	RB1#0	0.75	19.5	20.25	0.11	2	PASS	
		RB25#0	0.34	19.5	19.84	0.10	2	PASS	
10 MHz	Low	QPSK	RB1#0	0.84	19.5	20.34	0.11	2	PASS
			RB50#0	-0.19	19.5	19.31	0.09	2	PASS
		16QAM	RB1#0	1.05	19.5	20.55	0.11	2	PASS
			RB50#0	-0.01	19.5	19.49	0.09	2	PASS
	Middle	QPSK	RB1#0	0.34	19.5	19.84	0.10	2	PASS
			RB50#0	0.12	19.5	19.62	0.09	2	PASS
		16QAM	RB1#0	-0.09	19.5	19.41	0.09	2	PASS
			RB50#0	-0.57	19.5	18.93	0.08	2	PASS
	High	QPSK	RB1#0	0.76	19.5	20.26	0.11	2	PASS
			RB50#0	0.47	19.5	19.97	0.10	2	PASS
		16QAM	RB1#0	1.27	19.5	20.77	0.12	2	PASS
			RB50#0	0.21	19.5	19.71	0.09	2	PASS
15 MHz	Low	QPSK	RB1#0	1.3	19.5	20.80	0.12	2	PASS
			RB75#0	0.12	19.5	19.62	0.09	2	PASS
		16QAM	RB1#0	0.4	19.5	19.90	0.10	2	PASS
			RB75#0	0.23	19.5	19.73	0.09	2	PASS
	Middle	QPSK	RB1#0	0.75	19.5	20.25	0.11	2	PASS
			RB75#0	-0.13	19.5	19.37	0.09	2	PASS
		16QAM	RB1#0	0.24	19.5	19.74	0.09	2	PASS
			RB75#0	-0.27	19.5	19.23	0.08	2	PASS
	High	QPSK	RB1#0	1.48	19.5	20.98	0.13	2	PASS
			RB75#0	0.66	19.5	20.16	0.10	2	PASS
16QAM		RB1#0	0.89	19.5	20.39	0.11	2	PASS	
		RB75#0	0.84	19.5	20.34	0.11	2	PASS	
20MHz	Low	QPSK	RB1#0	1.12	19.5	20.62	0.12	2	PASS
			RB100#0	0.28	19.5	19.78	0.10	2	PASS
		16QAM	RB1#0	0.66	19.5	20.16	0.10	2	PASS
			RB100#0	-0.2	19.5	19.30	0.09	2	PASS
	Middle	QPSK	RB1#0	1.19	19.5	20.69	0.12	2	PASS
			RB100#0	0.35	19.5	19.85	0.10	2	PASS
		16QAM	RB1#0	0.25	19.5	19.75	0.09	2	PASS
			RB100#0	-0.11	19.5	19.39	0.09	2	PASS
High	QPSK	RB1#0	0.88	19.5	20.38	0.11	2	PASS	
		RB100#0	-0.09	19.5	19.41	0.09	2	PASS	

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 52 of 59

		16QAM	RB1#0	1.03	19.5	20.53	0.11	2	PASS
			RB100#0	0.35	19.5	19.85	0.10	2	PASS

FDD LTE Band 12									
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured ERP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)		
1.4 MHz	Low	QPSK	RB1#0	10.32	8.1	18.42	0.07	7	PASS
			RB6#0	9.56	8.1	17.66	0.06	7	PASS
		16QAM	RB1#0	9.01	8.1	17.11	0.05	7	PASS
			RB6#0	8.58	8.1	16.68	0.05	7	PASS
	Middle	QPSK	RB1#0	9.76	8.1	17.86	0.06	7	PASS
			RB6#0	9.79	8.1	17.89	0.06	7	PASS
		16QAM	RB1#0	8.22	8.1	16.32	0.04	7	PASS
			RB6#0	8.47	8.1	16.57	0.05	7	PASS
	High	QPSK	RB1#0	9.79	8.1	17.89	0.06	7	PASS
			RB6#0	9.26	8.1	17.36	0.05	7	PASS
		16QAM	RB1#0	8.94	8.1	17.04	0.05	7	PASS
			RB6#0	8.58	8.1	16.68	0.05	7	PASS
3 MHz	Low	QPSK	RB1#0	9.67	8.1	17.77	0.06	7	PASS
			RB15#0	9	8.1	17.10	0.05	7	PASS
		16QAM	RB1#0	8.36	8.1	16.46	0.04	7	PASS
			RB15#0	8.5	8.1	16.60	0.05	7	PASS
	Middle	QPSK	RB1#0	10.03	8.1	18.13	0.07	7	PASS
			RB15#0	8.99	8.1	17.09	0.05	7	PASS
		16QAM	RB1#0	8.4	8.1	16.50	0.04	7	PASS
			RB15#0	8.7	8.1	16.80	0.05	7	PASS
	High	QPSK	RB1#0	9.83	8.1	17.93	0.06	7	PASS
			RB15#0	9.33	8.1	17.43	0.06	7	PASS
		16QAM	RB1#0	9.06	8.1	17.16	0.05	7	PASS
			RB15#0	8.7	8.1	16.80	0.05	7	PASS
5 MHz	Low	QPSK	RB1#0	10.07	8.1	18.17	0.07	7	PASS
			RB25#0	9.3	8.1	17.40	0.05	7	PASS
		16QAM	RB1#0	9.25	8.1	17.35	0.05	7	PASS
			RB25#0	8.19	8.1	16.29	0.04	7	PASS
	Middle	QPSK	RB1#0	9.61	8.1	17.71	0.06	7	PASS
			RB25#0	9.49	8.1	17.59	0.06	7	PASS
		16QAM	RB1#0	7.94	8.1	16.04	0.04	7	PASS
			RB25#0	8.29	8.1	16.39	0.04	7	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 53 of 59

	High	QPSK	RB1#0	9.73	8.1	17.83	0.06	7	PASS	
			RB25#0	9.8	8.1	17.90	0.06	7	PASS	
		16QAM	RB1#0	9.36	8.1	17.46	0.06	7	PASS	
			RB25#0	8.56	8.1	16.66	0.05	7	PASS	
	10 MHz	Low	QPSK	RB1#0	9.76	8.1	17.86	0.06	7	PASS
				RB50#0	9.51	8.1	17.61	0.06	7	PASS
			16QAM	RB1#0	8.44	8.1	16.54	0.05	7	PASS
				RB50#0	8.4	8.1	16.50	0.04	7	PASS
Middle		QPSK	RB1#0	9.65	8.1	17.75	0.06	7	PASS	
			RB50#0	8.85	8.1	16.95	0.05	7	PASS	
		16QAM	RB1#0	8.23	8.1	16.33	0.04	7	PASS	
			RB50#0	8.73	8.1	16.83	0.05	7	PASS	
High		QPSK	RB1#0	10.39	8.1	18.49	0.07	7	PASS	
			RB50#0	9.36	8.1	17.46	0.06	7	PASS	
		16QAM	RB1#0	8.81	8.1	16.91	0.05	7	PASS	
			RB50#0	8.55	8.1	16.65	0.05	7	PASS	

FDD LTE Band 13									
Test BW	CH	Modul.	RB Set (Size#Offset)	Measured ERP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)		
5 MHz	Low	QPSK	RB1#0	8.11	9.83	17.94	0.06	3	PASS
			RB25#0	7.27	9.83	17.10	0.05	3	PASS
		16QAM	RB1#0	8.09	9.83	17.92	0.06	3	PASS
			RB25#0	7.27	9.83	17.10	0.05	3	PASS
	Middle	QPSK	RB1#0	7.35	9.83	17.18	0.05	3	PASS
			RB25#0	6.81	9.83	16.64	0.05	3	PASS
		16QAM	RB1#0	7.41	9.83	17.24	0.05	3	PASS
			RB25#0	7.77	9.83	17.60	0.06	3	PASS
	High	QPSK	RB1#0	8.32	9.83	18.15	0.07	3	PASS
			RB25#0	7.49	9.83	17.32	0.05	3	PASS
		16QAM	RB1#0	8.07	9.83	17.90	0.06	3	PASS
			RB25#0	7.71	9.83	17.54	0.06	3	PASS
10 MHz	Low	QPSK	RB1#0	8.02	9.83	17.85	0.06	3	PASS
			RB50#0	7.07	9.83	16.90	0.05	3	PASS
		16QAM	RB1#0	7.8	9.83	17.63	0.06	3	PASS
			RB50#0	7.73	9.83	17.56	0.06	3	PASS
	Middle	QPSK	RB1#0	8.01	9.83	17.84	0.06	3	PASS
			RB50#0	6.98	9.83	16.81	0.05	3	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 54 of 59

	16QAM	RB1#0	7.36	9.83	17.19	0.05	3	PASS	
		RB50#0	8.07	9.83	17.90	0.06	3	PASS	
	High	QPSK	RB1#0	7.49	9.83	17.32	0.05	3	PASS
			RB50#0	7.21	9.83	17.04	0.05	3	PASS
	16QAM	RB1#0	8.52	9.83	18.35	0.07	3	PASS	
		RB50#0	7.24	9.83	17.07	0.05	3	PASS	

FDD LTE Band 17

Test BW	CH	Modul.	RB Set (Size#Offset)	Measured ERP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)		
5 MHz	Low	QPSK	RB1#0	9.88	8.1	17.98	0.06	3	PASS
			RB25#0	9.21	8.1	17.31	0.05	3	PASS
		16QAM	RB1#0	8.94	8.1	17.04	0.05	3	PASS
			RB25#0	8.7	8.1	16.80	0.05	3	PASS
	Middle	QPSK	RB1#0	9.64	8.1	17.74	0.06	3	PASS
			RB25#0	9.43	8.1	17.53	0.06	3	PASS
		16QAM	RB1#0	8.29	8.1	16.39	0.04	3	PASS
			RB25#0	8.42	8.1	16.52	0.04	3	PASS
	High	QPSK	RB1#0	9.87	8.1	17.97	0.06	3	PASS
			RB25#0	9.81	8.1	17.91	0.06	3	PASS
		16QAM	RB1#0	9.09	8.1	17.19	0.05	3	PASS
			RB25#0	8.68	8.1	16.78	0.05	3	PASS
10 MHz	Low	QPSK	RB1#0	10.05	8.1	18.15	0.07	3	PASS
			RB50#0	8.87	8.1	16.97	0.05	3	PASS
		16QAM	RB1#0	8.61	8.1	16.71	0.05	3	PASS
			RB50#0	8	8.1	16.10	0.04	3	PASS
	Middle	QPSK	RB1#0	10.14	8.1	18.24	0.07	3	PASS
			RB50#0	9.08	8.1	17.18	0.05	3	PASS
		16QAM	RB1#0	8.02	8.1	16.12	0.04	3	PASS
			RB50#0	8.54	8.1	16.64	0.05	3	PASS
	High	QPSK	RB1#0	9.95	8.1	18.05	0.06	3	PASS
			RB50#0	9.03	8.1	17.13	0.05	3	PASS
		16QAM	RB1#0	9.01	8.1	17.11	0.05	3	PASS
			RB50#0	8.7	8.1	16.80	0.05	3	PASS

FDD LTE Band 25

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 55 of 59

Test BW	CH	Modul.	RB Set (Size#Offset)	Measured EIRP				Limit (W)	Verdict
				SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)		
1.4 MHz	Low	QPSK	RB1#0	0.89	17.8	18.69	0.07	1	PASS
			RB6#0	-0.02	17.8	17.78	0.06	1	PASS
		16QAM	RB1#0	0.61	17.8	18.41	0.07	1	PASS
			RB6#0	-0.22	17.8	17.58	0.06	1	PASS
	Middle	QPSK	RB1#0	0.74	17.8	18.54	0.07	1	PASS
			RB6#0	0.52	17.8	18.32	0.07	1	PASS
		16QAM	RB1#0	-0.09	17.8	17.71	0.06	1	PASS
			RB6#0	-0.55	17.8	17.25	0.05	1	PASS
	High	QPSK	RB1#0	0.79	17.8	18.59	0.07	1	PASS
			RB6#0	0.52	17.8	18.32	0.07	1	PASS
		16QAM	RB1#0	0.88	17.8	18.68	0.07	1	PASS
			RB6#0	0.75	17.8	18.55	0.07	1	PASS
3 MHz	Low	QPSK	RB1#0	1.45	17.8	19.25	0.08	1	PASS
			RB15#0	0.19	17.8	17.99	0.06	1	PASS
		16QAM	RB1#0	1.36	17.8	19.16	0.08	1	PASS
			RB15#0	0.34	17.8	18.14	0.07	1	PASS
	Middle	QPSK	RB1#0	0.75	17.8	18.55	0.07	1	PASS
			RB15#0	-0.04	17.8	17.76	0.06	1	PASS
		16QAM	RB1#0	0.2	17.8	18.00	0.06	1	PASS
			RB15#0	-0.52	17.8	17.28	0.05	1	PASS
	High	QPSK	RB1#0	0.88	17.8	18.68	0.07	1	PASS
			RB15#0	0.18	17.8	17.98	0.06	1	PASS
		16QAM	RB1#0	0.47	17.8	18.27	0.07	1	PASS
			RB15#0	0.59	17.8	18.39	0.07	1	PASS
5 MHz	Low	QPSK	RB1#0	1.14	17.8	18.94	0.08	1	PASS
			RB25#0	0.62	17.8	18.42	0.07	1	PASS
		16QAM	RB1#0	0.72	17.8	18.52	0.07	1	PASS
			RB25#0	0.03	17.8	17.83	0.06	1	PASS
	Middle	QPSK	RB1#0	1.13	17.8	18.93	0.08	1	PASS
			RB25#0	0.34	17.8	18.14	0.07	1	PASS
		16QAM	RB1#0	-0.12	17.8	17.68	0.06	1	PASS
			RB25#0	-0.28	17.8	17.52	0.06	1	PASS
	High	QPSK	RB1#0	1.02	17.8	18.82	0.08	1	PASS
			RB25#0	0.11	17.8	17.91	0.06	1	PASS
		16QAM	RB1#0	1.2	17.8	19.00	0.08	1	PASS
			RB25#0	0.72	17.8	18.52	0.07	1	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 56 of 59

10 MHz	Low	QPSK	RB1#0	1.12	17.8	18.92	0.08	1	PASS
			RB50#0	0.68	17.8	18.48	0.07	1	PASS
		16QAM	RB1#0	0.7	17.8	18.50	0.07	1	PASS
			RB50#0	0.06	17.8	17.86	0.06	1	PASS
	Middle	QPSK	RB1#0	1.14	17.8	18.94	0.08	1	PASS
			RB50#0	0.36	17.8	18.16	0.07	1	PASS
		16QAM	RB1#0	0.17	17.8	17.97	0.06	1	PASS
			RB50#0	-0.42	17.8	17.38	0.05	1	PASS
	High	QPSK	RB1#0	0.86	17.8	18.66	0.07	1	PASS
			RB50#0	0.11	17.8	17.91	0.06	1	PASS
		16QAM	RB1#0	1.08	17.8	18.88	0.08	1	PASS
			RB50#0	0.85	17.8	18.65	0.07	1	PASS
15 MHz	Low	QPSK	RB1#0	0.81	17.8	18.61	0.07	1	PASS
			RB75#0	-0.03	17.8	17.77	0.06	1	PASS
		16QAM	RB1#0	1.08	17.8	18.88	0.08	1	PASS
			RB75#0	-0.32	17.8	17.48	0.06	1	PASS
	Middle	QPSK	RB1#0	1.3	17.8	19.10	0.08	1	PASS
			RB75#0	0.45	17.8	18.25	0.07	1	PASS
		16QAM	RB1#0	0.25	17.8	18.05	0.06	1	PASS
			RB75#0	-0.65	17.8	17.15	0.05	1	PASS
	High	QPSK	RB1#0	0.4	17.8	18.20	0.07	1	PASS
			RB75#0	0.73	17.8	18.53	0.07	1	PASS
		16QAM	RB1#0	1.44	17.8	19.24	0.08	1	PASS
			RB75#0	0.73	17.8	18.53	0.07	1	PASS
20MHz	Low	QPSK	RB1#0	1.29	17.8	19.09	0.08	1	PASS
			RB100#0	0.24	17.8	18.04	0.06	1	PASS
		16QAM	RB1#0	0.4	17.8	18.20	0.07	1	PASS
			RB100#0	-0.31	17.8	17.49	0.06	1	PASS
	Middle	QPSK	RB1#0	1.03	17.8	18.83	0.08	1	PASS
			RB100#0	0.52	17.8	18.32	0.07	1	PASS
		16QAM	RB1#0	0.54	17.8	18.34	0.07	1	PASS
			RB100#0	-0.87	17.8	16.93	0.05	1	PASS
	High	QPSK	RB1#0	0.58	17.8	18.38	0.07	1	PASS
			RB100#0	0.38	17.8	18.18	0.07	1	PASS
		16QAM	RB1#0	1.03	17.8	18.83	0.08	1	PASS
			RB100#0	0.18	17.8	17.98	0.06	1	PASS

FDD LTE Band 41

Test	CH	Modul.	RB Set	Measured EIRP	Limit	Verdict
------	----	--------	--------	---------------	-------	---------

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 57 of 59

BW			(Size#Offset)	SA Read Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)	(W)	
5 MHz	Low	QPSK	RB1#0	1.3	19.5	20.80	0.12	2	PASS
			RB25#0	0.45	19.5	19.95	0.10	2	PASS
		16QAM	RB1#0	1.06	19.5	20.56	0.11	2	PASS
			RB25#0	-0.01	19.5	19.49	0.09	2	PASS
	Middle	QPSK	RB1#0	0.81	19.5	20.31	0.11	2	PASS
			RB25#0	0.45	19.5	19.95	0.10	2	PASS
		16QAM	RB1#0	0.13	19.5	19.63	0.09	2	PASS
			RB25#0	-0.65	19.5	18.85	0.08	2	PASS
	High	QPSK	RB1#0	0.75	19.5	20.25	0.11	2	PASS
			RB25#0	0.09	19.5	19.59	0.09	2	PASS
		16QAM	RB1#0	0.97	19.5	20.47	0.11	2	PASS
			RB25#0	0.78	19.5	20.28	0.11	2	PASS
10 MHz	Low	QPSK	RB1#0	1.03	19.5	20.53	0.11	2	PASS
			RB50#0	0.3	19.5	19.80	0.10	2	PASS
		16QAM	RB1#0	1.4	19.5	20.90	0.12	2	PASS
			RB50#0	0.02	19.5	19.52	0.09	2	PASS
	Middle	QPSK	RB1#0	0.86	19.5	20.36	0.11	2	PASS
			RB50#0	0.6	19.5	20.10	0.10	2	PASS
		16QAM	RB1#0	0.25	19.5	19.75	0.09	2	PASS
			RB50#0	-0.8	19.5	18.70	0.07	2	PASS
	High	QPSK	RB1#0	0.95	19.5	20.45	0.11	2	PASS
			RB50#0	0.42	19.5	19.92	0.10	2	PASS
		16QAM	RB1#0	0.77	19.5	20.27	0.11	2	PASS
			RB50#0	0.46	19.5	19.96	0.10	2	PASS
15 MHz	Low	QPSK	RB1#0	0.72	19.5	20.22	0.11	2	PASS
			RB75#0	0.19	19.5	19.69	0.09	2	PASS
		16QAM	RB1#0	0.91	19.5	20.41	0.11	2	PASS
			RB75#0	-0.14	19.5	19.36	0.09	2	PASS
	Middle	QPSK	RB1#0	0.88	19.5	20.38	0.11	2	PASS
			RB75#0	0.16	19.5	19.66	0.09	2	PASS
		16QAM	RB1#0	0.42	19.5	19.92	0.10	2	PASS
			RB75#0	-0.45	19.5	19.05	0.08	2	PASS
	High	QPSK	RB1#0	1.22	19.5	20.72	0.12	2	PASS
			RB75#0	0.88	19.5	20.38	0.11	2	PASS
		16QAM	RB1#0	0.62	19.5	20.12	0.10	2	PASS
			RB75#0	-0.03	19.5	19.47	0.09	2	PASS
20MHz	Low	QPSK	RB1#0	1.31	19.5	20.81	0.12	2	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 58 of 59

		16QAM	RB100#0	0.14	19.5	19.64	0.09	2	PASS
			RB1#0	0.63	19.5	20.13	0.10	2	PASS
			RB100#0	0.27	19.5	19.77	0.09	2	PASS
	Middle	QPSK	RB1#0	0.71	19.5	20.21	0.10	2	PASS
			RB100#0	0.43	19.5	19.93	0.10	2	PASS
		16QAM	RB1#0	0.07	19.5	19.57	0.09	2	PASS
			RB100#0	-0.46	19.5	19.04	0.08	2	PASS
	High	QPSK	RB1#0	0.5	19.5	20.00	0.10	2	PASS
			RB100#0	0.69	19.5	20.19	0.10	2	PASS
		16QAM	RB1#0	0.89	19.5	20.39	0.11	2	PASS
			RB100#0	-0.01	19.5	19.49	0.09	2	PASS

TEST REPORT

Report No.: SHE19020010-05IE

Date: 2020-05-27

Page 59 of 59

5.1.2 Field Strength of Spurious Radiation

Note(s):

1. GSM and EGPRS modes have been verified, only the worst data with different transmit bandwidth for LTE are shown here.
2. The frequencies of verdict which are marked by "N/A" should be ignored because they are MS carrier frequency.
3. When measurement frequency is above 18GHz, there is only noise floor of test system existing. So that there is no test data above 18GHz in the report.
4. Test plots please refer to the document "Annex No: EXHIBIT E".

End of the report