



FCC Part 15C Test Report

FCC ID: 2AOPH-NX-SP201

Product Name:	Smart Plug - 2 in 1
Trademark:	NANXIN
Model Name :	NX-SP201
Prepared For :	SHENZHEN NANXIN TECHNOLOGY LIMITED
Address :	Room 1608A, Xiangzhao Building, Fulong Road, Longhua District, Shenzhen City, Guangdong Province, China
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China.
Test Date:	Jan. 04–Jan. 12, 2018
Date of Report :	Jan. 12, 2018
Report No.:	BCTC-FY171208368E



TEST RESULT CERTIFICATION

Applicant's name : **SHENZHEN NANXIN TECHNOLOGY LIMITED**

Address : Room 1608A, Xiangzhao Building, Fulong Road, Longhua District, Shenzhen City, Guangdong Province, China

Manufacture's Name : **SHENZHEN NANXIN TECHNOLOGY LIMITED**

Address : Room 1608A, Xiangzhao Building, Fulong Road, Longhua District, Shenzhen City, Guangdong Province, China

Product description

Product name : Smart Plug - 2 in 1

Model and/or type reference : NX-SP201

Standards : FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Willem Wang

Reviewer(Supervisor): Rita Xiao

Approved(Manager): Carson Zhang





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	13
3.1.3 DEVIATION FROM TEST STANDARD	13
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (1GHZ~25GHZ)	24
3.3 RADIATED BAND EMISSION MEASUREMENT	27
3.3.1 TEST REQUIREMENT:	27
3.3.2 TEST PROCEDURE	27
3.3.3 DEVIATION FROM TEST STANDARD	28
3.3.4 TEST SETUP	28
3.3.5 EUT OPERATING CONDITIONS	28
4 . POWER SPECTRAL DENSITY TEST	30



Table of Contents	Page
4.1 APPLIED PROCEDURES / LIMIT	30
4.1.1 TEST PROCEDURE	30
4.1.2 DEVIATION FROM STANDARD	30
4.1.3 TEST SETUP	30
4.1.4 EUT OPERATION CONDITIONS	30
4.1.5 TEST RESULTS	31
5 . BANDWIDTH TEST	37
5.1 APPLIED PROCEDURES / LIMIT	37
5.1.1 TEST PROCEDURE	37
5.1.2 DEVIATION FROM STANDARD	37
5.1.3 TEST SETUP	37
5.1.4 EUT OPERATION CONDITIONS	37
5.1.5 TEST RESULTS	38
6 . PEAK OUTPUT POWER TEST	44
6.1 APPLIED PROCEDURES / LIMIT	44
6.1.1 TEST PROCEDURE	44
6.1.2 DEVIATION FROM STANDARD	44
6.1.3 TEST SETUP	44
6.1.4 EUT OPERATION CONDITIONS	44
6.1.5 TEST RESULTS	45
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	46
7.1 APPLICABLE STANDARD	46
7.2 TEST PROCEDURE	46
7.3 DEVIATION FROM STANDARD	46
7.4 TEST SETUP	46
7.5 EUT OPERATION CONDITIONS	46
7.1 TEST RESULTS	46
8 . DUTY CYCLE OF TEST SIGNAL	53
8.1 STANDARD REQUIREMENT	53
8.2 FORMULA:	53
9 . ANTENNA REQUIREMENT	55
9.1 STANDARD REQUIREMENT	55
9.2 EUT ANTENNA	55
10 . EUT TEST PHOTO	56



Table of Contents

Page

11 . EUT PHOTO	58
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C KBD 558074 D01 DTS Meas Guidance v03r05			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (d)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China.

FCC Registered No.: 712850

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Plug - 2 in 1	
Trade Name	NANXIN	
Model Name	NX-SP201	
Product Description	The EUT is a Smart Plug - 2 in 1	
	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz
	Modulation Type:	WIFI: OFDM/DSSS
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 75Mbps
	Number Of Channel	802.11b/g/n20MHz:11 CH
	Antenna Designation:	Please see Note 3.
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.		
Channel List	Please refer to the Note 2.	
Power	AC 110-240V~50/60HZ	
Adapter	N/A	
hardware version	--	
Software version	--	
Serial number	--	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB antenna	N/A	1	

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11


Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test





2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Smart Plug - 2 in 1	NANXIN	NX-SP201	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2017.08.27	2018.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2017.08.27	2018.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2017.08.27	2018.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2017.09.03	2018.09.02
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2017.09.03	2018.09.02
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2017.08.27	2018.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2017.08.27	2018.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2017.08.27	2018.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2017.09.03	2018.09.02
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2017.08.27	2018.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2017.08.27	2018.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2017.08.27	2018.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2017.08.27	2018.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2017.08.27	2018.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2017.08.27	2018.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2017.08.27	2018.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2017.08.27	2018.08.26

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1011 65-ha	2017.08.27	2018.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2017.08.27	2018.08.26
3	LISN	R&S	NSLK8126	8126487	2017.08.27	2018.08.26
4	RF cables	R&S	R204	R20X	2017.08.27	2018.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2017.08.27	2018.08.26



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

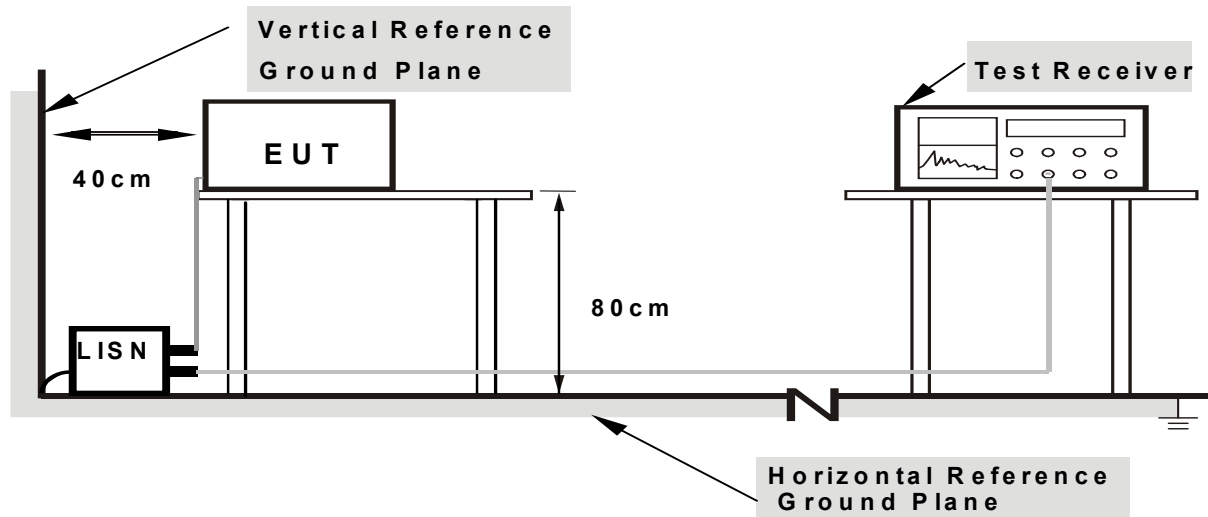

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



3.1.6 TEST RESULTS

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Input: AC120V/60Hz	Test Mode :	Mode 4

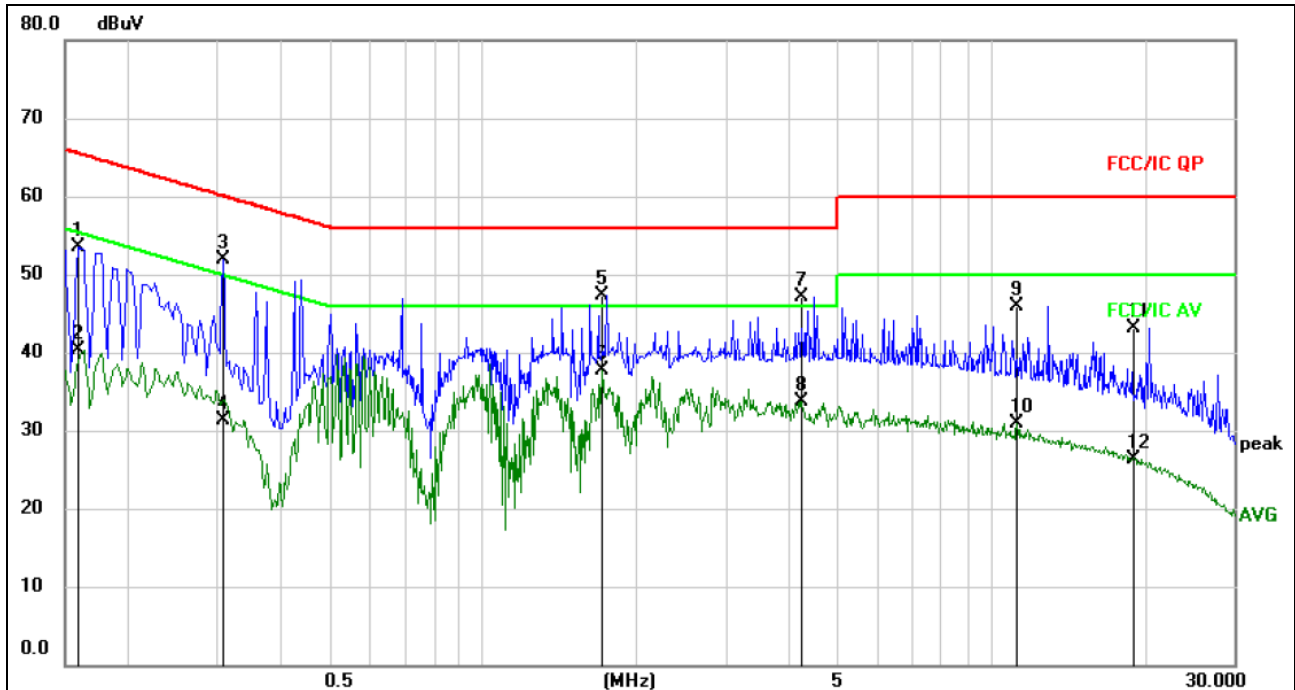


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1		0.1590	43.87	9.67	53.54	65.52	-11.98	QP
2		0.1590	30.69	9.67	40.36	55.52	-15.16	AVG
3	*	0.3075	42.17	9.66	51.83	60.04	-8.21	QP
4		0.3075	21.55	9.66	31.21	50.04	-18.83	AVG
5		1.7115	37.64	9.70	47.34	56.00	-8.66	QP
6		1.7115	27.92	9.70	37.62	46.00	-8.38	AVG
7		4.2360	37.30	9.73	47.03	56.00	-8.97	QP
8		4.2360	23.99	9.73	33.72	46.00	-12.28	AVG
9		11.2560	36.16	9.83	45.99	60.00	-14.01	QP
10		11.2560	21.05	9.83	30.88	50.00	-19.12	AVG
11		19.0680	33.20	9.86	43.06	60.00	-16.94	QP
12		19.0680	16.54	9.86	26.40	50.00	-23.60	AVG



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Input: AC120V/60Hz	Test Mode :	Mode 4

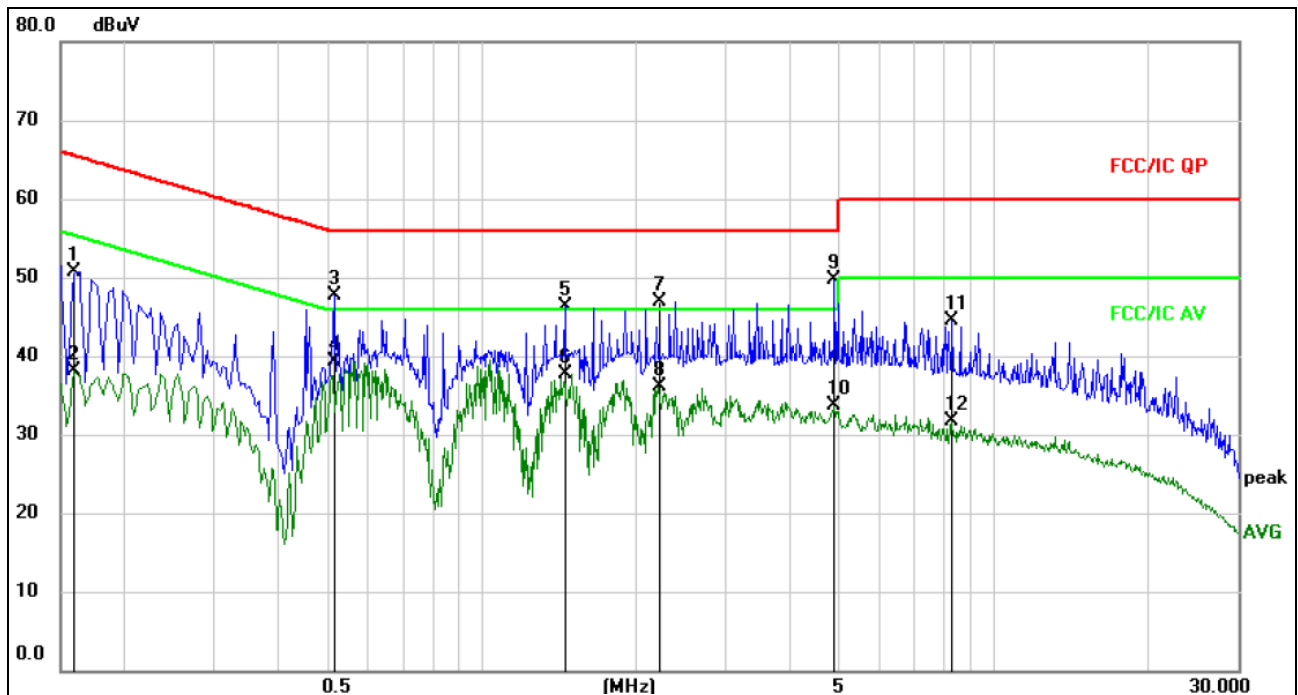

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1590	41.13	9.67	50.80	65.52	-14.72	QP	
2		0.1590	28.36	9.67	38.03	55.52	-17.49	AVG	
3		0.5144	38.11	9.68	47.79	56.00	-8.21	QP	
4		0.5144	29.61	9.68	39.29	46.00	-6.71	AVG	
5		1.4550	36.70	9.70	46.40	56.00	-9.60	QP	
6		1.4550	28.08	9.70	37.78	46.00	-8.22	AVG	
7		2.2110	37.24	9.72	46.96	56.00	-9.04	QP	
8		2.2110	26.38	9.72	36.10	46.00	-9.90	AVG	
9	*	4.8975	39.99	9.74	49.73	56.00	-6.27	QP	
10		4.8975	23.99	9.74	33.73	46.00	-12.27	AVG	
11		8.2500	34.79	9.81	44.60	60.00	-15.40	QP	
12		8.2500	21.86	9.81	31.67	50.00	-18.33	AVG	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-25000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

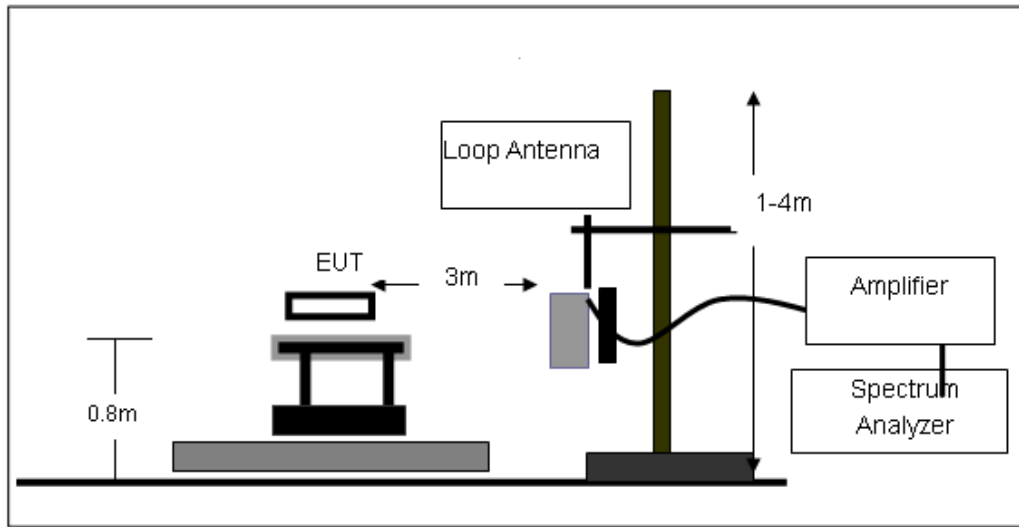

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

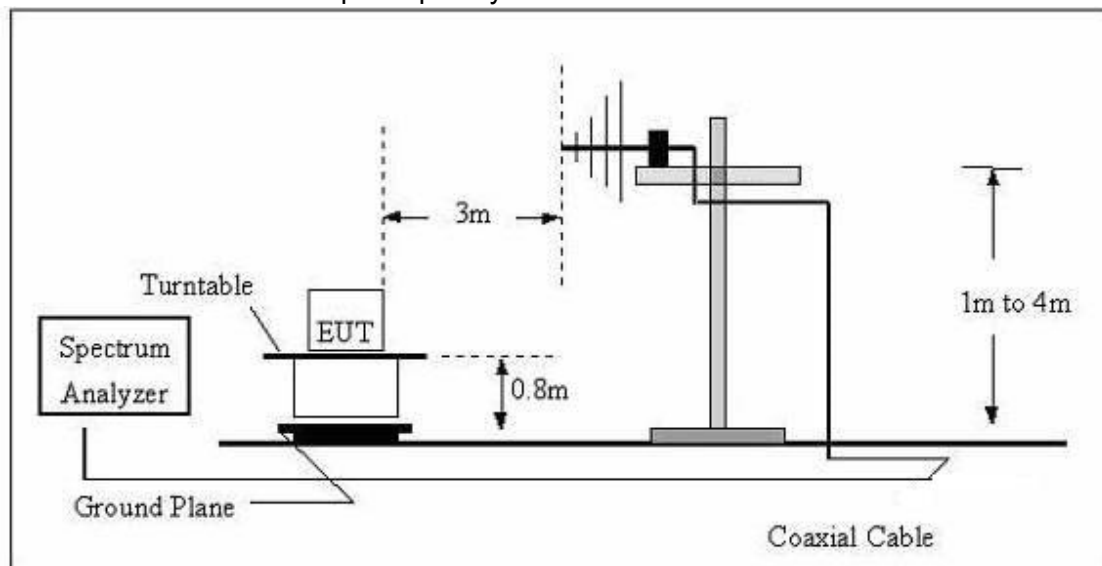

(C) Radiated Emission Test-Up Frequency Above 1GHz

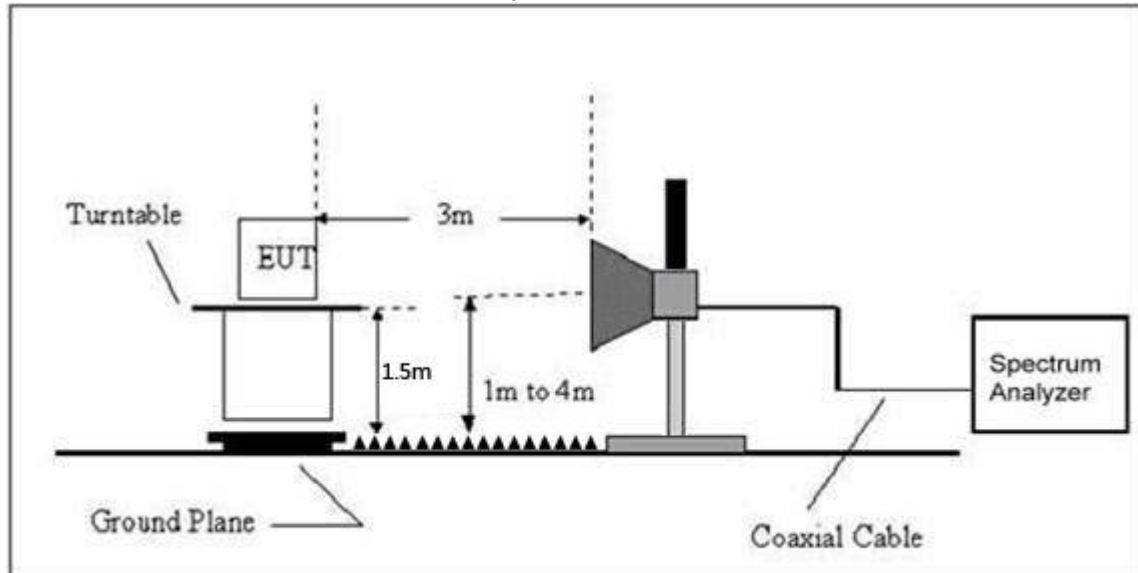

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60HZ
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60HZ		
Test Mode :	Mode 4		

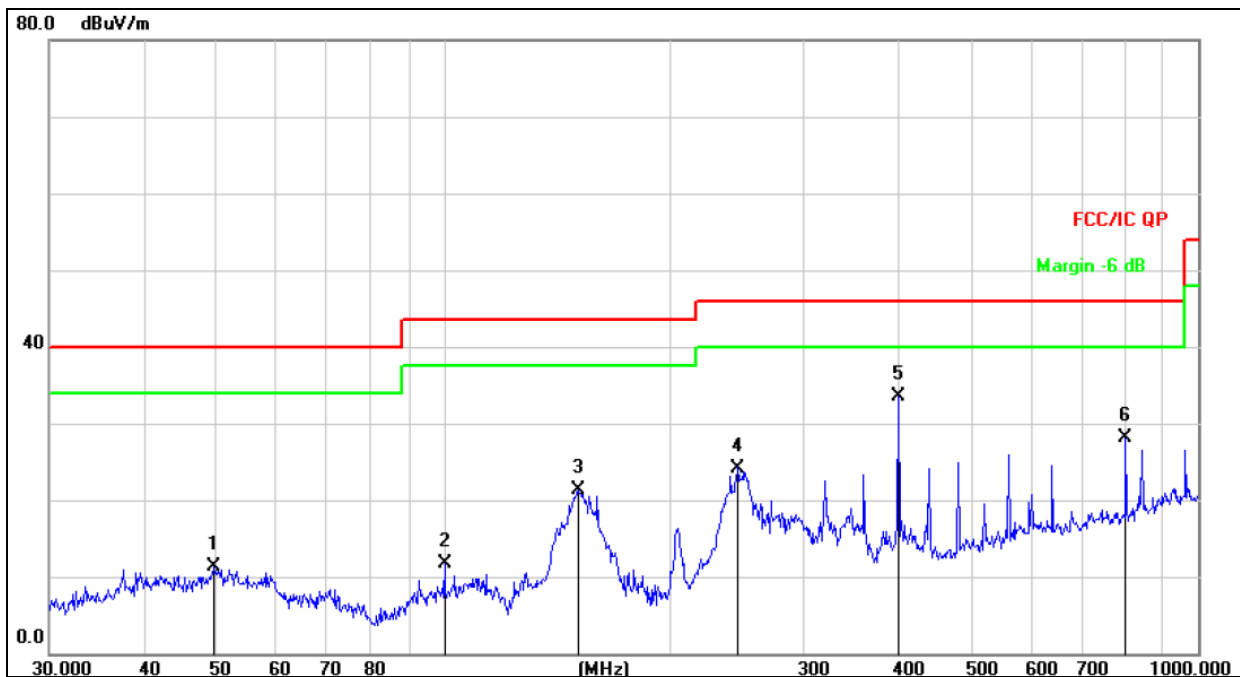


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	49.5328	25.23	-13.96	11.27	40.00	-28.73	QP
2	100.2286	27.27	-15.54	11.73	43.50	-31.77	QP
3	151.0666	40.29	-18.98	21.31	43.50	-22.19	QP
4	245.0900	39.51	-15.31	24.20	46.00	-21.80	QP
5 *	400.4319	45.51	-11.99	33.52	46.00	-12.48	QP
6	801.7863	32.91	-4.85	28.06	46.00	-17.94	QP



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60HZ		
Test Mode :	Mode 4		

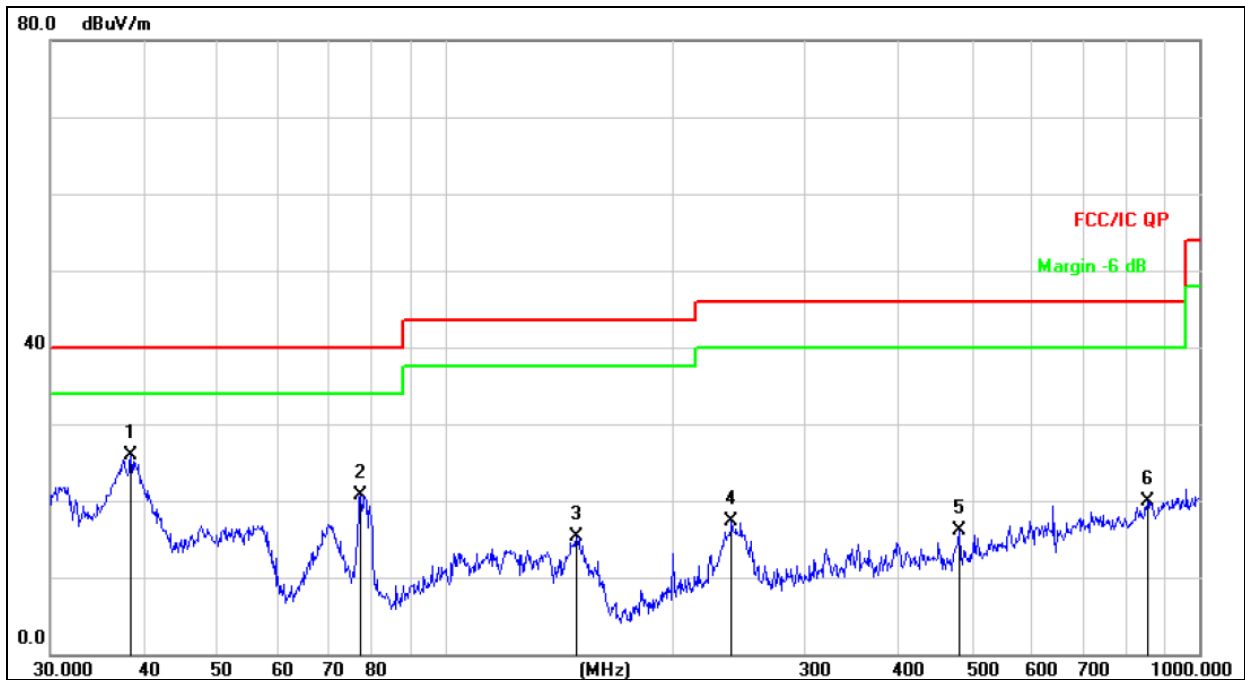

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	38.3462	41.15	-15.31	25.84	40.00	-14.16	QP
2		77.3212	39.68	-19.07	20.61	40.00	-19.39	QP
3		149.4857	34.35	-19.00	15.35	43.50	-28.15	QP
4		239.9874	32.83	-15.52	17.31	46.00	-28.69	QP
5		480.5276	26.31	-10.28	16.03	46.00	-29.97	QP
6		854.0247	23.47	-3.49	19.98	46.00	-26.02	QP



3.2.8 TEST RESULTS (1GHZ~25GHZ)

802.11b									
Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824.00	67.86	39.55	7.85	25.66	61.82	74.00	-12.18	PK
V	4824.00	51.72	39.55	7.85	25.66	45.68	54.00	-8.32	AV
V	7236.00	60.21	38.33	7.52	24.55	53.95	74.00	-20.05	PK
V	7236.00	46.45	38.33	7.52	24.55	40.19	54.00	-13.81	AV
V	15450.00	53.37	35.23	6.75	26.59	51.48	74.00	-22.52	PK
H	4824.00	64.80	39.55	7.85	25.66	58.76	74.00	-15.24	PK
H	4824.00	50.61	39.55	7.85	25.66	44.57	54.00	-9.43	AV
H	7236.00	64.01	38.33	7.52	23.55	56.75	74.00	-17.25	PK
H	7236.00	52.65	38.33	7.52	23.22	45.06	54.00	-8.94	AV
H	15450.00	50.30	35.45	6.75	27.88	49.48	74.00	-24.52	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2437									
V	4874.00	68.93	38.89	7.57	25.45	63.06	74.00	-10.94	PK
V	4874.00	51.97	38.89	7.57	25.45	46.10	54.00	-7.90	AV
V	7311.00	67.59	38.78	7.35	24.78	60.94	74.00	-13.06	PK
V	7311.00	46.27	38.78	7.35	24.78	39.62	54.00	-14.38	AV
V	15450.00	53.48	35.89	6.42	26.47	50.48	74.00	-23.52	PK
H	4874.00	66.00	38.89	7.57	25.45	60.13	74.00	-13.87	PK
H	4874.00	51.27	38.89	7.57	25.45	45.40	54.00	-8.60	AV
H	7311.00	62.09	38.78	7.35	24.78	55.44	74.00	-18.56	PK
H	7311.00	50.18	38.78	7.35	24.78	43.53	54.00	-10.47	AV
H	15450.00	50.52	36.68	6.45	26.65	46.94	74.00	-27.06	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	4924.00	66.81	38.75	7.46	25.45	60.97	74.00	-13.03	PK
V	4924.00	50.06	38.75	7.46	25.45	44.22	54.00	-9.78	AV
V	7386.00	68.76	38.65	7.22	24.78	62.11	74.00	-11.89	PK
V	7386.00	50.20	38.65	7.22	24.78	43.55	54.00	-10.45	AV
V	15450.00	55.04	35.58	6.35	26.47	52.28	74.00	-21.72	PK
H	4924.00	64.50	38.75	7.46	25.45	58.66	74.00	-15.34	PK
H	4924.00	48.42	38.75	7.46	25.45	42.58	54.00	-11.42	AV
H	7386.00	57.43	38.65	7.22	24.78	50.78	74.00	-23.22	PK
H	7386.00	48.18	38.65	7.22	24.78	41.53	54.00	-12.47	AV
H	15450.00	52.21	36.42	6.32	26.65	48.76	74.00	-25.24	PK

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g									
Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824.00	64.83	39.55	7.85	25.66	58.79	74.00	-13.74	PK
V	4824.00	51.13	39.55	7.85	25.66	45.09	54.00	-10.29	AV
V	7236.00	59.42	38.33	7.52	24.55	53.16	74.00	-19.55	PK
V	7236.00	47.07	38.33	7.52	24.55	40.81	54.00	-12.19	AV
V	15450.00	50.33	35.23	6.75	26.59	48.44	74.00	-26.55	PK
H	4824.00	67.47	39.55	7.85	25.66	61.43	74.00	-14.13	PK
H	4824.00	50.74	39.55	7.85	25.66	44.70	54.00	-8.29	AV
H	7236.00	53.10	38.33	7.52	23.55	45.84	74.00	-28.71	PK
H	7236.00	51.87	38.33	7.52	23.22	44.28	54.00	-10.68	AV
H	15450.00	50.23	35.45	6.75	27.88	49.41	74.00	-23.64	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2437									
V	4874.00	69.70	38.89	7.57	25.45	63.83	74.00	-10.17	PK
V	4874.00	49.17	38.89	7.57	25.45	43.30	54.00	-10.70	AV
V	7311.00	58.70	38.78	7.35	24.78	52.05	74.00	-21.95	PK
V	7311.00	48.94	38.78	7.35	24.78	42.29	54.00	-11.71	AV
V	15450.00	51.37	35.89	6.42	26.47	48.37	74.00	-25.63	PK
H	4874.00	65.22	38.89	7.57	25.45	59.35	74.00	-14.65	PK
H	4874.00	51.47	38.89	7.57	25.45	45.60	54.00	-8.40	AV
H	7311.00	50.76	38.78	7.35	24.78	44.11	74.00	-29.89	PK
H	7311.00	50.39	38.78	7.35	24.78	43.74	54.00	-10.26	AV
H	15450.00	50.97	36.68	6.45	26.65	47.39	74.00	-26.61	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	4924.00	65.35	38.75	7.46	25.45	59.51	74.00	-14.49	PK
V	4924.00	55.37	38.75	7.46	25.45	49.53	54.00	-4.47	AV
V	7386.00	58.12	38.65	7.22	24.78	51.47	74.00	-22.53	PK
V	7386.00	49.38	38.65	7.22	24.78	42.73	54.00	-11.27	AV
V	15450.00	53.44	35.58	6.35	26.47	50.68	74.00	-23.32	PK
H	4924.00	63.21	38.75	7.46	25.45	57.37	74.00	-16.63	PK
H	4924.00	46.46	38.75	7.46	25.45	40.62	54.00	-13.38	AV
H	7386.00	57.18	38.65	7.22	24.78	50.53	74.00	-23.47	PK
H	7386.00	48.76	38.65	7.22	24.78	42.11	54.00	-11.89	AV
H	15450.00	50.16	36.42	6.32	26.65	46.71	74.00	-27.29	PK

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)									
Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824.00	64.85	39.55	7.85	25.66	58.81	74.00	-15.19	PK
V	4824.00	51.17	39.55	7.85	25.66	45.13	54.00	-8.87	AV
V	7236.00	53.58	38.33	7.52	24.55	47.32	74.00	-26.68	PK
V	7236.00	53.19	38.33	7.52	24.55	46.93	54.00	-7.07	AV
V	15450.00	51.66	35.23	6.75	26.59	49.77	74.00	-24.23	PK
H	4824.00	66.93	39.55	7.85	25.66	60.89	74.00	-13.11	PK
H	4824.00	48.31	39.55	7.85	25.66	42.27	54.00	-11.73	AV
H	7236.00	60.73	38.33	7.52	23.55	53.47	74.00	-20.53	PK
H	7236.00	53.62	38.33	7.52	23.22	46.03	54.00	-7.97	AV
H	15450.00	50.85	35.45	6.75	27.88	50.03	74.00	-23.97	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2437									
V	4874.00	66.55	38.89	7.57	25.45	60.68	74.00	-13.32	PK
V	4874.00	53.14	46.71	7.57	25.45	47.27	54.00	-6.73	AV
V	7311.00	60.95	38.78	7.35	24.78	54.30	74.00	-19.70	PK
V	7311.00	48.05	38.78	7.35	24.78	41.40	54.00	-12.60	AV
V	15450.00	52.38	35.89	6.42	26.47	49.38	74.00	-24.62	PK
H	4874.00	62.33	38.89	7.57	25.45	56.46	74.00	-17.54	PK
H	4874.00	48.95	38.89	7.57	25.45	43.08	54.00	-10.92	AV
H	7311.00	53.16	38.78	7.35	24.78	46.51	74.00	-27.49	PK
H	7311.00	50.17	38.78	7.35	24.78	43.52	54.00	-10.48	AV
H	15450.00	50.20	36.68	6.45	26.65	46.62	74.00	-27.38	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	4924.00	67.02	38.75	7.46	25.45	61.18	74.00	-12.82	PK
V	4924.00	55.68	38.75	7.46	25.45	49.84	54.00	-4.16	AV
V	7386.00	59.25	38.65	7.22	24.78	52.60	74.00	-21.40	PK
V	7386.00	48.63	38.65	7.22	24.78	41.98	54.00	-12.02	AV
V	15450.00	54.13	35.58	6.35	26.47	51.37	74.00	-22.63	PK
H	4924.00	63.77	38.75	7.46	25.45	57.93	74.00	-16.07	PK
H	4924.00	46.31	38.75	7.46	25.45	40.47	54.00	-13.53	AV
H	7386.00	57.20	38.65	7.22	24.78	50.55	74.00	-23.45	PK
H	7386.00	49.85	38.65	7.22	24.78	43.20	54.00	-10.80	AV
H	15450.00	51.35	36.42	6.32	26.65	47.90	74.00	-26.10	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

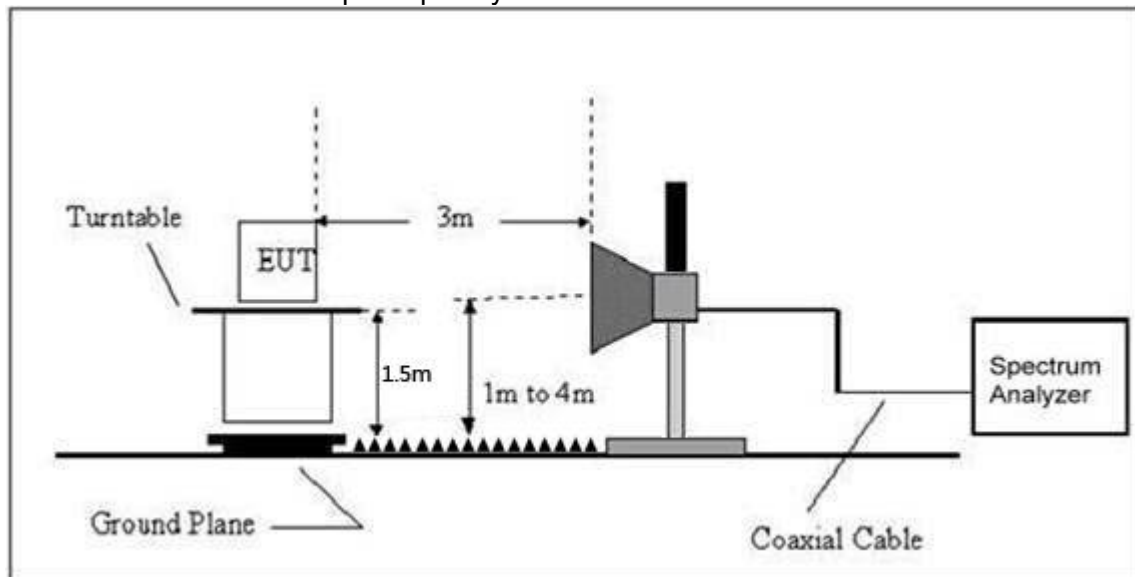

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	55.70	38.06	7.42	20.15	45.21	74.00	54.00	PASS
	H	2400.00	60.10	38.06	7.42	20.15	49.61	74.00	54.00	PASS
	V	2390.00	55.10	38.06	7.42	20.15	44.61	74.00	54.00	PASS
	V	2400.00	56.91	38.06	7.42	20.15	46.42	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	53.05	38.17	7.45	20.54	42.87	74.00	54.00	PASS
	H	2500.00	57.28	38.17	7.45	20.54	47.10	74.00	54.00	PASS
	V	2485.50	53.31	38.20	7.45	20.54	43.10	74.00	54.00	PASS
	V	2500.00	55.52	38.20	7.45	20.54	45.31	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	57.51	38.06	7.42	20.15	47.02	74.00	54.00	PASS
	H	2400.00	60.65	38.06	7.42	20.15	50.16	74.00	54.00	PASS
	V	2390.00	56.41	38.06	7.42	20.15	45.92	74.00	54.00	PASS
	V	2400.00	59.26	38.06	7.42	20.15	48.77	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	58.43	38.17	7.45	20.54	48.25	74.00	54.00	PASS
	H	2500.00	61.39	38.17	7.45	20.54	51.21	74.00	54.00	PASS
	V	2485.50	56.98	38.20	7.45	20.54	46.77	74.00	54.00	PASS
	V	2500.00	60.25	38.20	7.45	20.54	50.04	74.00	54.00	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	54.53	38.06	7.42	20.15	44.04	74.00	54.00	PASS
	H	2400.00	59.17	38.06	7.42	20.15	48.68	74.00	54.00	PASS
	V	2390.00	54.48	38.06	7.42	20.15	43.99	74.00	54.00	PASS
	V	2400.00	58.48	38.06	7.42	20.15	47.99	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	57.04	38.17	7.45	20.54	46.86	74.00	54.00	PASS
	H	2500.00	58.12	38.17	7.45	20.54	47.94	74.00	54.00	PASS
	V	2485.50	54.70	38.20	7.45	20.54	44.49	74.00	54.00	PASS
	V	2500.00	58.33	38.20	7.45	20.54	48.12	74.00	54.00	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

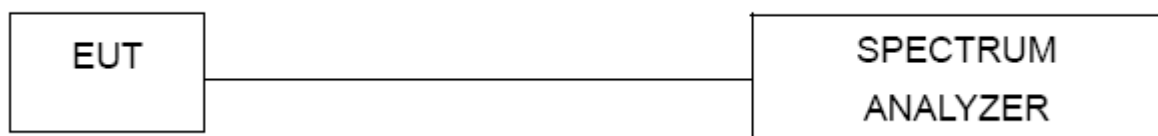

4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC 120V/60HZ
Test Mode :	TX b Mode		


Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-14.81	8	PASS
2437 MHz	-11.16	8	PASS
2462 MHz	-6.654	8	PASS

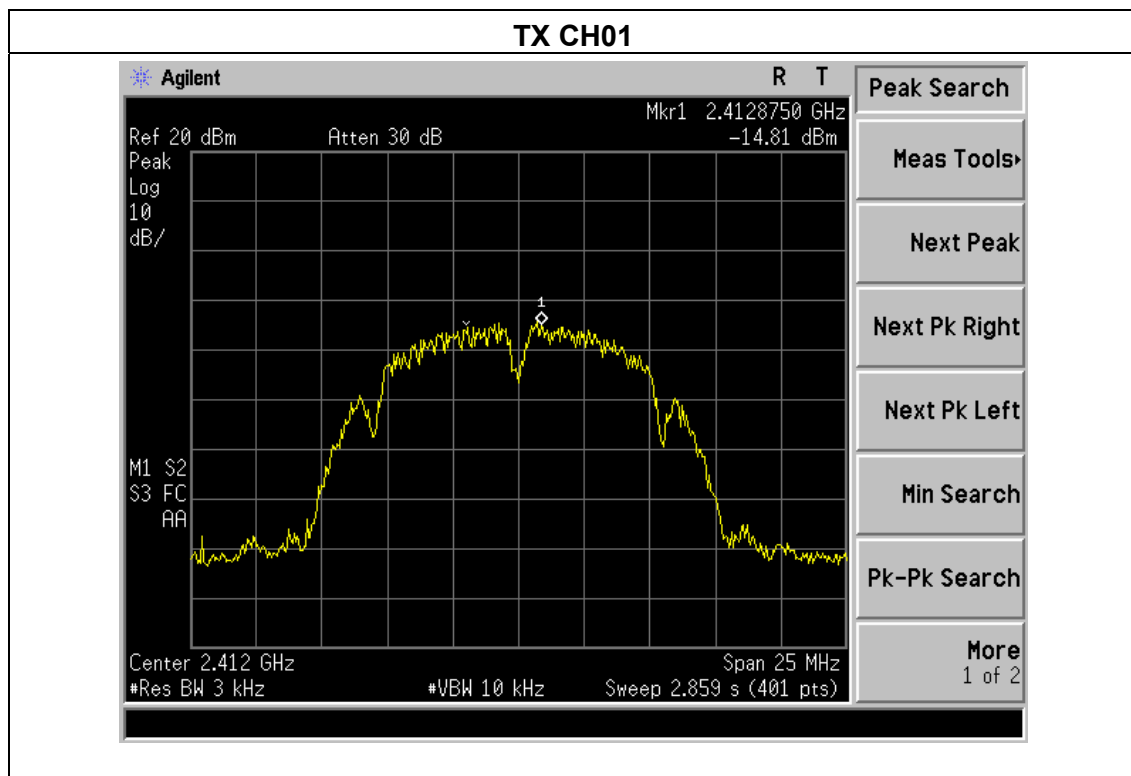

TX CH06

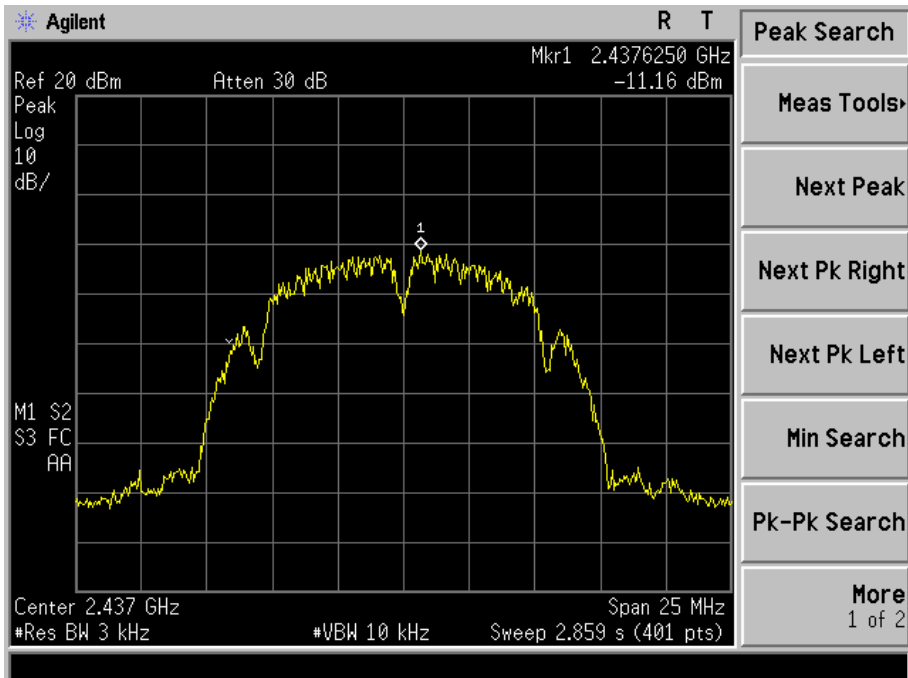


TX CH11


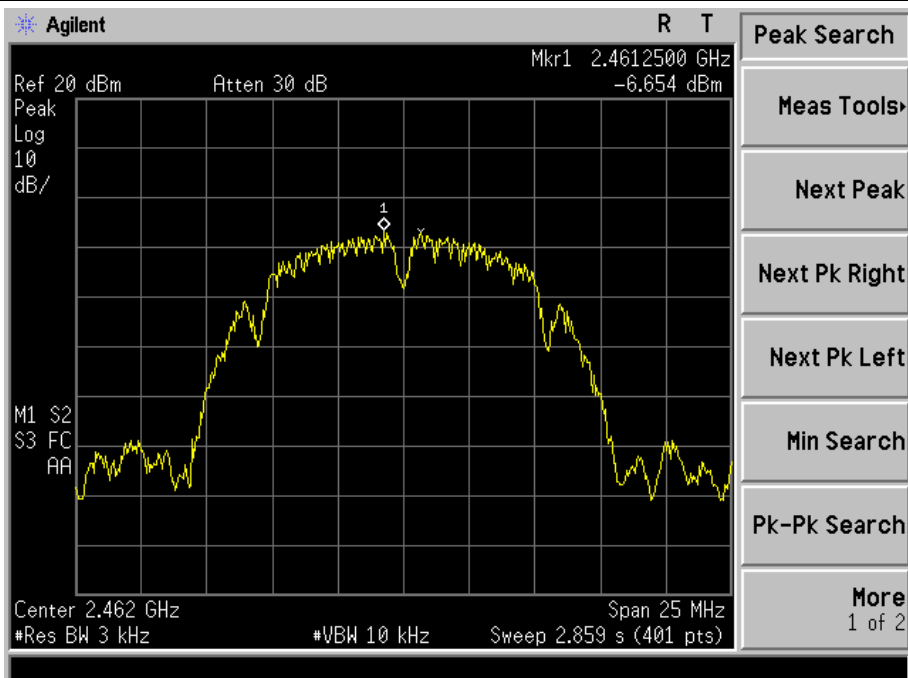




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC 120V/60HZ
Test Mode :	TX g Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-15.87	8	PASS
2437 MHz	-12.29	8	PASS
2462 MHz	-7.746	8	PASS

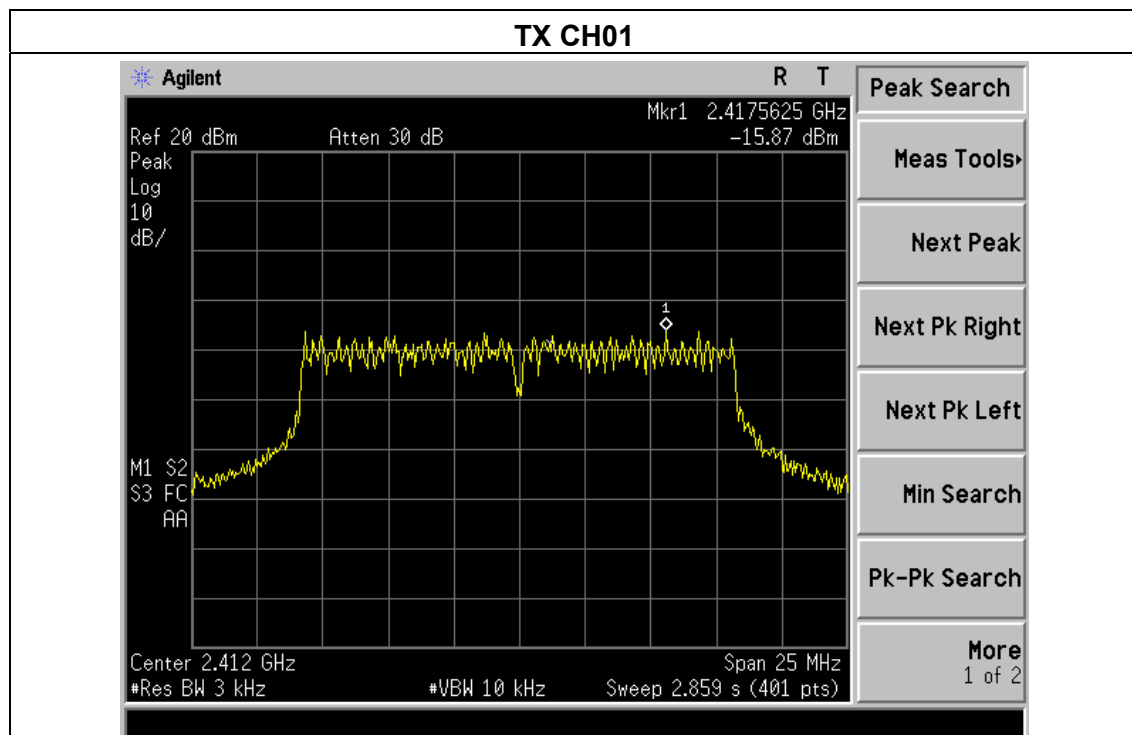


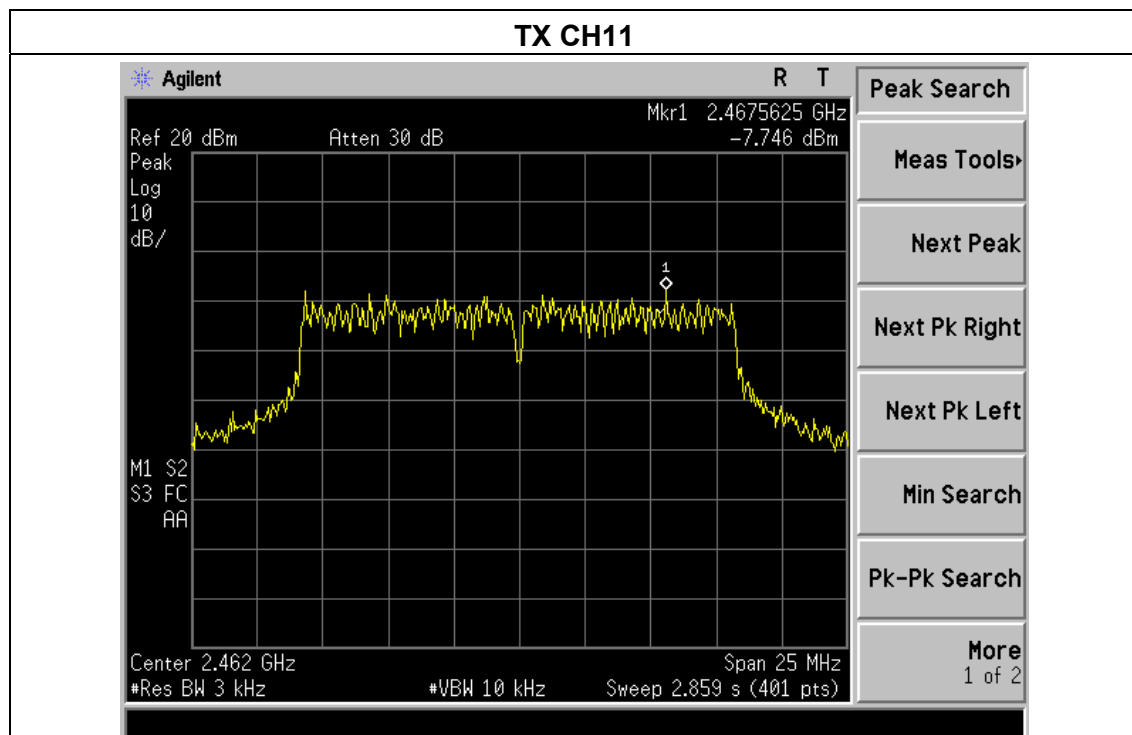
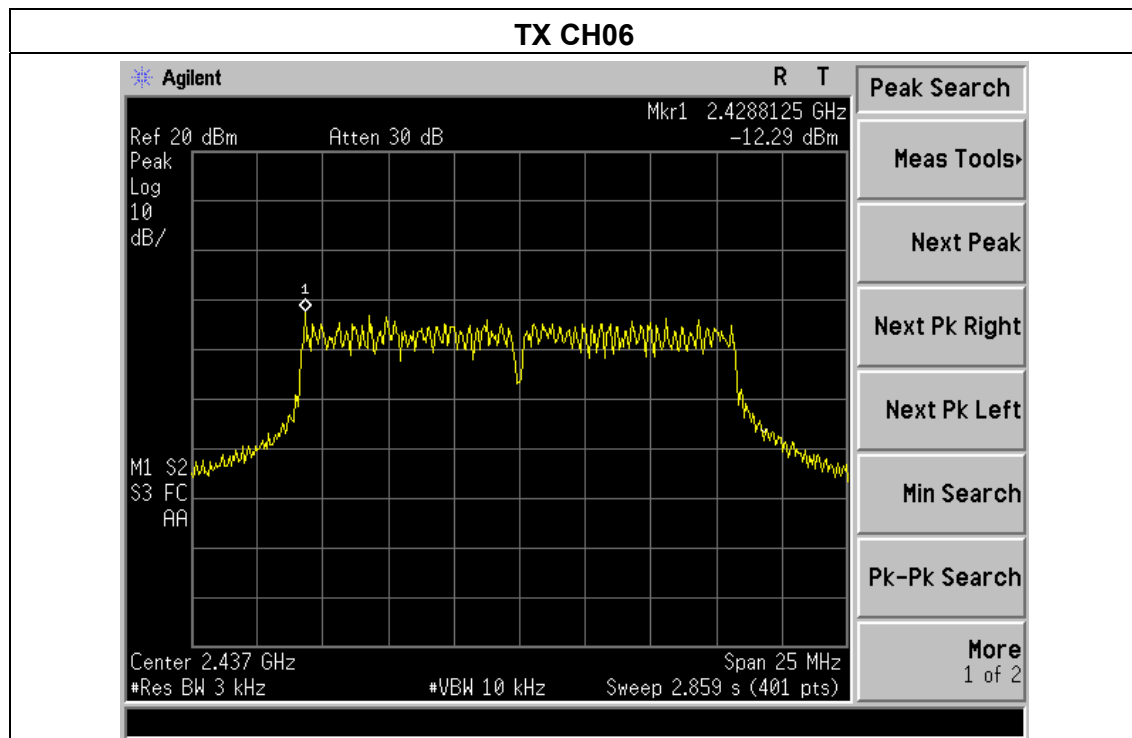




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC 120V/60HZ
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-16.49	8	PASS
2437 MHz	-13.75	8	PASS
2462 MHz	-9.37	8	PASS

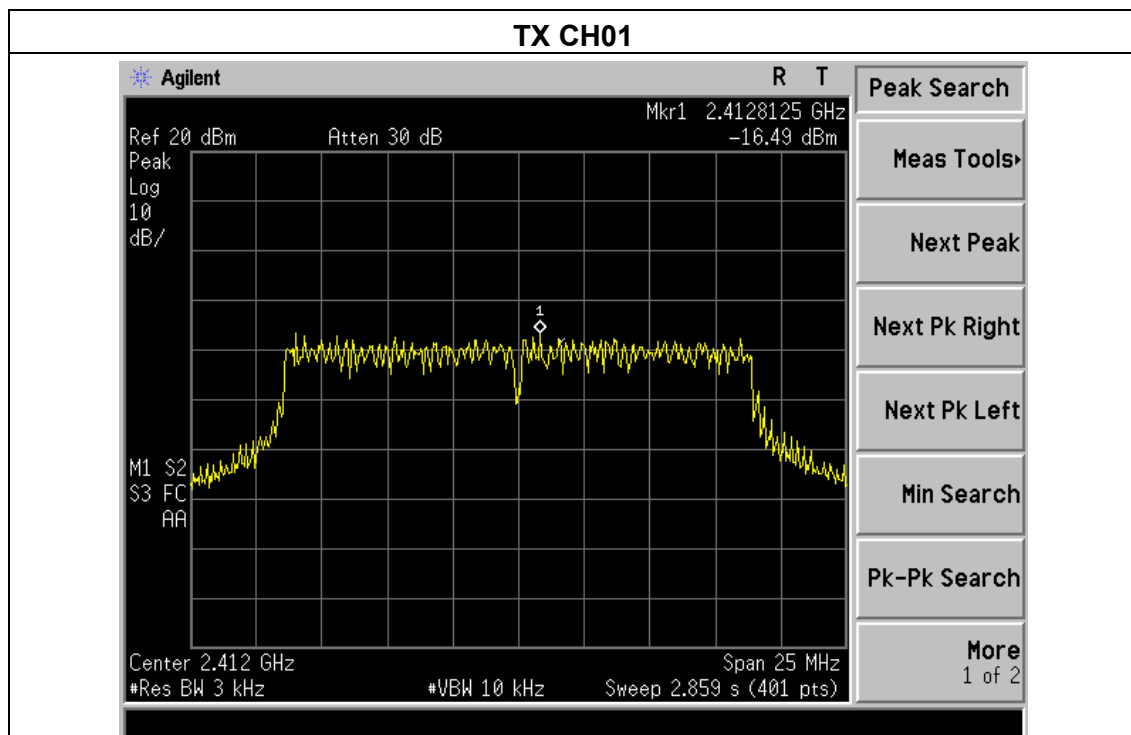

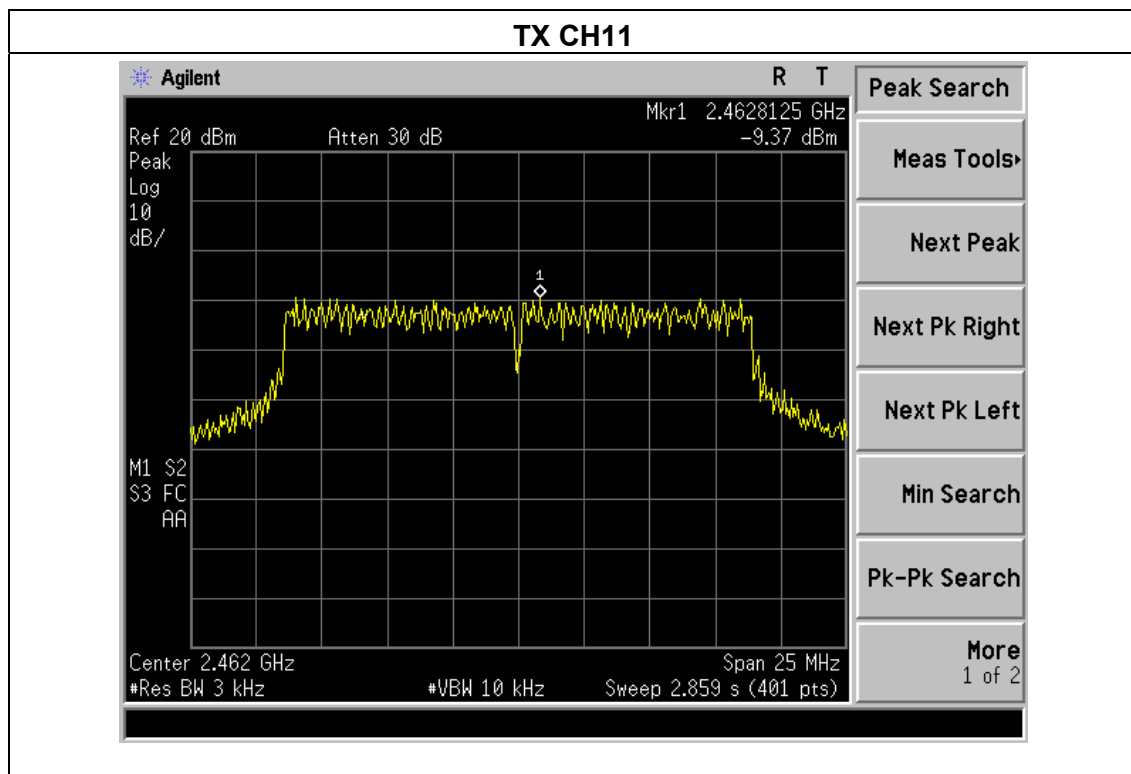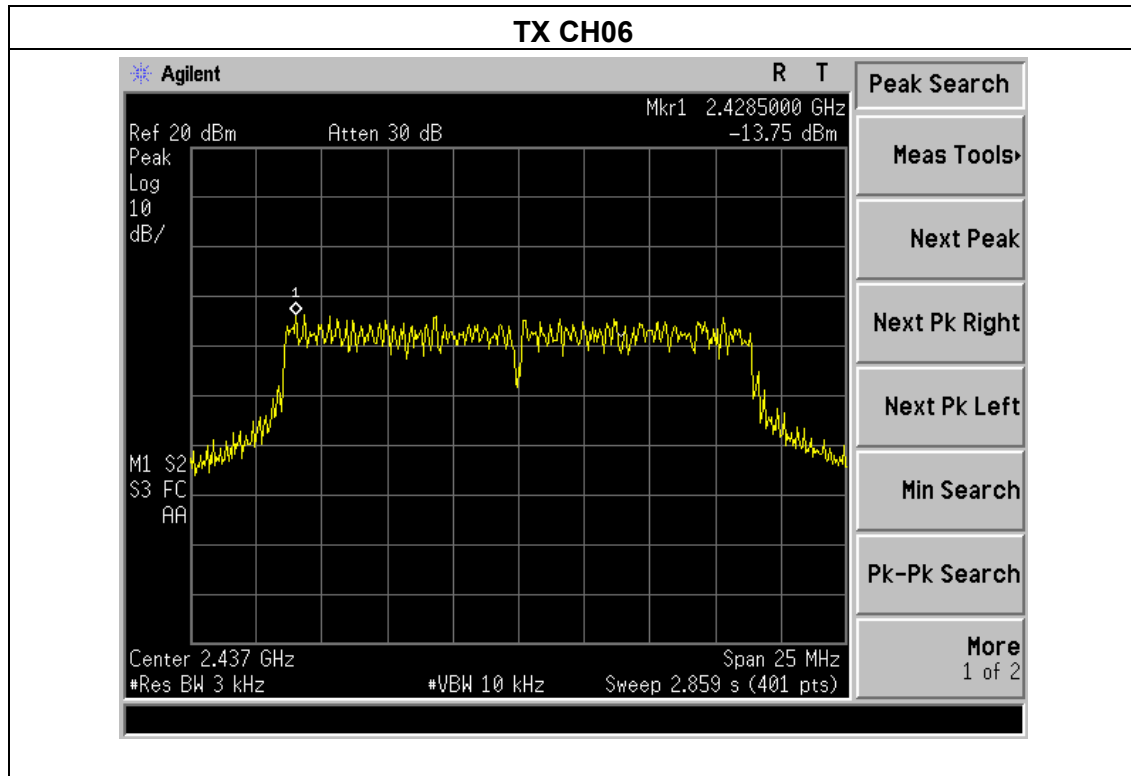



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

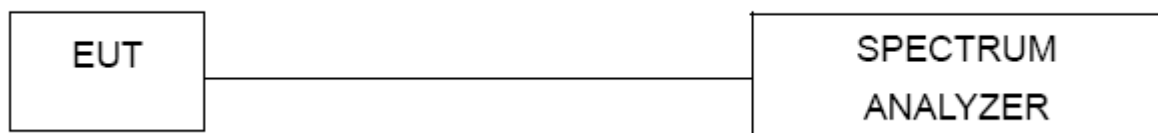

5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.5 TEST RESULTS


Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60HZ
Test Mode :	TX b Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	8.074	500	Pass
Middle	2437	8.586	500	Pass
High	2462	8.151	500	Pass

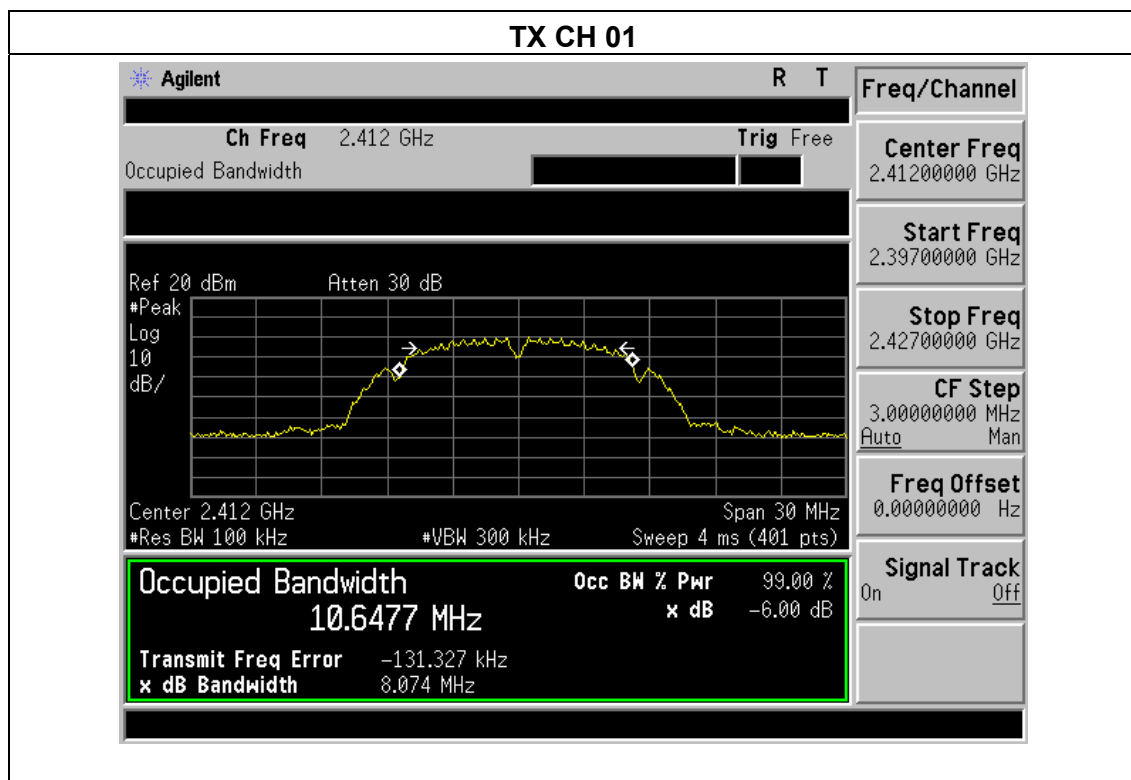




TX CH 06

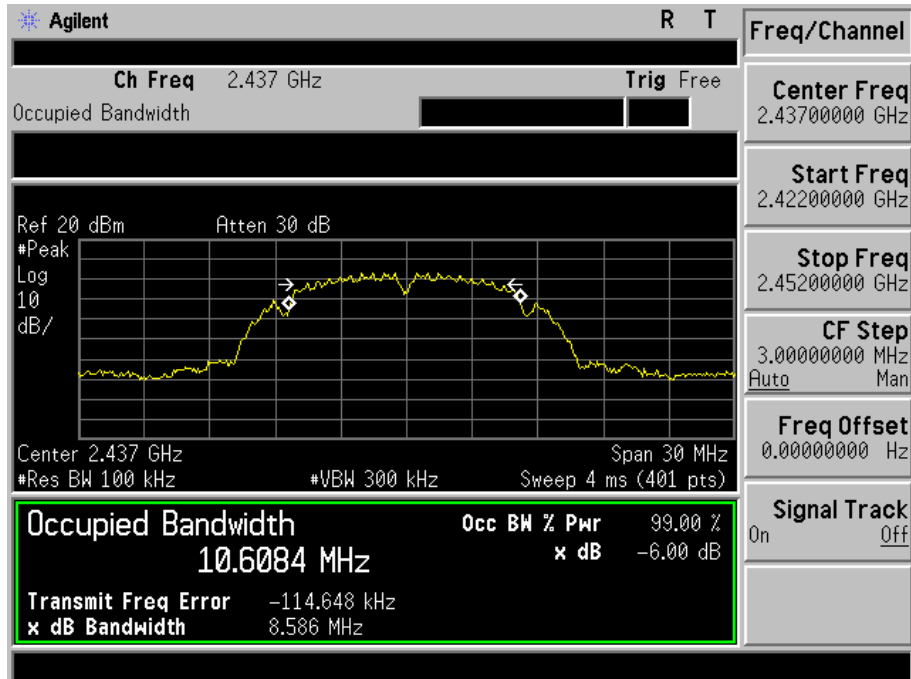


TX CH 11

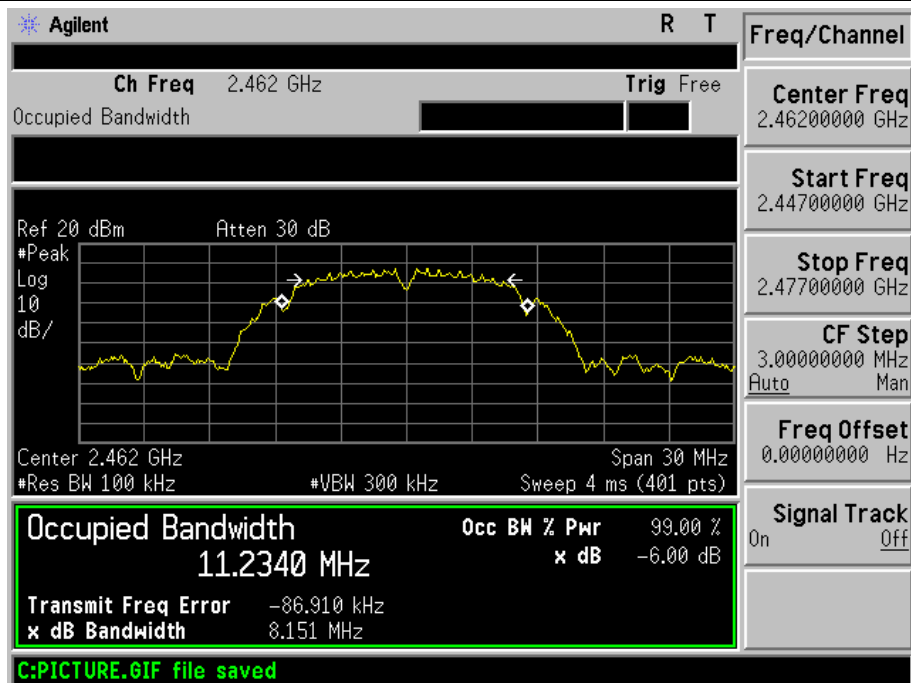




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60HZ
Test Mode :	TX g Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.387	500	Pass
Middle	2437	16.371	500	Pass
High	2462	16.374	500	Pass

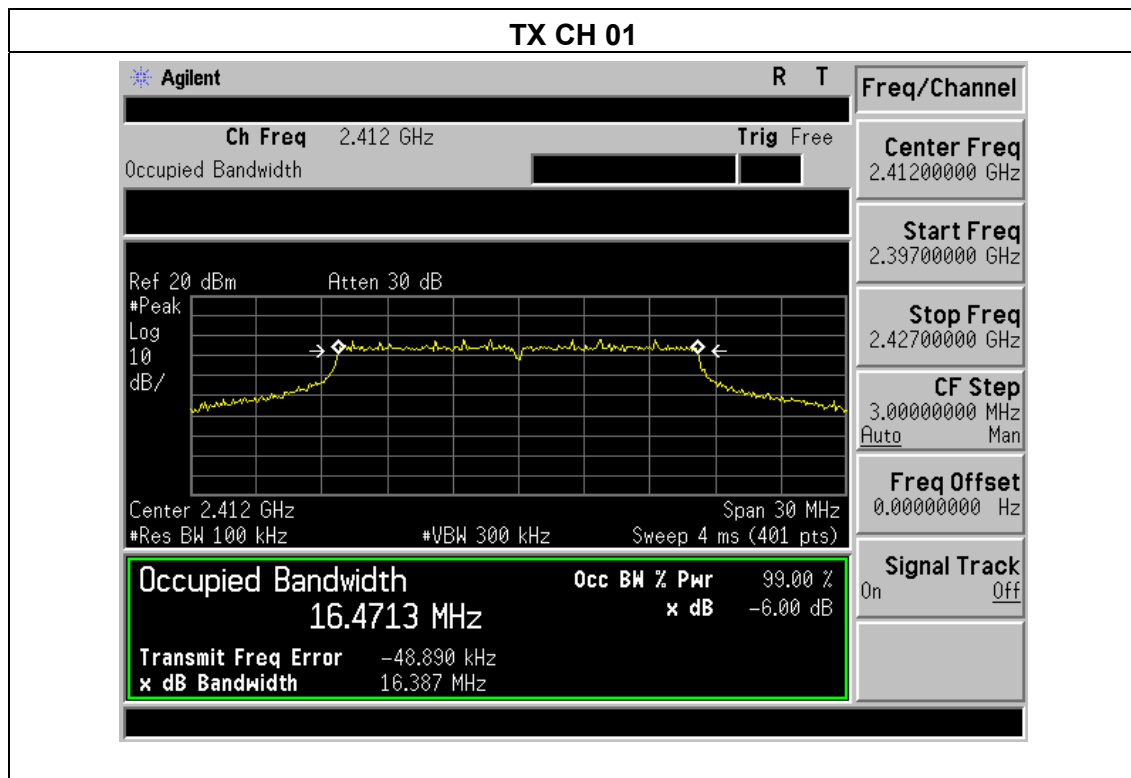




TX CH 06

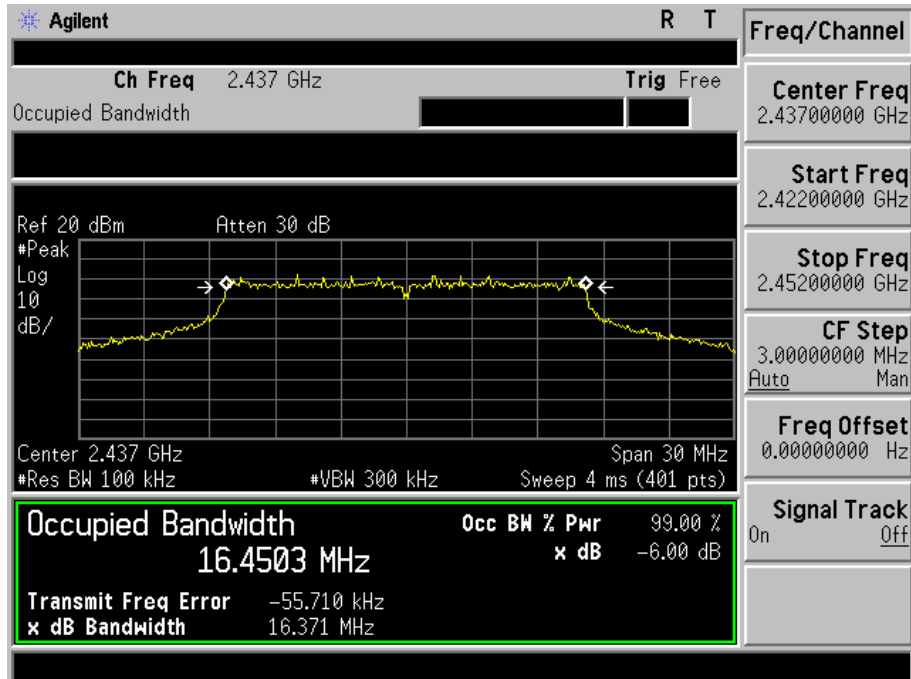


TX CH 11

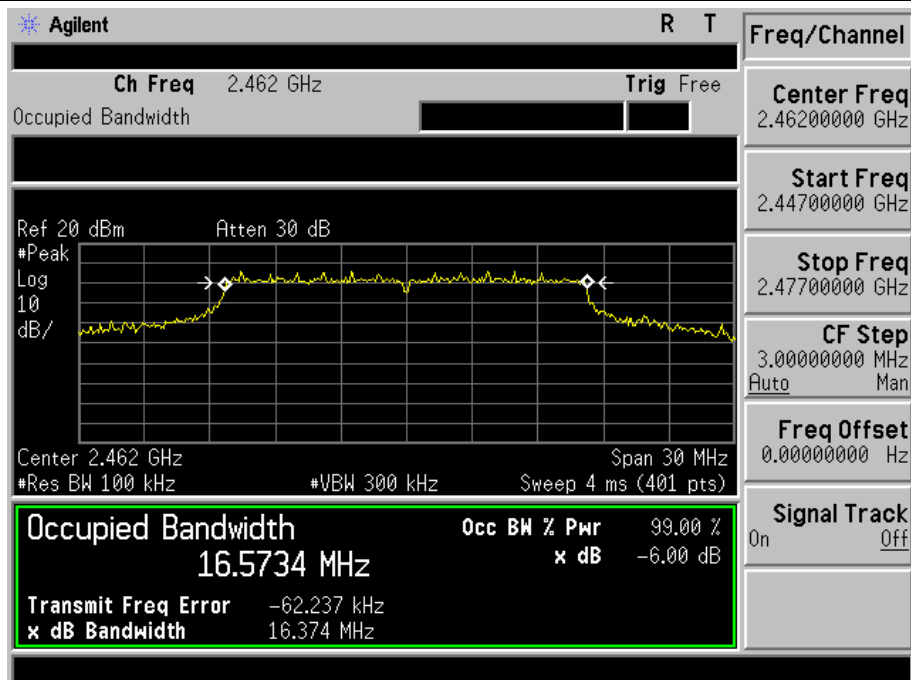




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60HZ
Test Mode :	TX n Mode(20M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.611	500	Pass
Middle	2437	17.57	500	Pass
High	2462	17.515	500	Pass

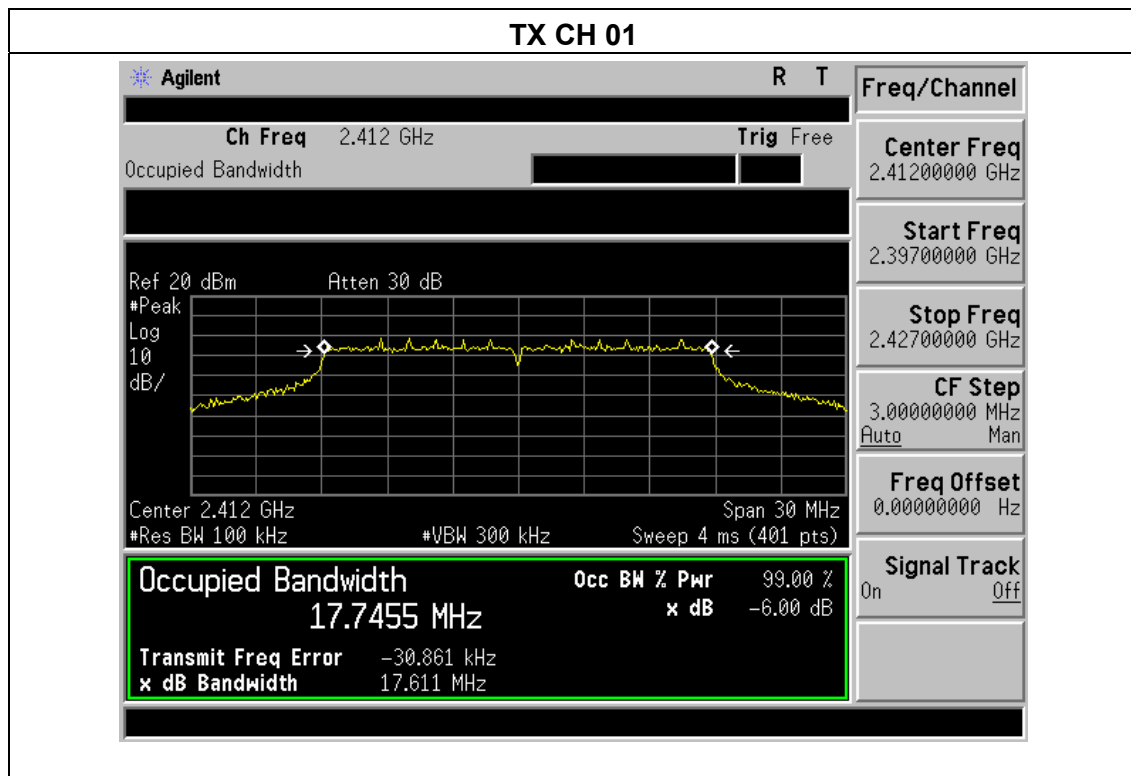




TX CH 06

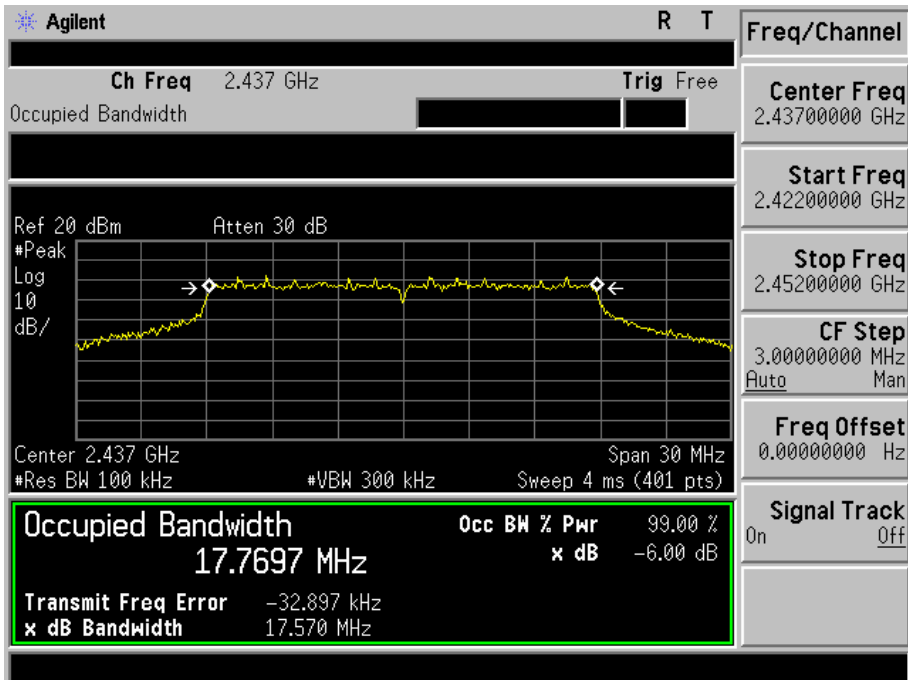

TX CH 11

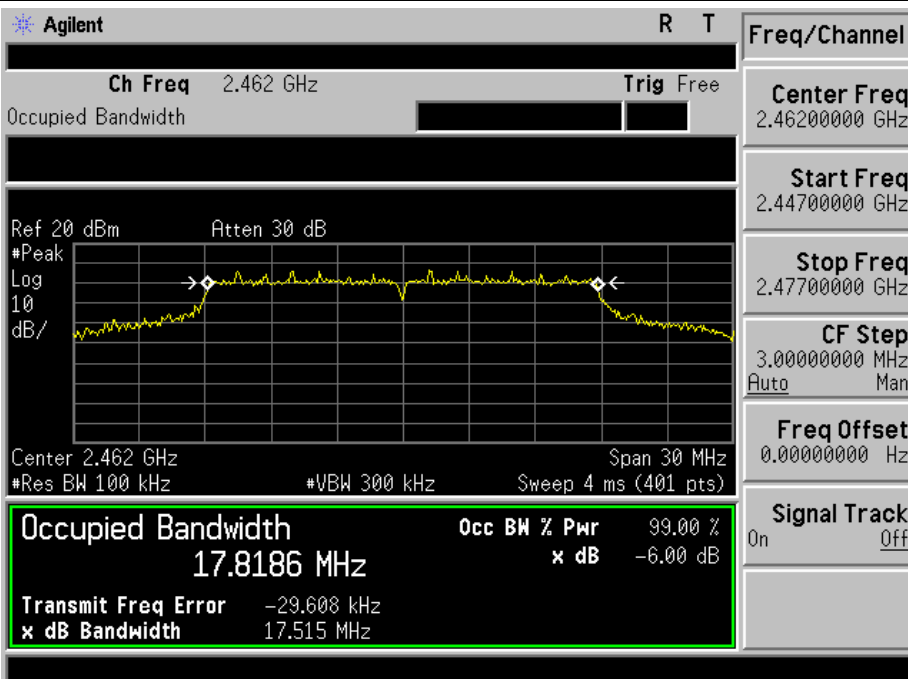



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60HZ

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	17.34	30
	2437	17.39	30
	2462	17.19	30
802.11g	2412	16.35	30
	2437	16.59	30
	2462	16.61	30
802.11n20	2412	15.43	30
	2437	15.62	30
	2462	15.51	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.2 TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.1 TEST RESULTS



802.11b: Band Edge, Left Side

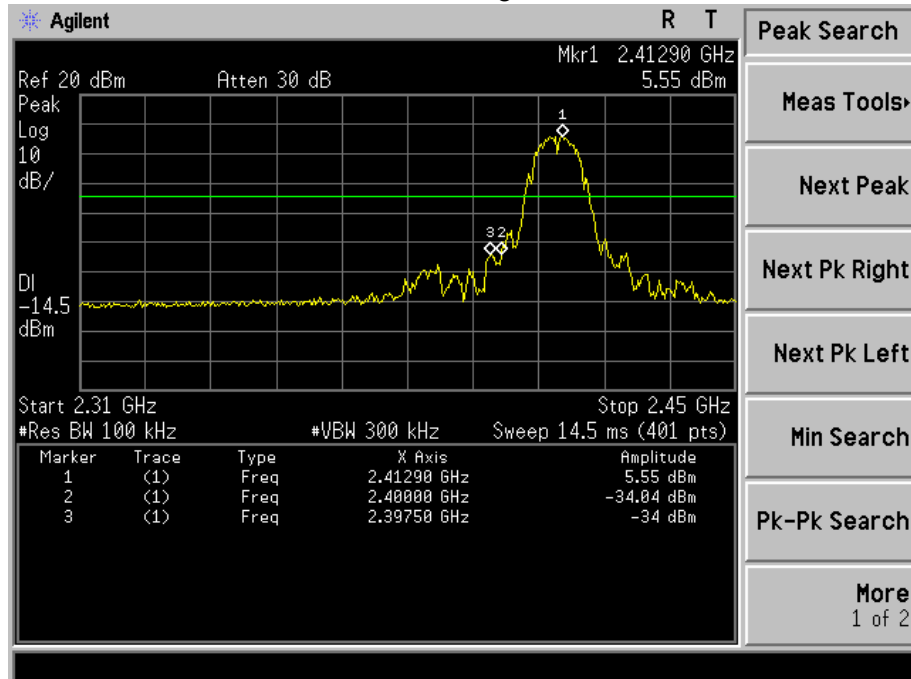


802.11b: Band Edge, Right Side

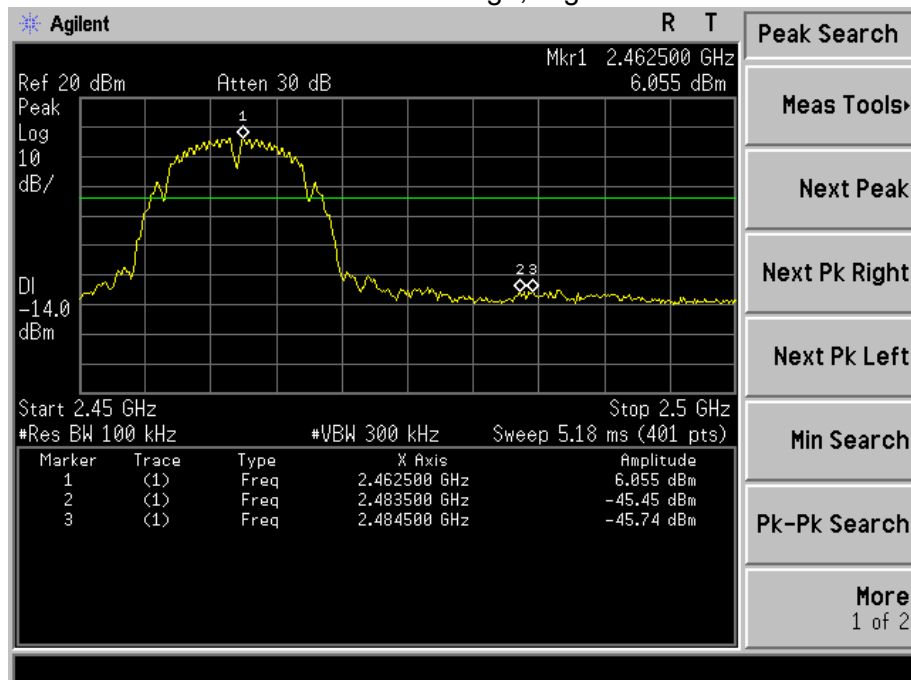




802.11g: Band Edge, Left Side

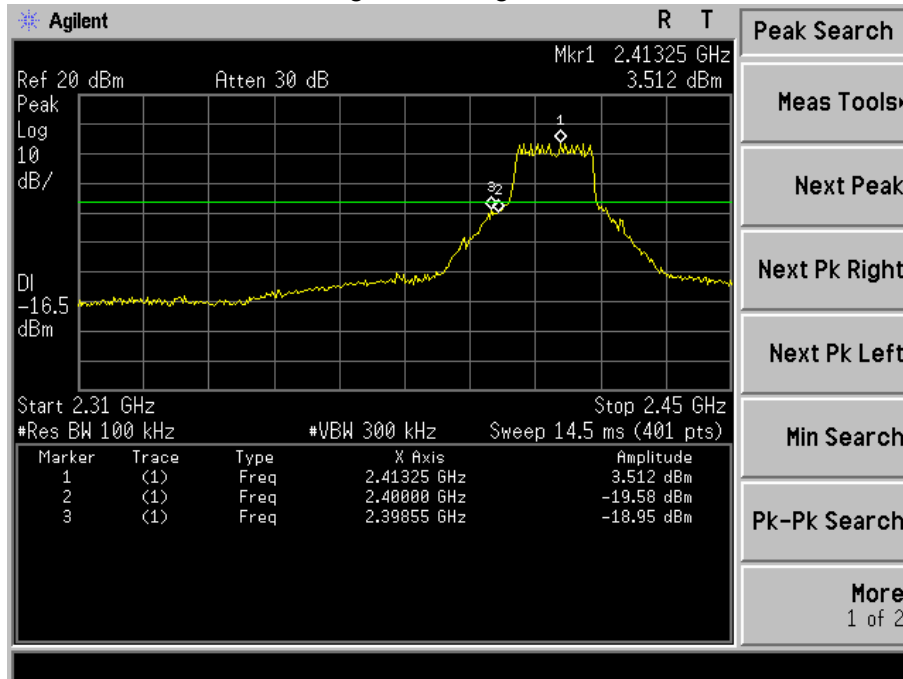


802.11g: Band Edge, Right Side

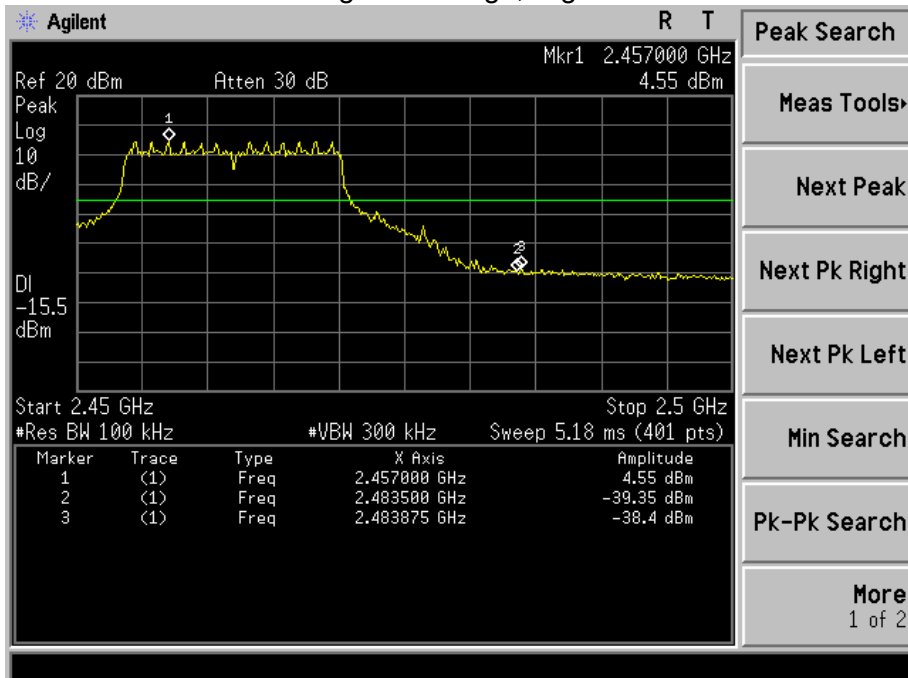




802.11n-HT20: Band Edge, Left Side

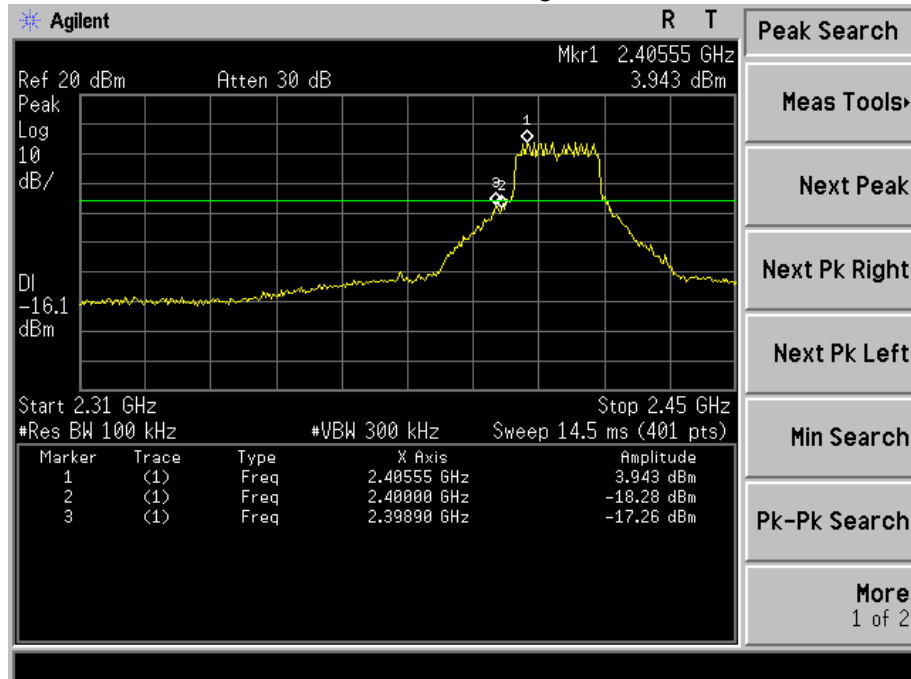



802.11n-HT20: Band Edge, Right Side

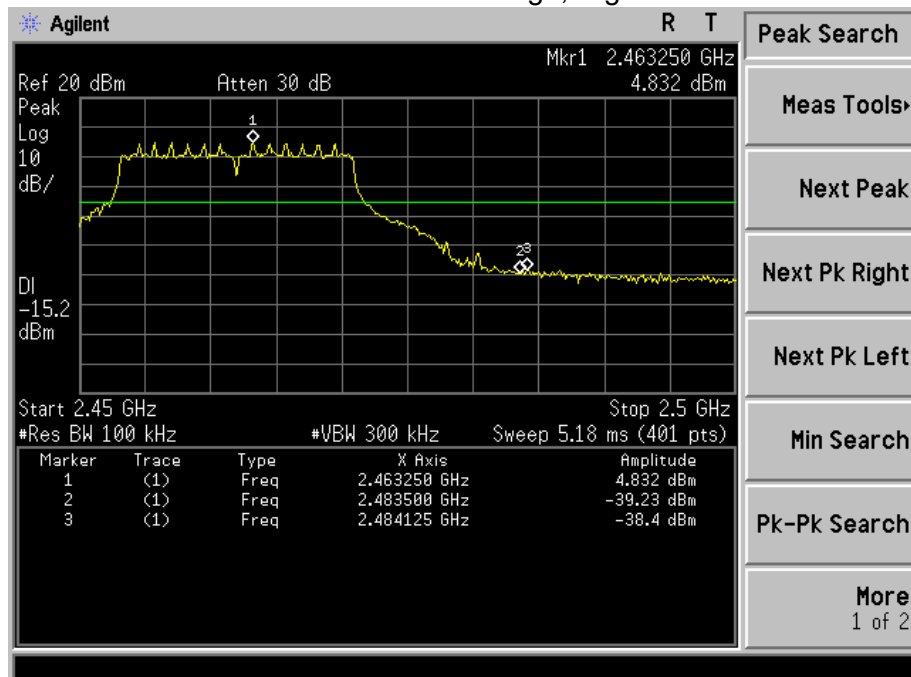





802.11b



Low Channel 2412MHz

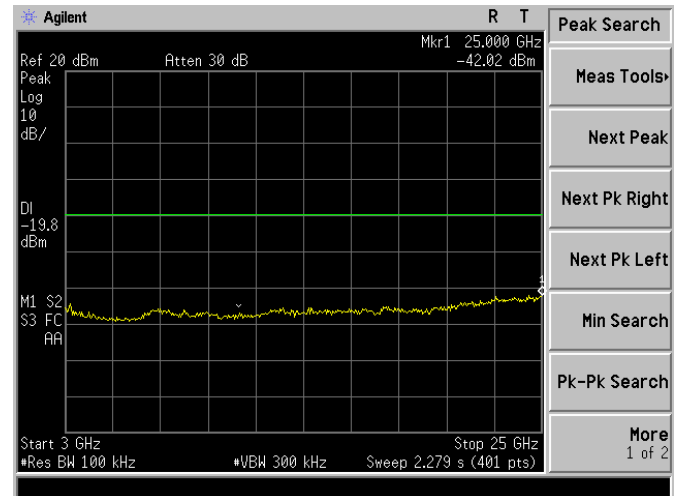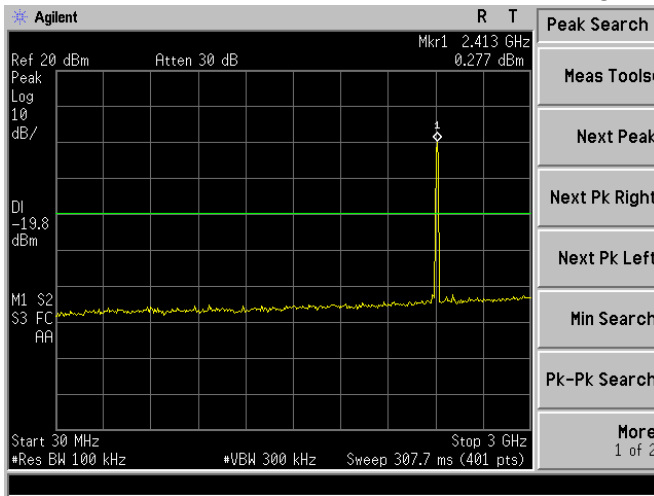

Middle Channel 2437MHz

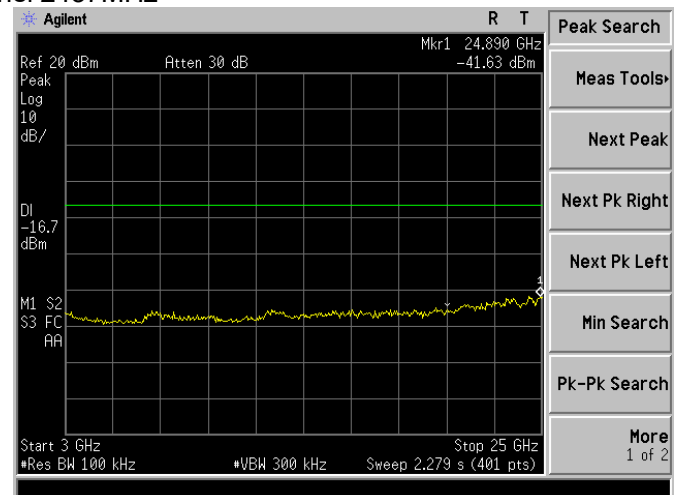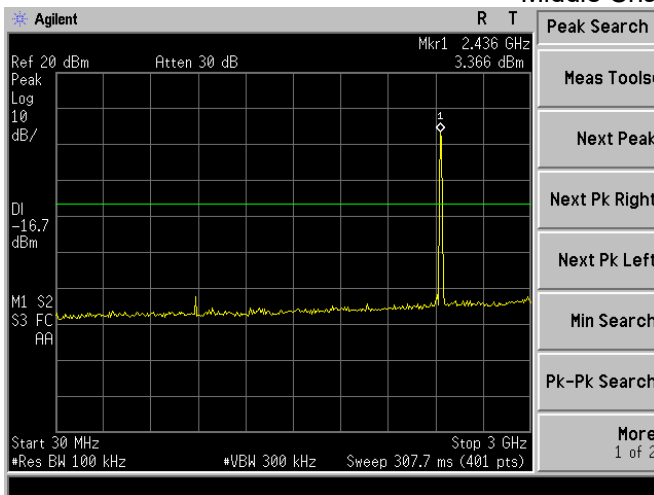



High Channel 2462MHz

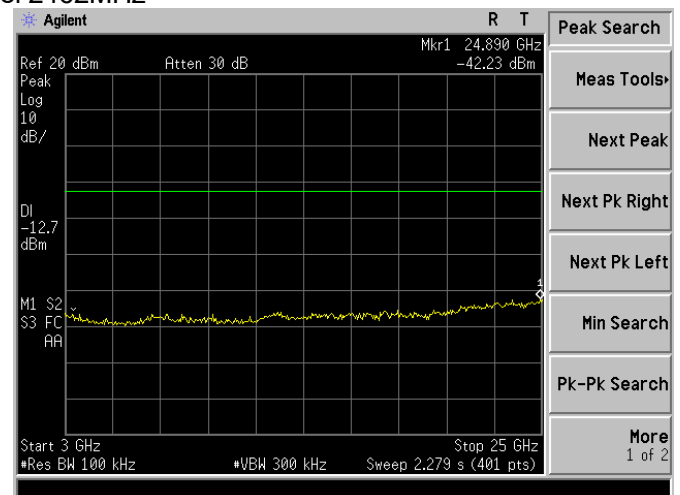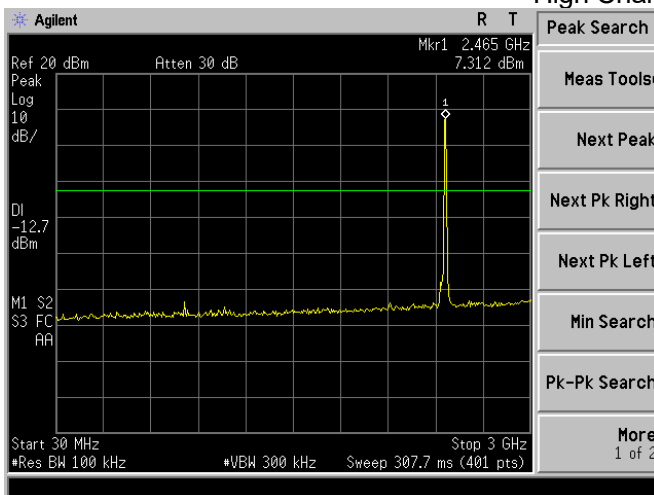





802.11g



Low Channel 2412MHz

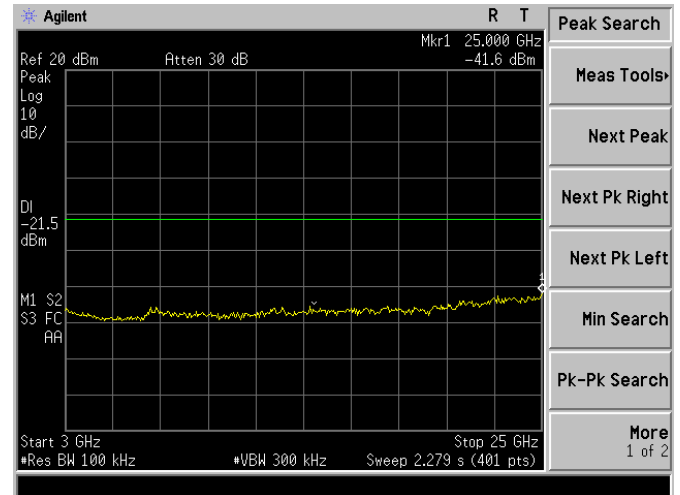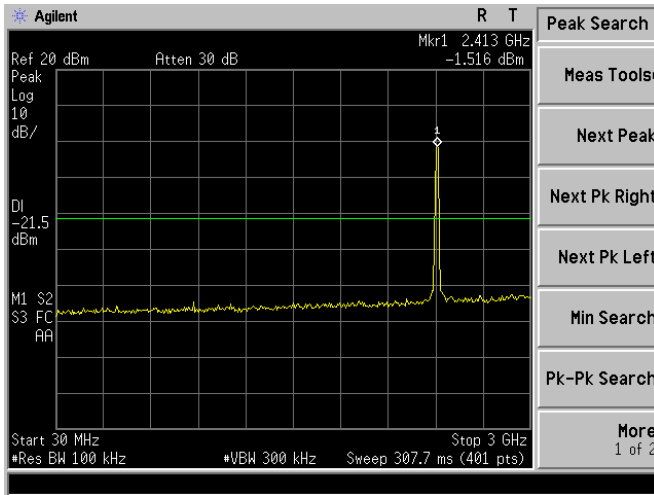

Middle Channel 2437MHz

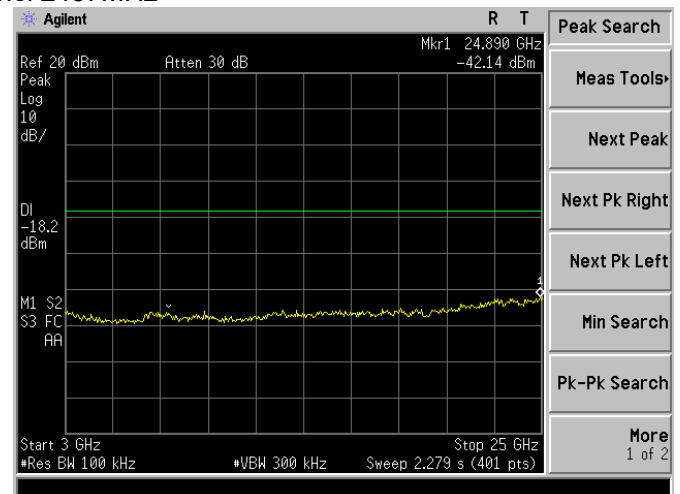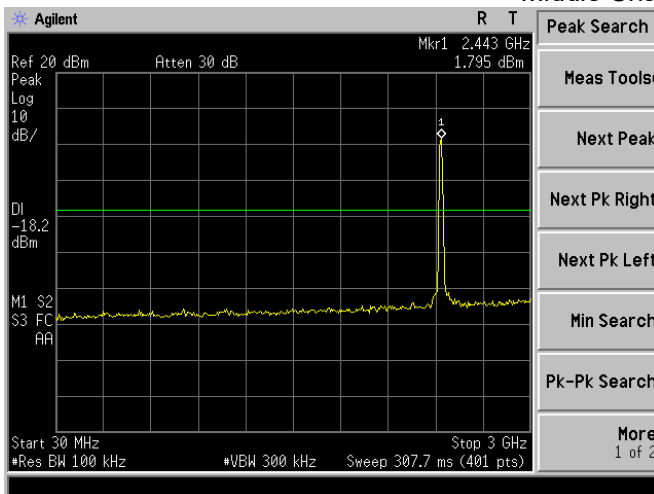



High Channel 2462MHz

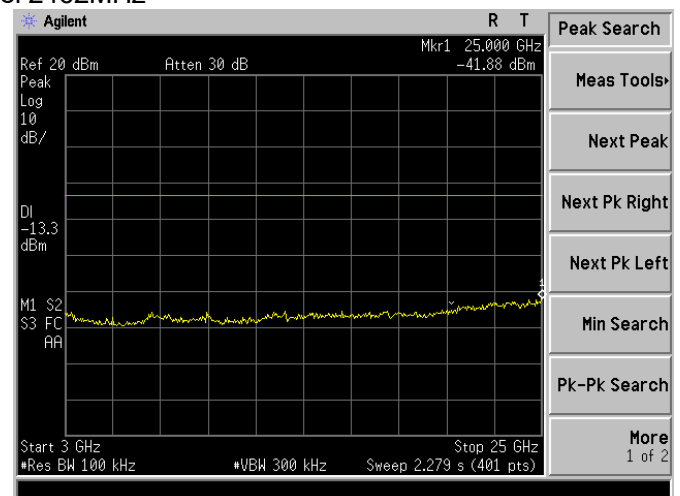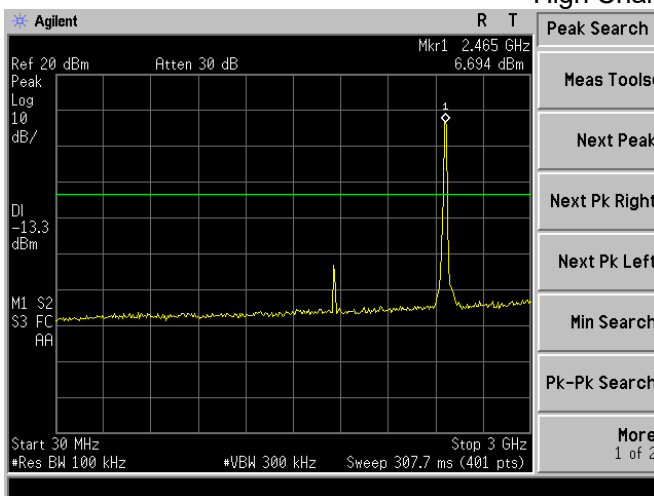





802.11n20



Low Channel 2412MHz

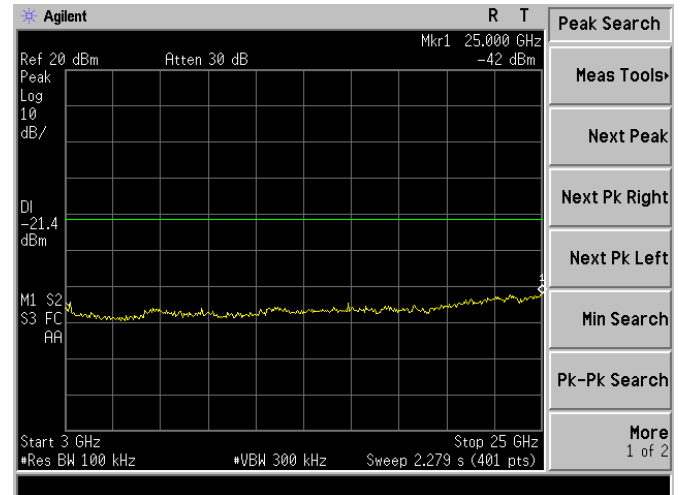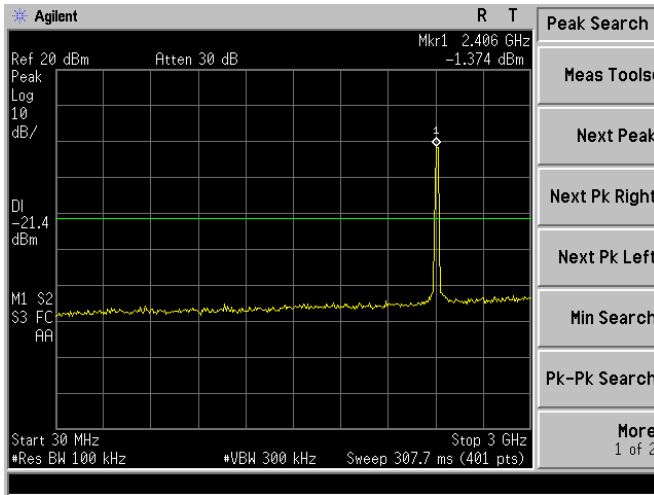

Middle Channel 2437MHz

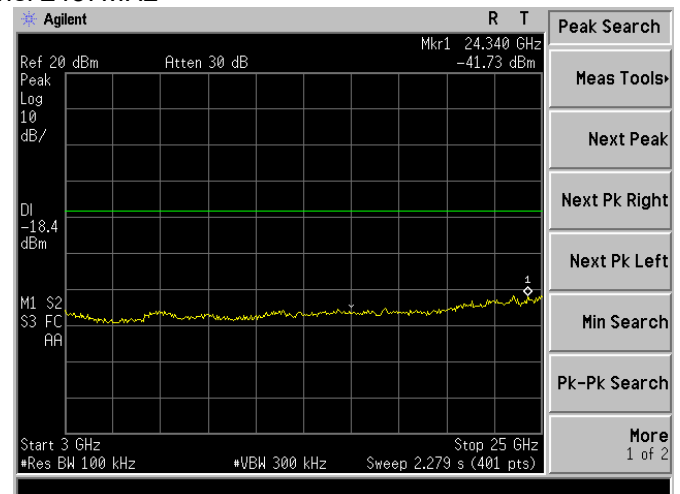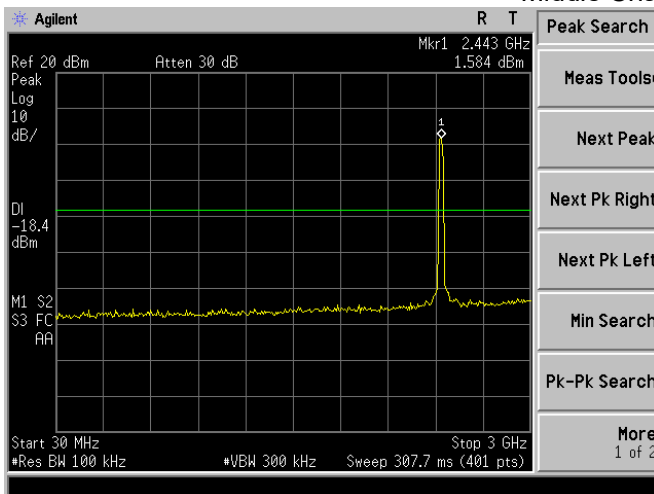

High Channel 2462MHz

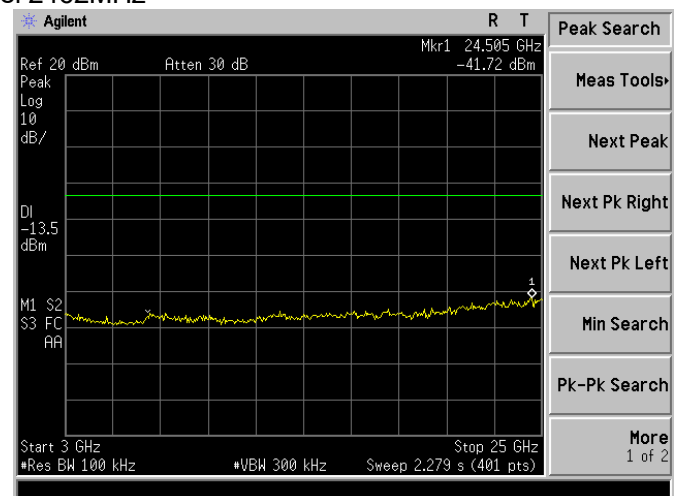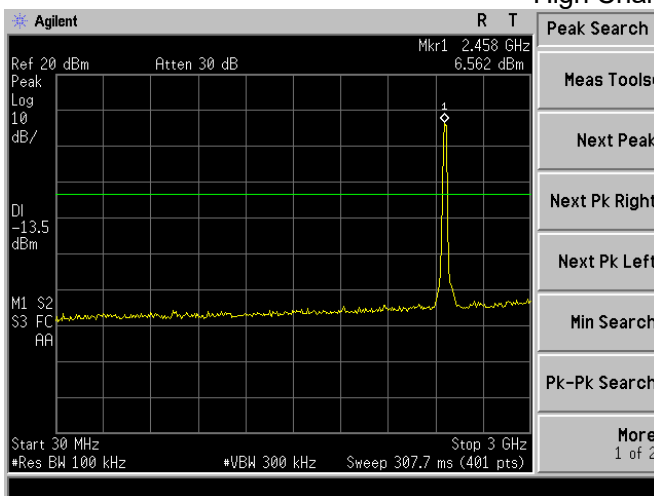



8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:

	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0

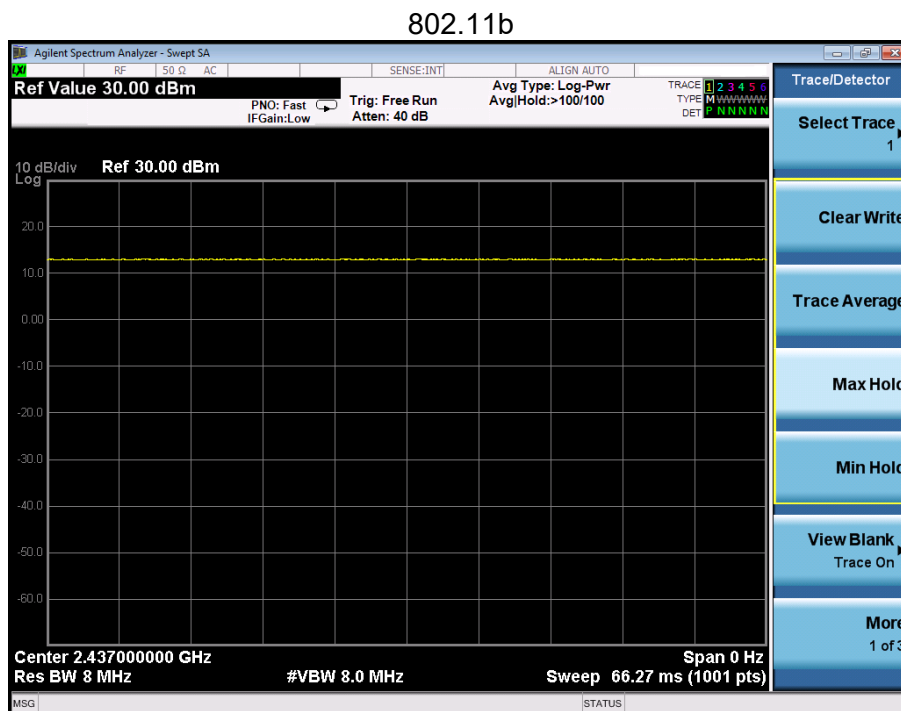



Agilent Spectrum Analyzer - Swept SA

RF 50 Ω AC SENSE:INT ALIGN AUTO

Ref Value 30.00 dBm

PNO: Fast IFGain:Low Trig: Free Run Atten: 40 dB

Avg Type: Log-Pwr Avg|Hold->100/100

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET P N N N N N N

10.0 dB/div
Log

Ref 30.00 dBm

Center 2.437000000 GHz
Res BW 8 MHz
#VBW 8.0 MHz
Sweep 66.27 ms (1001 pts)
Span 0 Hz

MSG STATUS

Trace/Detector
Select Trace 1
Clear Write
Trace Average
Max Hold
Min Hold
View Blank Trace On
More 1 of 3

Agilent Spectrum Analyzer - Swept SA

RF 50 Ω AC SENSE:INT ALIGN AUTO

Ref Value 30.00 dBm PNO: Fast IFGain:Low Trig: Free Run Avg|Hold->100/100

Avg Type: Log-Pwr TYPE 2 3 4 5 6 DET P NNNNN

10.0 dB/div Log Ref 30.00 dBm

Center 2.437000000 GHz Span 0 Hz

Res BW 8 MHz #VBW 8.0 MHz Sweep 66.27 ms (1001 pts)

MSG STATUS



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA


The EUT antenna is PCB Antenna, It comply with the standard requirement.

10. EUT TEST PHOTO

Conducted Measurement Photos




Radiated Measurement Photos

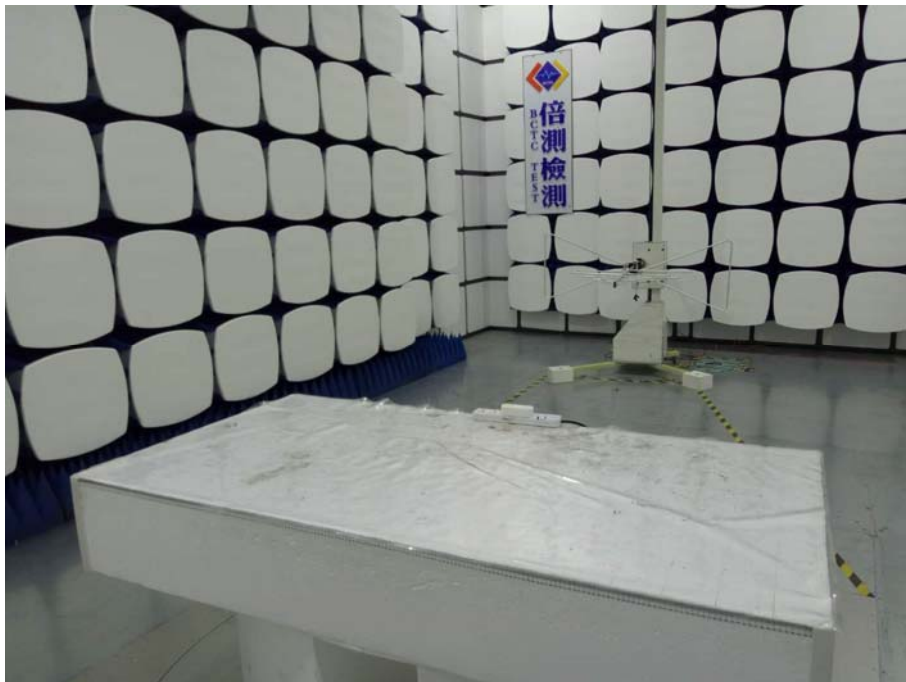



Radiated Measurement Photos

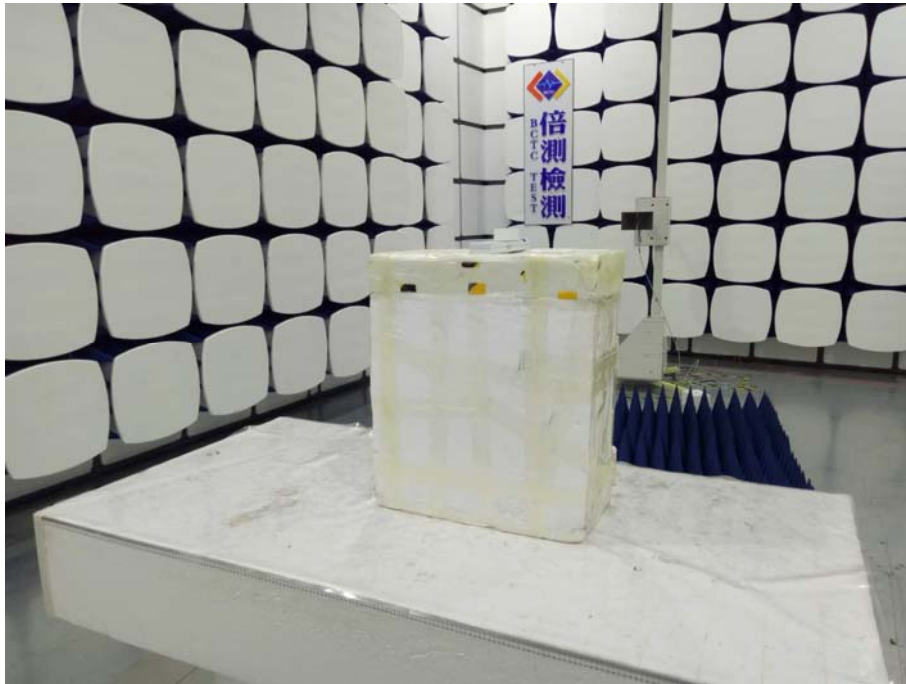

11. EUT PHOTO

EUT Photo 1



EUT Photo 2



***** END OF REPORT *****