



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15B MEASUREMENT AND TEST REPORT

For

Gouldin Technologies, LLC

2150 Chenault Dr., Carrollton, Texas, 75006 United States

FCC ID: 2AOQ7-W410

| | |
|---|---------------------------------|
| Report Type: Original Report | Product Type: TALKMAN |
| Test Engineer: CK Huang | <i>CK Huang</i> |
| Report Number: RXM190912050-00A | |
| Report Date: 2019-09-25 | |
| Reviewed By: Oscar Ye EMC Leader | <i>Oscar Ye</i> |
| Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....3
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
 OBJECTIVE3
 RELATED SUBMITTAL(S)/GRANT(S).....3
 TEST METHODOLOGY3
 TEST FACILITY3

SYSTEM TEST CONFIGURATION.....4
 JUSTIFICATION4
 EUT EXERCISE SOFTWARE4
 SPECIAL ACCESSORIES.....4
 EQUIPMENT MODIFICATIONS4
 SUPPORT EQUIPMENT LIST AND DETAILS4
 BLOCK DIAGRAM OF RADIATED TEST SETUP.....6

SUMMARY OF TEST RESULTS7

FCC §15.107 –CONDUCTED EMISSIONS8
 APPLICABLE STANDARD8
 MEASUREMENT UNCERTAINTY8
 EUT SETUP8
 EMI TEST RECEIVER SETUP.....9
 TEST PROCEDURE9
 TEST EQUIPMENT LIST AND DETAILS.....9
 TEST DATA10

FCC §15.109 - RADIATED EMISSIONS14
 APPLICABLE STANDARD14
 MEASUREMENT UNCERTAINTY14
 EUT SETUP14
 EMI TEST RECEIVER SETUP.....15
 TEST PROCEDURE15
 TEST EQUIPMENT LIST AND DETAILS.....16
 CORRECTED AMPLITUDE & MARGIN CALCULATION (FOR ABOVE 1GHZ).....17
 TEST DATA17

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|-----------------------------|--|
| Applicant | Gouldin Technologies, LLC |
| Test Model | W410 |
| Product | TALKMAN |
| Rate Voltage | DC 12V from Adapter or DC 48V from POE |
| Highest Operation Frequency | 400 MHz |
| Dimension | 163mm (L)*140mm (W)*215.3mm(H) |

**All measurement and test data in this report was gathered from production sample serial number: 20190912050. (Assigned by the BAACL. The EUT supplied by the applicant was received on 2019-09-12)*

Objective

This report is prepared on behalf of *Gouldin Technologies, LLC* in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B device.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test mode 1: Powered by adapter & LAN Link & Camera on

Test mode 2: Powered by POE & LAN Link & Camera on

EUT Exercise Software

No exercise software was used to test.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|----------------------------|----------------|------------------|---------------|
| DELL | Notebook | E6410 | 3094742521 |
| NTEGEAR | POE | GS308P | 4F217B5000891 |
| TP-LINK | Router | EC26CA652860 | 1153150000000 |
| GOLDEN PROFIT ELEC TRONICS | Adapter | GPE018W-120100-2 | N/A |
| FuShi | Switch | AR22PR-310B | N/A |
| AnYong | Load | RXLG | N/A |
| WeiShi | Entrance Guard | Q3 | N/A |
| Schneider Electric | Relay | RXM2LB2BD | N/A |


External I/O Cable

| Cable Description | Length (m) | From/Port | To |
|--------------------|------------|-----------|-----------------|
| Power supply cable | 1.0 | EUT | AC Power Supply |
| RJ45 cable | 1.2 | EUT | Notebook |
| RJ45 cable | 5.0 | EUT | POE |
| Power supply cable | 1.2 | POE | POE Adapter |
| RJ45 cable | 1.5 | EUT | Router |
| Power supply cable | 5.0 | EUT | Load |


| | | | |
|--------------|-----|-----|----------------|
| Signal Cable | 5.0 | EUT | Switch |
| Signal Cable | 5.0 | EUT | Relay |
| Signal Cable | 5.0 | EUT | Entrance Guard |

Block Diagram of Radiated Test Setup

Test Mode 1

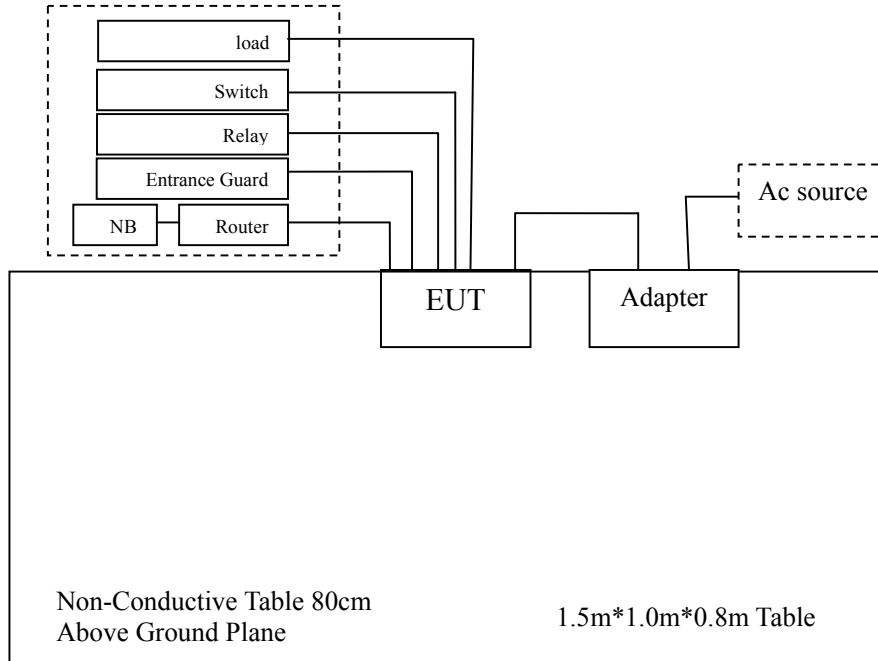

Test Mode 2

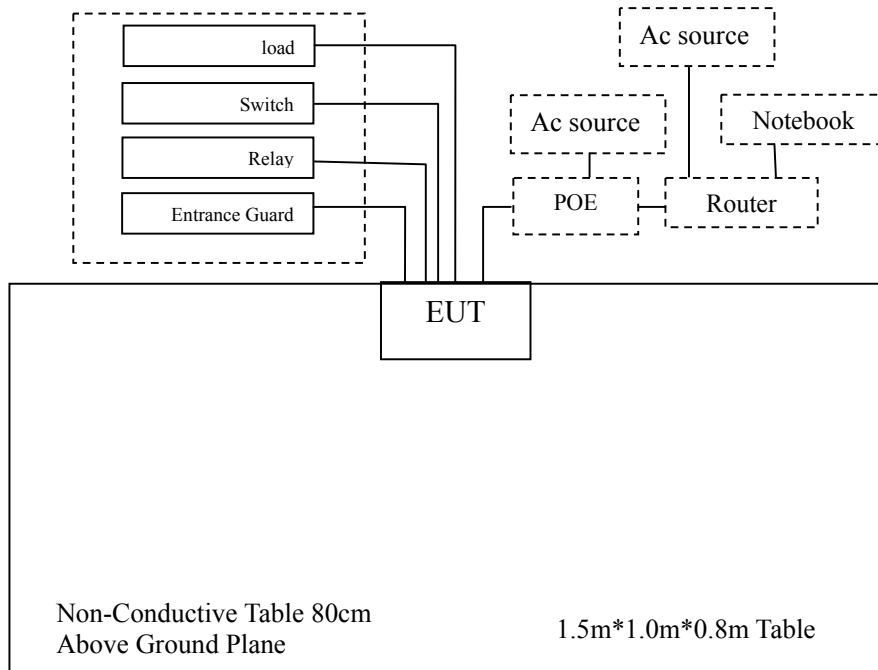

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Results |
|------------------|----------------------------|----------------|
| §15.107 | Conducted Emissions | Compliant |
| §15.109 | Radiated Emissions | Compliant |

FCC §15.107 –CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

| Item | | Measurement Uncertainty | U_{cispr} |
|------|--------------|-------------------------|-------------|
| AMN | 150kHz~30MHz | 3.19 dB | 3.4 dB |

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

EUT Setup

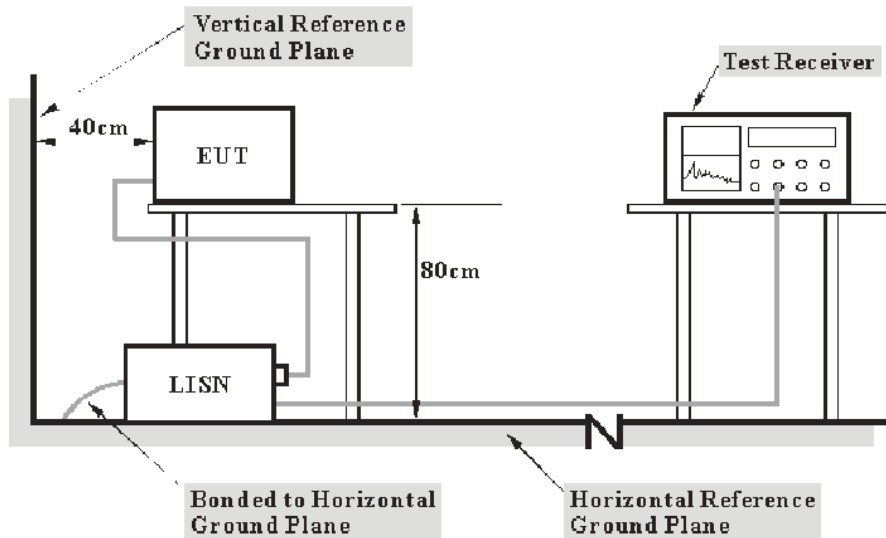

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|----------------------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESR | 1316.3003K03 -101746-zn | 2019-07-11 | 2020-07-10 |
| ROHDE&SCHWARZ | LISN | ENV216 | 3560655016 | 2018-11-30 | 2019-11-29 |
| Audix | Test Software | e3 | V9 | -- | -- |
| MICRO-COAX | Coaxial Cable | Cable-6 | 006 | 2019-09-08 | 2020-09-07 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Over Limit Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for margin calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 22 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.1 kPa |

The testing was performed by CK Huang on 2019-09-20.


Test mode 1

Line:

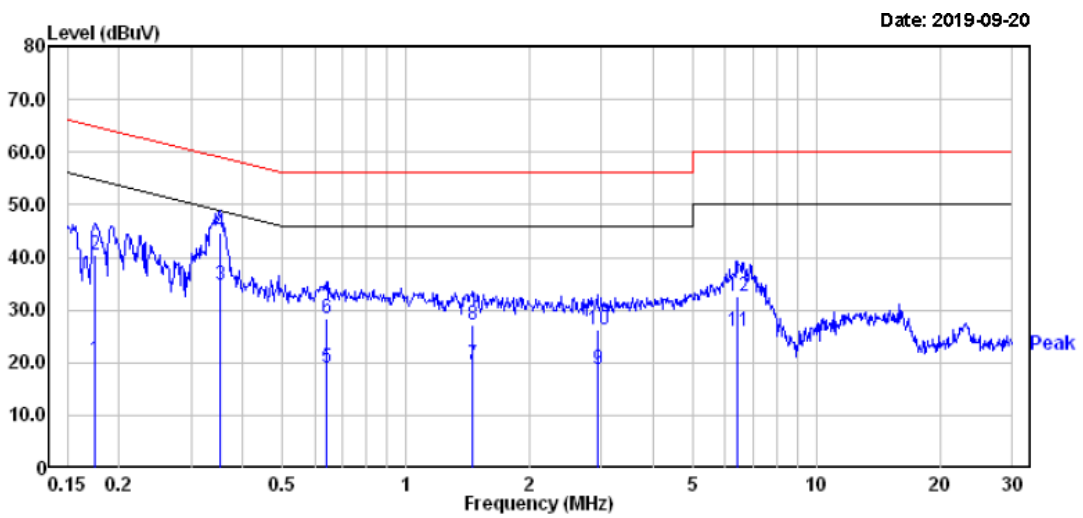

| | Read Freq | Read Level | Factor | Limit Level | Limit Line | Over Limit | Remark |
|----|-----------|------------|--------|-------------|------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | |
| 1 | 0.175 | 0.60 | 19.83 | 20.43 | 54.72 | -34.29 | Average |
| 2 | 0.175 | 20.50 | 19.83 | 40.33 | 64.72 | -24.39 | QP |
| 3 | 0.354 | 15.00 | 19.80 | 34.80 | 48.87 | -14.07 | Average |
| 4 | 0.354 | 24.80 | 19.80 | 44.60 | 58.87 | -14.27 | QP |
| 5 | 0.641 | -0.80 | 19.75 | 18.95 | 46.00 | -27.05 | Average |
| 6 | 0.641 | 8.60 | 19.75 | 28.35 | 56.00 | -27.65 | QP |
| 7 | 1.456 | -0.30 | 19.84 | 19.54 | 46.00 | -26.46 | Average |
| 8 | 1.456 | 7.40 | 19.84 | 27.24 | 56.00 | -28.76 | QP |
| 9 | 2.931 | -0.60 | 19.46 | 18.86 | 46.00 | -27.14 | Average |
| 10 | 2.931 | 6.70 | 19.46 | 26.16 | 56.00 | -29.84 | QP |
| 11 | 6.454 | 6.50 | 19.51 | 26.01 | 50.00 | -23.99 | Average |
| 12 | 6.454 | 13.10 | 19.51 | 32.61 | 60.00 | -27.39 | QP |

Neutral:

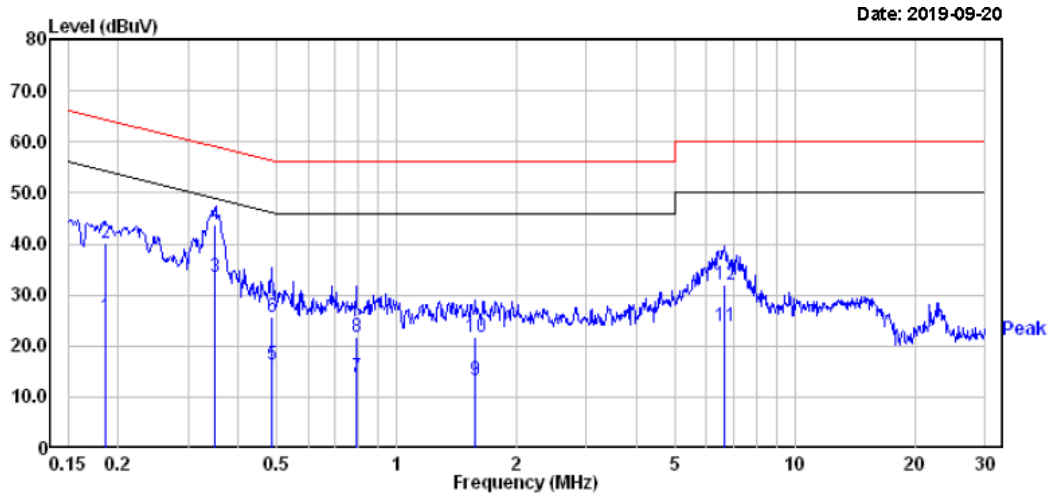


| | Read | Limit | Over | |
|------|-------|--------|-------|-------|
| Freq | Level | Factor | Level | Line |
| MHz | dBuV | dB | dBuV | dBuV |
| 1 | 0.185 | 5.81 | 19.82 | 25.63 |
| 2 | 0.185 | 20.41 | 19.82 | 40.23 |
| 3 | 0.350 | 13.70 | 19.81 | 33.51 |
| 4 | 0.350 | 23.90 | 19.81 | 43.71 |
| 5 | 0.486 | -3.60 | 19.76 | 16.16 |
| 6 | 0.486 | 6.00 | 19.76 | 25.76 |
| 7 | 0.792 | -5.79 | 19.70 | 13.91 |
| 8 | 0.792 | 2.01 | 19.70 | 21.71 |
| 9 | 1.577 | -6.51 | 19.85 | 13.34 |
| 10 | 1.577 | 1.89 | 19.85 | 21.74 |
| 11 | 6.662 | 4.20 | 19.51 | 23.71 |
| 12 | 6.662 | 12.40 | 19.51 | 31.91 |

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)


Test mode 2

Line:

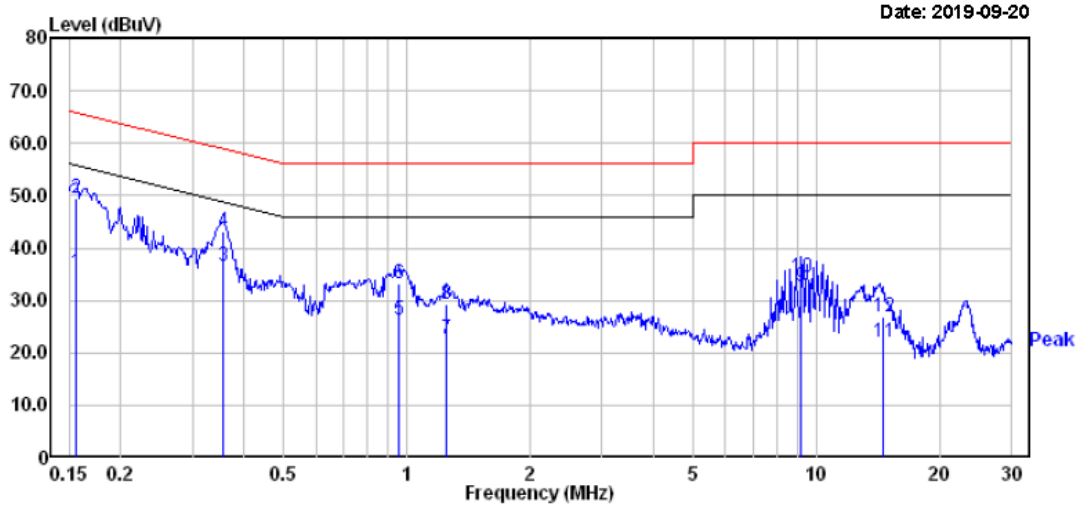

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|----|--------|------------|--------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | |
| 1 | 0.156 | 15.40 | 19.82 | 35.22 | 55.69 | -20.47 | Average |
| 2 | 0.156 | 29.70 | 19.82 | 49.52 | 65.69 | -16.17 | QP |
| 3 | 0.356 | 16.70 | 19.80 | 36.50 | 48.83 | -12.33 | Average |
| 4 | 0.356 | 23.40 | 19.80 | 43.20 | 58.83 | -15.63 | QP |
| 5 | 0.958 | 6.40 | 19.78 | 26.18 | 46.00 | -19.82 | Average |
| 6 | 0.958 | 13.40 | 19.78 | 33.18 | 56.00 | -22.82 | QP |
| 7 | 1.249 | 2.90 | 19.82 | 22.72 | 46.00 | -23.28 | Average |
| 8 | 1.249 | 9.60 | 19.82 | 29.42 | 56.00 | -26.58 | QP |
| 9 | 9.204 | 13.00 | 19.55 | 32.55 | 50.00 | -17.45 | Average |
| 10 | 9.204 | 14.90 | 19.55 | 34.45 | 60.00 | -25.55 | QP |
| 11 | 14.634 | 2.39 | 19.63 | 22.02 | 50.00 | -27.98 | Average |
| 12 | 14.634 | 7.29 | 19.63 | 26.92 | 60.00 | -33.08 | QP |

Neutral:

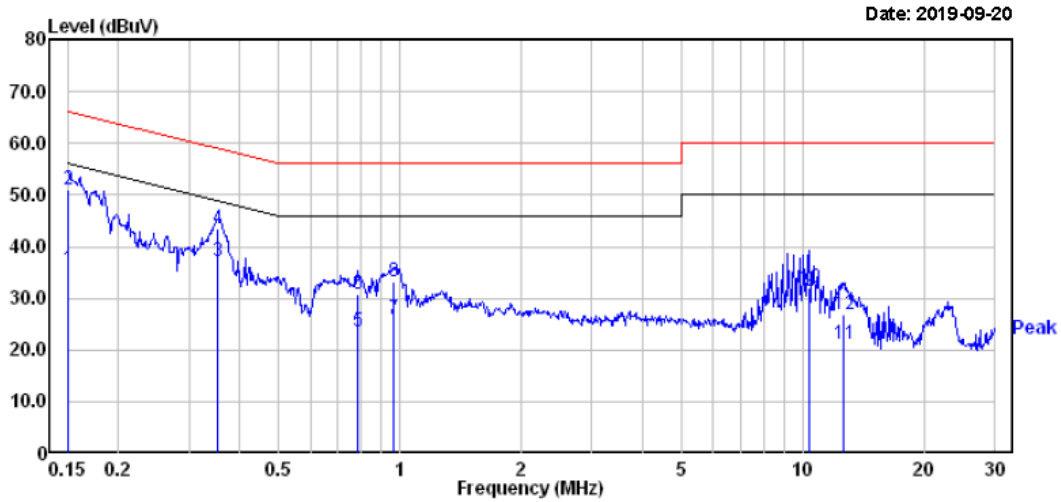

| | Freq | Read Level | Factor | Level | Limit | Over | Remark |
|----|--------|------------|--------|-------|-------|--------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | |
| 1 | 0.150 | 15.90 | 19.82 | 35.72 | 56.00 | -20.28 | Average |
| 2 | 0.150 | 31.20 | 19.82 | 51.02 | 66.00 | -14.98 | QP |
| 3 | 0.354 | 17.30 | 19.80 | 37.10 | 48.87 | -11.77 | Average |
| 4 | 0.354 | 23.60 | 19.80 | 43.40 | 58.87 | -15.47 | QP |
| 5 | 0.783 | 3.80 | 19.71 | 23.51 | 46.00 | -22.49 | Average |
| 6 | 0.783 | 11.10 | 19.71 | 30.81 | 56.00 | -25.19 | QP |
| 7 | 0.963 | 6.30 | 19.79 | 26.09 | 46.00 | -19.91 | Average |
| 8 | 0.963 | 13.40 | 19.79 | 33.19 | 56.00 | -22.81 | QP |
| 9 | 10.397 | 11.70 | 19.56 | 31.26 | 50.00 | -18.74 | Average |
| 10 | 10.397 | 12.50 | 19.56 | 32.06 | 60.00 | -27.94 | QP |
| 11 | 12.649 | 1.40 | 19.60 | 21.00 | 50.00 | -29.00 | Average |
| 12 | 12.649 | 7.20 | 19.60 | 26.80 | 60.00 | -33.20 | QP |

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

FCC §15.109 - RADIATED EMISSIONS

Applicable Standard

FCC §15.109

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average) and system repeatability.

| Item | Measurement Uncertainty | U_{cispr} |
|-------------------|-------------------------|-------------|
| Radiated Emission | 30MHz~1GHz | 6.11dB |
| | 1GHz~6GHz | 4.45dB |
| | 6 GHz ~18 GHz | 5.23dB |


Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

EUT Setup

Below 1GHz:

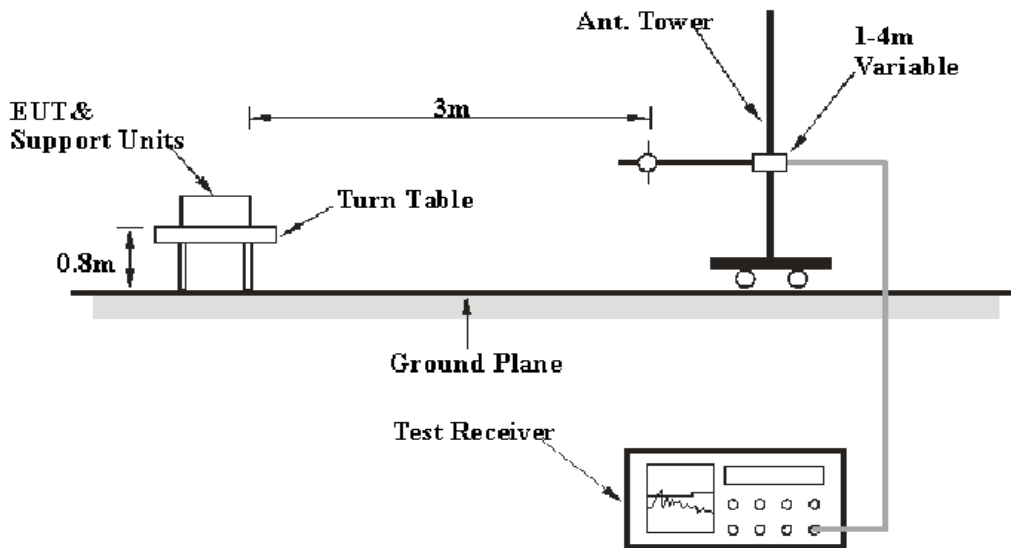

Above 1GHz:

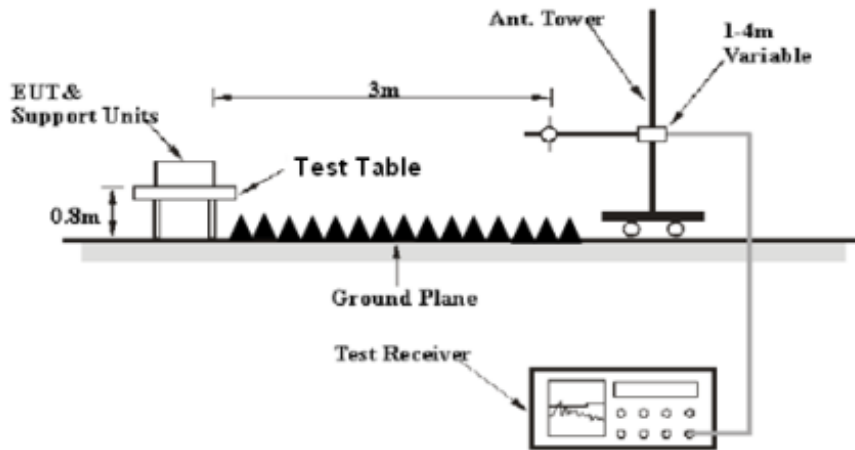

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 18 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|------------------|---------|-----------|--------|----------|
| 30MHz – 1000 MHz | 120 kHz | 300 kHz | 120kHz | QP |
| Above 1 GHz | 1MHz | 3 MHz | / | Peak |
| | 1MHz | 3 MHz | 1MHz | AVG |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------------|-----------|----------------------------|------------------|----------------------|
| Sonoma Instrument | Amplifier | 310N | 185700 | 2019-08-14 | 2020-08-13 |
| Rohde & Schwarz | EMI Test Receiver | ESR | 1316.3003K03 -101746-zn | 2019-07-11 | 2020-07-10 |
| Sunol Sciences | Broadband Antenna | JB3 | A090413-1 | 2016-12-26 | 2019-12-25 |
| Champrotek | Chamber | Chamber A | T-KSEMC049 | - | - |
| Champrotek | Chamber | Chamber B | T-KSEMC080 | - | - |
| Audix | Test Software | e3 | V9 | -- | -- |
| R&S | Auto test Software | EMC32 | 100361 | - | - |
| ETS | Horn Antenna | 3115 | 6229 | 2016-12-12 | 2019-12-11 |
| Rohde & Schwarz | EMI Receiver | ESU40 | 100207 | 2019-08-27 | 2020-08-26 |
| A.H.Systems, inc | Amplifier | 2641-1 | 491 | 2019-02-20 | 2020-02-19 |
| MICRO-COAX | Coaxial Cable | Cable-8 | 008 | 2019-08-15 | 2020-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-9 | 009 | 2019-08-15 | 2020-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-10 | 010 | 2019-08-15 | 2020-08-14 |
| MICRO-COAX | Coaxial Cable | Cable-4 | 004 | 2018-12-12 | 2019-12-11 |
| MICRO-COAX | Coaxial Cable | Cable-5 | 005 | 2018-12-12 | 2019-12-11 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Factor & Over Limit Calculation (For Below 1GHz)

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for margin calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Corrected Amplitude & Margin Calculation (For Above 1GHz)

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


| | |
|---------------------------|---------------------|
| Temperature: | 22 °C |
| Relative Humidity: | 50% |
| ATM Pressure: | 101.1 kPa~102.1 kPa |

The testing was performed by CK Huang on 2019-09-19.

Test mode 1


Below 1 GHz:

Horizontal:

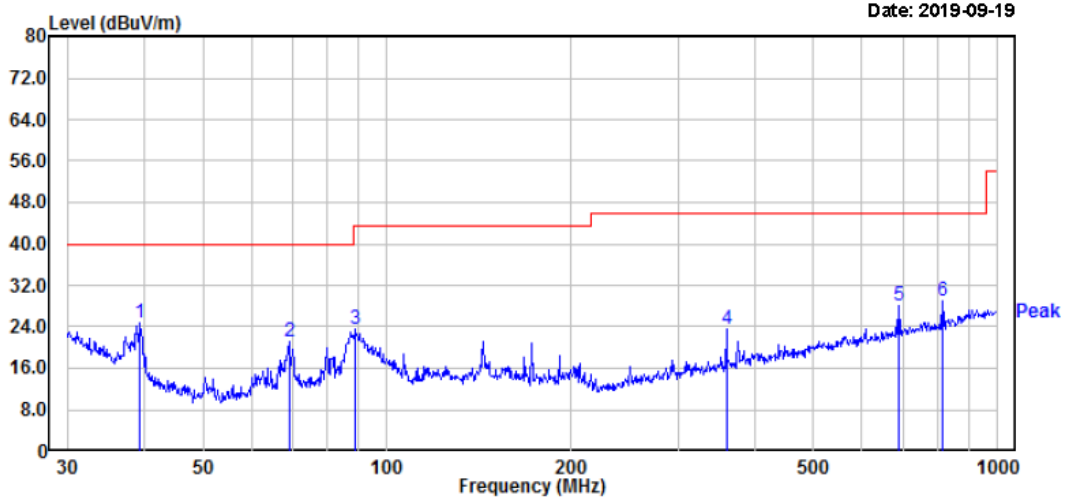

| | Read Freq | Read Level | Factor | Limit Level | Over Limit | APos | TPos | Remark |
|---|-----------|------------|--------|-------------|------------|--------|------|----------|
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | cm | deg |
| 1 | 39.44 | 35.65 | -10.97 | 24.68 | 40.00 | -15.32 | 100 | 6 Peak |
| 2 | 69.11 | 38.14 | -16.94 | 21.20 | 40.00 | -18.80 | 200 | 323 Peak |
| 3 | 88.96 | 40.79 | -17.24 | 23.55 | 43.50 | -19.95 | 200 | 4 Peak |
| 4 | 360.45 | 32.46 | -8.81 | 23.65 | 46.00 | -22.35 | 100 | 109 Peak |
| 5 | 689.57 | 30.27 | -2.28 | 27.99 | 46.00 | -18.01 | 100 | 6 Peak |
| 6 | 813.11 | 29.44 | -0.57 | 28.87 | 46.00 | -17.13 | 200 | 305 Peak |

Vertical:

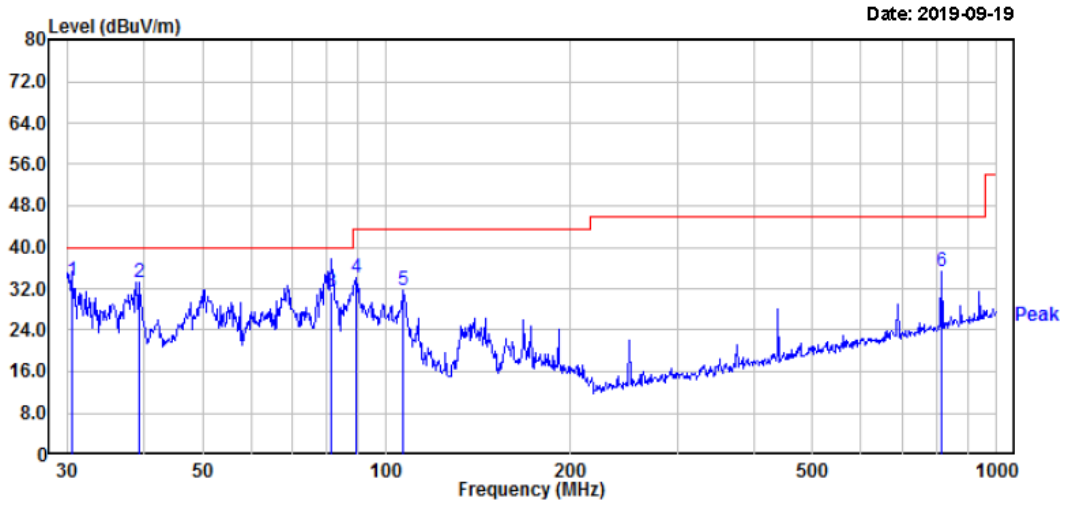


| | Read | | Limit | Over | APos | TPos | |
|------|--------|--------|--------|--------|-------|--------|--------------|
| Freq | Level | Factor | Level | Line | Limit | | Remark |
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | cm | deg |
| 1 | 30.53 | 37.20 | -3.57 | 33.63 | 40.00 | -6.37 | 100 5 QP |
| 2 | 39.44 | 44.13 | -10.97 | 33.16 | 40.00 | -6.84 | 100 337 Peak |
| 3 | 81.21 | 48.50 | -17.18 | 31.32 | 40.00 | -8.68 | 100 5 QP |
| 4 | 89.28 | 51.22 | -17.25 | 33.97 | 43.50 | -9.53 | 100 5 Peak |
| 5 | 106.76 | 45.03 | -13.27 | 31.76 | 43.50 | -11.74 | 100 5 Peak |
| 6 | 813.11 | 35.99 | -0.57 | 35.42 | 46.00 | -10.58 | 100 11 Peak |

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

Above 1 GHz:

Full Spectrum

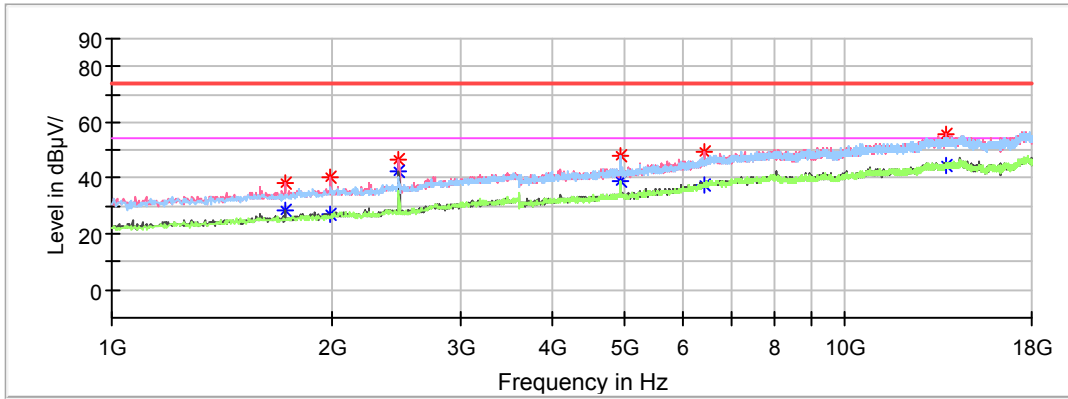


| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|--------------------|------------------|-------------|-------------|-----|---------------|------------|
| 1724.200000 | --- | 28.56 | 54.00 | 25.44 | 100.0 | V | 353.0 | -9.2 |
| 1724.200000 | 37.95 | --- | 74.00 | 36.05 | 100.0 | V | 353.0 | -9.2 |
| 1989.400000 | --- | 27.05 | 54.00 | 26.95 | 200.0 | V | 0.0 | -8.3 |
| 1989.400000 | 40.65 | --- | 74.00 | 33.35 | 200.0 | V | 0.0 | -8.3 |
| 2465.400000 | --- | 42.14 | 54.00 | 11.86 | 100.0 | V | 106.0 | -7.0 |
| 2465.400000 | 46.66 | --- | 74.00 | 27.34 | 100.0 | V | 106.0 | -7.0 |
| 4933.800000 | --- | 39.24 | 54.00 | 14.76 | 100.0 | H | 352.0 | -0.4 |
| 4933.800000 | 48.06 | --- | 74.00 | 25.94 | 100.0 | H | 352.0 | -0.4 |
| 6419.600000 | --- | 37.68 | 54.00 | 16.32 | 200.0 | V | 126.0 | 4.1 |
| 6419.600000 | 49.37 | --- | 74.00 | 24.63 | 200.0 | V | 126.0 | 4.1 |
| 13784.000000 | --- | 44.61 | 54.00 | 9.39 | 200.0 | V | 78.0 | 12.3 |
| 13784.000000 | 55.40 | --- | 74.00 | 18.60 | 200.0 | V | 78.0 | 12.3 |

Test Mode 2


Below 1 GHz:

Horizontal:

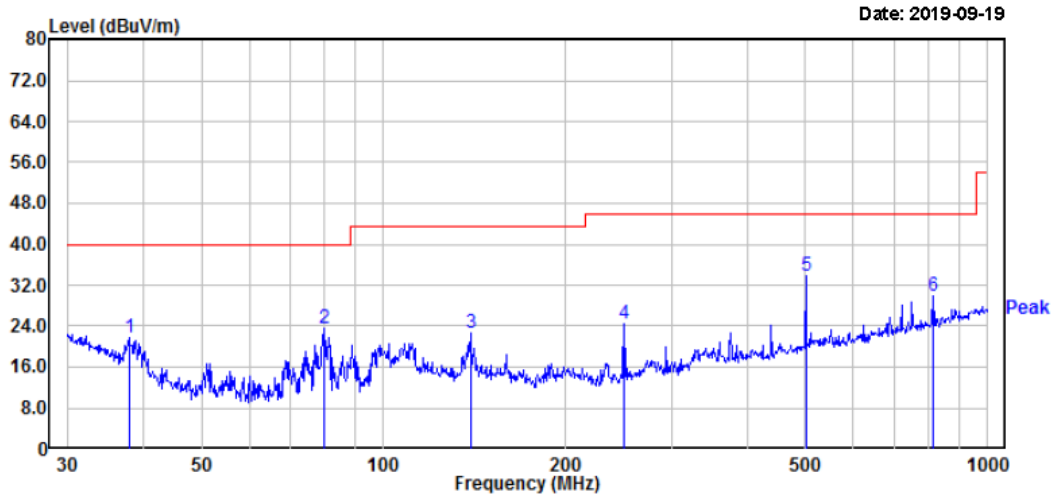

| | Read Freq | Read Level | Factor | Limit Level | Over Limit | APos | TPos | Remark |
|---|-----------|------------|--------|-------------|------------|--------|------|----------|
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | cm | deg |
| 1 | 37.95 | 31.37 | -9.73 | 21.64 | 40.00 | -18.36 | 200 | 207 Peak |
| 2 | 79.80 | 40.59 | -17.16 | 23.43 | 40.00 | -16.57 | 200 | 299 Peak |
| 3 | 139.36 | 34.35 | -11.72 | 22.63 | 43.50 | -20.87 | 200 | 238 Peak |
| 4 | 250.30 | 36.53 | -12.12 | 24.41 | 46.00 | -21.59 | 100 | 260 Peak |
| 5 | 501.18 | 39.21 | -5.48 | 33.73 | 46.00 | -12.27 | 200 | 225 Peak |
| 6 | 813.11 | 30.31 | -0.57 | 29.74 | 46.00 | -16.26 | 100 | 359 Peak |

Vertical:

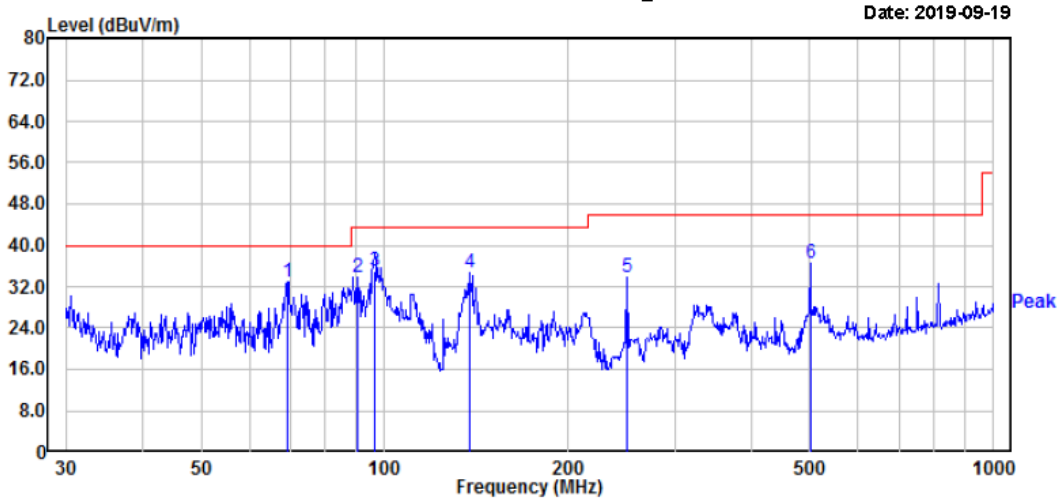


| | Read | | | Limit | Over | APos | TPos | |
|------|--------|--------|--------|--------|-------|--------|------|----------|
| Freq | Level | Factor | Level | Line | Limit | | | Remark |
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 69.11 | 49.96 | -16.94 | 33.02 | 40.00 | -6.98 | 100 | 229 Peak |
| 2 | 90.22 | 50.86 | -17.19 | 33.67 | 43.50 | -9.83 | 100 | 144 Peak |
| 3 | 96.44 | 50.60 | -15.56 | 35.04 | 43.50 | -8.46 | 100 | 138 QP |
| 4 | 138.39 | 46.30 | -11.67 | 34.63 | 43.50 | -8.87 | 100 | 328 Peak |
| 5 | 250.30 | 45.80 | -12.12 | 33.68 | 46.00 | -12.32 | 100 | 334 Peak |
| 6 | 501.18 | 41.98 | -5.48 | 36.50 | 46.00 | -9.50 | 100 | 82 Peak |

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

Above 1 GHz:

Full Spectrum

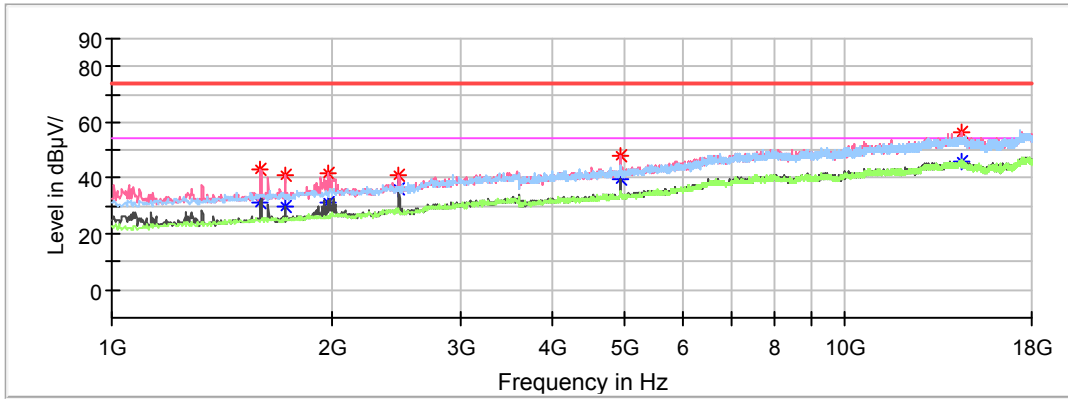

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|--------------------|------------------|-------------|-------------|-----|---------------|------------|
| 1591.600000 | --- | 31.10 | 54.00 | 22.90 | 200.0 | V | 0.0 | -9.6 |
| 1591.600000 | 42.98 | --- | 74.00 | 31.02 | 200.0 | V | 0.0 | -9.6 |
| 1724.200000 | --- | 29.68 | 54.00 | 24.32 | 100.0 | V | 161.0 | -9.2 |
| 1724.200000 | 41.29 | --- | 74.00 | 32.71 | 100.0 | V | 161.0 | -9.2 |
| 1975.800000 | --- | 31.39 | 54.00 | 22.61 | 100.0 | V | 341.0 | -8.3 |
| 1975.800000 | 42.04 | --- | 74.00 | 31.96 | 100.0 | V | 341.0 | -8.3 |
| 2465.400000 | --- | 36.24 | 54.00 | 17.76 | 100.0 | V | 201.0 | -7.0 |
| 2465.400000 | 41.05 | --- | 74.00 | 32.95 | 100.0 | V | 201.0 | -7.0 |
| 4933.800000 | --- | 39.36 | 54.00 | 14.64 | 200.0 | V | 124.0 | -0.4 |
| 4933.800000 | 48.34 | --- | 74.00 | 25.66 | 200.0 | V | 124.0 | -0.4 |
| 14409.60000 | --- | 46.12 | 54.00 | 7.88 | 200.0 | V | 265.0 | 12.7 |
| 14409.60000 | 56.65 | --- | 74.00 | 17.35 | 200.0 | V | 265.0 | 12.7 |

*****END OF REPORT*****