

FCC Part 15C
Measurement and Test Report
For
Shenzhen Litaosheng Technology Co, Ltd.

FCC ID: 2AOS6-TS09S

| | |
|--------------------------------------|--|
| FCC Rules: | <u>FCC Part 15C</u> |
| Product Description: | <u>Wireless charger</u> |
| Tested Model: | <u>TS09S</u> |
| Report No.: | <u>BSL180611289001RF</u> |
| Tested Date: | <u>July 02~06, 2018</u> |
| Issued Date: | <u>July 09,2018</u> |
| Tested By: | <u>Lisa. Li / Engineer</u> |
| Reviewed By: | <u>arno. Liu / EMC Manager</u> |
| Approved & Authorized By: | <u>Mike mo / PSQ Manager</u> |
| Prepared By: | BSL Testing Co.,LTD. NO. 24, ZH Park, Nantou, Shenzhen, 518000 China Tel: 86- 755-26508703 Fax: 86- 755-26508703 |




TABLE OF CONTENTS

| | |
|---|-----------|
| 1. GENERAL INFORMATION..... | 3 |
| 1.1 Product Description for Equipment Under Test (EUT)..... | 3 |
| 1.2 Test Standards..... | 4 |
| 1.3 Test Methodology..... | 4 |
| 1.4 Test Facility..... | 4 |
| 1.5 EUT Setup and Operation Mode..... | 5 |
| 1.6 Measurement Uncertainty..... | 5 |
| 1.7 Test Equipment List and Details..... | 6 |
| 2. SUMMARY OF TEST RESULTS..... | 7 |
| 3. CONDUCTED EMISSIONS..... | 8 |
| 3.1 Test Procedure..... | 8 |
| 3.2 Basic Test Setup Block Diagram..... | 8 |
| 3.3 Environmental Conditions..... | 8 |
| 3.4 Summary of Test Results/Plots..... | 9 |
| 3.5 Conducted Emissions Test Data..... | 10 |
| 4. RADIATED EMISSION..... | 12 |
| 4.1 Test Procedure..... | 12 |
| 4.2 Test Receiver Setup..... | 12 |
| 4.3 Corrected Amplitude & Margin Calculation..... | 13 |
| 4.4 Environmental Conditions..... | 13 |
| 4.5 Summary of Test Results/Plots..... | 14 |

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Litaosheng Technology Co, Ltd.
Room 208,4th Building,1970 Technology
Town,Minzhi,Longhua District,Shenzhen
City,Guangdong Province,China

Address of applicant:

Manufacturer: Shenzhen Litaosheng Technology Co, Ltd.
Room 208,4th Building,1970 Technology
Town,Minzhi,Longhua District,Shenzhen
City,Guangdong Province,China

Address of manufacturer:

| General Description of EUT | |
|--|------------------|
| Product Name: | Wireless charger |
| Trade Name: | LONTEMS 蓝钛思 |
| Model No.: | TS09S |
| Adding Model(s): | TS12,TS15,TS16 |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i> | |

| Technical Characteristics of EUT | |
|---|-------------------------|
| Frequency Range: | 110-175KHz |
| Rated Voltage: | DC 5V (Wireless output) |
| Rated Current: | 1A (Wireless output) |
| Rated Power: | 5W (Wireless output) |

1.2 Test Standards

The following report is prepared on behalf of the Dolphin Electronics Co., Ltd in accordance with Part 2, Subpart J, and FCC Part 15, Subpart B, Subpart C, and section 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.207, and 15.209 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

BSL Testing Co.,LTD.
NO. 24, ZH Park, Nantou, Shenzhen, 518000 China
Designation Number : CN1217
Test Firm Registration Number: 866035
Tel: 86- 755-26508703
Fax: 86- 755-26508703

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

| Test Mode | Description | Remark |
|-----------|-------------|-------------------|
| TM1 | Charging | With load |
| TM2 | Charging | With mobile phone |

Note: Test was performed with TM1 and TM2, TM1 is the worst case so it is only showed in this report.

EUT Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| AUX Cable | 0.8 | Unshielded | Without Ferrite |

Auxiliary Equipment List and Details

| Description | Manufacturer | Model | Serial Number |
|--------------|--------------|---------|---------------|
| Mobile Phone | SAMSUNG | SM-920V | / |
| Adapter | / | / | / |

Special Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| / | / | / | / |

1.6 Measurement Uncertainty

| Measurement uncertainty | | | |
|--------------------------------|------------|-------------|--|
| Parameter | Conditions | Uncertainty | |
| RF Output Power | Conducted | ±0.42dB | |
| Occupied Bandwidth | Conducted | ±1.5% | |
| Power Spectral Density | Conducted | ±1.8dB | |
| Conducted Spurious Emission | Conducted | ±2.17dB | |
| Conducted Emissions | Conducted | ±2.88dB | |
| Transmitter Spurious Emissions | Radiated | ±5.1dB | |

1.7 Test Equipment List and Details

| Description | Manufacturer | Model | Serial No. | Cal Date | Due. Date |
|-------------------------------------|------------------|-------------------|------------|------------|------------|
| Communication Tester | Rohde & Schwarz | CMW500 | 100358 | 2017-10-21 | 2018-10-20 |
| Spectrum Analyzer | R&S | FSP40 | 100550 | 2017-10-21 | 2018-10-20 |
| Test Receiver | R&S | ESCI7 | US47140102 | 2017-10-21 | 2018-10-20 |
| Signal Generator | HP | 83630B | 3844A01028 | 2017-10-22 | 2018-10-21 |
| Test Receiver | R&S | ESPI-3 | 100180 | 2017-10-21 | 2018-10-20 |
| Amplifier | Agilent | 8449B | 4035A00116 | 2017-10-22 | 2018-10-21 |
| Amplifier | HP | 8447E | 2945A02770 | 2017-10-22 | 2018-10-21 |
| Signal Generator | IFR | 2023A | 202307/242 | 2017-10-22 | 2018-10-21 |
| Broadband Antenna | SCHAFFNER | 2774 | 2774 | 2017-10-17 | 2018-10-16 |
| Biconical and log periodic antennas | ELECTRO-METRICS | EM-6917B-1 | 171 | 2017-10-17 | 2018-10-16 |
| Horn Antenna | R&S | HF906 | 100253 | 2017-10-17 | 2018-10-16 |
| Horn Antenna | EM | EM-6961 | 6462 | 2017-10-17 | 2018-10-16 |
| LISN | R&S | ESH3-Z5 | 100196 | 2017-10-17 | 2018-10-16 |
| LISN | COM-POWER | LI-115 | 02027 | 2017-10-17 | 2018-10-16 |
| 3m Semi-Anechoic Chamber | Chengyu Electron | 9 (L)*6 (W)*6 (H) | BSL086 | 2017-10-21 | 2018-10-20 |
| Horn Antenna | A-INFOMW | LB-180400KF | BSL088 | 2017-10-21 | 2018-10-20 |
| Loop Antenna | Schwarz beck | FMZB 1516 | 9773 | 2017-10-21 | 2018-10-20 |

2. SUMMARY OF TEST RESULTS

| Description of Test | Result |
|--------------------------------|---------------|
| §15.207 (a) Conducted Emission | Compliant |
| §15.209(a) Radiated Emission | Compliant |


N/A: not applicable

3. CONDUCTED EMISSIONS

3.1 Test Procedure

Test is conducting under the description of ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

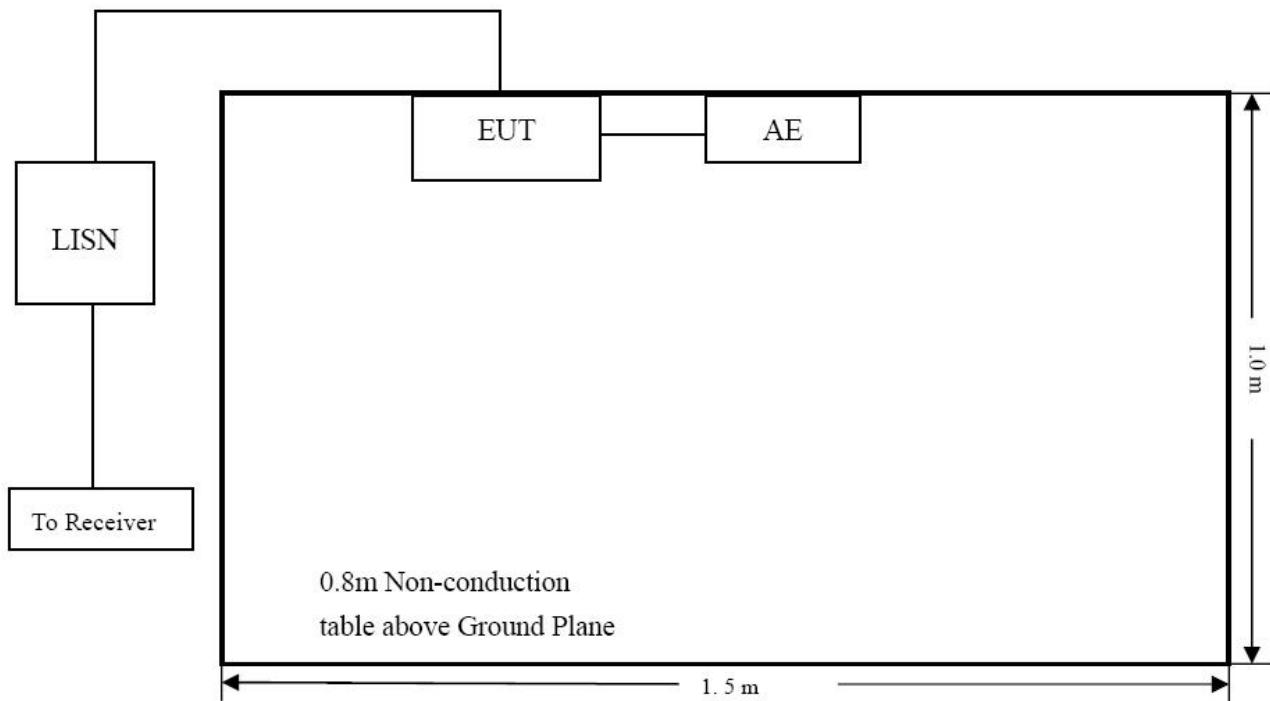

3.3 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 52% |
| ATM Pressure: | 1011 mbar |

3.4 Summary of Test Results/Plots

According to the data in section 3.5, the EUT complied with the FCC Part 15.207(a) Conducted margin for this device, with the *worst* margin reading of:


-9.03 dB at 1.7379 MHz in the Neutral, QP detector, 0.15-30MHz

3.5 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data

EUT: *Wireless charger*
 Tested Model: *TS09S*
 Operating Condition: *TM1*
 Comment: *120V/60Hz; Adapter DC 5V*

Test Specification: *Neutral*

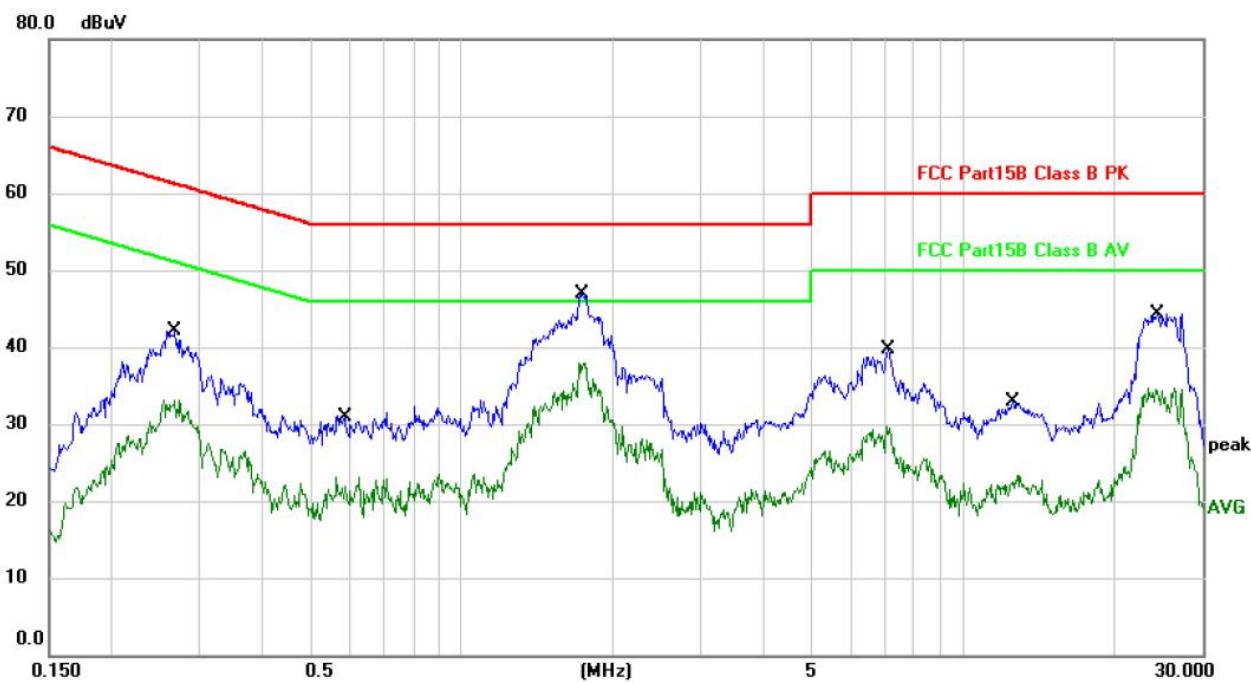

| No. | Mk. | Freq. | Measure- ment | | Limit | Over | Detector | Comment |
|-----|---------|--------|------------------|--------|-------|------|----------|---------|
| | | | MHz | dBuV | | | | |
| 1 | 0.2671 | 42.17 | 61.20 | -19.03 | QP | | | |
| 2 | 0.2671 | 30.98 | 51.20 | -20.22 | AVG | | | |
| 3 | 0.5856 | 30.36 | 56.00 | -25.64 | QP | | | |
| 4 | 0.5856 | 19.90 | 46.00 | -26.10 | AVG | | | |
| 5 | * | 1.7379 | 46.97 | 56.00 | -9.03 | QP | | |
| 6 | 1.7379 | 34.31 | 46.00 | -11.69 | AVG | | | |
| 7 | 7.0697 | 39.70 | 60.00 | -20.30 | QP | | | |
| 8 | 7.0697 | 24.25 | 50.00 | -25.75 | AVG | | | |
| 9 | 12.5457 | 32.84 | 60.00 | -27.16 | QP | | | |
| 10 | 12.5457 | 21.97 | 50.00 | -28.03 | AVG | | | |
| 11 | 24.5100 | 44.21 | 60.00 | -15.79 | QP | | | |
| 12 | 24.5100 | 34.62 | 50.00 | -15.38 | AVG | | | |

Test Specification:

Line

80.0 dBuV




| No. | Mk. | Measure- ment | | Limit dBuV | Over dB | Over Detector | Comment |
|-----|---------|------------------|-------|---------------|------------|------------------|---------|
| | | Freq. MHz | dBuV | | | | |
| 1 | 0.2139 | 43.16 | 63.05 | -19.89 | | QP | |
| 2 | 0.2139 | 31.23 | 53.05 | -21.82 | | AVG | |
| 3 | 0.5220 | 41.26 | 56.00 | -14.74 | | QP | |
| 4 | 0.5220 | 27.21 | 46.00 | -18.79 | | AVG | |
| 5 * | 1.0820 | 46.42 | 56.00 | -9.58 | | QP | |
| 6 | 1.0820 | 30.57 | 46.00 | -15.43 | | AVG | |
| 7 | 2.6699 | 41.91 | 56.00 | -14.09 | | QP | |
| 8 | 2.6699 | 30.41 | 46.00 | -15.59 | | AVG | |
| 9 | 5.1459 | 37.62 | 60.00 | -22.38 | | QP | |
| 10 | 5.1459 | 23.91 | 50.00 | -26.09 | | AVG | |
| 11 | 10.3376 | 38.67 | 60.00 | -21.33 | | QP | |
| 12 | 10.3376 | 24.01 | 50.00 | -25.99 | | AVG | |

4. RADIATED EMISSION

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

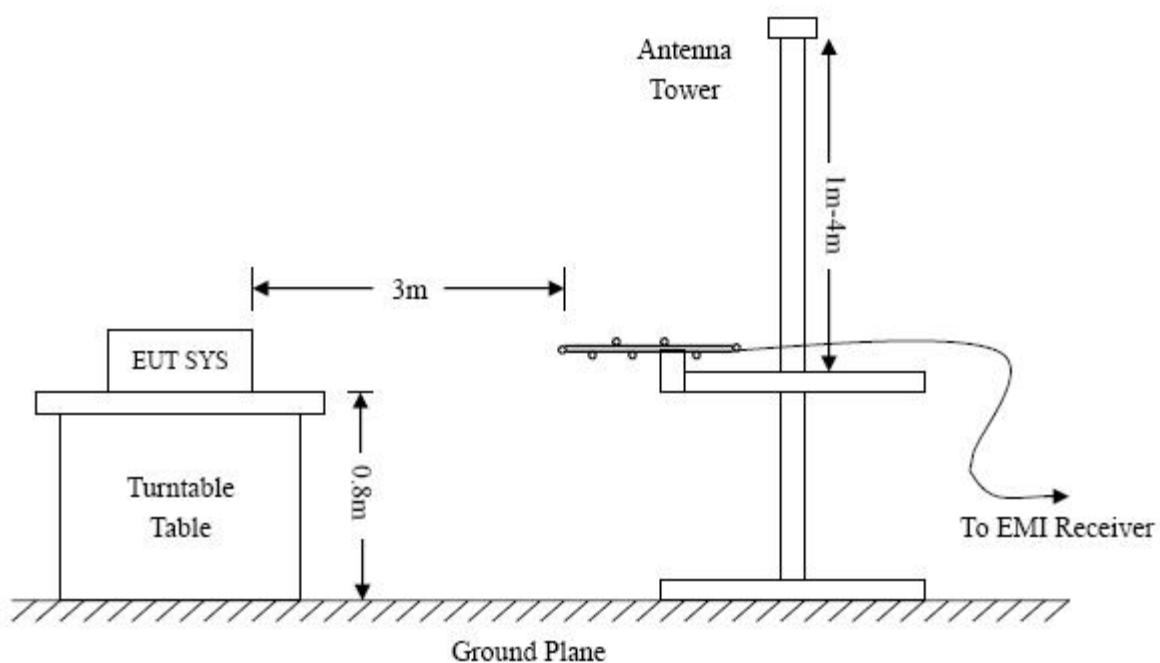

4.2 Test Receiver Setup

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for this device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.209(a) Limit}$$

4.4 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 55 % |
| ATM Pressure: | 1011 mbar |

4.5 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.209(a) rule, and had the worst margin of:

-11.11 dB at 670.4891 MHz in the Horizontal polarization, 9 KHz to 1 GHz, 3Meters

Plot of Radiated Emissions Test Data(Below 30MHz)

EUT: Wireless charger
Tested Model: TS09S
Operating Condition: TMI
Comment: 120V/60Hz; Adapter DC 5V

Test Specification: Loop Antenna

| No. | Frequency (KHz) | Reading (dB μ V) | Detector (PK/QP/A) | Emission (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----|--------------------|-------------------------|-----------------------|----------------------------|-------------------------|----------------|
| 1 | 25 | 60.25 | AV | 80.25 | 119.65 | -39.40 |
| 2 | 39 | 61.35 | AV | 81.24 | 115.78 | -34.54 |
| 3 | 75 | 58.26 | AV | 79.01 | 110.10 | -31.09 |
| 4 | 284 | 54.01 | AV | 75.21 | 98.54 | -23.33 |
| 5* | 392 | 62.24 | AV | 75.35 | 95.74 | -20.39 |
| 6 | 425 | 74.14 | AV | 74.57 | 95.04 | -20.47 |
| 7 | 488 | 65.57 | AV | 68.91 | 93.84 | -24.93 |
| 8 | 2585 | 53.58 | QP | 35.54 | 59.36 | -23.82 |
| 9 | 6254 | 31.92 | QP | 26.57 | 51.68 | -25.11 |

1. “*” Means Fundamental frequency

2. Emission Level [dB μ V/m] = Reading [dB μ V] + Ant. Factor [dB/m] + Cable Loss [dB]

3. Margin [dB] = Emission Level [dB μ V/m] - Limit [dB μ V/m]

4. Limit calculation: Limit at specified distance + $40\log(300/3)$ = Limit + 80 dB for up to 0.49 MHz Limit at specified distance + $40\log(30/3)$ = Limit + 40 dB for above 0.49 MHz, Below 30 MHz

Plot of Radiated Emissions Test Data (From 30MHz to 1GHz)


EUT: Wireless charger

Tested Model: TS09S

Operating Condition: TMI


Comment: 120V/60Hz; Adapter DC 5V

Test Specification: Horizontal

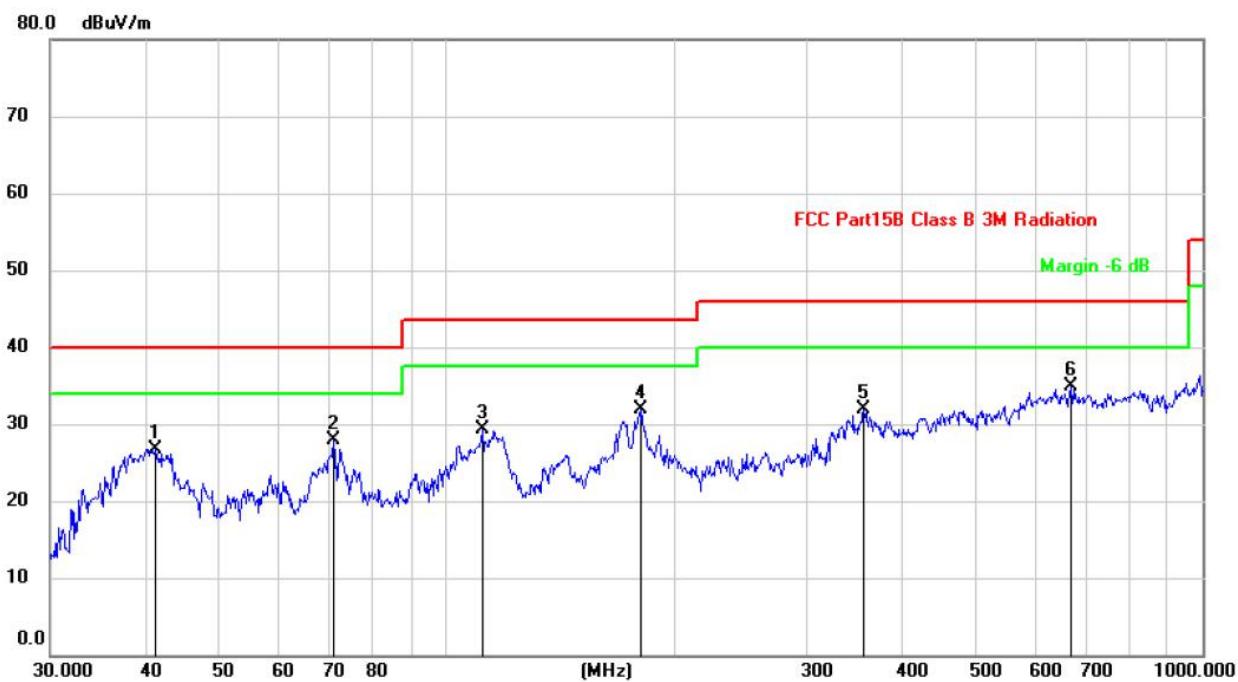

| No. | Mk. | Freq. | Measure- | Limit | Over | Antenna | Table | | | |
|-----|-----|----------|----------|--------|--------|---------|----------|----|--------|---------|
| | | | ment | | | | | | | |
| | | MHz | | dBuV/m | dBuV/m | dB | Detector | cm | degree | Comment |
| 1 | | 41.2764 | 26.78 | 40.00 | -13.22 | QP | | | | |
| 2 | | 71.0802 | 27.85 | 40.00 | -12.15 | QP | | | | |
| 3 | | 111.7377 | 29.36 | 43.50 | -14.14 | QP | | | | |
| 4 | | 181.2834 | 31.89 | 43.50 | -11.61 | QP | | | | |
| 5 | | 356.6757 | 31.84 | 46.00 | -14.16 | QP | | | | |
| 6 | * | 670.4891 | 34.89 | 46.00 | -11.11 | QP | | | | |

Test Specification: Vertical

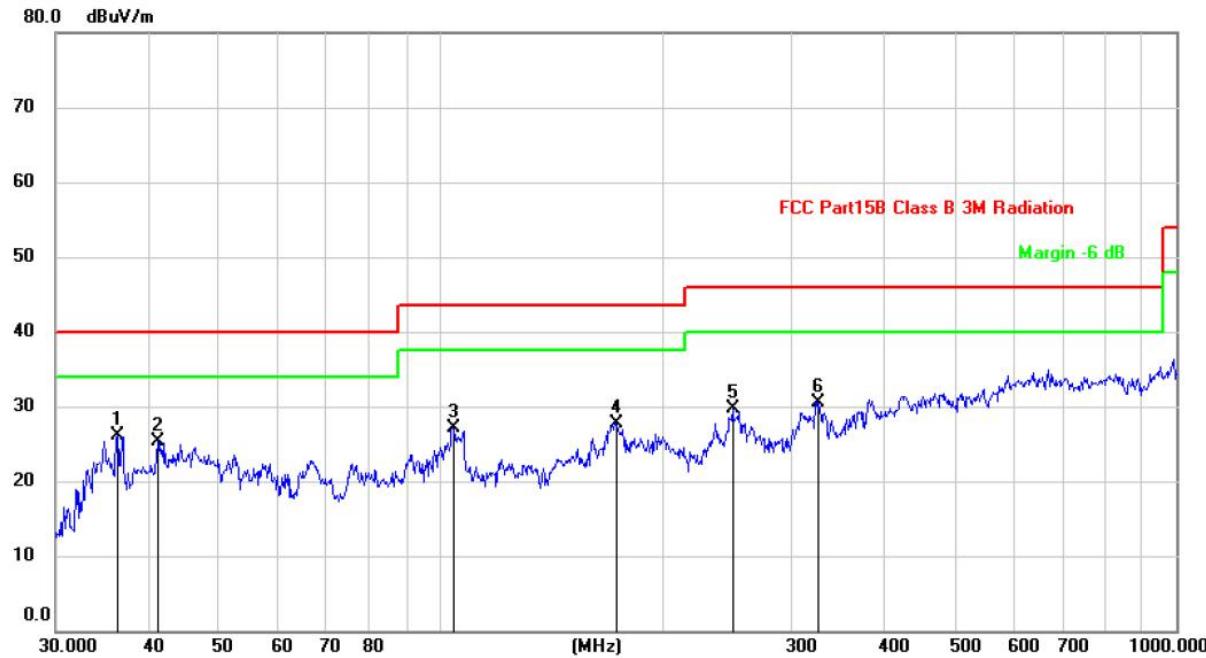

| No. | Mk. | Freq. | Measure- ment | Limit | Over | Antenna | | Table Degree | | | | | |
|-----|-----|----------|------------------|-------|--------|---------|--------|-----------------|----------|--------|----|--------|---------|
| | | | | | | MHz | dBuV/m | dB | Detector | Height | cm | degree | Comment |
| 1 | * | 36.3813 | 26.03 | 40.00 | -13.97 | QP | | | | | | | |
| 2 | | 41.2764 | 25.28 | 40.00 | -14.72 | QP | | | | | | | |
| 3 | | 104.1701 | 27.13 | 43.50 | -16.37 | QP | | | | | | | |
| 4 | | 173.8135 | 27.79 | 43.50 | -15.71 | QP | | | | | | | |
| 5 | | 249.4250 | 29.68 | 46.00 | -16.32 | QP | | | | | | | |
| 6 | | 326.7395 | 30.59 | 46.00 | -15.41 | QP | | | | | | | |

***** END OF REPORT *****