

Page 1 of 77

FCC Test Report


Report No.: AGC00385180601FE04

FCC ID	Ċ	2AOSG-TWSX002B
APPLICATION PURPOSE	i	Original Equipment
PRODUCT DESIGNATION	Global	Bluetooth earphone
BRAND NAME		LATOW
MODEL NAME	© 4	TWSX002B, Latow Luna
CLIENT	:	SHENZHEN XILAILE TECHNOLOGY CO.,LTD
DATE OF ISSUE	<u>A</u> :	Jun. 21, 2018
STANDARD(S)	:	FCC Part 15 Subpart C Section 15.247
REPORT VERSION		V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		Jun. 21, 2018	Valid	Initial release





Report No.: AGC00385180601FE04 Page 3 of 77

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION 2.2. TABLE OF CARRIER FREQUENCYS 2.3. RECEIVER INPUT BANDWIDTH	
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR 2.6. TEST METHOD	
2.7. EQUIPMENT MODIFICATIONS	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	12
5.1. CONFIGURATION OF EUT SYSTEM 5.2. EQUIPMENT USED IN EUT SYSTEM 5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	14
7. TEST EQUIPMENT LIST	
8. PEAK OUTPUT POWER	
8.1. MEASUREMENT PROCEDURE 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 8.3. LIMITS AND MEASUREMENT RESULT	
9. BANDWIDTH	23
9.1. MEASUREMENT PROCEDURE 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 9.3. LIMITS AND MEASUREMENT RESULTS	
10. CONDUCTED SPURIOUS EMISSION	
10.1. MEASUREMENT PROCEDURE 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 10.3. LIMITS AND MEASUREMENT RESULT	30 30

AGC[®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00385180601FE04 Page 4 of 77

11. RADIATED EMISSION	34
11.1. TEST LIMIT	
11.2. MEASUREMENT PROCEDURE	
11.3. TEST SETUP	
11.4. TEST RESULT	
12. BAND EDGE EMISSION	51
12.1. MEASUREMENT PROCEDURE	
12.2. TEST SET-UP	
12.3. TEST RESULT	
13. NUMBER OF HOPPING FREQUENCY	56
13.1. MEASUREMENT PROCEDURE	
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
13.3. LIMITS AND MEASUREMENT RESULT	
14. TIME OF OCCUPANCY (DWELL TIME)	58
14.1. MEASUREMENT PROCEDURE	
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
14.3. LIMITS AND MEASUREMENT RESULT	58
15. FREQUENCY SEPARATION	
15.1. MEASUREMENT PROCEDURE	
15.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
15.3. LIMITS AND MEASUREMENT RESULT	61
16. LINE CONDUCTED EMISSION TEST	63
16.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
16.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
16.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	64
16.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
16.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	65
APPENDIX B: PHOTOGRAPHS OF EUT	67



1. VERIFICATION OF CONFORMITY

SHENZHEN XILAILE TECHNOLOGY CO.,LTD				
2F. 9F. 10F. JiangNan Building, XinWeiZai Village, HeBei, YongXiang Road, BanTian, Longgang District, Shenzhen, China				
SHENZHEN XILAILE TECHNOLOGY CO.,LTD				
2F. 9F. 10F. JiangNan Building, XinWeiZai Village, HeBei, YongXiang Road, BanTian, Longgang District, Shenzhen, China				
Bluetooth earphone				
LATOW				
TWSX002B				
Latow Luna				
All the same except for the appearance shape.				
Jun. 08, 2018 to Jun. 18, 2018				
None				
ndition of Test Sample Normal				
AGCRT-US-BR/RF (2013-03-01)				

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.247. The test results of this report relate only to the tested sample identified in this report.

Tested By

Zhang Harry

Henry Zhang(Zhang Zhuorui) Jun. 18, 2018

we chang

Reviewed By

Cool Cheng(Cheng Mengguo) Jun. 21, 2018

Forvesto en

Approved By

Forrest Lei(Lei Yonggang) Authorized Officer

Jun. 21, 2018





2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is "Bluetooth earphone" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical descripti	on of EUT is described as following
Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	5.94dBm(Max)
Bluetooth Version	V5.0
Modulation	GFSK, π /4-DQPSK, 8DPSK for BR/EDR
Number of channels	79
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Ceramic Antenna
Antenna Gain	0.5dBi
Power Supply	DC 3.7V by Battery
Note: 1.The EUT didn't su	pport BLE.

2. The BT function of EUT didn't work when charging.

3. The EUT comprises left and right channel headsets, both are the same and have been tested. Only the test data of left headset recorded in this report.

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
C = F d Contra Contra	CO O	2402MHz
CC CC	1	2403MHz
	A A A A A A A A A A A A A A A A A A A	and the Frank Content of Frank Street
the man	38	2440 MHz
2402~2480MHz	39	2441 MHz
Not No	40	2442 MHz
W.	The second second second	
S T T A Constant	77	2479 MHz
C The strength	78	2480 MHz

AGC [®] 鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00385180601FE04 Page 7 of 77

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the

master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values: 1. LAP/UAP of the master of the connection.

2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations)are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.



AGC [®]鑫宇环检测 Attestation of Global Compliance

Report No.: AGC00385180601FE04 Page 8 of 77

2.6. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.





Report No.: AGC00385180601FE04 Page 9 of 77

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, $Uc = \pm 3.9 \text{ dB}$
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB





4. DESCRIPTION OF TEST MODES

1105		
	NO.	TEST MODE DESCRIPTION
Harran Co	1 10 100	Low channel GFSK
obal C	2	Middle channel GFSK
GO	3	High channel GFSK
	4	Low channel π /4-DQPSK
Fr allon of Giol	5 Franciscom	Middle channel π /4-DQPSK
Alles	6	High channel π /4-DQPSK
	7	Low channel 8DPSK
8	8	Middle channel 8DPSK
C.C	9	High channel 8DPSK
	10	BT Link
Note	P	

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.



Software Setting

Ion Link Mode	Hopping RW O	ptions LE Test LED	1		HCI Reset
Channel Packet Type Payload Type Tx Packet Cou Tx Gain Index Tx Gain Value Parameter 1 F fessage	DH1 ALL'0 ant 0 5 0xCE arameter 2 Parameter	r 3 Table Cal	Pkt-Tx Exec Stop Item Value Tx bits 97438 Tx Pkt Count 4048 TX Report RX Report	Clear Report	Test Mode Patch code GetChipInfo Get BT Stage 0
>LMP_Version=0 >Version=0c >Is_After_Patch0 >Skip patch code >Download patch >Enable TRX Th	iode=1 e !! n code Success	11			Script



AGC [®] 鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00385180601FE04 Page 12 of 77

5. SYSTEM TEST CONFIGURATION 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

EUT

Configure 2: (Control continuous TX)

			T		1
EUT	-	Control box	oal Con	PC	lobs
	× a				

5.2. EQUIPMENT USED IN EUT SYSTEM

ltem	Equipment	Mfr/Brand	Model/Type No.	Remark
a Contance	Bluetooth earphone	LATOW	TWSX002B	EUT
2	Battery	Jinyuzhou	401012	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	SERIAL	N/A	A.E
5	IPOD	APPLE	A1367	A.E
6	Temporary Antenna Connector	T10	N/A	A.E
7 。	USB Cable	N/A	1m unshielded	A.E

Note: The temporary antenna connector is a RF SMA connector with fifty ohm resistor, which is welded to the PCB board or module.





5.3. SUMMARY OF TEST RESULTS

DESCRIPTION OF TEST	RESULT	
Peak Output Power	Compliant	
20 dB Bandwidth	Compliant	
Conducted Spurious Emission	Compliant	
Radiated Emission	Compliant	
Band Edges	Compliant	
Number of hopping frequency	Compliant	
Time of Occupancy	Compliant	
Frequency Separation	Compliant	
Line conduction Emission	N/A	
	Peak Output Power 20 dB Bandwidth Conducted Spurious Emission Radiated Emission Band Edges Number of hopping frequency Time of Occupancy Frequency Separation	

Note: N/A means it's not applicable to this item.





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0



R GC 鑫 宇 环 检 测 Attestation of Global Compliance 测

7. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May.18, 2017	May.17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B		Mar. 01, 2018	Feb. 28, 2019
Radiation Cable 1	MXT	RS1	R005	June 6, 2018	June 5, 2019
Radiation Cable 2	MXT	RS1	R006	June 6, 2018	June 5, 2019
			1		





Report No.: AGC00385180601FE04 Page 16 of 77

8. PEAK OUTPUT POWER

8.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. RBW > the 20 dB bandwidth of the emission being measured, VBW \ge RBW.
- 4. Record the maximum power from the Spectrum Analyzer.
- 5. The maximum peak power shall be less 21dBm.


8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

RF Attenuator Spectrum Analyzer



8.3. LIMITS AND MEASUREMENT RESULT


		MEASUREMENT RESULT	
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	2.48	21	Pass
2.441	2.44	21 ⁹ ¹ ¹ ¹	Pass
2.480	2.06	21	Pass

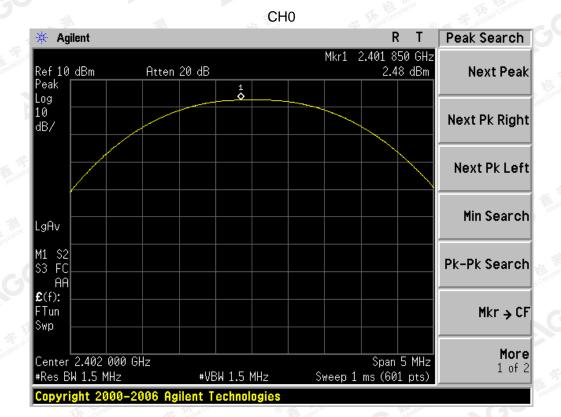






Report No.: AGC00385180601FE04 Page 18 of 77

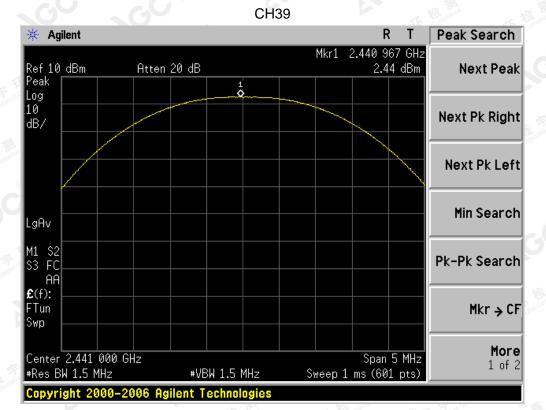


CH78

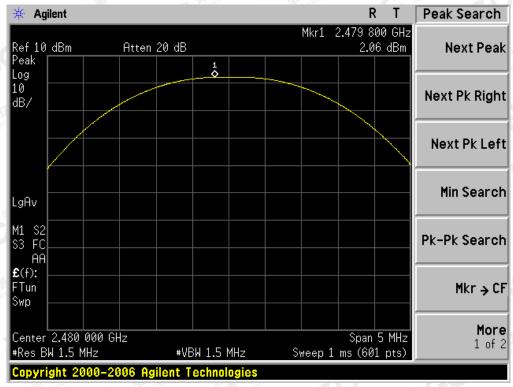



5.48 ²	PEAK OUTPUT POWE	R MEASUREMENT RESULT	
	FOR 11 /4-D0	PSK MODULATION	
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	5.94	21	Pass
2.441	4.95	21 0	Pass
2.480	4.52	21	Pass

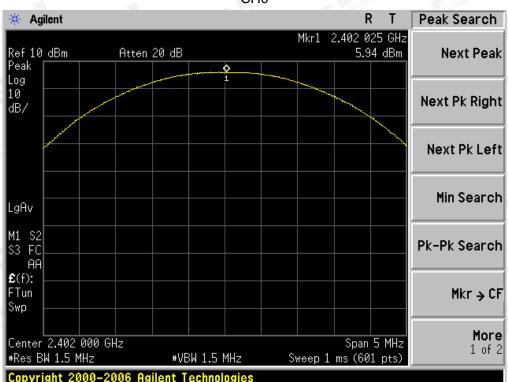

The results shows in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




CH0



Report No.: AGC00385180601FE04 Page 20 of 77

CH39 Peak Search Agilent R Т ÷#+ Mkr1 2.441 192 GHz 4.95 dBm Ref 10 dBm Atten 20 dB Next Peak Peak ٥ Log 10 Next Pk Right dB/ Next Pk Left Min Search LgAv M1 S2 S3 FC Pk-Pk Search AA £(f): FTun Mkr → CF Swp More Center 2.441 000 GHz Span 5 MHz 1 of 2 #Res BW 1.5 MHz Sweep 1 ms (601 pts) #VBW 1.5 MHz


CH78

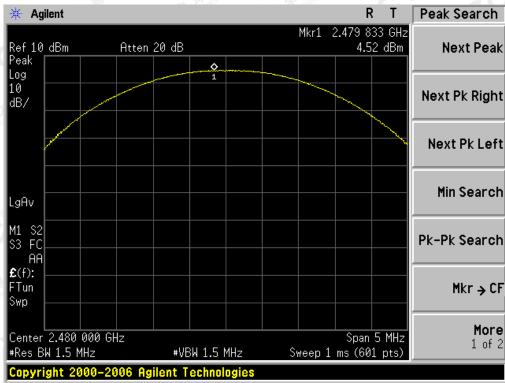

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 🖉 C, this documents and the authenticity of the reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cert.com.

A

I	PEAK OUTPUT POWE	R MEASUREMENT RESULT	
	FOR 8-DPS	K MODULATION	
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	5.44	21	Pass
2.441	5.37	21	Pass
2.480	4.91	21	Pass

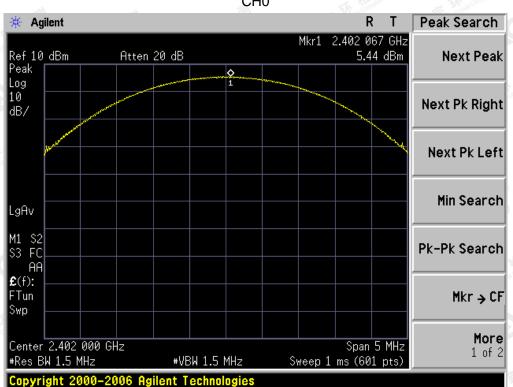

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



GC

鑫 宇 环 检 测 Attestation of Global Compliance

CH0




Report No.: AGC00385180601FE04 Page 22 of 77

Peak Search Agilent R Т ÷#+ Mkr1 2.440 992 GHz 5.37 dBm Ref 10 dBm Atten 20 dB Next Peak Peak Ó Log 10 Next Pk Right dB/ Next Pk Left Min Search LgAv M1 S2 S3 FC Pk-Pk Search AA £(f): FTun Mkr → CF Swp More Center 2.441 000 GHz Span 5 MHz 1 of 2 #Res BW 1.5 MHz Sweep 1 ms (601 pts) #VBW 1.5 MHz

CH39

CH78

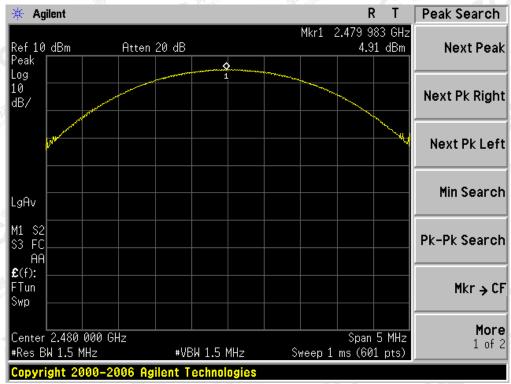

AGC [®]鑫宇环检测 Attestation of Global Compliance


Report No.: AGC00385180601FE04 Page 23 of 77


9. BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel PRM > 4% of the 20 dB bandwidth VRM > 2PRM + Support = support = Patenter function = nach
- $RBW \ge 1\%$ of the 20 dB bandwidth, VBW $\ge 3RBW$; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





RF Cable

Note: The EUT has been used temporary antenna connector for testing.

9.3. LIMITS AND MEASUREMENT RESULTS

	BLUETOOTH	1MBPS LIMITS AN	ID MEASUREMENT	RESULT
		Me	easurement Result	
Applicable Limits	Test Data (MHz)		Decult	
		99%OBW (MHz)	-20dB BW(MHz)	Result
() The state of th	Low Channel	0.964	1.129	PASS
N/A	Middle Channel	0.949	1.127	PASS
	High Channel	0.957	1.103	PASS





TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

🔆 Agilent R Freq/Channel Т Center Freq Ch Freq 2.441 GHz Trig Free 2.44100000 GHz Occupied Bandwidth Center 2.441000000 GHz Start Freq 2.43950000 GHz Ref 20 dBm Atten 30 dB Stop Freq #Peak 2.44250000 GHz Log 10 ٥ Ô-**CF** Step dB/ 300.000000 kHz Man <u>Auto</u> Freq Offset 0.00000000 Hz Center 2.441 000 GHz Span 3 MHz #Res BW 100 kHz Sweep 1 ms (601 pts) #VBW 300 kHz Signal Track Occupied Bandwidth Occ BW % Pwr 99.00 % 0n Off -20.00 dB x dB 949.1321 kHz Transmit Freq Error -4.151 kHz x dB Bandwidth 1.127 MHz

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

The results shown if this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL




	BLUETOOTH 2	MBPS LIMITS AN	D MEASUREMENT R	ESULT
		Ме	asurement Result	
Applicable Limits		Test Data (MHz)		Deevilt
		99%OBW (MHz)	-20dB BW(MHz)	Result
The the annual	Low Channel	1.228	1.411	PASS
N/A	Middle Channel	1.231	1.424	PASS
SGC *	High Channel	1.227	1.418	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL






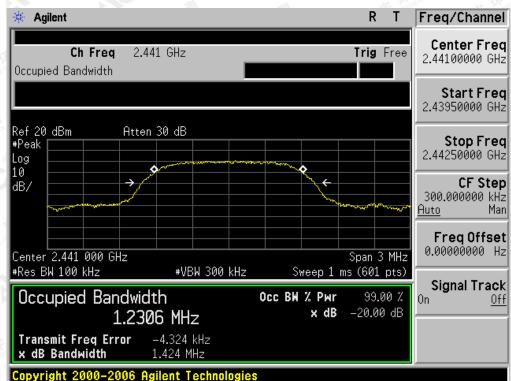


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

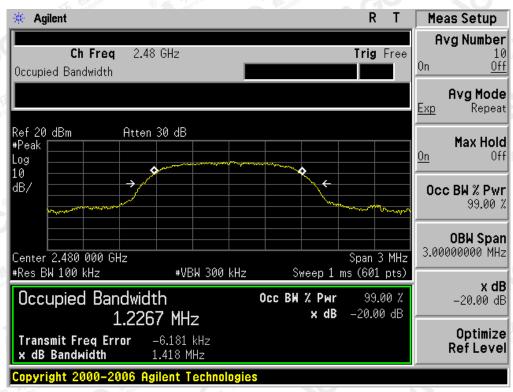


	BLUETOOTH :	3MBPS LIMITS AN	D MEASUREMENT R	ESULT
		Ме	asurement Result	
Applicable Limits		Test Data (MHz)		Decult
		99%OBW (MHz)	-20dB BW(MHz)	Result
The tampion	Low Channel	1.234	1.399	PASS
N/A	Middle Channel	1.239	1.411	PASS
SGC	High Channel	1.233	1.415	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

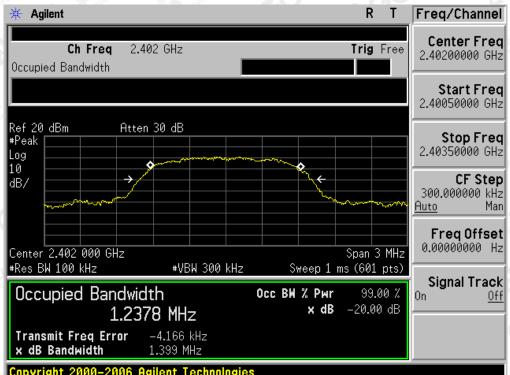




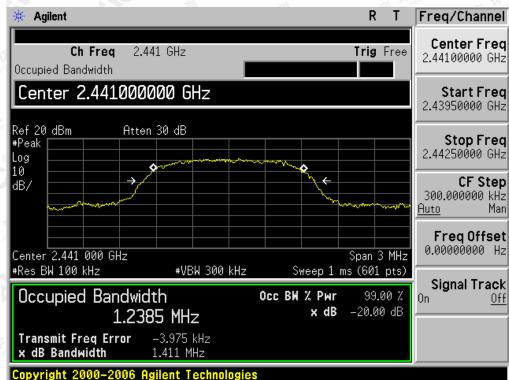

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

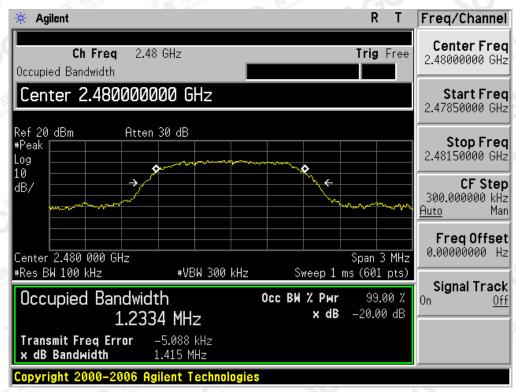

AGC a 宇 环 检 测 Attestation of Global Compliance


Report No.: AGC00385180601FE04 Page 30 of 77


10. CONDUCTED SPURIOUS EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 - RBW = 100 kHz; VBW = 300kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





RF Cable

10.3. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Measurement Result				
Test Data	Result			
At least -20dBc than the limit Specified on the BOTTOM Channel	PASS			
Same of the second of the seco	3C Manufactoria			
At least -20dBc than the limit Specified on the TOP Channel	PASS			
	Measurement Rest Test Data At least -20dBc than the limit Specified on the BOTTOM Channel			




R * Agilent т Peak Search Mkr1 478.1 MHz -67.28 dBm Atten 20 dB Ref 10 dBm Next Peak Peak Log 10 dB/ Next Pk Right Next Pk Left **Min Search** _gAv Start 9kHz Stop 1.000 0 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 92.83 ms (8192 pts) Pk-Pk Search Trace (1) Type Freq Marker X Axis Amplitude 478.1 MHz -67.28 dBm Mkr → CF More 1 of 2 Copyright 2000-2006 Agilent Technologies 🔆 Agilent R Т Peak Search Mkr2 20.40 GHz -61.11 dBm Ref 10 dBm Atten 20 dB Next Peak Peak Log 10 Next Pk Right dB/ Next Pk Left **Min Search** LgAv Start 1.00 GHz Stop 25.00 GHz #Res BW 100 kHz Pk-Pk Search #VBW 300 kHz Sweep 2.294 s (8192 pts) X Axis 2.40 GHz Type Freq Freq Marker Trace Amplitude 2.19 dBm -61.11 dBm (1) (1) 2 20.40 GHz Mkr → CF More 1 of 2

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF π /4-DQPSK MODULATION IN LOW CHANNEL

Copyright 2000-2006 Agilent Technologies

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




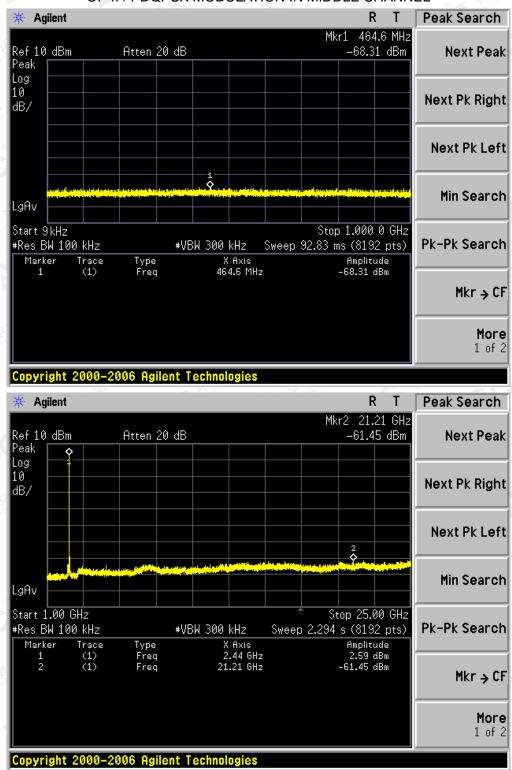

TEST PLOT OF OUT OF BAND EMISSIONS OF π /4-DQPSK MODULATION IN MIDDLE CHANNEL

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



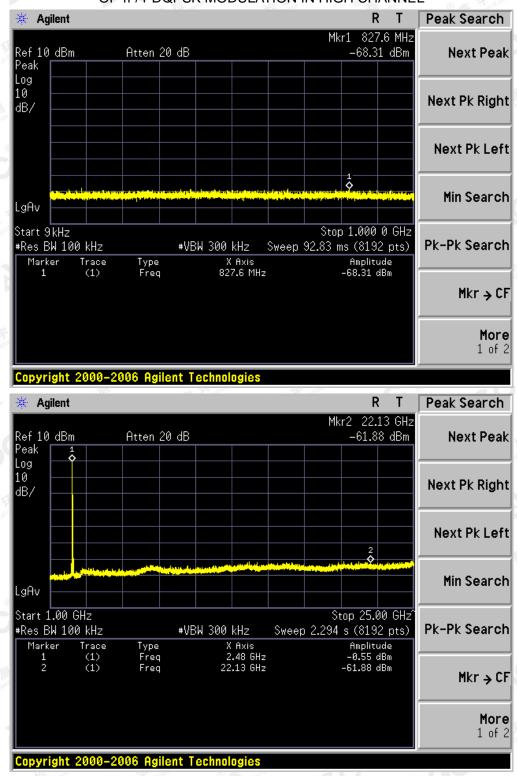

TEST PLOT OF OUT OF BAND EMISSIONS OF π /4-DQPSK MODULATION IN HIGH CHANNEL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.



11. RADIATED EMISSION

11.1. TEST LIMIT

Frequency	Distance	Field Strengths Limit	
(MHz)	Meters	μ V/m	dB(µV)/m
0.009 ~ 0.490	300	2400/F(kHz)	ane o
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	1 3 Th 1	200	46.0
960 ~ 1000	3 Same Coort	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Peak)	54.0 dB(µV)/m (Average)

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

11.2. MEASUREMENT PROCEDURE

- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)





Report No.: AGC00385180601FE04 Page 35 of 77

Sp	ectrum Parameter	Setting
Sta	art ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Sta	art ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Sta	art ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
C Sta	art ~Stop Frequency	1GHz~26.5GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average

The following table is the setting of spectrum analyzer and receiver.

	and the second sec	
	Receiver Parameter	Setting
Start ~Stop Frequency		9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency		150KHz~30MHz/RB 9KHz for QP
and a	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP






Report No.: AGC00385180601FE04 Page 36 of 77


11.3. TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 30MHz

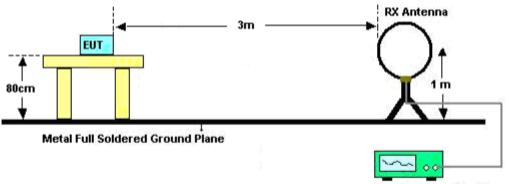

Spectrum Analyzer / Receiver

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

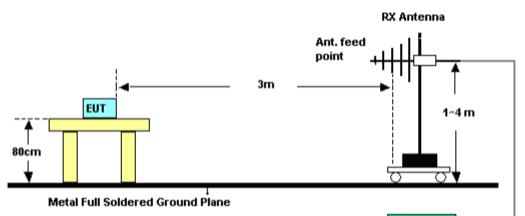


Spectrum Analyzer / Receiver





Report No.: AGC00385180601FE04 Page 37 of 77

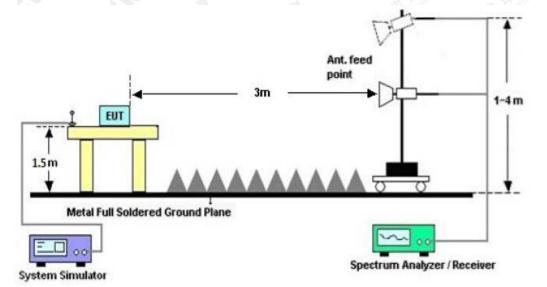

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





Report No.: AGC00385180601FE04 Page 38 of 77

11.4. TEST RESULT

(Worst Modulation: π /4-DQPSK)

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

The results show of this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




AGC[®]鑫宇环检测 Attestation of Global Compliance

Report No.: AGC00385180601FE04 Page 39 of 77

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

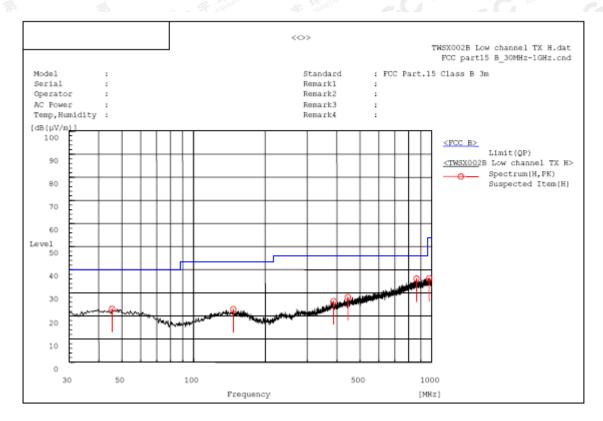


A. Suspected List:

	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	45.520	н	5.8	17.3	23.1	40.0	16.9	Pass	200.0	288.5
ſ	146.885	н	6.3	16.6	22.9	43.5	20.6	Pass	150.0	252.9
	386.960	н	6.1	20.3	26.4	46.0	19.6	Pass	200.0	143.6
	444.675	Н	6.1	22.0	28.1	46.0	17.9	Pass	200.0	288.5
	863.715	Н	6.3	29.8	36.1	46.0	9.9	Pass	100.0	342.6
	976.235	Н	5.4	30.9	36.3	54.0	17.7	Pass	150.0	180.7

RESULT: PASS

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.

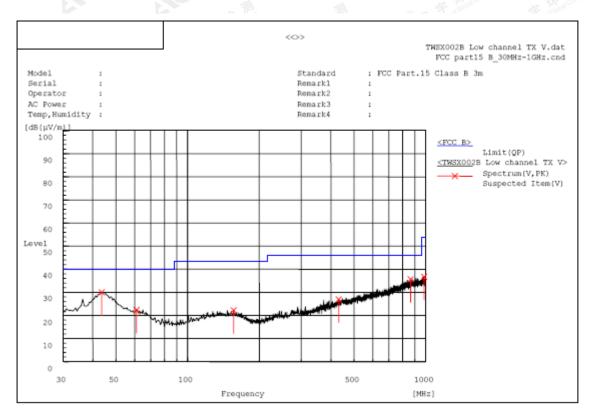

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

A. Suspected List:

	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(u∨/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
ſ	43.580	v	12.6	17.4	30.0	40.0	10.0	Pass	200.0	341.2
ſ	61.040	v	6.3	16.1	22.4	40.0	17.6	Pass	100.0	142.6
	156.100	v	5.7	16.6	22.3	43.5	21.2	Pass	100.0	286.2
	431.095	v	5.2	21.7	26.9	46.0	19.1	Pass	200.0	268.3
	863.715	v	5.9	29.8	35.7	46.0	10.3	Pass	200.0	194.8
	984.965	v	5.7	31.0	36.7	54.0	17.3	Pass	150.0	181.3


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



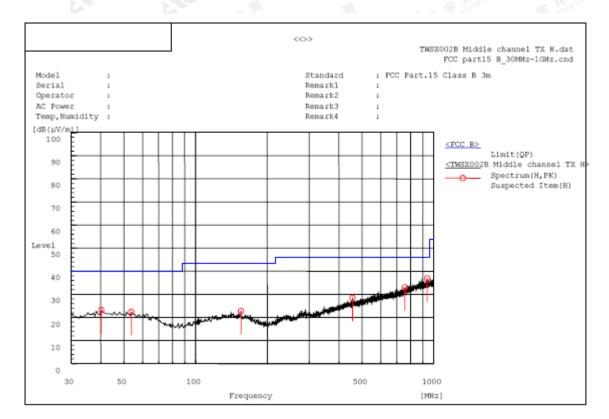


RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
40.185	Н	5.8	17.4	23.2	40.0	16.8	Pass	200.0	266.8
53.765	н	5.6	16.8	22.4	40.0	17.6	Pass	200.0	195.4
155.130	Н	6.2	16.6	22.8	43.5	20.7	Pass	100.0	255.5
455.830	н	6.2	22.2	28.4	46.0	17.6	Pass	100.0	182.0
756.530	н	5.4	27.7	33.1	46.0	12.9	Pass	150.0	71.4
938.405	н	6.3	30.6	36.9	46.0	9.1	Pass	200.0	303.4

RESULT: PASS

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.

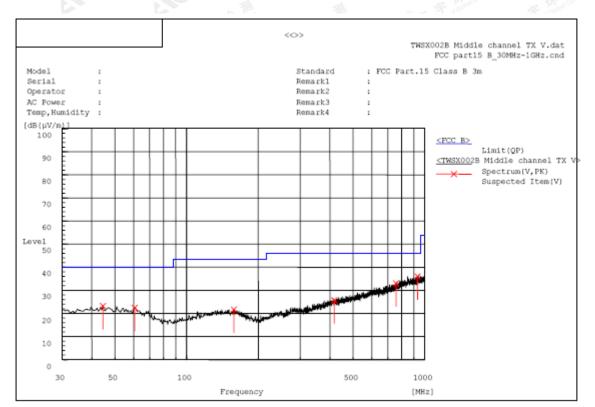

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

A. Suspected List:

	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(u∨/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
ſ	44.550	v	5.9	17.3	23.2	40.0	16.8	Pass	200.0	214.3
ſ	60.555	v	6.3	16.1	22.4	40.0	17.6	Pass	150.0	252.1
	158.040	v	5.1	16.6	21.7	43.5	21.8	Pass	100.0	52.5
	417.030	v	4.4	21.3	25.7	46.0	20.3	Pass	200.0	71.4
	757.500	v	5.3	27.7	33.0	46.0	13.0	Pass	150.0	144.2
	933.070	v	5.5	30.5	36.0	46.0	10.0	Pass	200.0	323.5


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



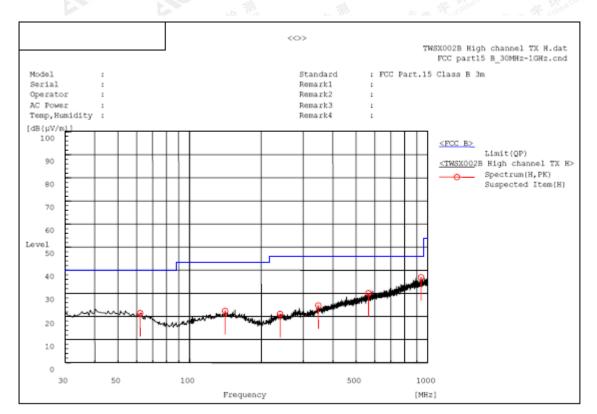


RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
62.010	н	5.4	16.0	21.4	40.0	18.6	Pass	200.0	267.7
141.065	н	5.8	16.6	22.4	43.5	21.1	Pass	200.0	123.3
240.005	н	4.8	16.2	21.0	46.0	25.0	Pass	100.0	255.5
347.190	Н	5.9	18.8	24.7	46.0	21.3	Pass	200.0	267.7
563.985	н	5.9	24.2	30.1	46.0	15.9	Pass	200.0	267.7
938.405	н	6.3	30.6	36.9	46.0	9.1	Pass	200.0	303.4

RESULT: PASS

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.

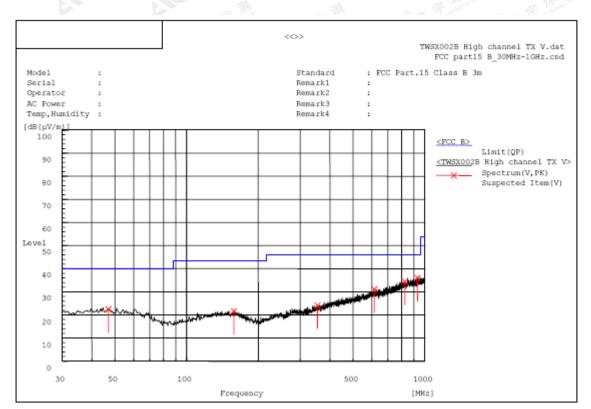

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
46.975	v	5.3	17.2	22.5	40.0	17.5	Pass	100.0	268.1
158.040	v	5.1	16.6	21.7	43.5	21.8	Pass	100.0	52.5
354.465	v	5.0	19.1	24.1	46.0	21.9	Pass	200.0	323.5
614.425	v	5.9	25.2	31.1	46.0	14.9	Pass	150.0	287.1
825.400	v	5.2	29.2	34.4	46.0	11.6	Pass	200.0	214.3
933.070	v	5.5	30.5	36.0	46.0	10.0	Pass	200.0	323.5

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.






Report No.: AGC00385180601FE04 Page 45 of 77

RADIATED EMISSION ABOVE 1GHz

RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL-HORIZONTAL

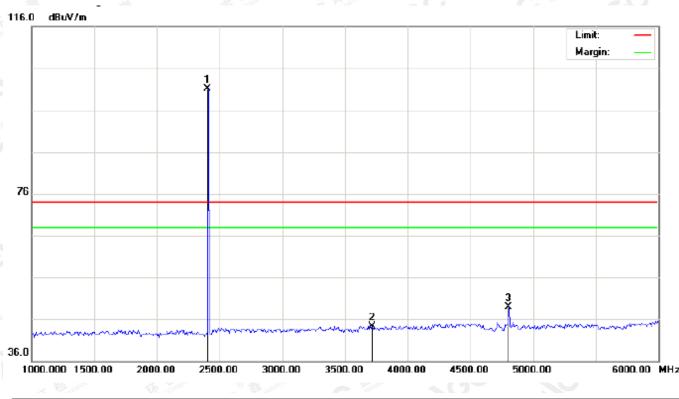


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	90.75	10.32	101.07	74.00	27.07	peak			
2		3716.667	30.77	13.44	44.21	74.00	-29.79	peak			
3		4804.000	41.21	7.69	48.90	74.00	-25.10	peak			

RESULT: PASS

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.



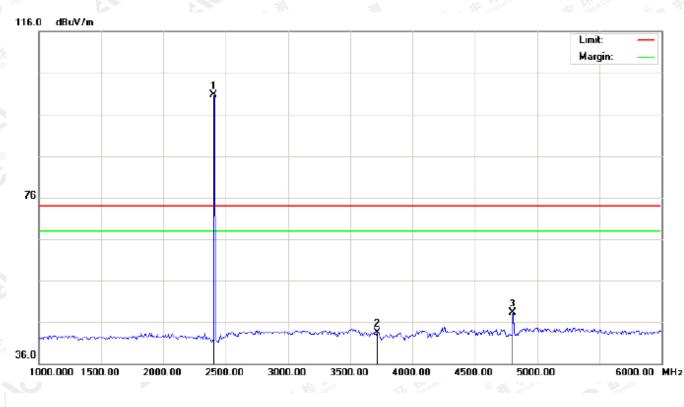

RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL –VERTICAL


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1	*	2402.000	90.32	10.32	100.64	74.00	26.64	peak			
2		3716.667	30.08	13.44	43.52	74.00	-30.48	peak			
3		4804.000	40.55	7.69	48.24	74.00	-25.76	peak			

RESULT: PASS

The results shows in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-MIDDLE CHANNEL-HORIZONTAL

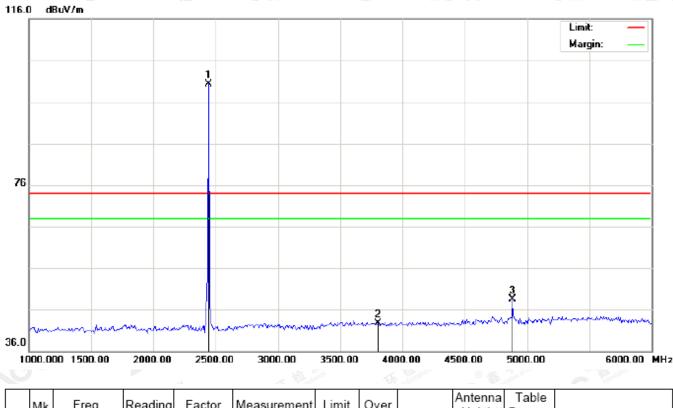


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	89.85	10.36	100.21	74.00	26.21	peak			
2		3800.000	28.82	13.96	42.78	74.00	-31.22	peak			
3		4882.000	40.66	7.89	48.55	74.00	-25.45	peak			

RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics) - MIDDLE CHANNEL -VERTICAL

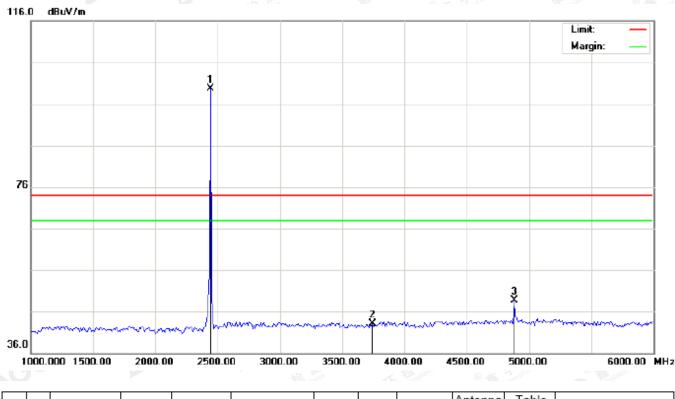

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1	*	2441.000	89.40	10.36	99.76	74.00	25.76	peak			
2		3741.667	29.43	13.60	43.03	74.00	-30.97	peak			
3		4882.000	40.89	7.89	48.78	74.00	-25.22	peak			

RESULT: PASS

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.



116.0 dBuV/m Limit: Margin: 1 76 X 36.0 1000.000 1500.00 2500.00 3000.00 3500.00 4000.00 4500.00 6000.00 MHz 2000.00 5000.00


PADIATED EMISSION ABOVE 1047	10 th Harmonias) HICH CHANNEL HORIZ	ONITAL
RADIATED EIVIISSION ABOVE TGHZ	10 th Harmonics)-HIGH CHANNEL-HORIZ	.ONTAL

No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
0	-	MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1	*	2480.496	89.72	10.41	100.13	74.00	26.13	peak			
2		3850.000	29.28	14.27	43.55	74.00	-30.45	peak			
3		4960.000	41.10	8.09	49.19	74.00	-24.81	peak			

RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.cett.com.



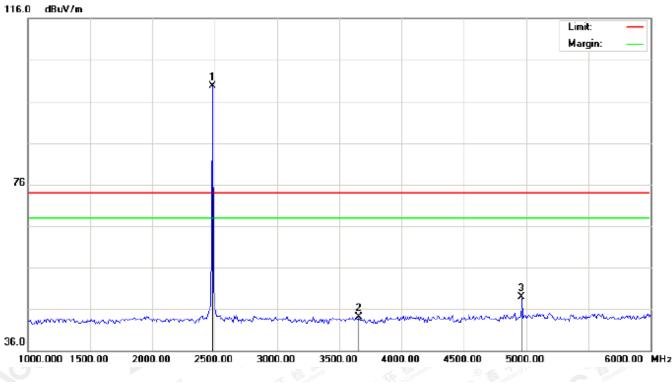

RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-HIGH CHANNEL –VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	89.29	10.41	99.70	74.00	25.70	peak			
2		3658.333	31.08	13.09	44.17	74.00	-29.83	peak			
3		4960.000	40.91	8.09	49.00	74.00	-25.00	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

- Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.
 - The "Factor" value can be calculated automatically by software of measurement system.

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.



ACC [®]鑫 宇 环 检 测 Attestation of Global Compliance 测


Report No.: AGC00385180601FE04 Page 51 of 77

12. BAND EDGE EMISSION

12.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency, For unrestricted band: RBW=100kHz, VBW=300kHz For restricted band: RBW=1MHz, VBW=3*RBW
 - Center frequency =Operation frequency
- 3. The band edges was measured and recorded.

12.2. TEST SET-UP

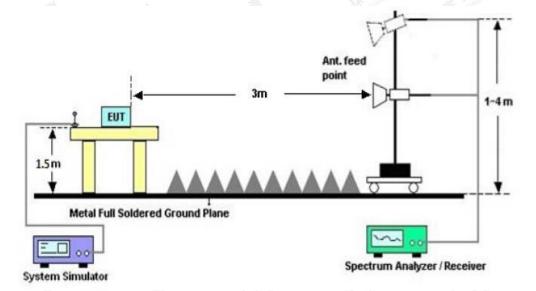

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 🖉 C, this documents and the authenticity of the reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cett.com.




AGC Attestation of Global Compliance

12.3. TEST RESULT

(Worst Modulation: π /4-DQPSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (2Mbps)-Horizontal

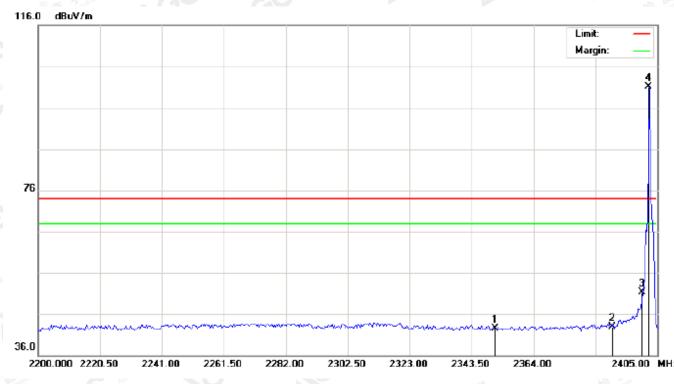

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1		2351.358	32.14	10.27	42.41	74.00	-31.59	peak			
2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
3		2400.000	40.97	10.32	51.29	74.00	-22.71	peak			
4	*	2402.000	90.72	10.32	101.04	74.00	27.04	peak			

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



AGC[®]鑫宇环检测 Attestation of Global Compliance

116.0 dBuV/m Limit: Margin: 76 36.0 2200.000 2220.50 2241.00 2261.50 2282.00 2302.50 2323.00 2343.50 2364.00 2405.00 MHz Antenna Table Freq. Reading Factor Measurement Limit Over Mk Height Degree Comment No. Detector dB MHz dBu∨ dB/m dBuV/m dBuV/m cm degree

74.00

74.00

74.00

74.00

-31.13

-29.48

-24.62

26.60

peak

peak

peak

peak

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (2Mbps)-Vertical

Report No.: AGC00385180601FE04

Page 53 of 77

The results sponton (http://est report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



2353.408

2390.000

2400.000

2402.000

1

2

3

4

32.60

34.21

39.06

90.28

10.27

10.31

10.32

10.32

42.87


44.52

49.38

100.60



Report No.: AGC00385180601FE04 Page 54 of 77

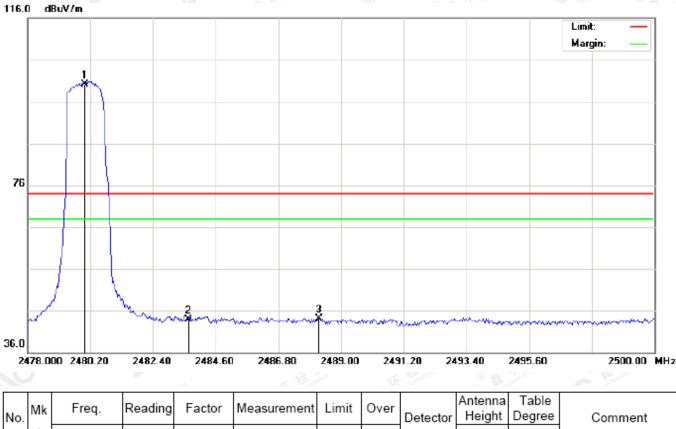

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (2Mbps)-Horizontal


1	٩o.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
4		-	MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
Γ	1	*	2480.000	89.75	10.41	100.16	74.00	26.16	peak			
Γ	2		2483.650	33.59	10.41	44.00	74.00	-30.00	peak			
	3		2488.230	33.66	10.42	44.08	74.00	-29.92	peak			

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





Report No.: AGC00385180601FE04 Page 55 of 77

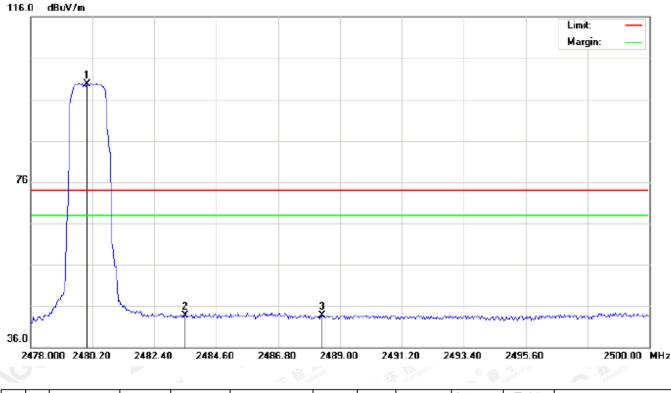

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (2Mbps)-Vertical

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1	*	2480.000	89.32	10.41	99.73	74.00	25.73	peak			
2		2483.500	33.26	10.41	43.67	74.00	-30.33	peak			
3		2488.377	33.21	10.42	43.63	74.00	-30.37	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Hopping off and Hopping on have been tested and only worst case recorded

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.



AGC [®] 鑫 宇 环 检 测 Attestation of Global Compliance


Report No.: AGC00385180601FE04 Page 56 of 77

13. NUMBER OF HOPPING FREQUENCY

13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=3RBW.

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)



EUT

Spectrum Analyzer


RF Cable

13.3. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 🖉 C, this documents and the authenticity of the reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-gett.com.



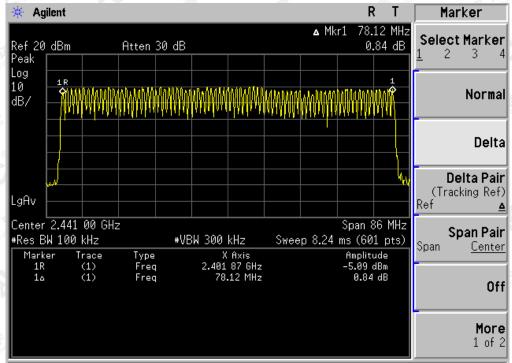

TEST PLOT FOR NO. OF TOTAL CHANNELS

Copyright 2000-2006 Agilent Technologies

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.



ACC 整字环检测 Attestation of Global Compliance

Report No.: AGC00385180601FE04 Page 58 of 77

14. TIME OF OCCUPANCY (DWELL TIME)


14.1. MEASUREMENT PROCEDURE


1. Place the EUT on the table and set it in transmitting mode

2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.

- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)





RF Cable


14.3. LIMITS AND MEASUREMENT RESULT

	The We	orst Case (2Mbps)	G ment	
Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.842	31.6	303.15	400
Middle	2.870	31.6	306.13	400
High	2.898	31.6	309.12	400

Low Channel Time 2.842*(1600/6)/79*31.6=303.15ms Middle Channel Time 2.870*(1600/6)/79*31.6=306.13ms **High Channel Time** 2.898*(1600/6)/79*31.6=309.12ms


The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 🖉 C, this documents and the authenticity of the reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-gett.com.



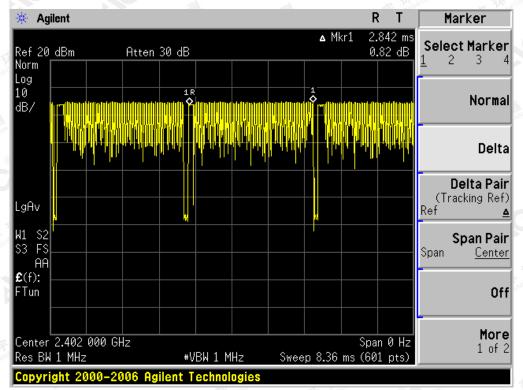


TEST PLOT OF LOW CHANNEL

TEST PLOT OF MIDDLE CHANNEL

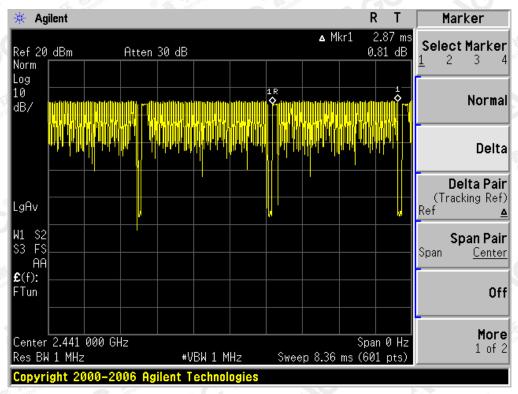

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



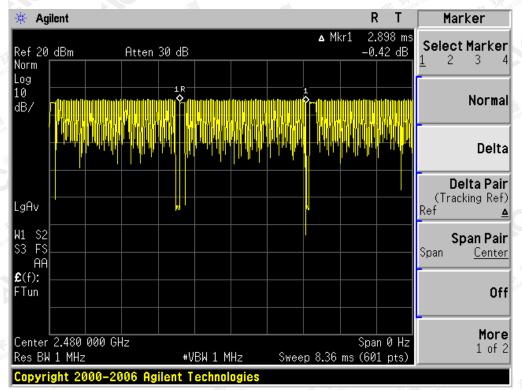

TEST PLOT OF HIGH CHANNEL

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



AGC [®] 鑫 宇 环 检 测 Attestation of Global Compliance


Report No.: AGC00385180601FE04 Page 61 of 77

15. FREQUENCY SEPARATION

15.1. MEASUREMENT PROCEDURE


- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

15.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)



EUT

Spectrum Analyzer




RF Cable

15.3. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT	
	KHz	KHz		
CH00-CH01	991	>=25 KHz or 2/3 20 dB BW	Pass	

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.ceit.com.



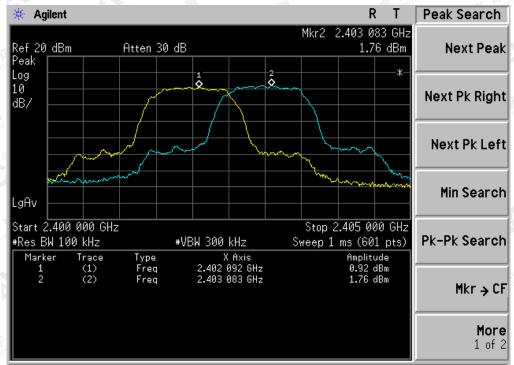

TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

Copyright 2000-2006 Agilent Technologies

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



A G C [®] 鑫 宇 环 检 测 Attestation of Global Compliance

16. LINE CONDUCTED EMISSION TEST

16.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Frominant	Maximum RF Line Voltage						
Frequency	Q.P.(dBuV)	Average(dBuV)					
150kHz~500kHz	66-56	56-46					
500kHz~5MHz	56	46					
5MHz~30MHz	60	50					

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

16.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

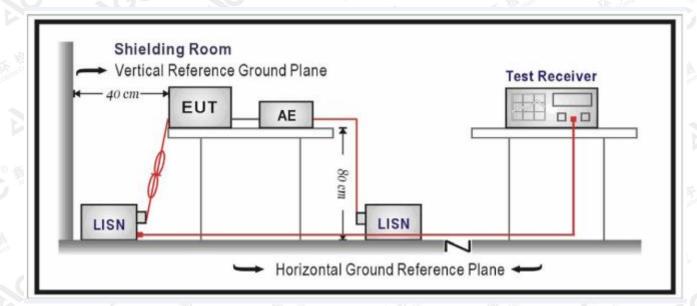

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



AGC [®] 鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00385180601FE04 Page 64 of 77

16.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

16.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

16.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function of EUT didn't work when charging.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





Report No.: AGC00385180601FE04 Page 65 of 77

APPENDIX A: PHOTOGRAPHS OF TEST SETUP FCC RADIATED EMISSION TEST SETUP

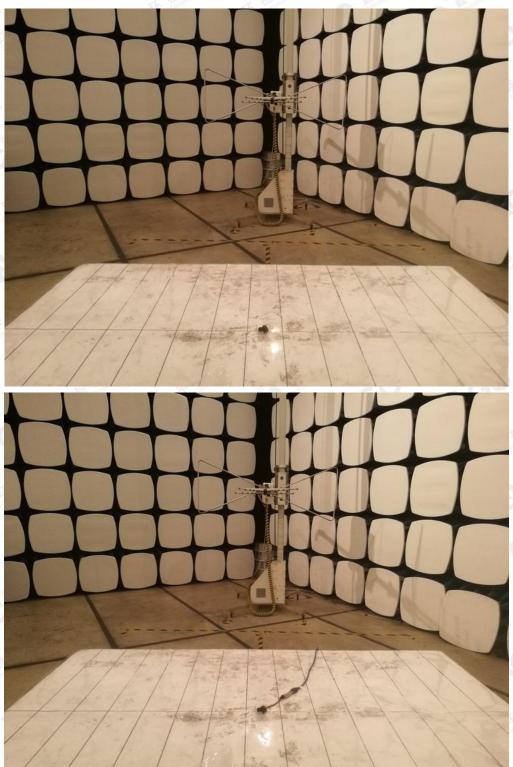


The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.





Report No.: AGC00385180601FE04 Page 66 of 77

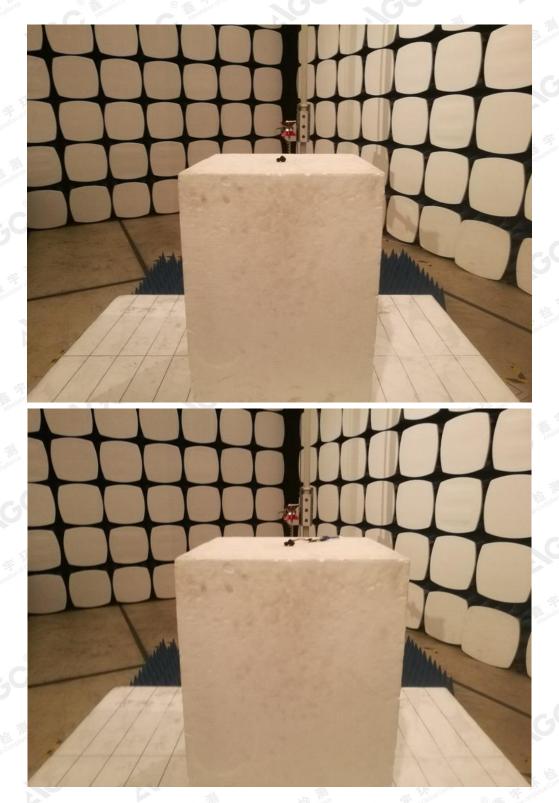

The results show of this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gent.com.

Attestation of Global Compliance



Report No.: AGC00385180601FE04 Page 67 of 77



APPENDIX B: PHOTOGRAPHS OF EUT TOTAL VIEW OF EUT

TOP VIEW OF EUT



The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.



Report No.: AGC00385180601FE04 Page 68 of 77

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



Report No.: AGC00385180601FE04 Page 69 of 77

BACK VIEW OF EUT



LEFT VIEW OF EUT



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc?gett.com.





Report No.: AGC00385180601FE04 Page 70 of 77

RIGHT VIEW OF EUT



Left VIEW OF EUT (PORT)



The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc?gett.com.





Report No.: AGC00385180601FE04 Page 71 of 77

06 001 01 30 50 10 100 00 0.9 0.2 0.8

VIEW OF EUT (OPEN)

VIEW OF BATTERY




The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.






Report No.: AGC00385180601FE04 Page 72 of 77

INTERNAL VIEW OF EUT-1

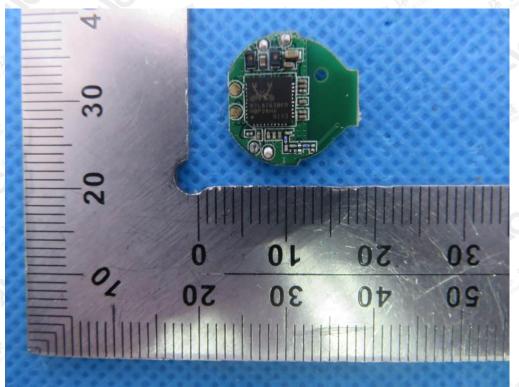

INTERNAL VIEW OF EUT-2

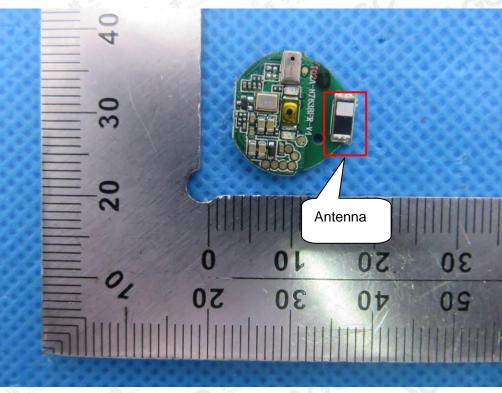


The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.





Report No.: AGC00385180601FE04 Page 73 of 77

INTERNAL VIEW OF EUT-3

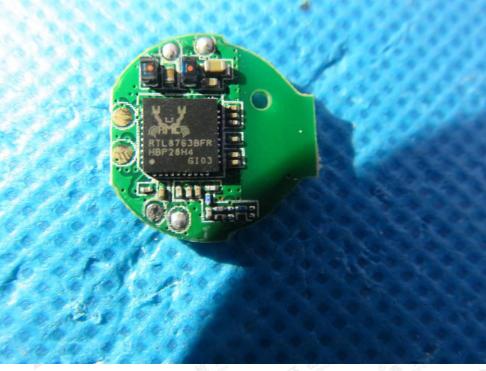

Right VIEW OF EUT (PORT)



The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cont.com.





Report No.: AGC00385180601FE04 Page 74 of 77



VIEW OF EUT (OPEN)

VIEW OF BATTERY




The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




Report No.: AGC00385180601FE04 Page 75 of 77

INTERNAL VIEW OF EUT-1

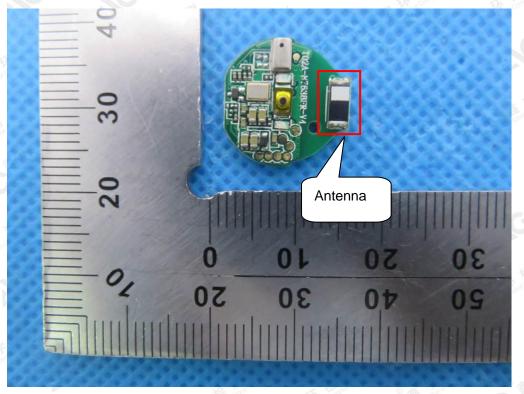

INTERNAL VIEW OF EUT-2

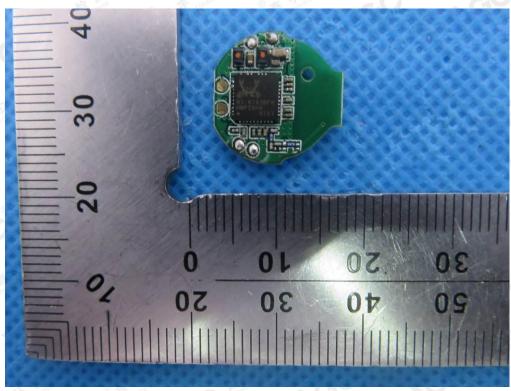

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.





Report No.: AGC00385180601FE04 Page 76 of 77

INTERNAL VIEW OF EUT-3



Charging Dock VIEW OF EUT-1



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





Report No.: AGC00385180601FE04 Page 77 of 77

VIEW OF EUT-2



--END OF REPORT--

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

