


# Human Exposure Report

**Application No.:** SZEM1907015882CR  
**Applicant:** ShenZhen KaiXingHui Technology Co., Ltd.  
**Address of Applicant:** 206, 2nd Floor G Bldg. Hengchangrong Xinghui Industrial Park, Huaning Rd, Dalang St. Longhua Dist. Shenzhen, 518000, China  
**Manufacturer:** ShenZhen KaiXingHui Technology Co., Ltd.  
**Address of Manufacturer:** 206, 2nd Floor G Bldg. Hengchangrong Xinghui Industrial Park, Huaning Rd, Dalang St. Longhua Dist. Shenzhen, 518000, China  
**Factory:** ShenZhen KaiXingHui Technology Co., Ltd.  
**Address of Factory:** 206, 2nd Floor G Bldg. Hengchangrong Xinghui Industrial Park, Huaning Rd, Dalang St. Longhua Dist. Shenzhen, 518000, China  
**Equipment Under Test (EUT):**  
**EUT Name:** Wireless Charging Pad  
**Model No.:** F500, F500A, F500B, F500C ♣  
 ♣ Please refer to section 3.1 of this report which indicates which model was actually tested and which were electrically identical.  
**FCC ID:** 2AOSUF500S  
**Standards:** 47 CFR PART 1, Subpart I, Section 1.1310  
**Date of Receipt:** 2019-07-02  
**Date of Test:** 2019-07-03 to 2019-08-19  
**Date of Issue:** 2019-08-22

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <b>Pass*</b> |
|----------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above

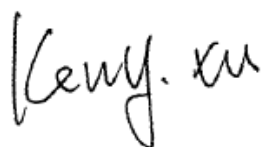

Keny Xu  
 EMC Laboratory Manager





| <i>Revision Record</i> |                |             |                 |               |
|------------------------|----------------|-------------|-----------------|---------------|
| <i>Version</i>         | <i>Chapter</i> | <i>Date</i> | <i>Modifier</i> | <i>Remark</i> |
| 01                     |                | 2019-08-22  |                 | Original      |
|                        |                |             |                 |               |
|                        |                |             |                 |               |

|                                 |  |   |  |
|---------------------------------|--|---|--|
| <b>Authorized for issue by:</b> |  |   |  |
|                                 |  |    |  |
|                                 |  | <hr/>   |  |
|                                 |  | <b>Powell Bao /Project Engineer</b>   |  |
|                                 |  |  |  |
|                                 |  | <hr/>   |  |
|                                 |  | <b>Eric Fu /Reviewer</b>  |  |



## 2 Contents

|          |   |          |
|----------|---|----------|
| <b>1</b> | <b>COVER PAGE</b> .....                     | <b>1</b> |
| <b>2</b> | <b>CONTENTS</b> .....                       | <b>3</b> |
| <b>3</b> | <b>GENERAL INFORMATION</b> .....            | <b>4</b> |
| 3.1      | DETAILS OF E.U.T. ....                      | 4        |
| 3.2      | DESCRIPTION OF SUPPORT UNITS .....          | 4        |
| 3.3      | TEST LOCATION.....                          | 5        |
| 3.4      | TEST FACILITY.....                          | 5        |
| 3.5      | DEVIATION FROM STANDARDS.....               | 5        |
| 3.6      | ABNORMALITIES FROM STANDARD CONDITIONS..... | 5        |
| <b>4</b> | <b>EQUIPMENTS USED DURING TEST</b> .....    | <b>6</b> |
| <b>5</b> | <b>TEST RESULTS</b> .....                   | <b>7</b> |
| 5.1      | RF EXPOSURE TEST .....                      | 7        |
| 5.1.1    | <i>E.U.T. Operation</i> .....               | 7        |
| 5.1.2    | <i>Measurement Data</i> .....               | 8        |
| <b>6</b> | <b>PHOTOGRAPHS</b> .....                    | <b>9</b> |
| 6.1      | TEST SETUP PHOTOS .....                     | 9        |





### 3 General Information

#### 3.1 Details of E.U.T.

Power supply: Input: DC5V,2A; DC9V,1.67A  
 Output: 5W,7.5W,10W

Cable: USB Cable(Unshielded, 100cm)

Operation Frequency: 111.54kHz to 147.92kHz

Modulation Type: Load Modulation

Antenna Type: Loop Antenna

Remark: All tests were conducted in all three load modes and the worst case (10W) were reported only.

**Remark:**

Model No.: F500, F500A, F500B, F500C

Only the model F500 was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only difference on model number.

#### 3.2 Description of Support Units

| Description       | Manufacturer | Model No.      | Serial No.       |
|-------------------|--------------|----------------|------------------|
| Adapter           | Apple        | A1357 W010A051 | REF. No.:SEA0500 |
| Adapter           | SAMSUNG      | EP-TA200       | R37J8YA7W71D     |
| iPhone 8          | Apple        | A1863          | F4GVQ656JC6D     |
| SAMSUNG Galaxy S8 | SAMSUNG      | SM-G9500       | R28J9140LPB      |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/cn/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/cn/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8397 1443, or e-mail: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

### 3.3 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 3.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

### 3.5 Deviation from Standards

None.

### 3.6 Abnormalities from Standard Conditions

None.





## 4 Equipments Used during Test

| Item | Equipment                             | Manufacturer           | Model No | Inventory No | Cal Date   | Cal Due Date |
|------|---------------------------------------|------------------------|----------|--------------|------------|--------------|
| 1    | Electric Field Probe<br>(100KHz-3GHz) | WANDEL &<br>GOLTERMANN | EMR-20   | EMC0907      | 2019-05-21 | 2020-05-20   |
| 2    | EMF Tester                            | Narda                  | ELT-400  | SZE039-4     | 2019-07-08 | 2020-07-07   |



## 5 Test Results

### 5.1 RF Exposure test

Test Requirement: 47 CFR PART 1, Subpart I, Section 1.1310  
 Measurement Distance: 15cm  
 Limit:

| Frequency range (MHz)  | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposures</b>        |                               |                               |                                     |                          |
| 0.3-3.0  | 614                           | 1.63                          | *(100)                              | 6                        |
| 3.0-30   | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                        |
| 30-300   | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1500   | /                             | /                             | f/300                               | 6                        |
| 1500-100,000   | /                             | /                             | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34   | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30  | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300   | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500   | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000   | /                             | /                             | 1.0                                 | 30                       |

F=frequency in MHz

\*=Plane-wave equivalent power density

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

#### 5.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 52 % RH Atmospheric Pressure: 1015 mbar

EUT Operation:

This device has been tested with mobile phone at zero charge, intermediate charge, and full charge.



**5.1.2 Measurement Data**

**Output Voltage=DC 9V; The max output power =10W**

**Magnetic Field Emissions**

| Operation frequency | Test Distance (cm) | Test Position | Probe Measure Result (A/m) | 50% Limit (A/m) |
|---------------------|--------------------|---------------|----------------------------|-----------------|
| 141 kHz             | 15                 | Side 1        | 0.1255                     | 0.815           |
|                     |                    | Side 2        | 0.0861                     | 0.815           |
|                     |                    | Side 3        | 0.1108                     | 0.815           |
|                     |                    | Side 4        | 0.0933                     | 0.815           |
|                     |                    | Top           | 0.0471                     | 0.815           |

**Mobile phone has been charge at zero charge, intermediate charge, and full charge.**

**Magnetic Field Emissions**


| Operation frequency | Test Distance (cm) | Test Position | Probe Measure Result(A/m) |                     |             | 50%Limit (A/m) |
|---------------------|--------------------|---------------|---------------------------|---------------------|-------------|----------------|
|                     |                    |               | zero charge               | intermediate charge | full charge |                |
| 141 kHz             | 15                 | Side 1        | 0.1379                    | 0.1237              | 0.1087      | 0.815          |
|                     |                    | Side 2        | 0.0961                    | 0.0822              | 0.0682      | 0.815          |
|                     |                    | Side 3        | 0.1239                    | 0.1089              | 0.0946      | 0.815          |
|                     |                    | Side 4        | 0.1028                    | 0.0875              | 0.0749      | 0.815          |
|                     |                    | Top           | 0.0575                    | 0.0433              | 0.0301      | 0.815          |





## 6 Photographs

### 6.1 Test setup photos

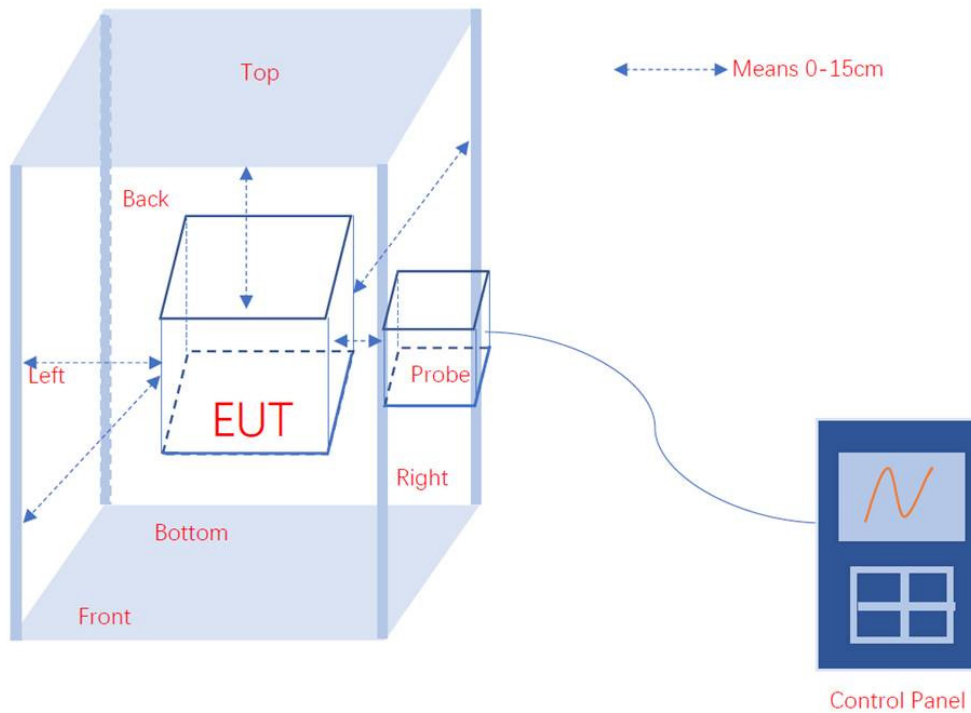

- End of the Report -