



SPECIFICATION FOR APPROVAL

承認書

Customer Name	Portable Multimedia Ltd
Product name	WIFI dual-frequency antenna /2.4Ghz/5.8Ghz/ coaxial line length 65±5mm/ with terminals / YY-SM01020-A.0/NBIQ series special /ROHS
Product number	332-200000052
Prepared By	Tony-Men
Checked By	
Approved By	
Apply Date	March 18, 2023

CUSTOMER SIGNATURE		
Prepared By	Checked By	Approved By

PLEASE RETURN TO US ONE COPY OF "SPECIFICATION FOR APPROVAL" WITH YOUR APPROVED SIGNATURES.

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

频率范围 Frequency range	2.65Dbi@2400 ~ 2500 MHz 2.63Dbi@5150 ~ 5850 MHz
驻波比系数 VSWR	<2.5
输入阻抗 Input Impedance	50±5 (Ω)
极化方式 Polarization	Horizontal polarization+ Vertical Polarization
半功率波束 (3dB) HPW	180° H-plane 120° E-plane

Shenzhen Yangyue Electronic Communication Technology Co., Ltd

Address:6th Floor, Building A, Chuangfu Winner Industrial Park, No. 2, Pujiang Road, Daning Community,
Humen Town, Dongguan City

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

Revision History

Date	Revision	Description of Changes
March 18, 2023	A.1	Measured with 2.4GHz/5.8GHZ antenna sample.

1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the 2.4GHz/5.8GHZ antenna program. We test the antenna with the latest version handset. And it seems to be acceptable.

2 General Description

2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Gain & Radiation Patterns

The gain of the antenna was measured in the Lxc's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 300 MHz through 6 GHz and an 18" diameter spherical quiet zone. The measurement results are calibrated using both dipole and leaky wave horn standards.

4.1.3 Matching Circuit Description

No changed..

深圳市扬跃电子通信科技有限公司


Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

5. Antenna - Radiation Pattern Test Data


2.4G Test Data

Passive Test For <u>wifi</u>		
Freq (MHz)	Effi (%)	Gain (dBi)
2400	49.86	2.65
2410	48.71	2.57
2420	48.25	2.48
2430	47.83	2.39
2440	46.29	2.27
2450	45.61	2.21
2460	45.24	2.13
2470	45.05	2.04
2480	44.11	1.98
2490	43.39	1.92
2500	42.16	1.73


2440.000MHz




2440.000MHz H

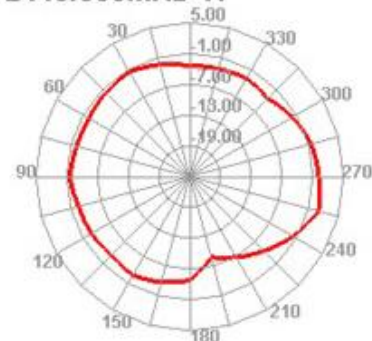

2440.000MHz E1

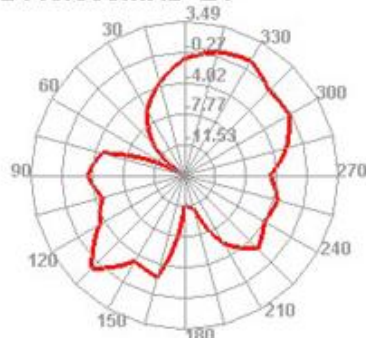

2440.000MHz E2

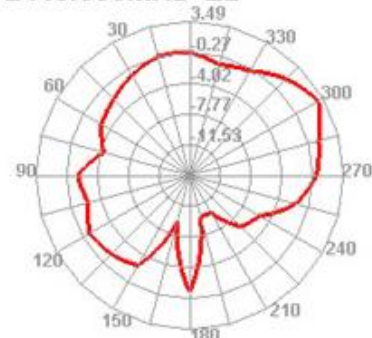


深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.


5G Test Data

Freq (MHz)	Effi (%)	Gain (dBi)
5150	40.86	2.03
5200	42.35	2.09
5250	47.47	2.06
5300	45.08	2.23
5350	49.82	2.26
5400	52.44	2.5
5450	47.22	2.03
5500	49.18	1.9
5550	51.34	2.15
5600	50.22	1.98
5650	43.22	1.65
5700	43.2	1.46
5750	47.51	2.52
5800	44.07	2.18
5850	44.24	2.63


5720.000MHz




5720.000MHz H

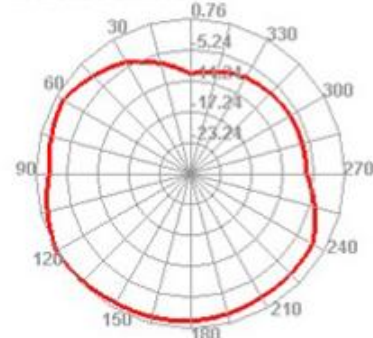

5720.000MHz E1

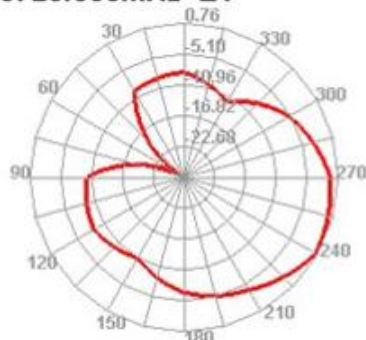

5720.000MHz E2

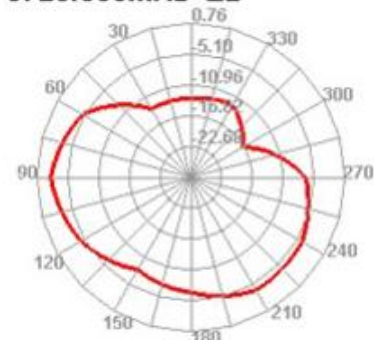

Shenzhen Yangyue Electronic Communication Technology Co., Ltd

Address: 6th Floor, Building A, Chuangfu Winner Industrial Park, No. 2, Pujiang Road, Daning Community, Humen Town, Dongguan City


深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

6.Plots


VSWR

注：驻波系数的标准值

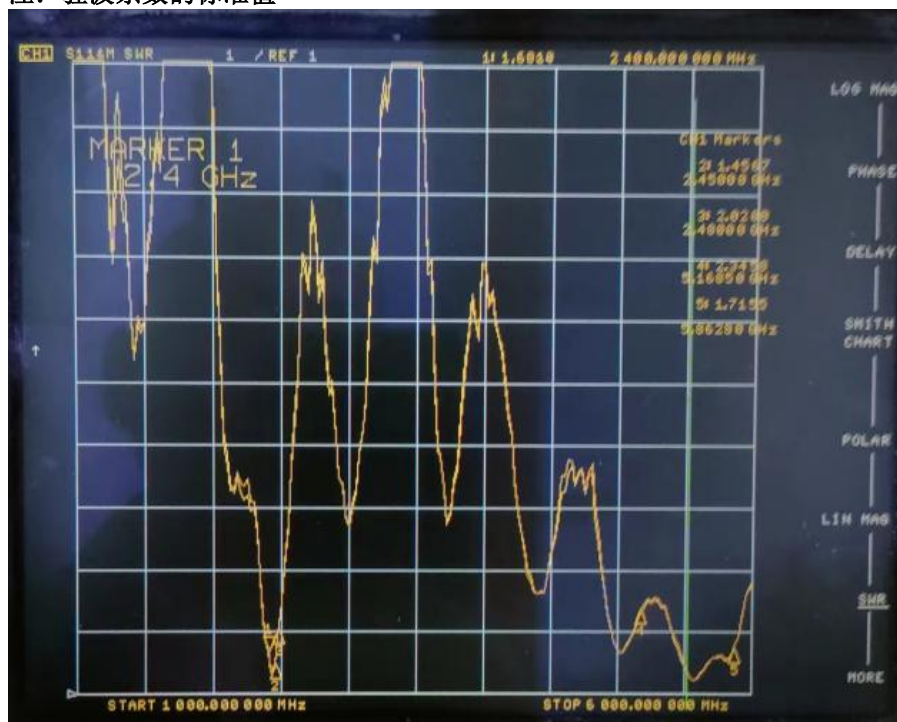

Log Mag(Return loss)

注：回损的标准值

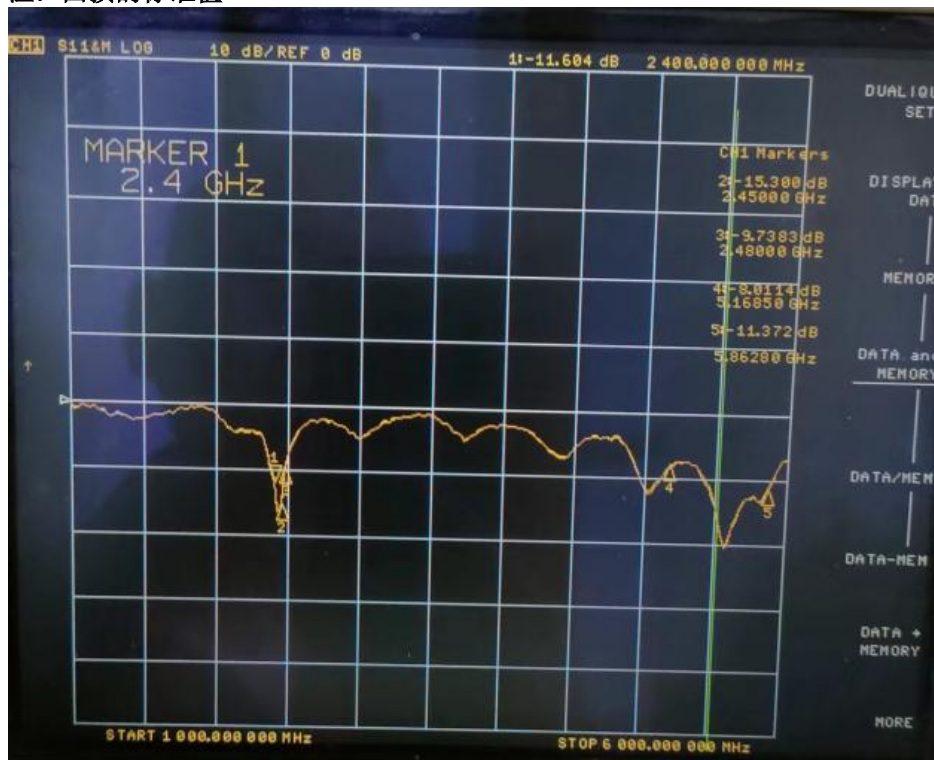

Shenzhen Yangyue Electronic Communication Technology Co., Ltd


Address:6th Floor, Building A, Chuangfu Winner Industrial Park, No. 2, Pujiang Road, Daning Community, Humen Town, Dongguan City

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

3.Smith
3.史密斯图

chart

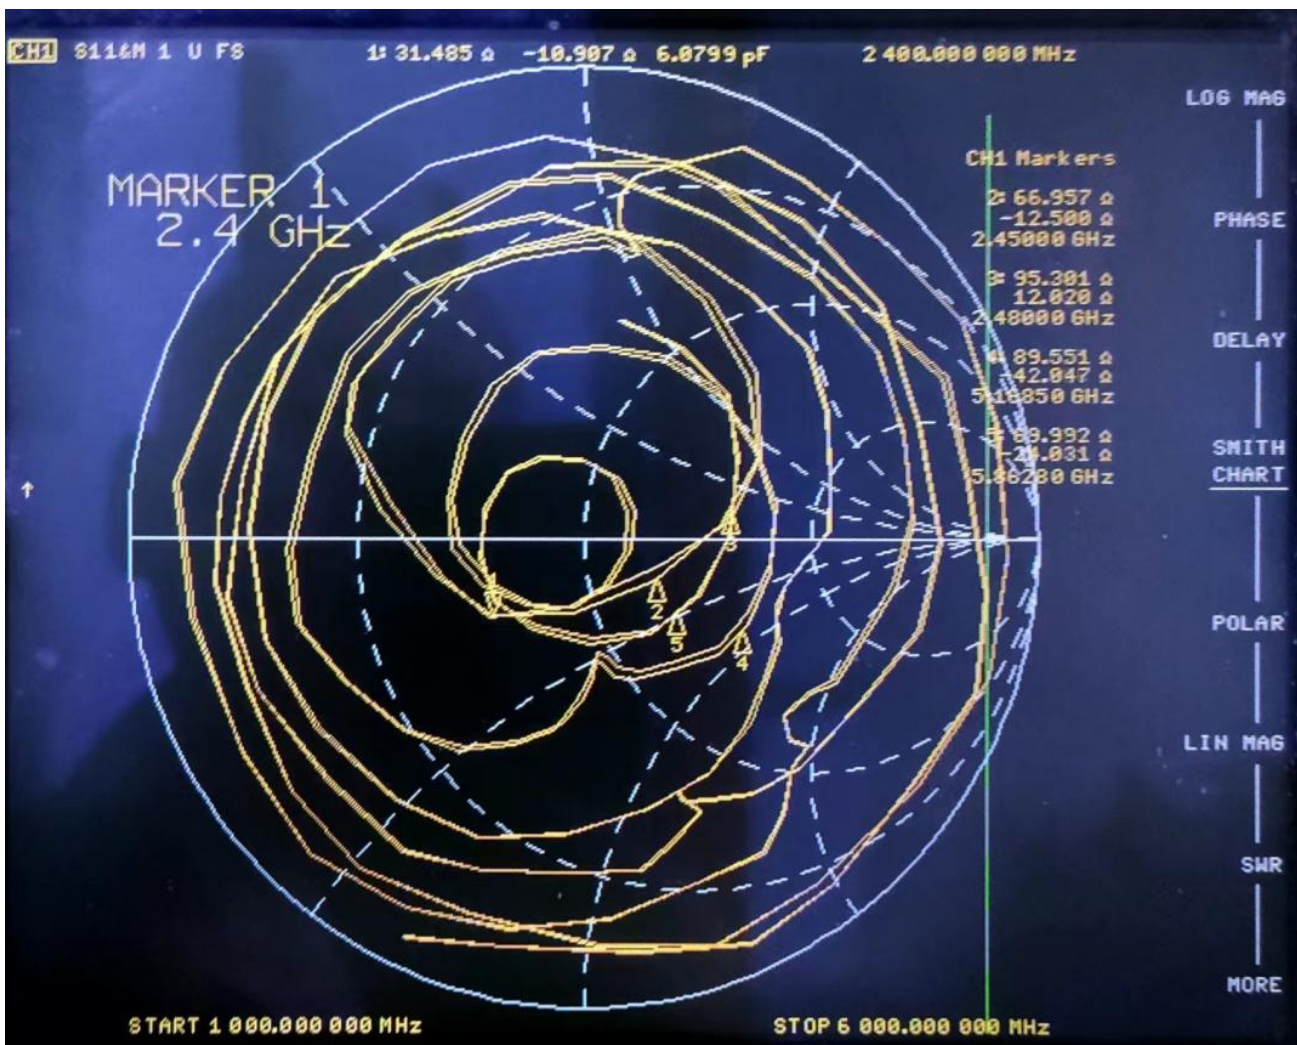

Shenzhen Yangyue Electronic Communication Technology Co., Ltd
Address:6th Floor, Building A, Chuangfu Winner Industrial Park, No. 2, Pujiang Road, Daning Community,
Humen Town, Dongguan City

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

6.Mechanical drawing

RoHS	AutoCAD	REV.	ORDER NO	DATE
		A.0	New edition	Nov 4, 2022
		A.1	The dia on the back of the RF solder tin becomes the dia five mm	Mar 18, 2023

Technical requirements:

1. Test frequency:
2.4~2.5Ghz/5.15~5.85Ghz

Front view

Back view

Glue-free zone

RF0.81 black Cable

4 generation original I-PEX terminals
The top of the cup is up

NO	PARTNAME	DESCRIPTION	PART NO.	QTY
3	FPC	29.4*23.4	070-292380-40	1
2	I-PEX terminal	I-PEX terminals (20448-001R-081)	030-01180-40	1
1	线材	RF0.81 black Cable L=65.0mm	0100-980000-91	1

PART NAME: 070-292380-40	PART NO.: 070-292380-40	Customer P/N : 332-200000002	Tolerance
APPROVED BY	CHECKED BY	DESIGNED BY	X, X ±0.50
DATE	DATE	DATE	X, XX ±0.2
SCALE: None	REVISION: A.1	REVISION: A.1	±3°

深圳市扬跃电子通信科技有限公司
Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

Shenzhen Yangyue Electronic Communication Technology Co., Ltd

Address: 6th Floor, Building A, Chuangfu Winner Industrial Park, No. 2, Pujiang Road, Daning Community, Humen Town, Dongguan City

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

Original
generation terminal
drawing

4

Recommended P/N 20448-001R-081

PART NO. 20448-001R-081

CARRIER CONDITION
S = 5.1

③ GROUND CONTACT
① HOUSING
② CONTACT
CABLE ASSEMBLY

PLUG PART NO. 20448-001R-081
RECEPTACLE PART NO. 20449-001E-44
MATING CONDITION

NOTES

1. APPLICABLE CONNECTOR 20448-001E-44
2. MATING AND UNMATING INSTRUCTION

2-1. MATING

MATE THE CONNECTOR VERTICALLY AS MUCH AS POSSIBLE ADJUSTING THE MATING AXIS OF PLUG AND RECEPTACLE. DO NOT SLANT MATE.

2-2. UNMATING

2-2-1. IN CASE OF UNMATING BY PULLING TOOL (PART NO. 90435-001) USE THE PULLING TOOL AS THE FOLLOWING DRAWING, AND PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

2-2-2. IN CASE OF UNMATING DIRECTLY BY HAND, CATCH THE CATCHING AREA OF PLUG, AND PULL TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

3. PERMISSIBLE LOAD OF CABLE AT MATING

NOTE 2-1.

PUSHING AND PULLING TOOL

NOTE 2-2-1.

PUSHING AND PULLING TOOL

NOTE 3

1 PROHIBITED
2N MAX.
1 PROHIBITED

NO.	DESCRIPTION	MATERIAL	FINISH	REMARKS
1	HOUSING	PBT	UL94V-0, BLACK	
2	CONTACT	PHOSPHOR BRONZE		ALL OVER: Ni 1.00 μm MIN. CONTACT PART: Au 0.05 μm MIN.
3	GROUND CONTACT	PHOSPHOR BRONZE		ALL OVER: Ni 1.00 μm MIN. CONTACT PART: Au 0.05 μm MIN.

REV.	ECN	BY	DATE	APP.	REVISION RECORD	DATE	DRW. NO.	20448	ONE-DRAWING-02 REV.11
1			2007/09/12		1. Headers				

DAIICHI SEIKO CO., LTD.

PROJECTION

SERIES NO. R10

CUSTOMER COPY

SOUL

10-1

DATE

10/1

UNIT

mm

CONNECTORS

SIZE

A3

SHEET 1/5

REV. 6

Shenzhen Yangyue Electronic Communication Technology Co., Ltd
Address: 6th Floor, Building A, Chuangfu Winner Industrial Park, No. 2, Pujiang Road, Daning Community, Humen Town, Dongguan City

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

7 Reliability tests

7.1 Test content

No	Test item	Test method	Decision criteria
1	Salt spray test	Spray a 5% salt solution for 24 hours	Can not have discoloration, distortion (deformation) fall off and other shortcomings of the corrosion area can not be too large

7.2 Test results

NO	Sample quantity	Test duration	Experimental result	remarks
1	10	24H	OK	技术等级为9级 腐蚀<0.4mm

8 Conclusion

以上数据表明此 2.4GHz/5.8GHz 天线参数均已达标。性能以装机后的实际使用效果为准。

From the above test results, we can know the electrical performance of the antenna is seems good.

Shenzhen Yangyue Electronic Communication Technology Co., Ltd, look forward to your confirmation, thank you for your cooperation !