

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

SPECIFICATION FOR APPROVAL

承認書

Customer Name	
Product name	WIFI antenna/YY-20240702-01/2.4 GHz/wire diameter 0.81 mm/coaxial line length 20 ± 2 mm/With 4 generation original terminal/Nano 2K dedicated/yangyue/ROHS
Product number	332-200000074
Prepared By	Tony-Men
Checked By	
Approved By	
Apply Date	July 12th , 2024

CUSTOMER SIGNATURE		
Prepared By	Checked By	Approved By

PLEASE RETURN TO US ONE COPY OF "SPECIFICATION FOR APPROVAL" WITH YOUR APPROVED SIGNATURES.

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

频率范围 Frequency range	2400~2500 (MHz)
增益 Gain	3.2dBi
驻波比系数 VSWR	<2.2
输入阻抗 Input Impedance	50±5 (Ω)
极化方式 Polarization	Vertical polarization+Horizontal polarization

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

Revision History

Date	Revision	Description of Changes
2024-7-12	RA	Measured with 2.4G WIFI Antenna sample.

1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the 2.4G WIFI Antenna program. We test the antenna with the latest version handset. And it seems to be acceptable.

2 General Description

2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Gain & Radiation Patterns

The gain of the antenna was measured in the Lxc's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 300 MHz through 3 GHz and an 18" diameter spherical quiet zone. The measurement results are calibrated using both dipole and leaky wave horn standards.


4.1.3 Matching Circuit Description

No changed..

深圳市扬跃电子通信科技有限公司



Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

5. Antenna - Radiation Pattern Test Data

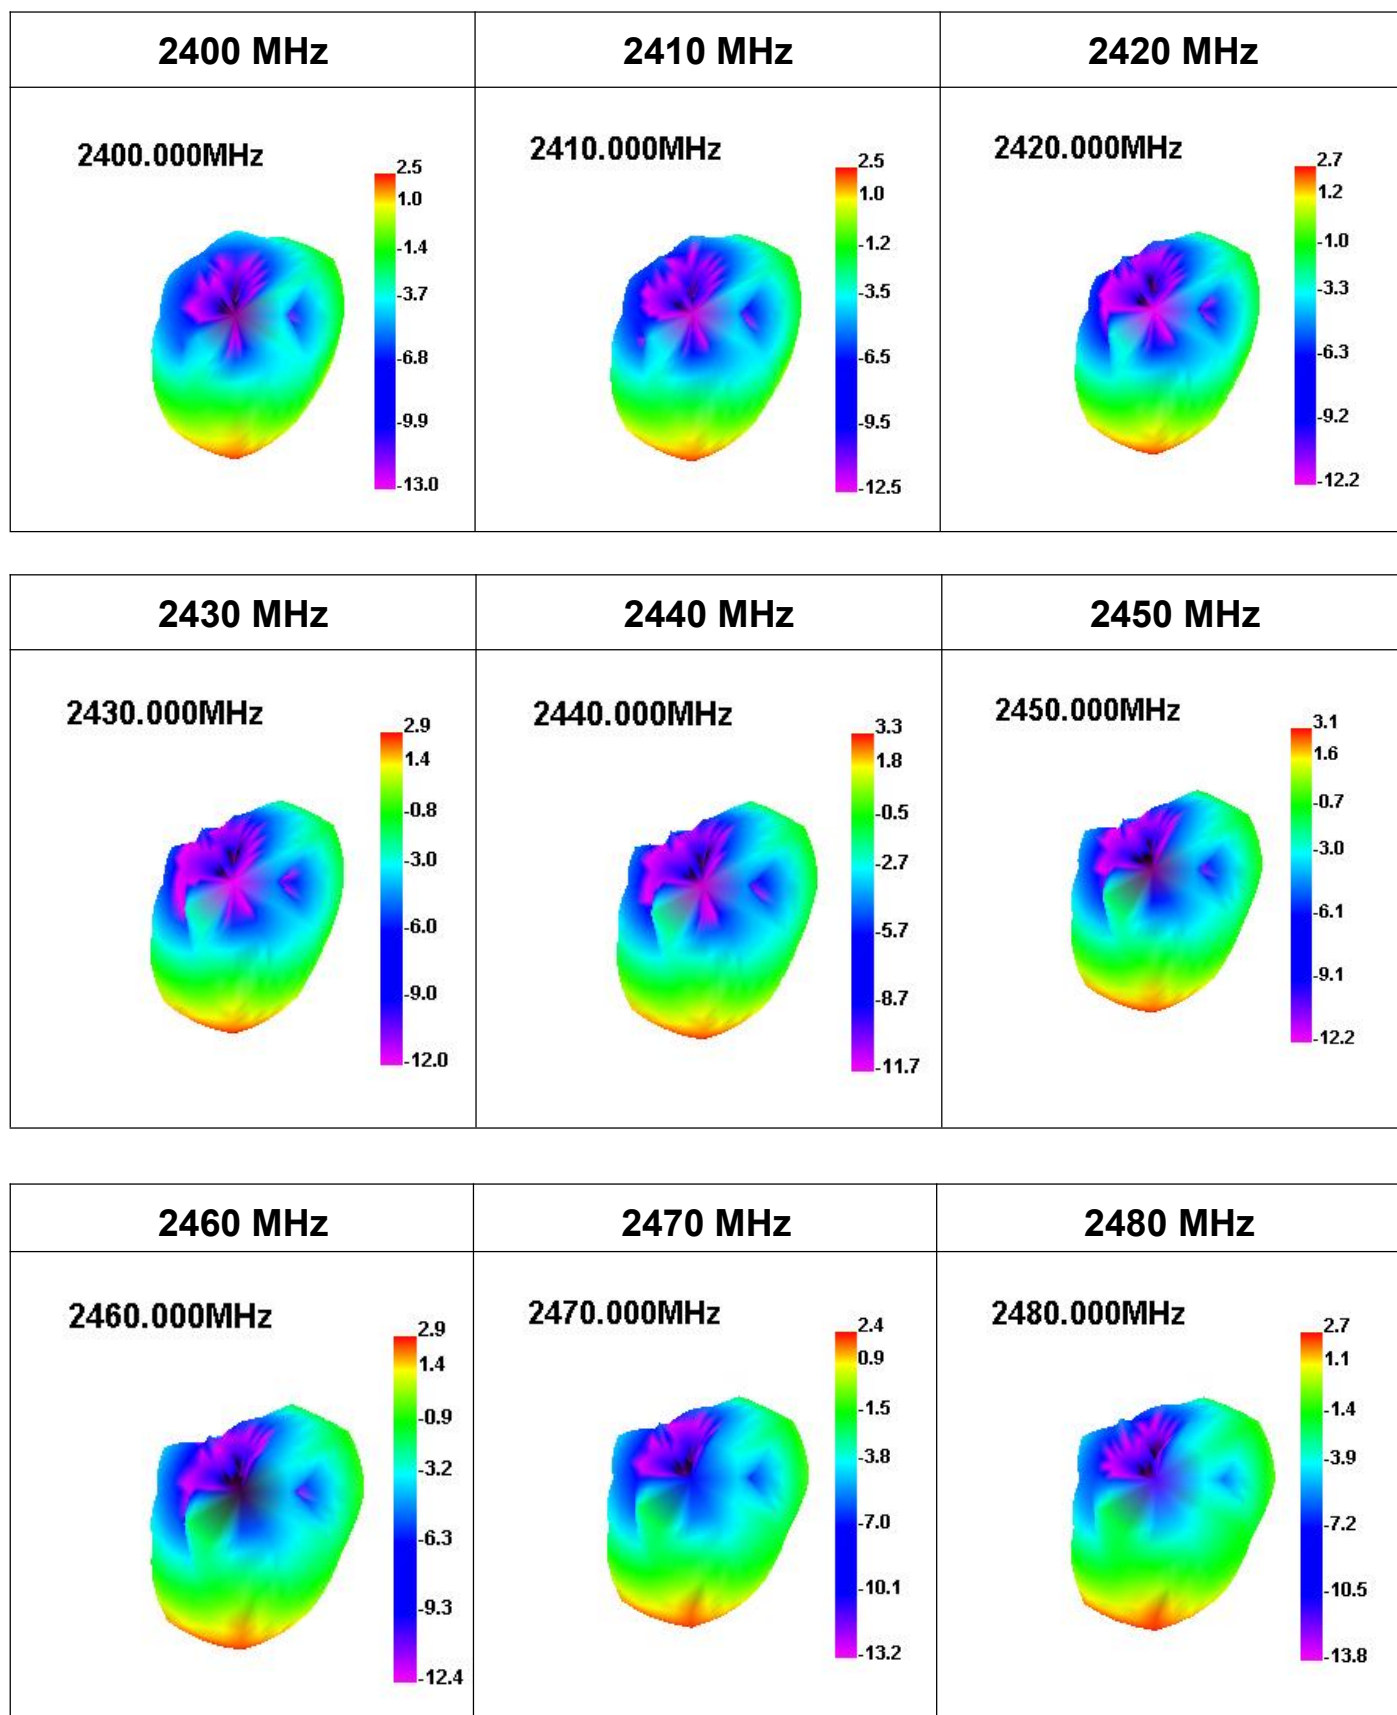

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

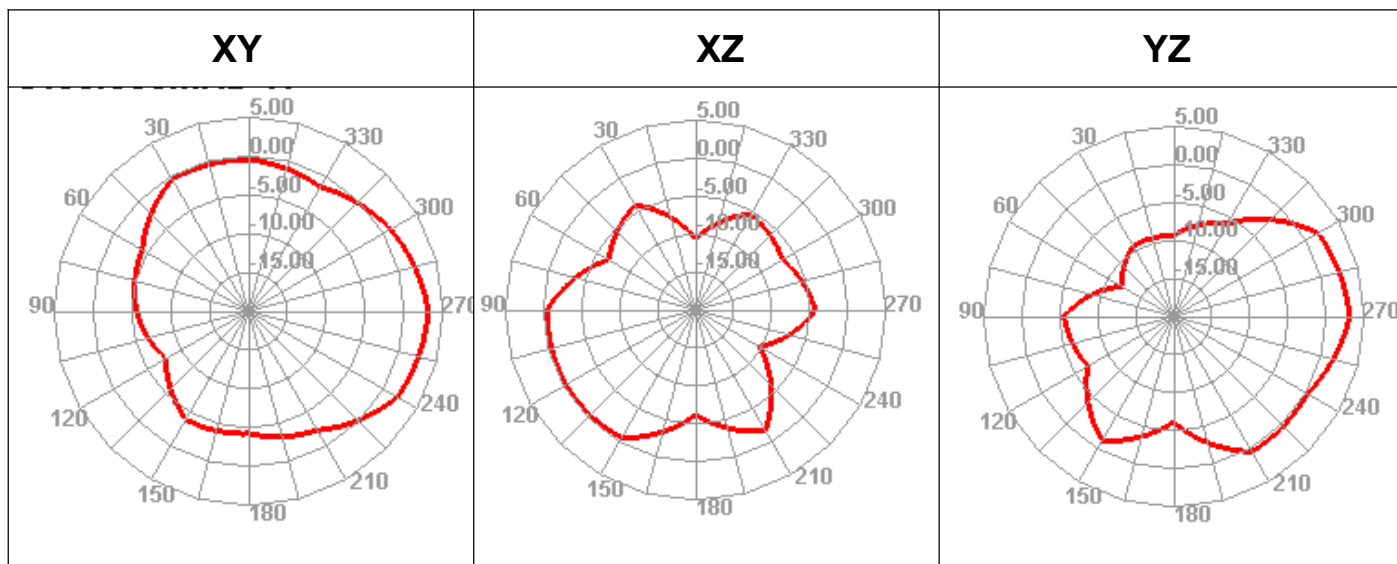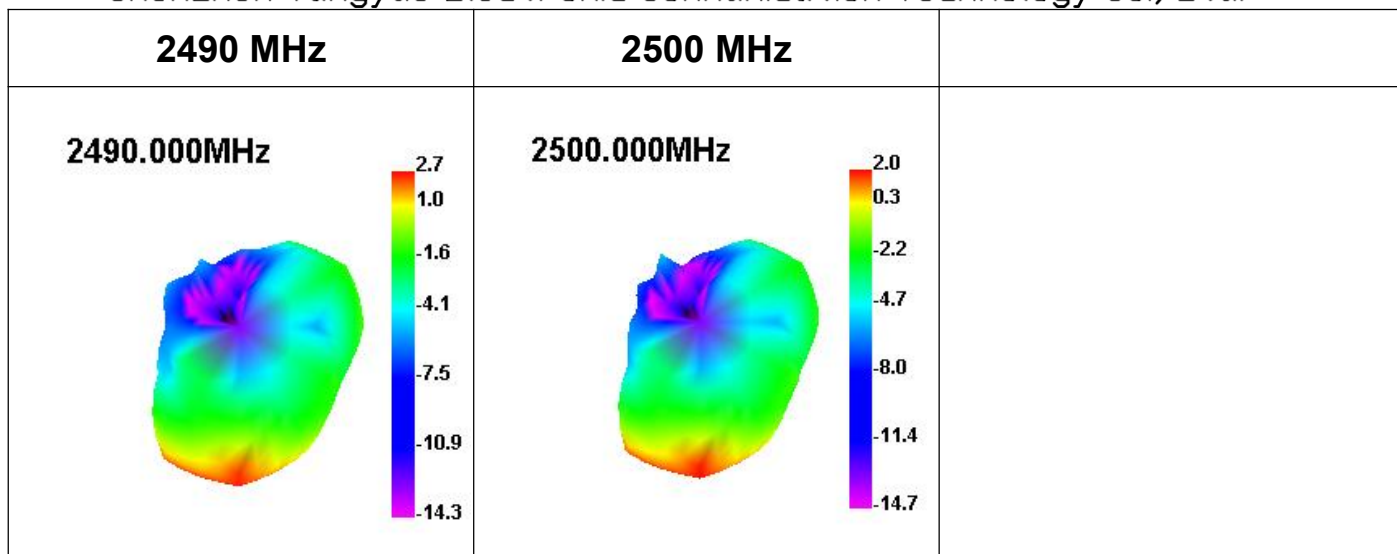


Freq	(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Effi	(%)	56.53	54.29	54.46	57.02	63.07	62.25	61.87	55.5	59.57	57.87	48.8
Gain	(dBi)	2.5	2.51	2.68	2.92	3.27	3.1	2.95	2.41	2.73	2.67	1.97

深圳市扬跃电子通信科技有限公司


Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

6.Plots

VSWR

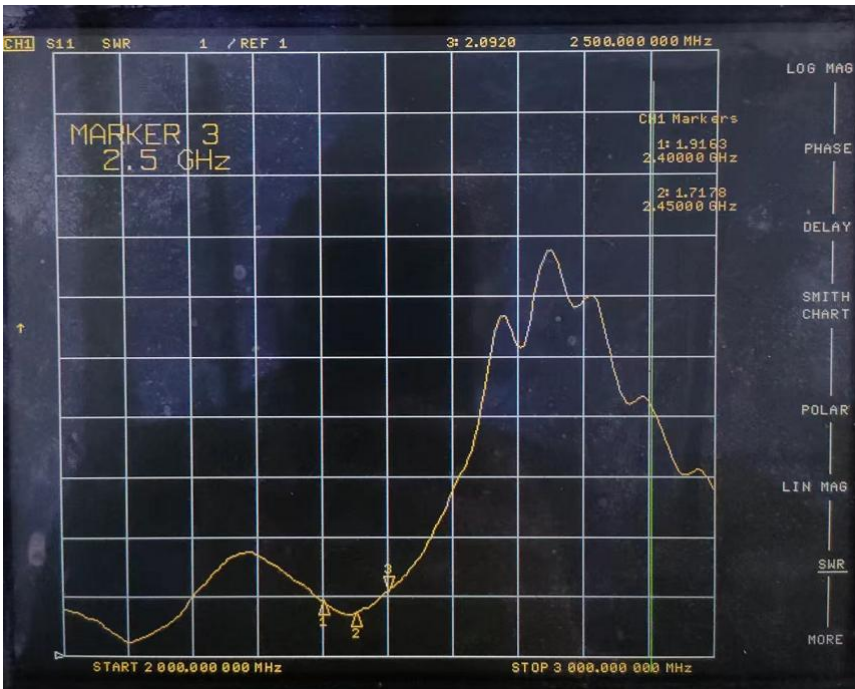


Return loss

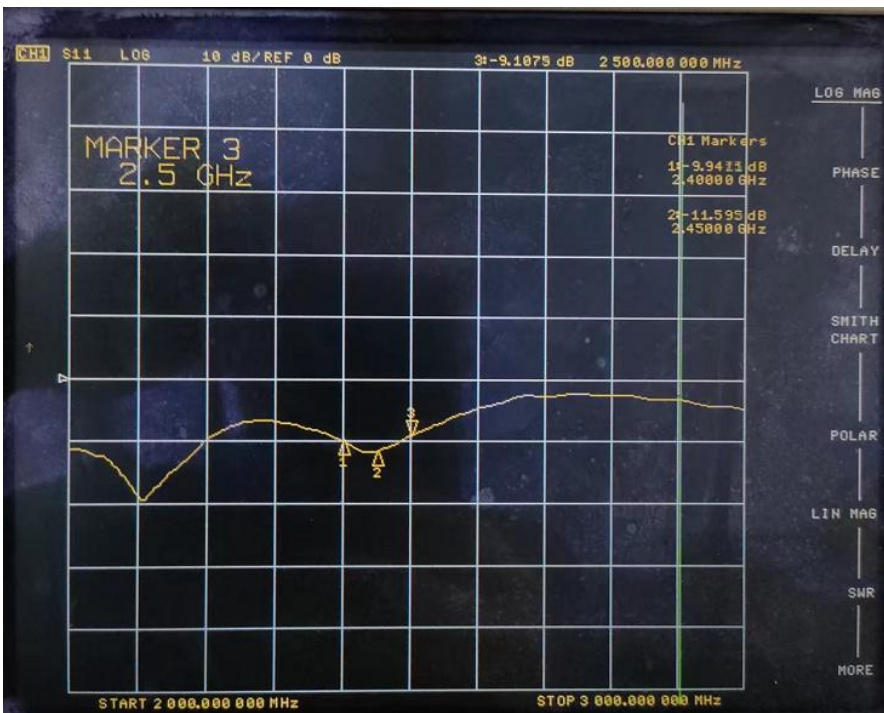

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.


Smith chart

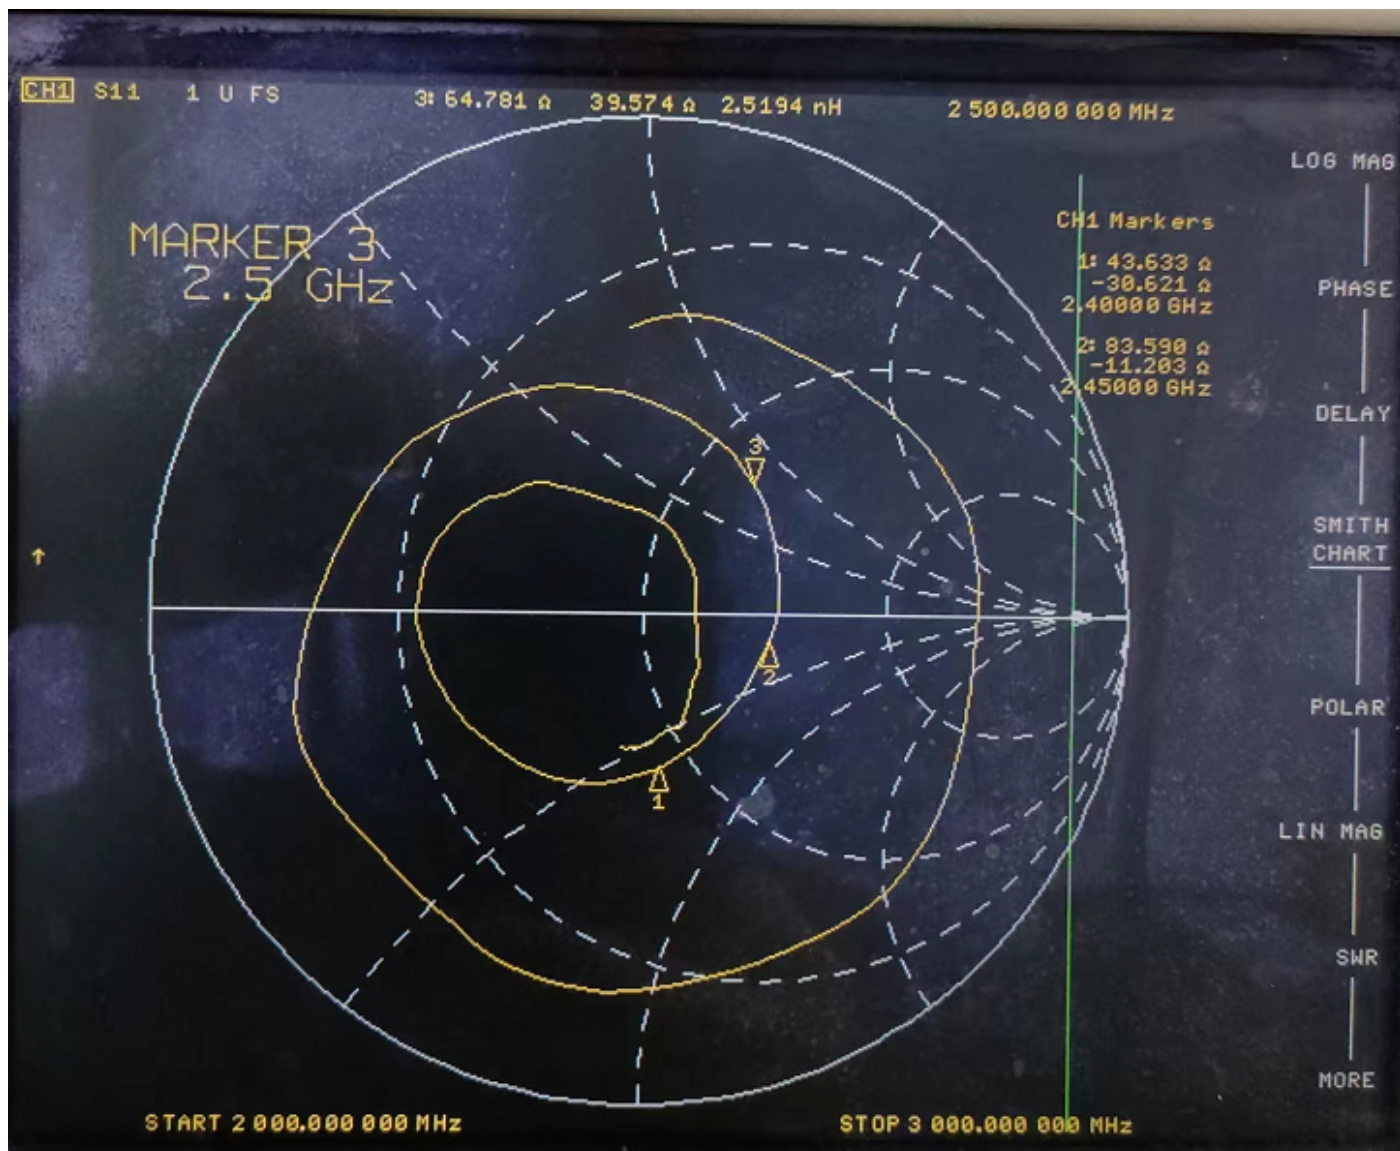

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

6.Mechanical drawing

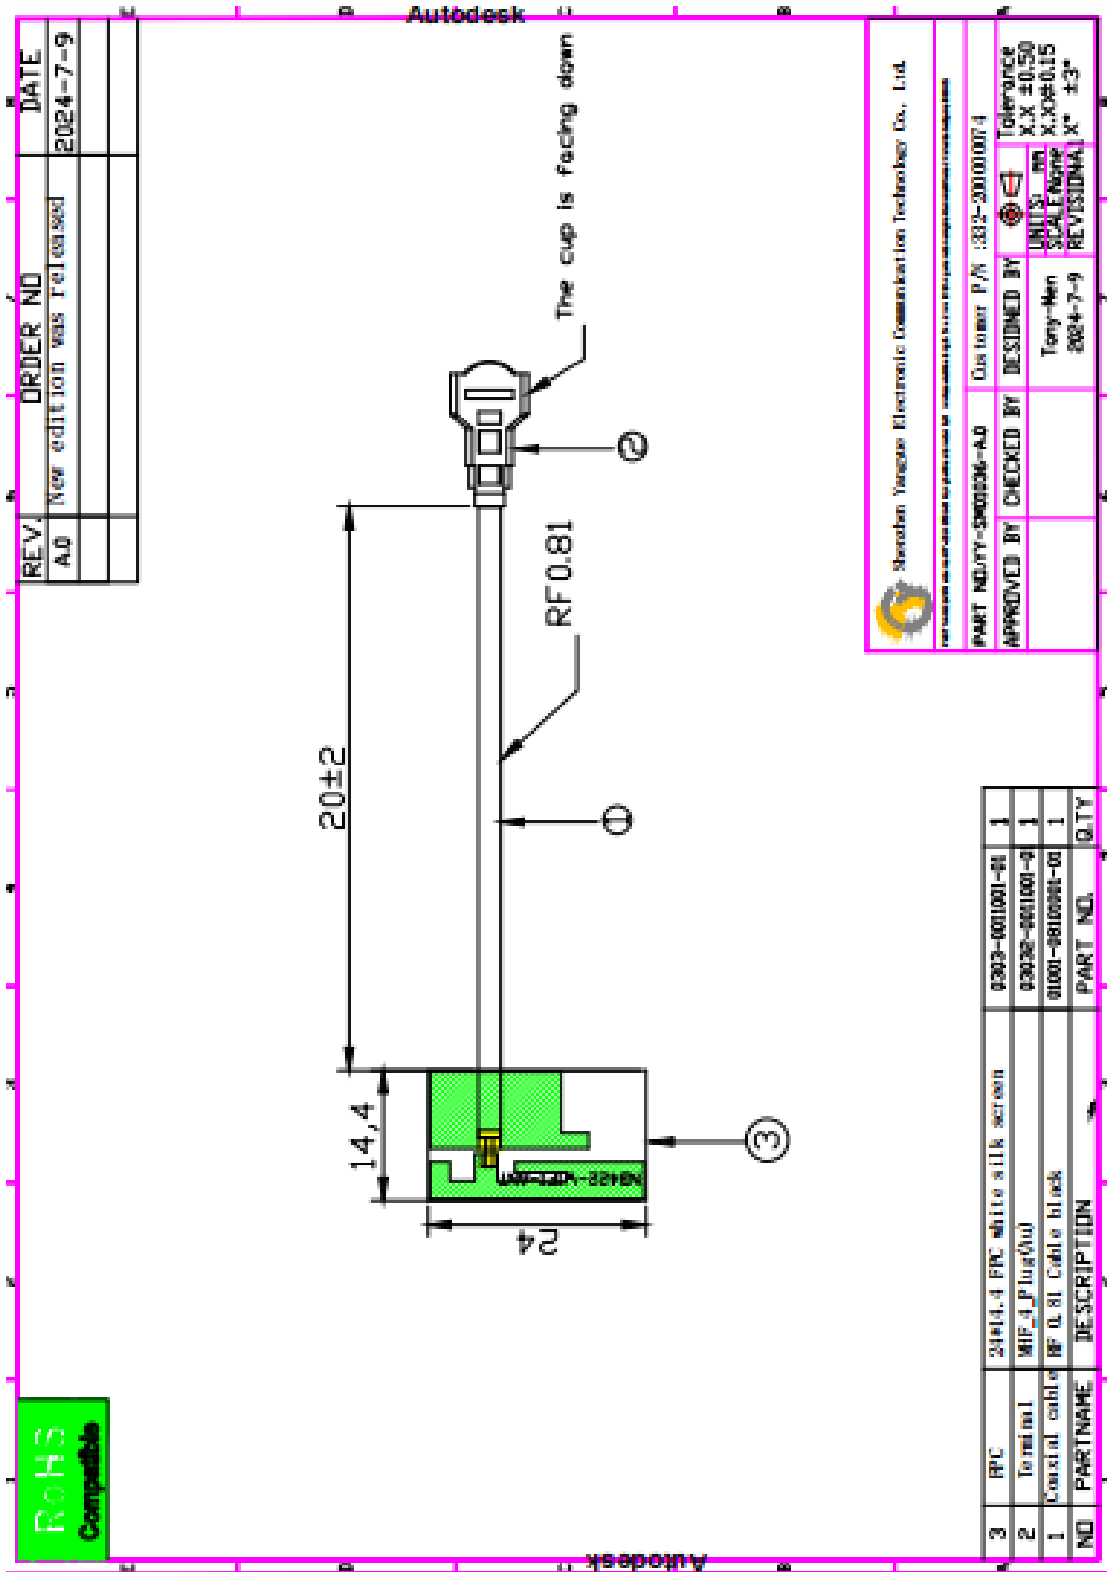

深圳市扬跃电子通信科技有限公司

Shenzhen Yangyue Electronic Communication Technology Co., Ltd.

7 Reliability tests

7.1 Test content

No	Pilot projects	Test method	Benchmark
1	盐水喷雾试验 Salt water spray test	把盐浓度 5%的溶液喷雾 24HR A solution of 5% salt was sprayed for 24 hr	不能有变色, 歪 (变形) 脱落等的缺点 腐蚀面积不能过大 Can not have discoloration, slanting (deformation) off and other shortcomings, corrosion area can not be too large

7.2 Test results

NO	样品数 Number of samples	试验期间 Test time	实验结果 The results of the experiment	备注 Notes
1	10	24H	PASS	技术等级为 9 级 腐蚀<0.4mm The technical grade is grade 9 Corrosion & LT; 0.4 mm

8 Conclusion

以上数据表明此 2.4GHz 天线参数均已达标。性能以装机后的实际使用效果为准。

The above data show that the 2.4 ghz antenna parameters have reached the standard. Performance is based on the actual use effect after installation

From the above test results, we can know the electrical performance of the antenna is seems good.

Shenzhen Yangyue Electronic Communication Technology Co., Ltd, look forward to your confirmation, thank you for your cooperation !