

# FCC RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART C

<b>Test Standard</b>	<b>FCC Part 15.247</b>
<b>Brand name</b>	<b>ALETA</b>
<b>Product name</b>	<b>ALETA S2C</b>
<b>Model No.</b>	<b>S2C, S2P</b>
<b>Test Result</b>	<b>Pass</b>

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.( Wugu Laboratory)

Approved by:



Sam Chuang  
Manager

Tested by:



Jerry Chuang  
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T180703W01-RP

Page: 2 /96  
Rev.: 00

### Revision History

Rev.	Issue Date	Revisions	Revised By
00	July 30, 2018	Initial Issue	Becca Chen
01	August 7, 2018	<ol style="list-style-type: none"><li>1. Modify conducted emission worst mode from mode 2 to mode1 on page 11.</li><li>2. Modify duty factor on page 12.</li><li>3. Modify Duty Cycle b mode data on page 49.</li><li>4. Modify test mode from test mode 1 to test mode 2 on page 68-69.</li></ol>	Becca Chen



## Table of contents

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 EUT INFORMATION	4
1.2 EUT CHANNEL INFORMATION	5
1.3 ANTENNA INFORMATION	5
1.4 MEASUREMENT UNCERTAINTY	6
1.5 FACILITIES AND TEST LOCATION	6
1.6 INSTRUMENT CALIBRATION	7
1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT	8
1.8 TEST METHODOLOGY AND APPLIED STANDARDS	8
<b>2. TEST SUMMERY</b>	<b>9</b>
<b>3. DESCRIPTION OF TEST MODES</b>	<b>10</b>
3.1 THE WORST MODE OF OPERATING CONDITION	10
3.2 THE WORST MODE OF MEASUREMENT	11
3.3 EUT DUTY CYCLE	12
<b>4. TEST RESULT</b>	<b>13</b>
4.1 AC POWER LINE CONDUCTED EMISSION	13
4.2 6DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)	16
4.3 OUTPUT POWER MEASUREMENT	26
4.4 POWER SPECTRAL DENSITY	29
4.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION	35
4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION	48
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	

## 1. GENERAL INFORMATION

### 1.1 EUT INFORMATION

Applicant	Ultracker Technology Co. Ltd 14F-1, No.888, Jingguo Rd., Taoyuan Dist
Equipment	ALETA S2C
Model Name	S2C, S2P
Model Discrepancy	Difference of the model numbers (list on this report) is just for difference UI ICON only.
Received Date	July 3, 2018
Date of Test	July 13 ~ 18, 2018
Output Power(W)	IEEE 802.11b mode: 0.0560 IEEE 802.11g mode: 0.1442 IEEE 802.11n HT 20 MHz mode: 0.2138 IEEE 802.11n HT 40 MHz mode: 0.2065
Power Supply	1. Powered from DC jack 12V + Data link via USB 2. Powered from battery + Data link via USB

**Note:** Client consigns EUT sample to test is model number: S2C.

## 1.2 EUT CHANNEL INFORMATION

Frequency Range	1. IEEE 802.11b/g/n HT 20 MHz mode: 2412MHz-2462MHz 2. IEEE 802.11n HT 40 MHz mode: 2422MHz-2452MHz
Modulation Type	1. IEEE 802.11b mode: CCK 2. IEEE 802.11g mode: OFDM 3. IEEE 802.11n HT 20 MHz mode: OFDM 4. IEEE 802.11n HT 40 MHz mode: OFDM
Number of channels	1. IEEE 802.11b mode: 11 Channels 2. IEEE 802.11g mode: 11 Channels 3. IEEE 802.11n HT 20 MHz mode: 11 Channels 4. IEEE 802.11n HT 40 MHz mode: 7 Channels

**Remark:**

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

## 1.3 ANTENNA INFORMATION

Antenna Type	<input checked="" type="checkbox"/> PIFA <input type="checkbox"/> PCB <input type="checkbox"/> Dipole <input type="checkbox"/> Coils
Antenna Gain	Gain: 3.66dBi

## 1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	
Radiation	Jerry Chuang	
RF Conducted	Jerry Chuang	

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

Report No.: T180703W01-RP

## 1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Power Meter	Anritsu	ML2495A	1012009	09/18/2017	09/17/2018
Power Sensor	Anritsu	MA2411B	917072	09/18/2017	09/17/2018
Spectrum Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018
Directional Coupler	Agilent	87301D	MY44350252	07/25/2017	07/24/2018
SUCOFLEX Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Divider	Solvang Technology	2-18GHz 4Way	STI08-0015	07/26/2017	07/25/2018

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	05/14/2018	05/13/2019
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	07/31/2017	07/30/2018
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	02/08/2018	02/07/2019
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/25/2017	08/24/2018
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Pre-Amplifier	EMEC	EM330	060609	07/31/2017	07/30/2018
Pre-Amplifier	HP	8449B	3008A00965	07/28/2017	07/27/2018
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
LISN	R&S	ENV216	101054	02/06/2018	02/05/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/09/2018	02/08/2019
EMI Test Receiver	R&S	ESCI	101203	11/02/2017	11/01/2018

**Remark:**

1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R. = No Calibration Required.

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(H)	Acer	Aspire 4320 series	N/A	QDS-BRCM1018
2	NB(C)	HP	dv6-1332TX	N/A	N/A
3	NB	Lenovo	TP00056A	N/A	PD97260HU

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247 KDB 558074 D01 V04.



## 2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Band Edge	Pass
15.247(d)	4.5	Conducted Emission	Pass
15.247(d)	4.6	Radiation Band Edge	Pass
15.247(d)	4.6	Radiation Spurious Emission	Pass

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	IEEE 802.11b mode : 1Mbps IEEE 802.11g mode : 6Mbps IEEE 802.11n HT 20 mode : MCS0 IEEE 802.11n HT 40 mode : MCS0
Test Channel Frequencies	<b>IEEE 802.11b mode :</b> 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz <b>IEEE 802.11g mode :</b> 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz <b>IEEE 802.11n HT 20 mode :</b> 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz <b>IEEE 802.11n HT 40 mode :</b> 1. Lowest Channel : 2422MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2452MHz
Operation Transmitter	IEEE 802.11b mode :1T1R IEEE 802.11g mode :1T1R IEEE 802.11n HT 20 mode :1T1R IEEE 802.11n HT 40 mode :1T1R

**Remark:**

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

### 3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: Powered form DC jack 12V + Data link via USB Mode 2: Powered form battery + Data link via USB
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: Powered form DC jack 12V + Data link via USB Mode 2: Powered form battery + Data link via USB
Worst Mode	<input type="checkbox"/> Mode 1 <input checked="" type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: Powered form DC jack 12V + Data link via USB Mode 2: Powered form battery + Data link via USB
Worst Mode	<input type="checkbox"/> Mode 1 <input checked="" type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4


**Remark:**

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (X-Plane and Horizontal) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

Report No.: T180703W01-RP

### 3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
802.11b	1.8800	1.9400	96.91%	0.27
802.11g	2.0900	2.2400	93.30%	0.60
802.11n HT 20	0.4200	0.6400	65.63%	3.66
802.11n HT 40	0.2100	0.4100	51.22%	5.81

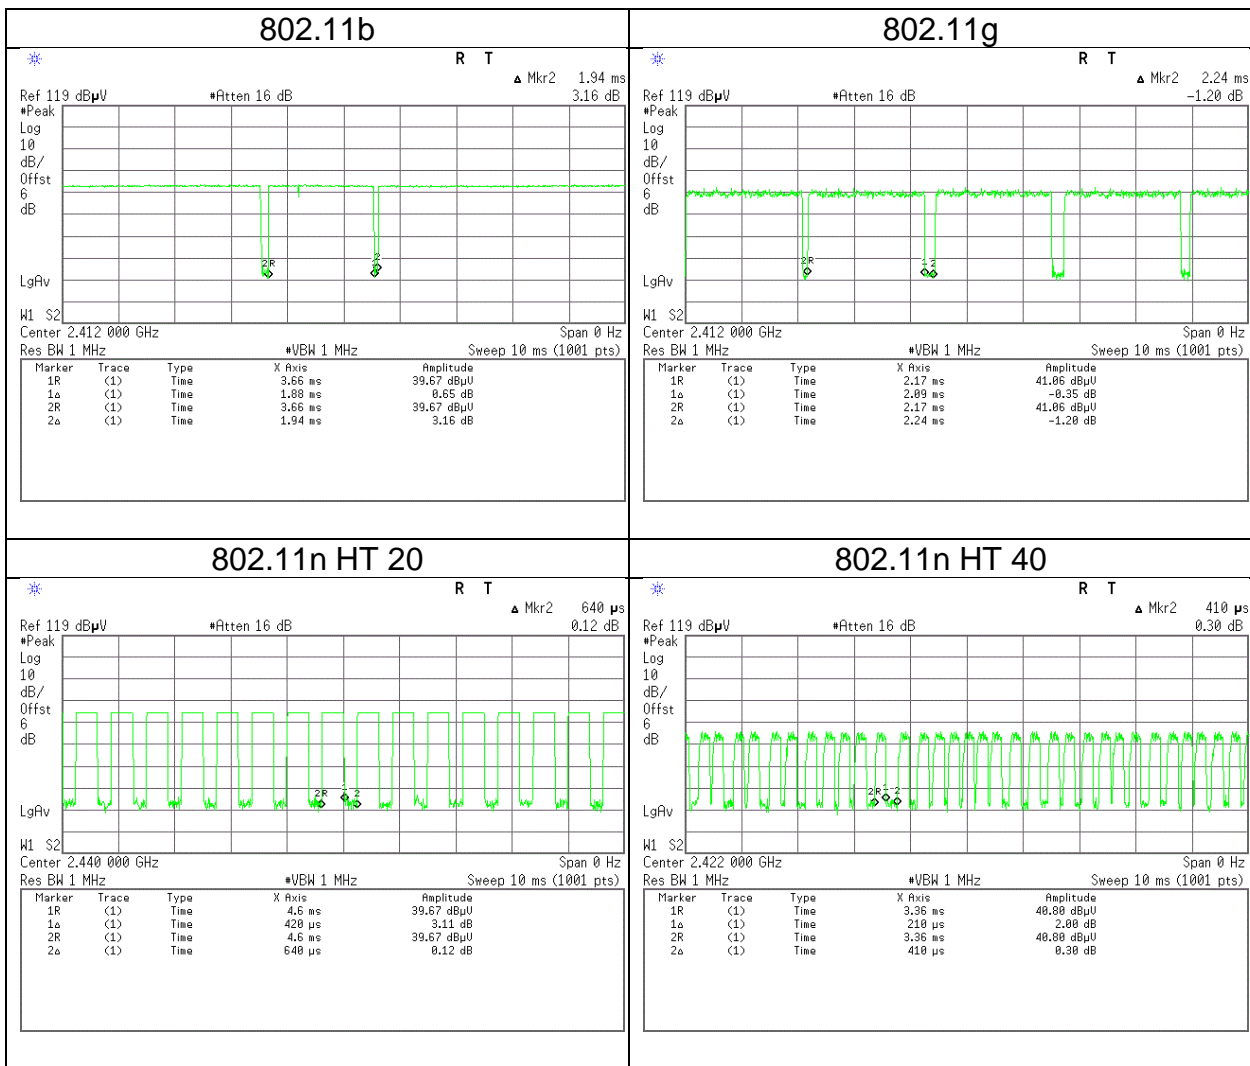

Report No.: T180703W01-RP

## 4. TEST RESULT

### 4.1 AC POWER LINE CONDUCTED EMISSION

#### 4.1.1 Test Limit

According to §15.207(a)

Frequency Range (MHz)	Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


\* Decreases with the logarithm of the frequency.

#### 4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

#### 4.1.3 Test Setup

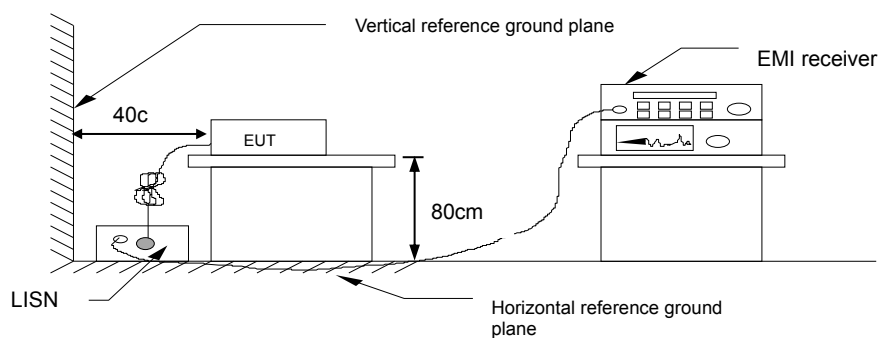


#### 4.1.4 Test Result

**Pass.**

Report No.: T180703W01-RP


### Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Line	Test Date	July 18, 2018
		Test Engineer	Dally Hong

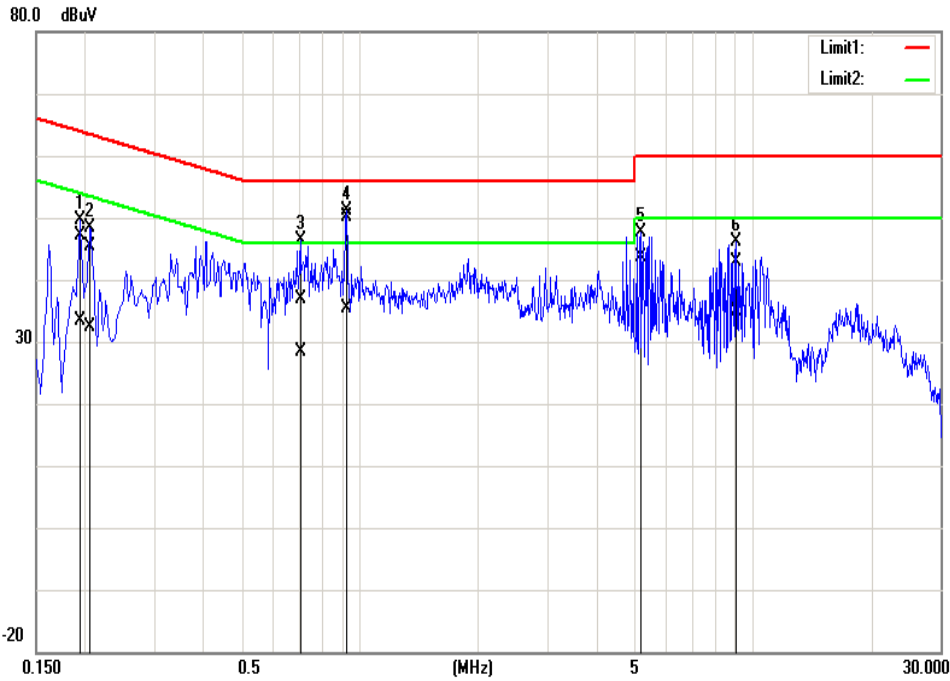

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1940	47.01	33.15	0.11	47.12	33.26	63.86	53.86	-16.74	-20.60
2	0.2060	45.39	32.32	0.11	45.50	32.43	63.37	53.37	-17.87	-20.94
3	0.7060	36.75	28.25	0.13	36.88	28.38	56.00	46.00	-19.12	-17.62
4*	0.9260	50.10	35.20	0.13	50.23	35.33	56.00	46.00	-5.77	-10.67
5	5.1700	47.37	43.47	0.21	47.58	43.68	60.00	50.00	-12.42	-6.32
6	9.0860	42.57	34.68	0.28	42.85	34.96	60.00	50.00	-17.15	-15.04

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Neutral	Test Date	July 18, 2018
		Test Engineer	Dally Hong

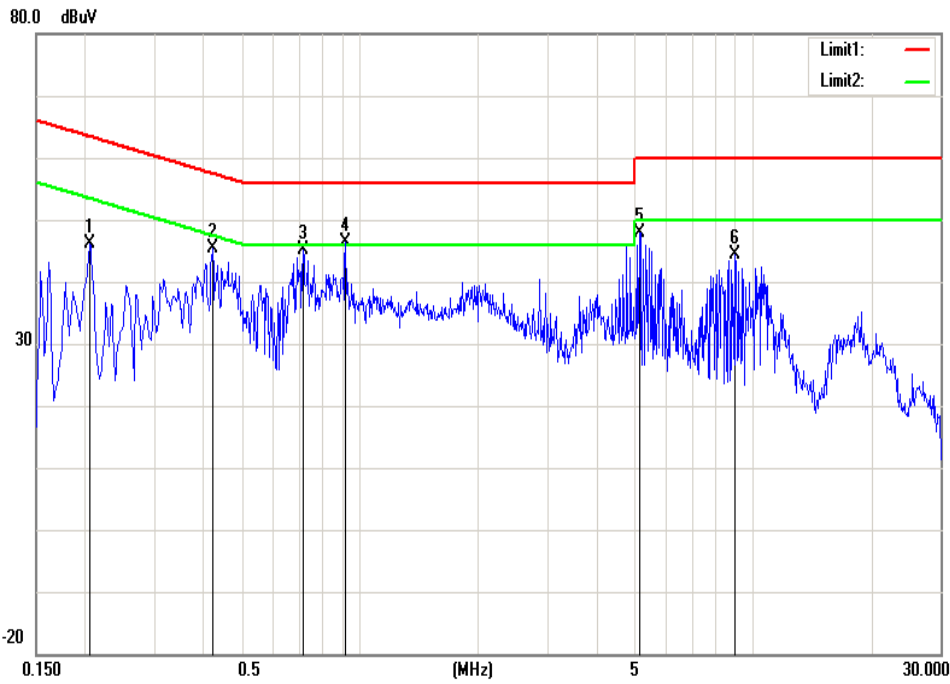

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.2060	43.64	31.13	0.13	43.77	31.26	63.36	53.37	-19.59	-22.11
2	0.4220	33.05	19.13	0.13	33.18	19.26	57.41	47.41	-24.23	-28.15
3	0.7180	41.08	36.27	0.14	41.22	36.41	56.00	46.00	-14.78	-9.59
4	0.9220	45.70	33.52	0.14	45.84	33.66	56.00	46.00	-10.16	-12.34
5*	5.1660	46.17	42.78	0.22	46.39	43.00	60.00	50.00	-13.61	-7.00
6	8.9980	42.90	37.70	0.28	43.18	37.98	60.00	50.00	-16.82	-12.02

## 4.2 6DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

### 4.2.1 Test Limit

According to §15.247(a)(2)

#### 6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

### 4.2.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 8.1 and ANSI 63.10:2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz, VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

### 4.2.3 Test Setup

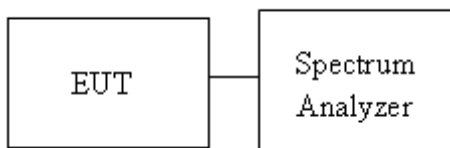



#### 4.2.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	15.2821	--	10.0435	--	≥500
Mid	2437	15.3256	--	10.0870	--	
High	2462	16.3675	--	10.0000	--	

Test mode: IEEE 802.11g mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	16.6280	--	15.7826	--	≥500
Mid	2437	16.6280	--	16.0435	--	
High	2462	16.6280	--	15.1304	--	

Test mode: IEEE 802.11n HT 20 MHz mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	18.0607	--	17.5652	--	≥500
Mid	2437	18.0173	--	17.5652	--	
High	2462	18.1041	--	17.5652	--	


Test mode: IEEE 802.11n HT 40 MHz mode / 2422-2452 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2422	36.3531	--	36.0580	--	≥500
Mid	2437	36.7004	--	35.2460	--	
High	2452	36.9319	--	35.4780	--	




Report No.: T180703W01-RP


# Test Data

## (99% OBW)

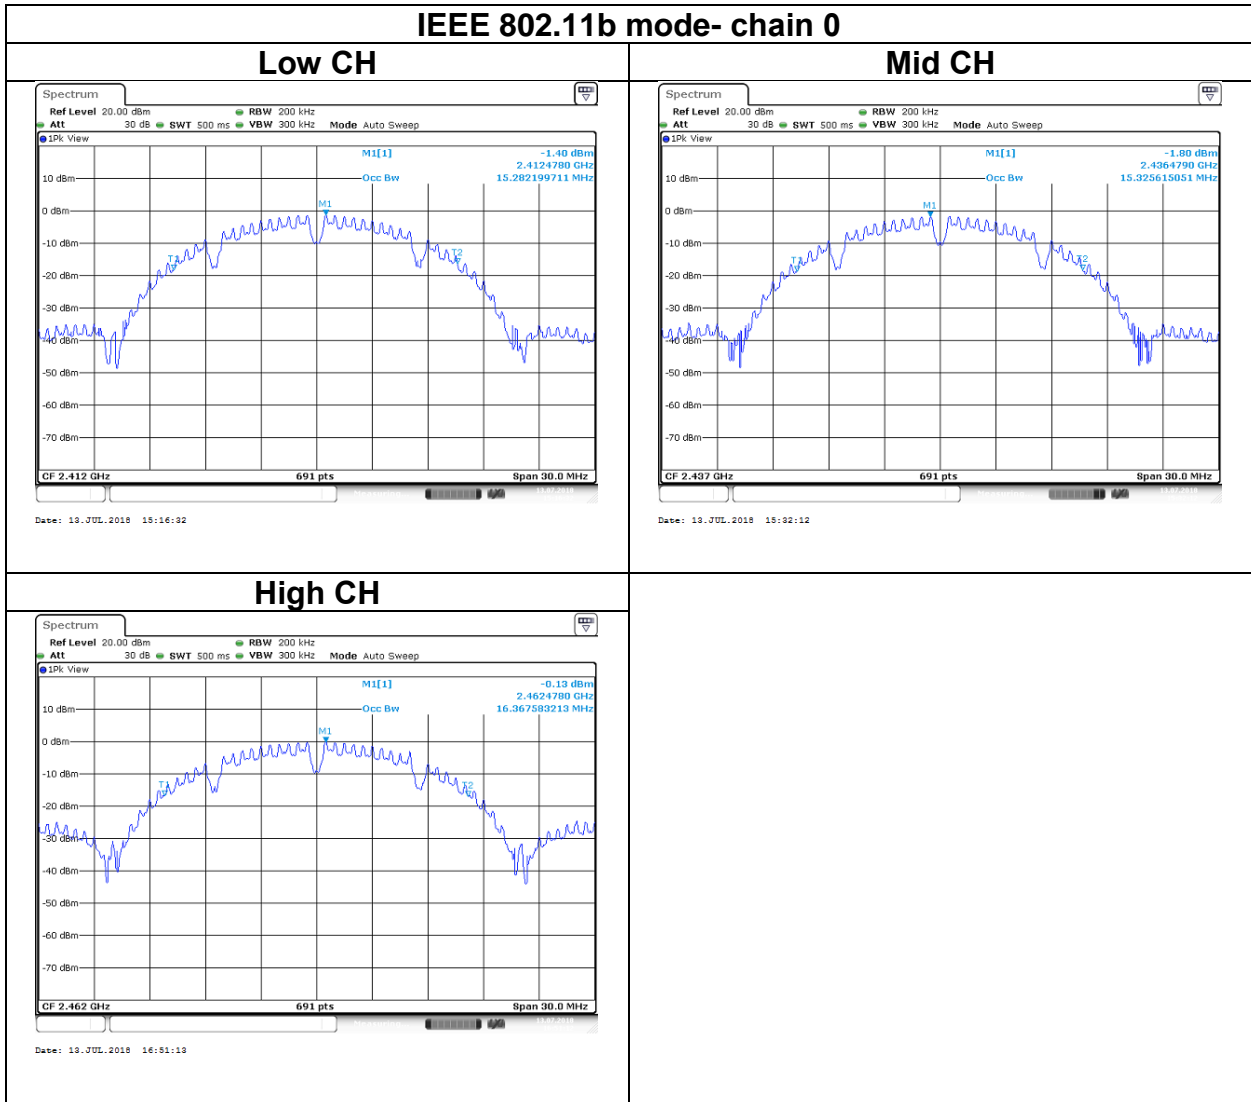

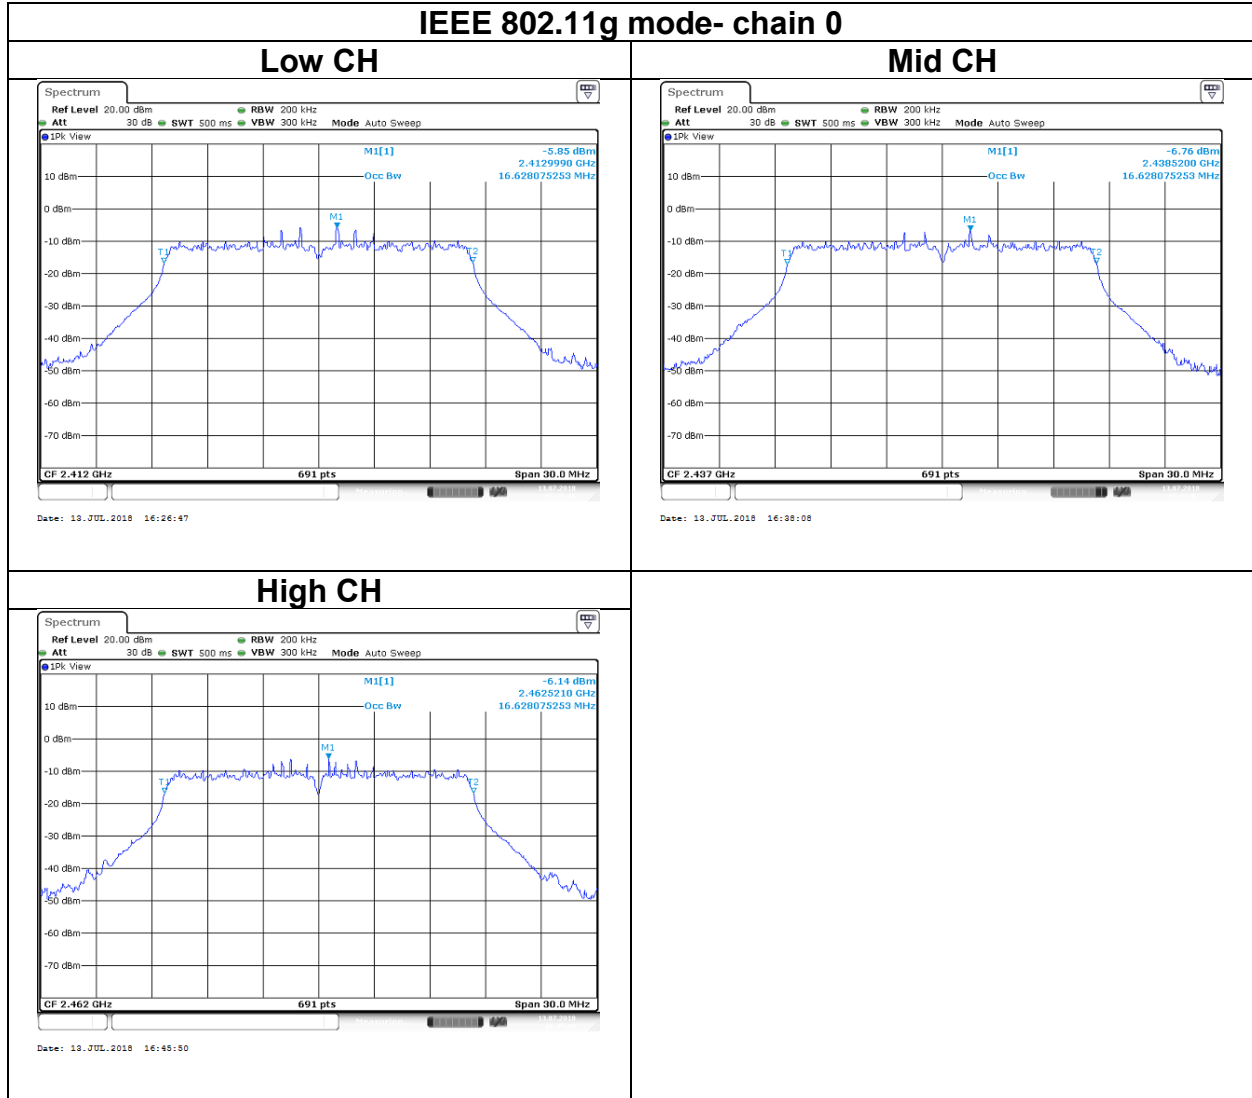


Report No.: T180703W01-RP

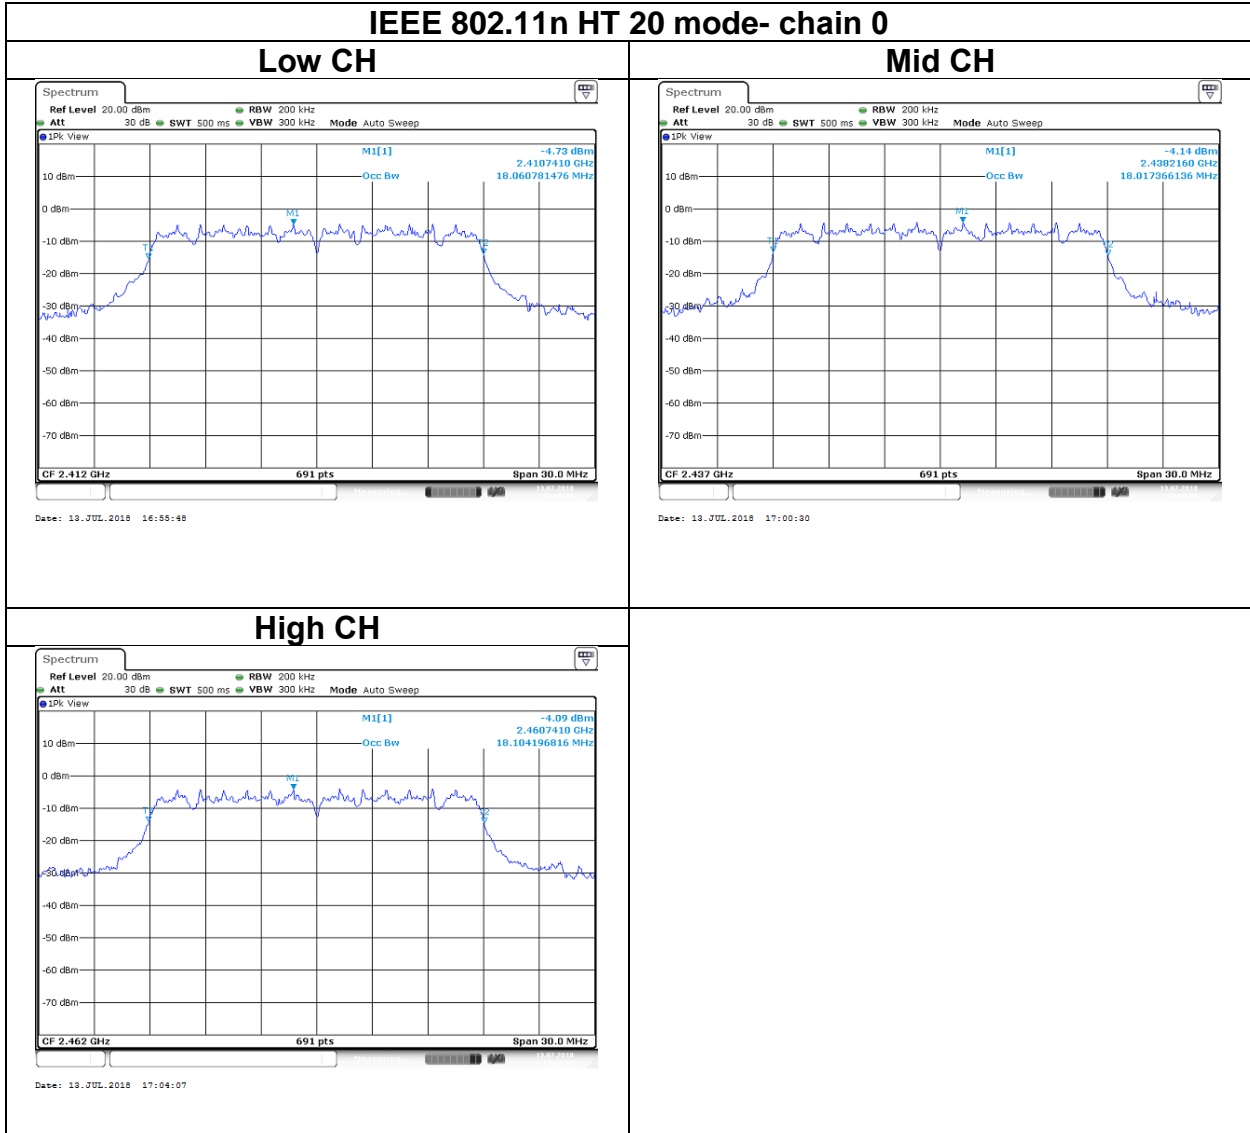




Report No.: T180703W01-RP

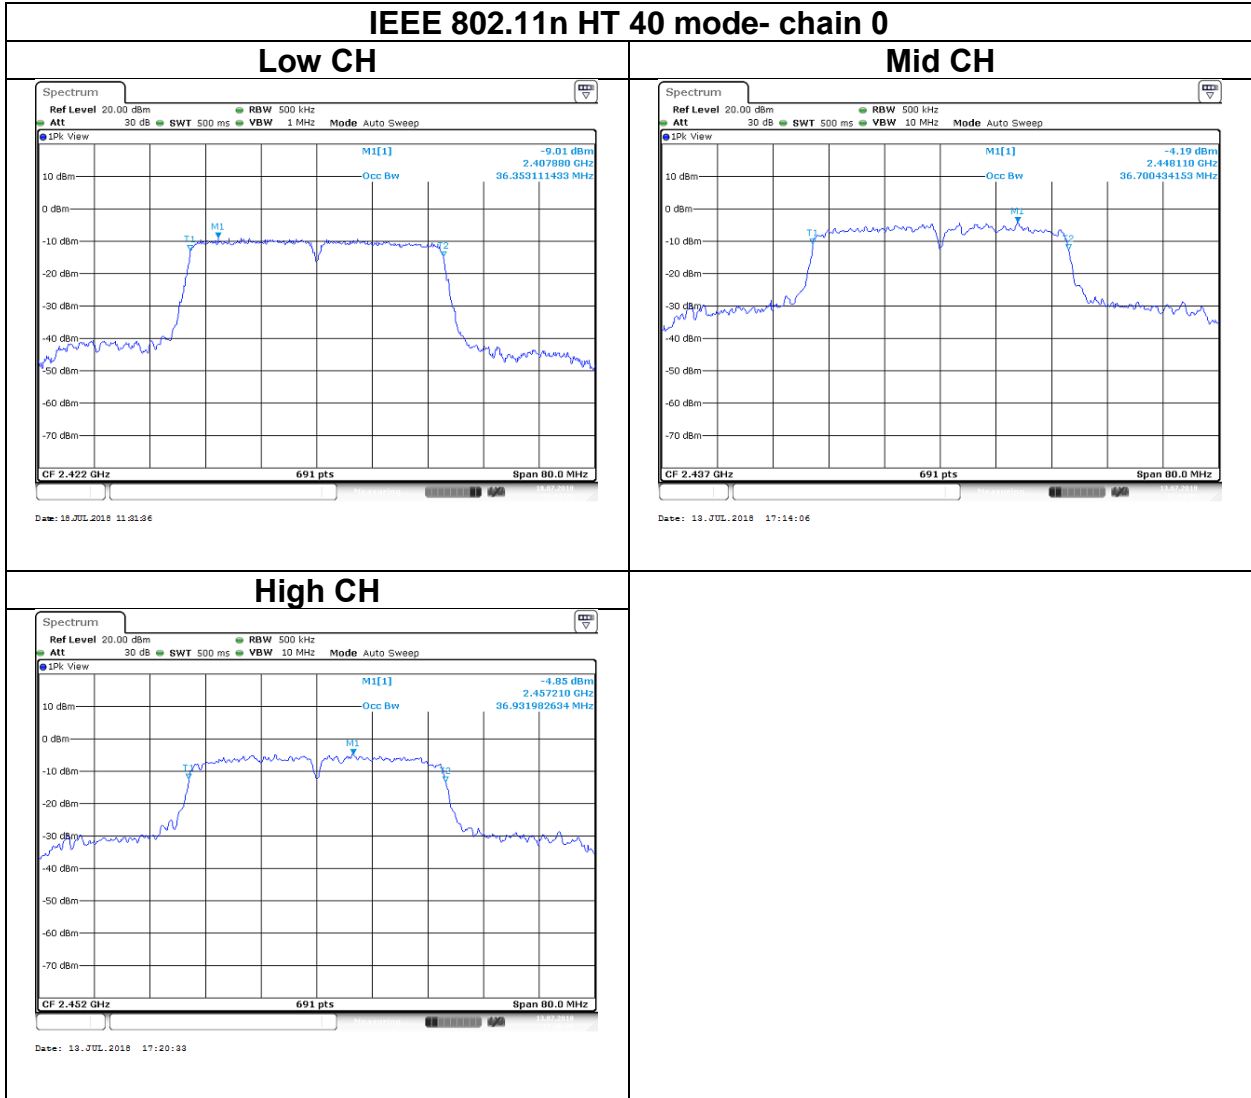




Report No.: T180703W01-RP


**Test Data**  
**(6dB)**

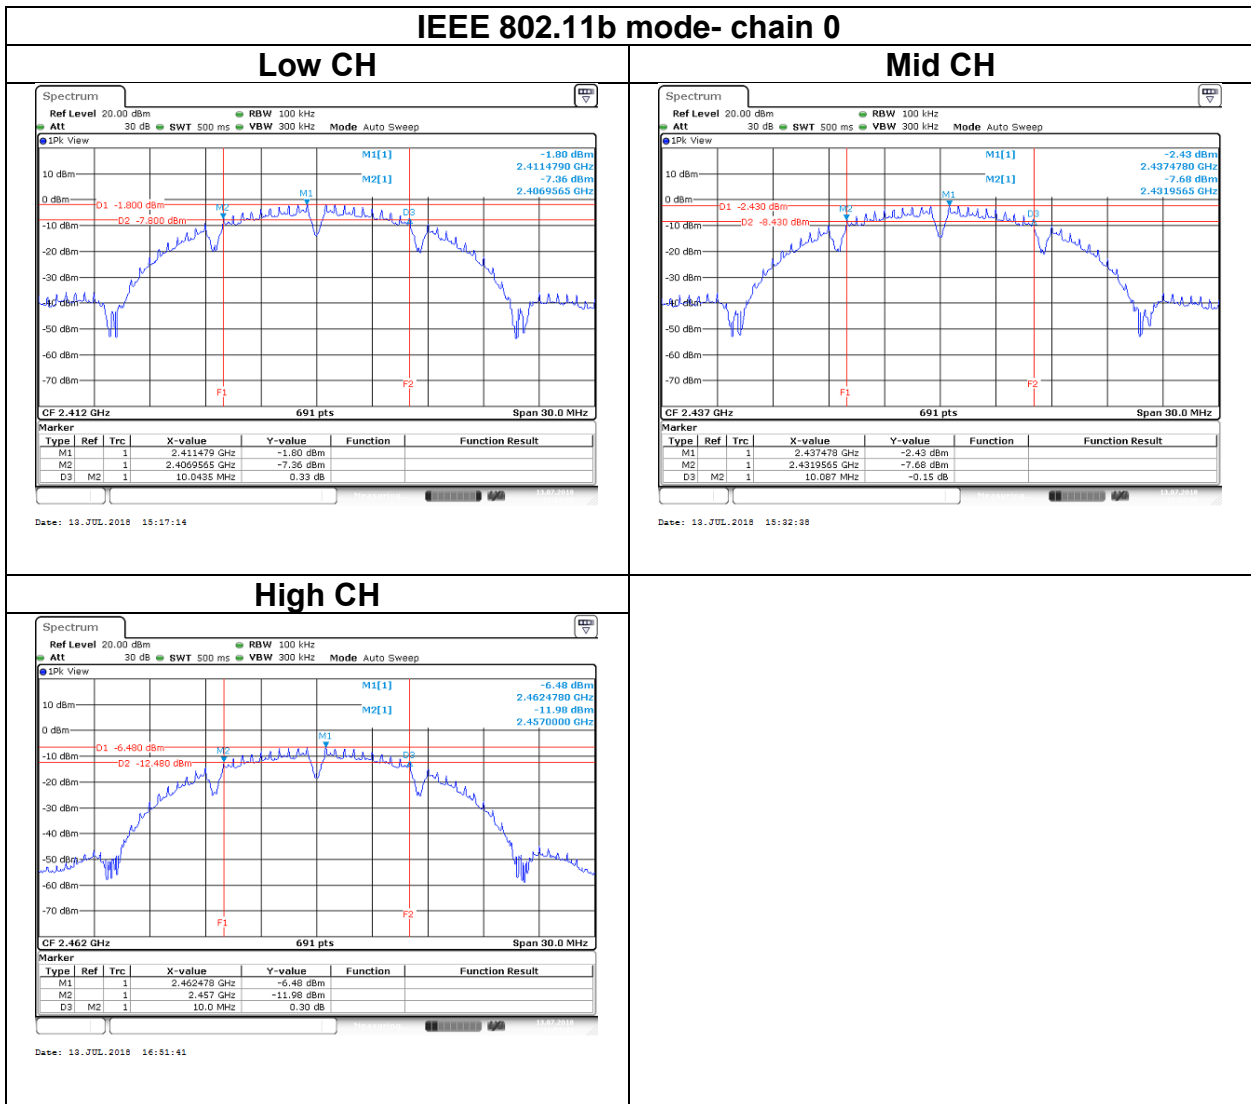

Report No.: T180703W01-RP

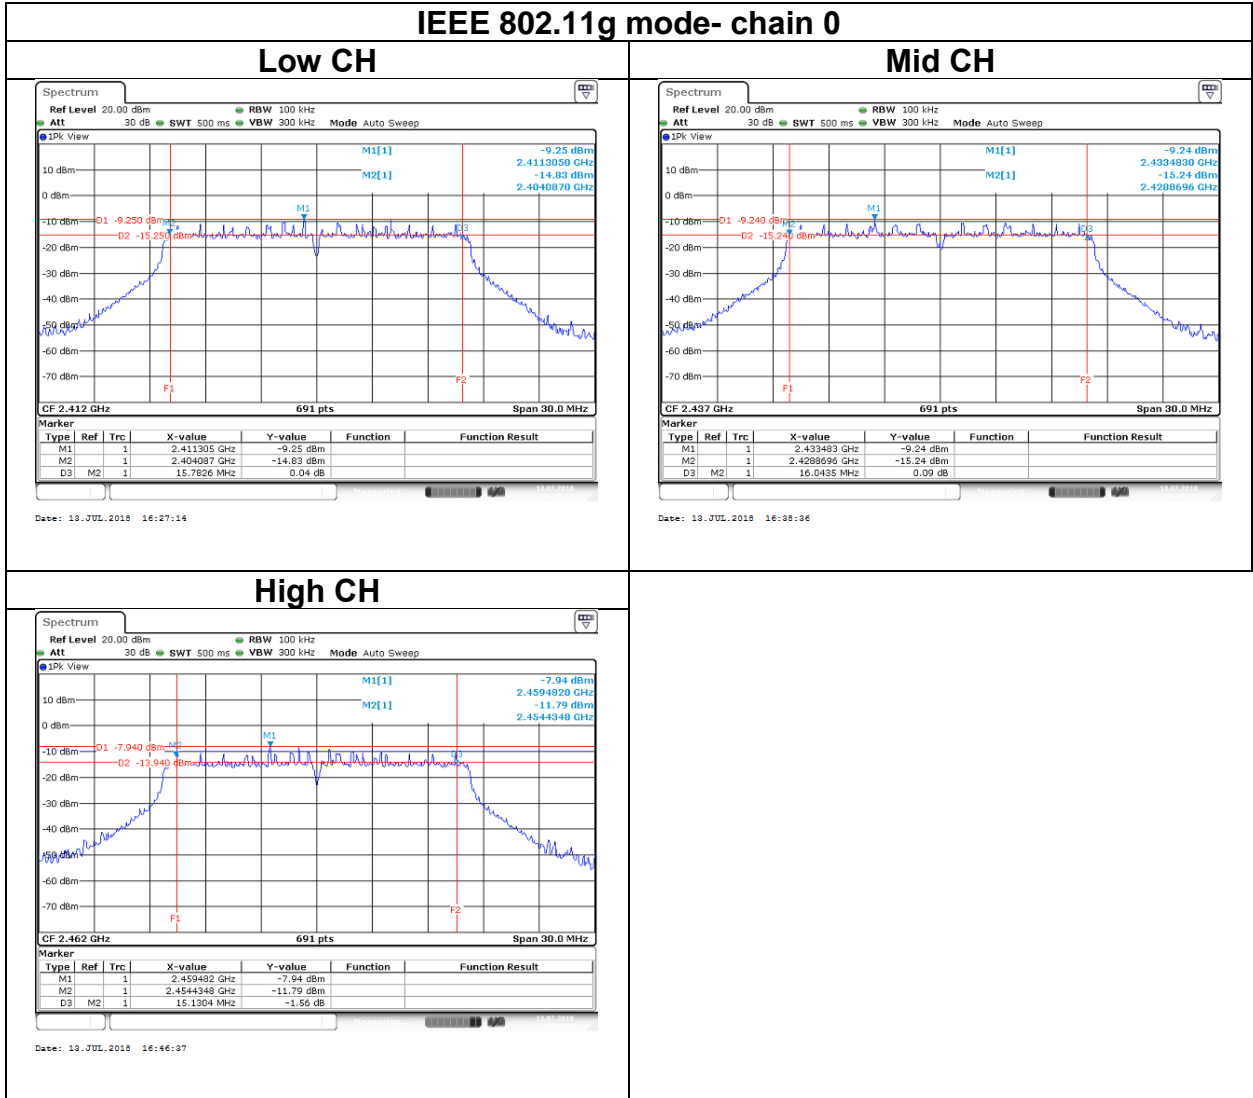


Report No.: T180703W01-RP

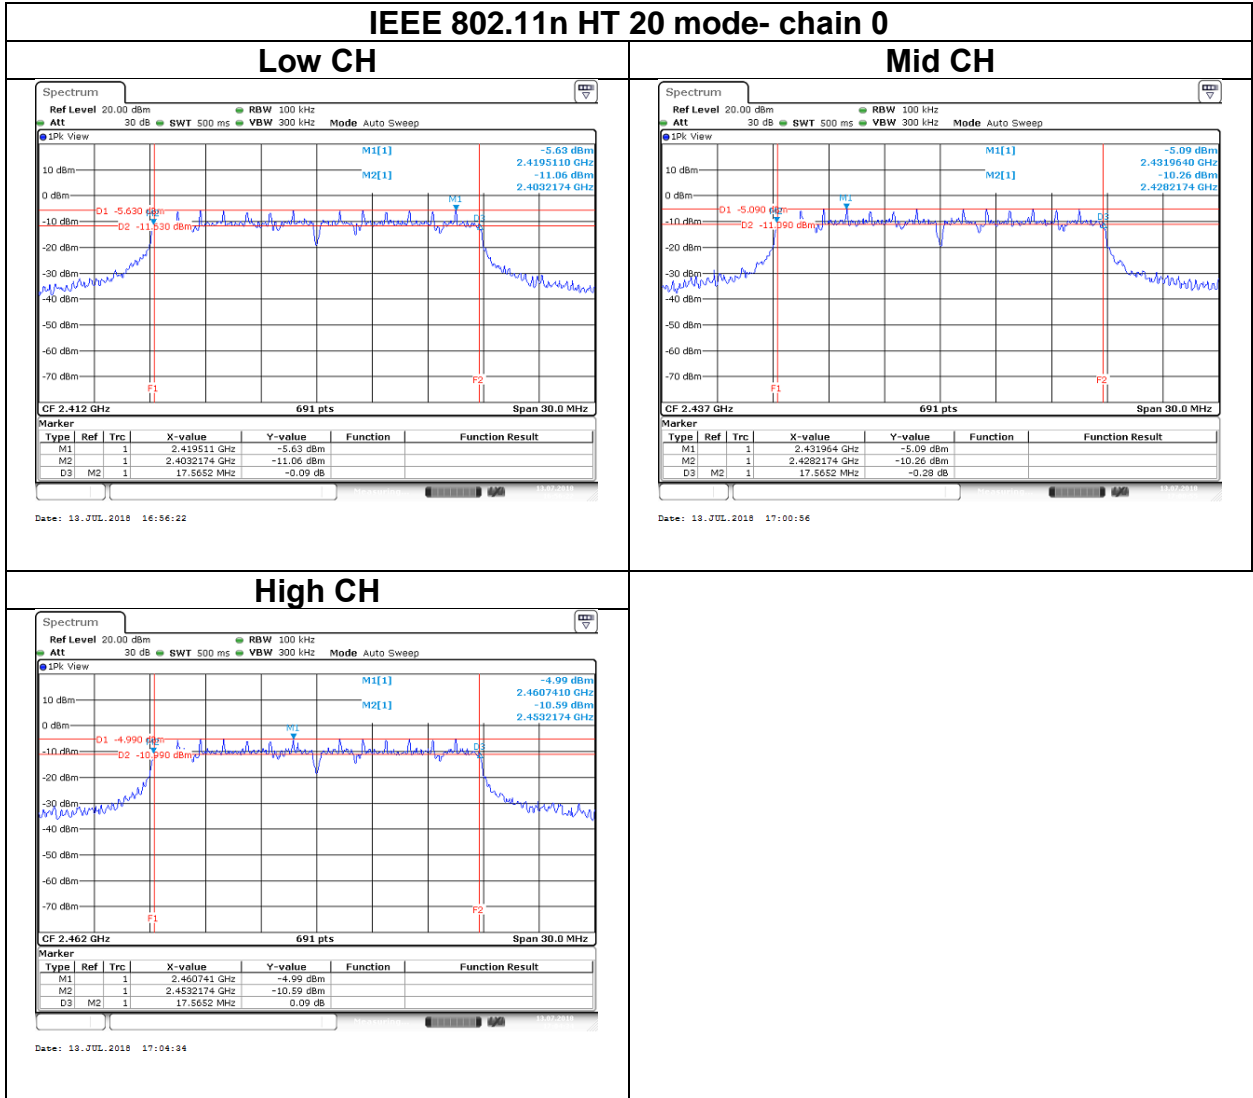



Report No.: T180703W01-RP

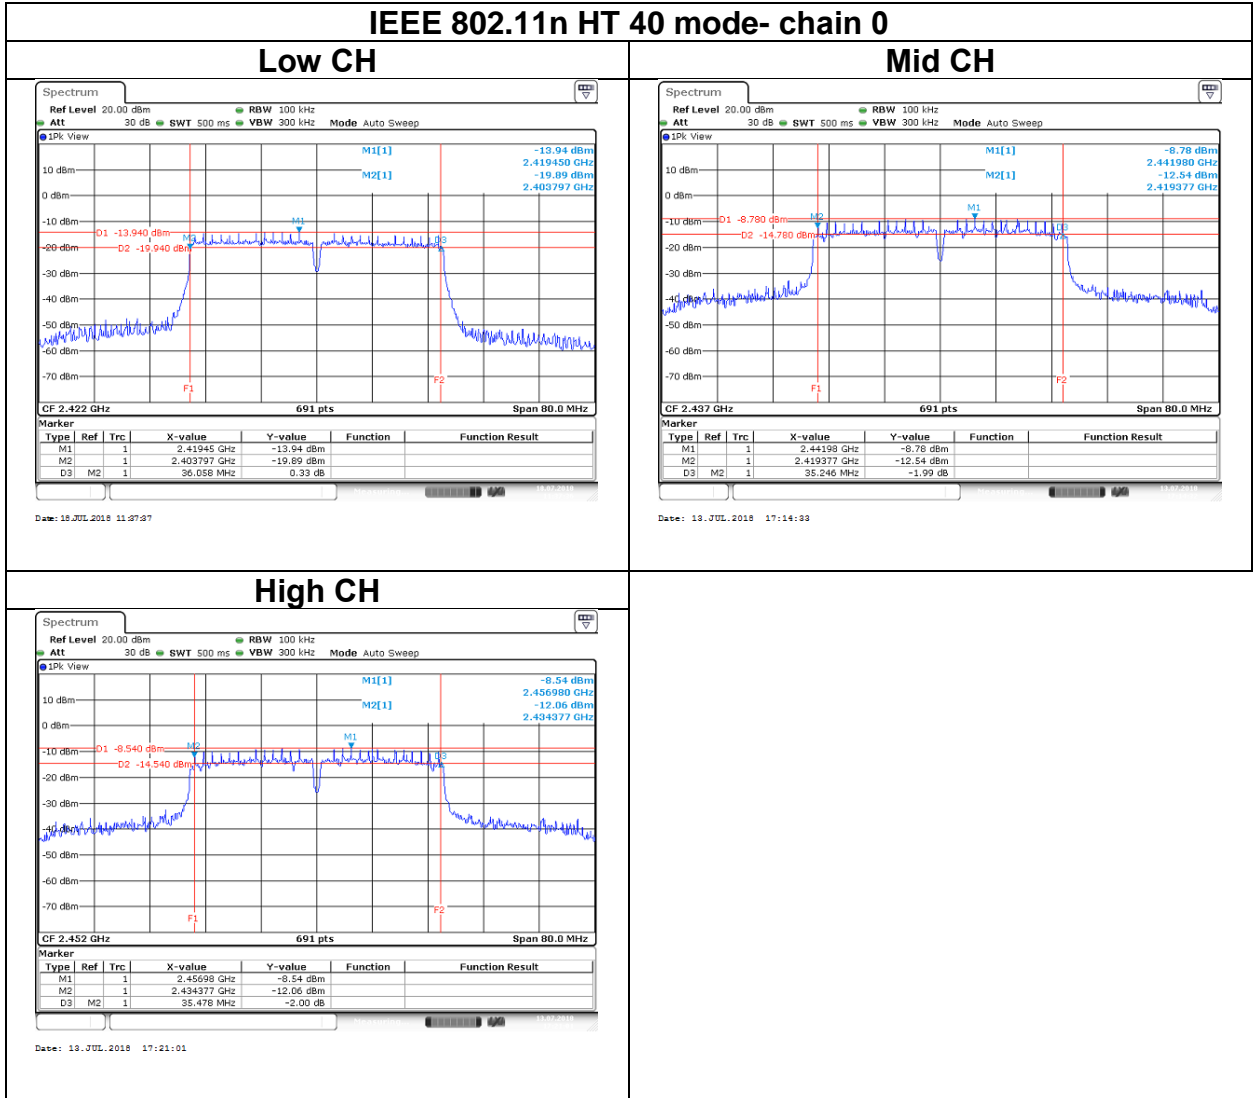

### 4.3 OUTPUT POWER MEASUREMENT

#### 4.3.1 Test Limit

According to §15.247(b)(3)

**Peak output power** :

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---


**Average output power** : For reporting purposes only.

#### 4.3.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

#### 4.3.3 Test Setup

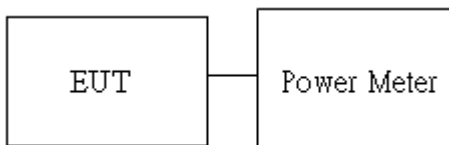



Report No.: T180703W01-RP

### 4.3.4 Test Result

#### Peak output power :

WIFI 2.4G									
Config	CH	Freq. (MHz)	Power Set		PK Power (dBm)		PK Total Power (dBm)	PK Total Power (W)	Limit (dBm)
			Chain 0	Chain 1	Chain 0	Chain 1			
IEEE 802.11b Data rate: 1Mbps	Low	2412	63	--	17.05	--	17.05	0.0507	30
	Mid	2437	63	--	16.85	--	16.85	0.0484	
	High	2462	63	--	17.48	--	<b>17.48</b>	<b>0.0560</b>	
IEEE 802.11g Data rate: 6Mbps	Low	2412	63	--	21.08	--	21.08	0.1282	
	Mid	2437	63	--	21.55	--	21.55	0.1429	
	High	2462	63	--	21.59	--	<b>21.59</b>	<b>0.1442</b>	
IEEE 802.11n HT 20 Data rate: MCS 0	Low	2412	63	--	22.95	--	22.95	0.1972	
	Mid	2437	63	--	22.71	--	22.71	0.1866	
	High	2462	63	--	23.3	--	<b>23.30</b>	<b>0.2138</b>	
IEEE 802.11n HT 40 Data rate: MCS 0	Low	2422	63	--	23.05	--	23.05	0.2018	
	Mid	2437	63	--	22.61	--	22.61	0.1824	
	High	2452	63	--	23.15	--	<b>23.15</b>	<b>0.2065</b>	



Report No.: T180703W01-RP

**Average output power :**

WIFI 2.4G					
Config	CH	Freq. (MHz)	AV Power (dBm)		AV Total Power (dBm)
			Chain 0	Chain 1	
IEEE 802.11b Data rate: 1Mbps	Low	2412	14.82	--	14.82
	Mid	2437	14.65	--	14.65
	High	2462	15.23	--	15.23
IEEE 802.11g Data rate: 6Mbps	Low	2412	12.42	--	12.42
	Mid	2437	12.79	--	12.79
	High	2462	12.84	--	12.84
IEEE 802.11n HT 20 Data rate: MCS 0	Low	2412	16.84	--	16.84
	Mid	2437	17.02	--	17.02
	High	2462	17.23	--	17.23
IEEE 802.11n HT 40 Data rate: MCS 0	Low	2422	18.09	--	18.09
	Mid	2437	16.97	--	16.97
	High	2452	17.13	--	17.13

## 4.4 POWER SPECTRAL DENSITY

### 4.4.1 Test Limit

According to §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [ Limit = 8 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation :
-------	---

### 4.4.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

### 4.4.3 Test Setup

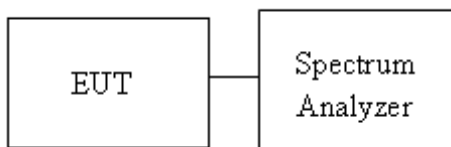

Report No.: T180703W01-RP

#### 4.4.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-4.59	--	-4.59	8
Mid	2437	-5.13	--	-5.13	
High	2462	-9.98	--	-9.98	

Test mode: IEEE 802.11g mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-13.18	--	-13.18	8
Mid	2437	-12.84	--	-12.84	
High	2462	-11.61	--	-11.61	


Test mode: IEEE 802.11n HT 20 MHz mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2412	-9.88	--	-9.88	8
Mid	2437	-9.24	--	-9.24	
High	2462	-8.29	--	-8.29	

Test mode: IEEE 802.11n HT 40 MHz mode / 2422-2452 MHz					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PSSD (dBm)	Limit (dBm)
Low	2422	-9.58	--	-9.58	8
Mid	2437	-11.78	--	-11.78	
High	2452	-10.43	--	-10.43	




Report No.: T180703W01-RP

### Test Data

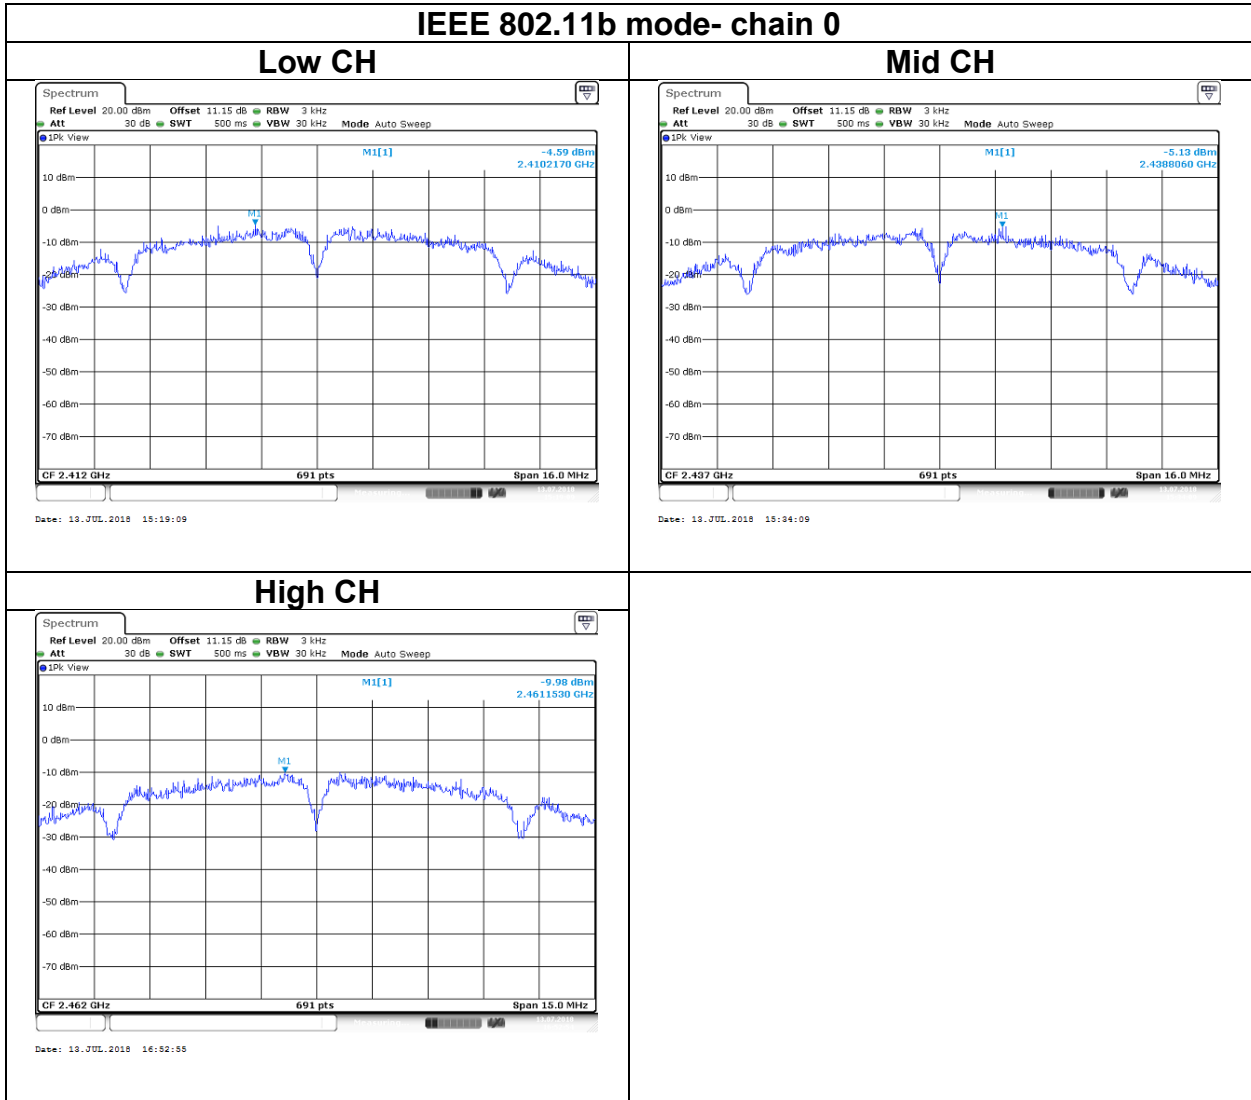


Report No.: T180703W01-RP

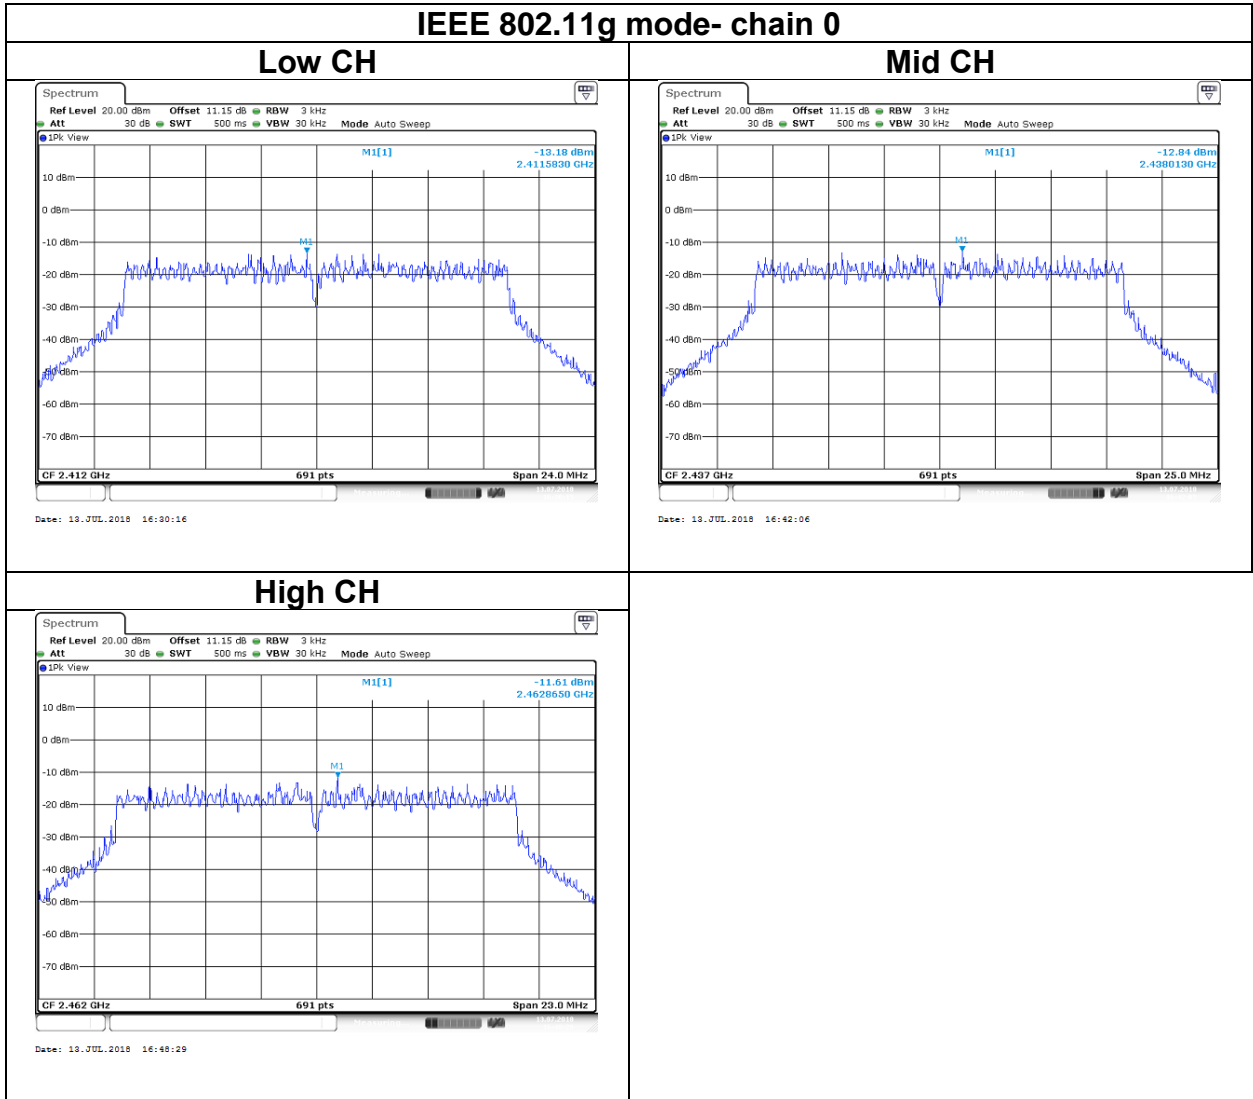






Report No.: T180703W01-RP

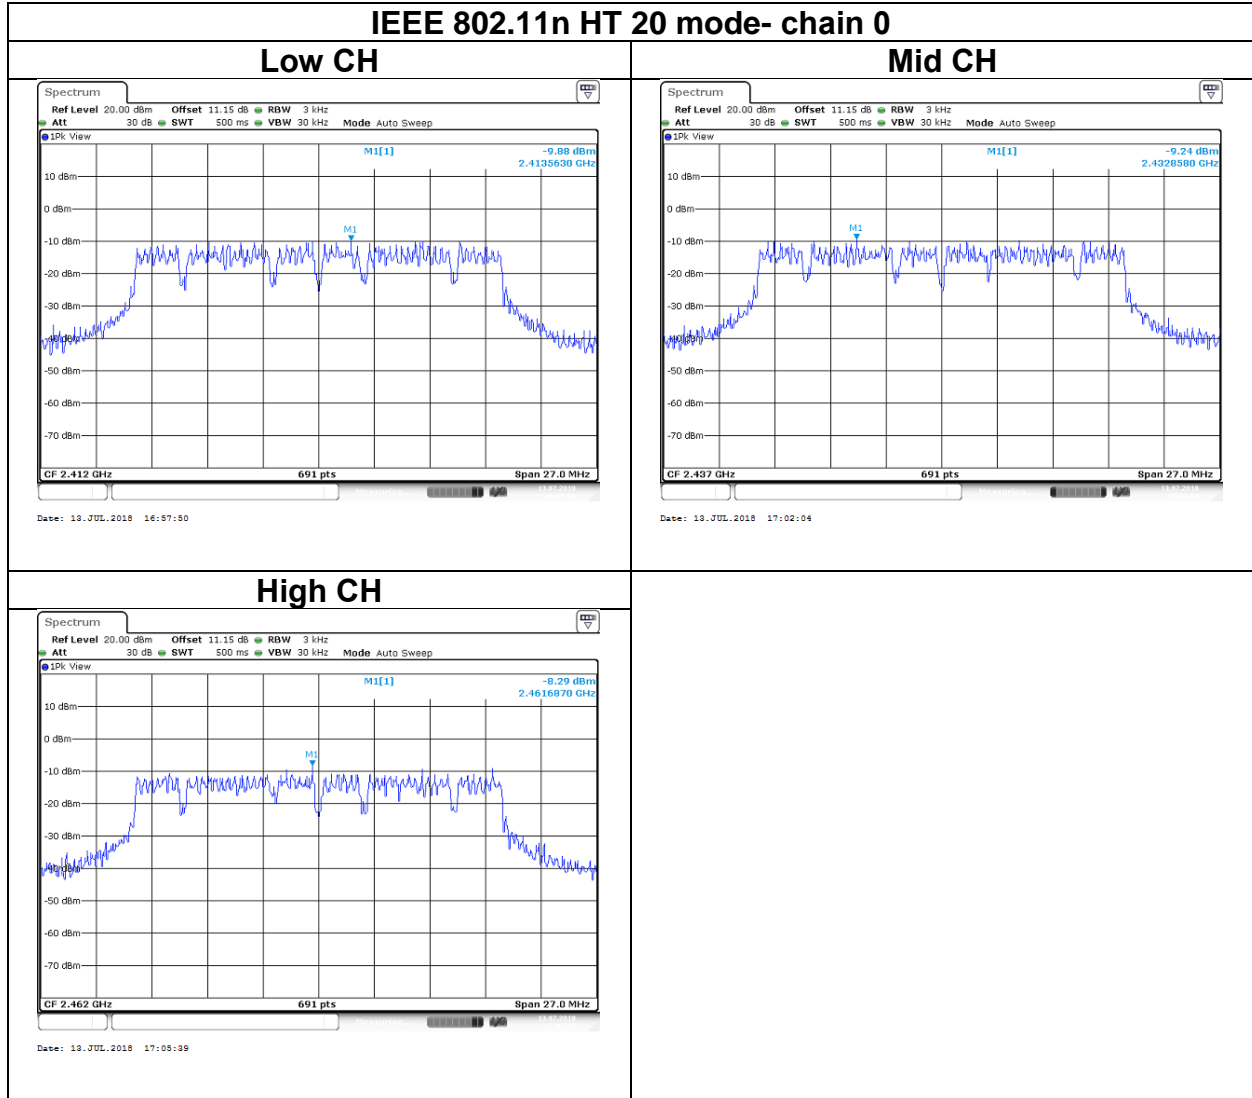



Report No.: T180703W01-RP

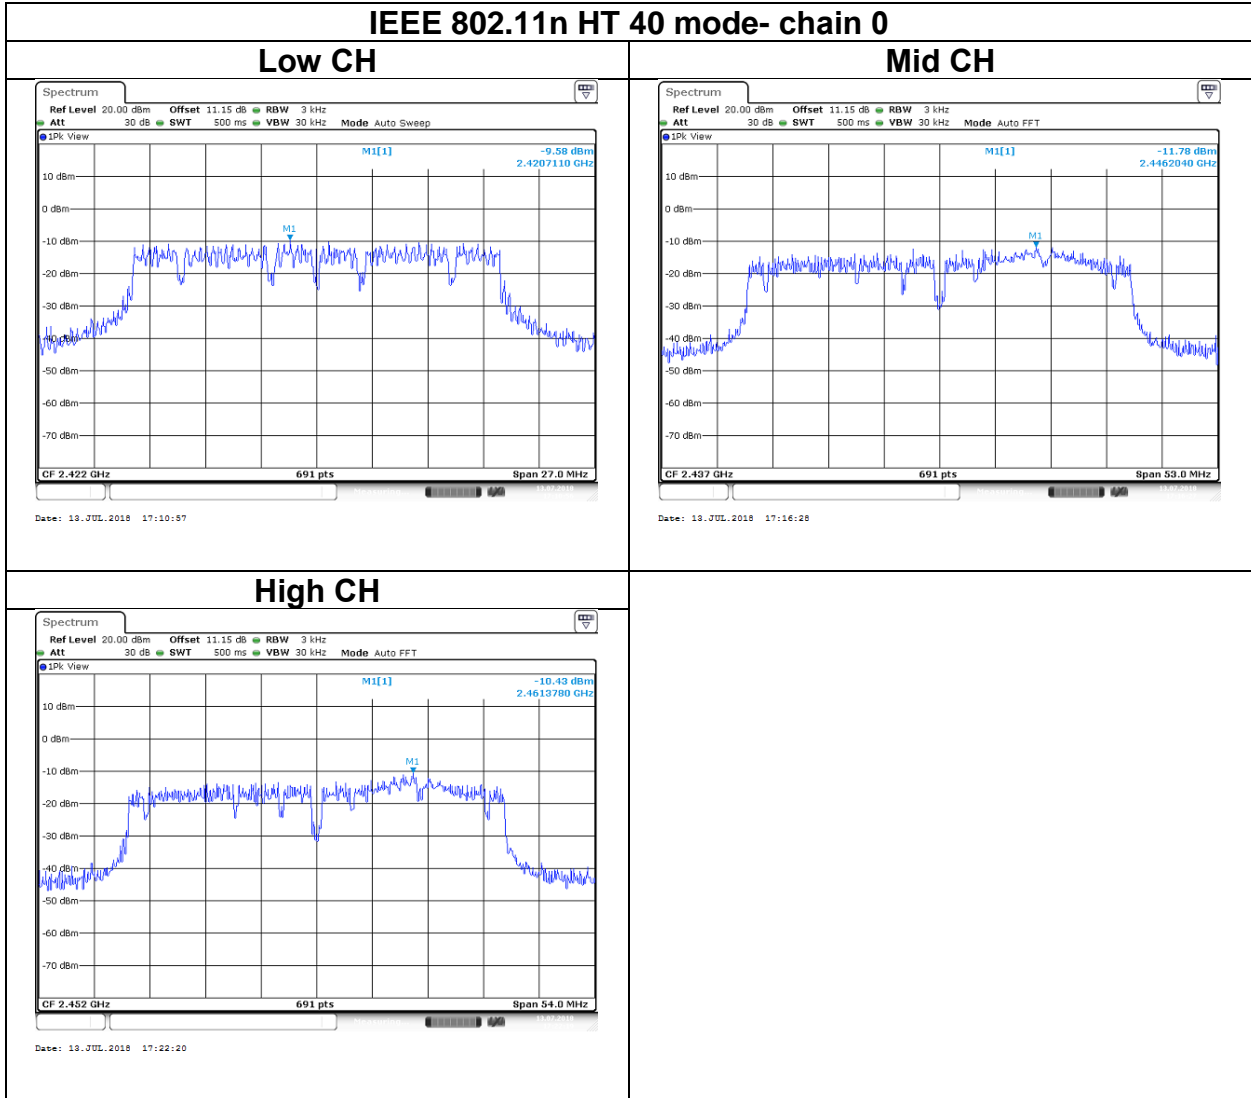

## 4.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### 4.5.1 Test Limit

According to §15.247(d)

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 4.5.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### 4.5.3 Test Setup





Report No.: T180703W01-RP

### 4.5.4 Test Result

#### Test Data

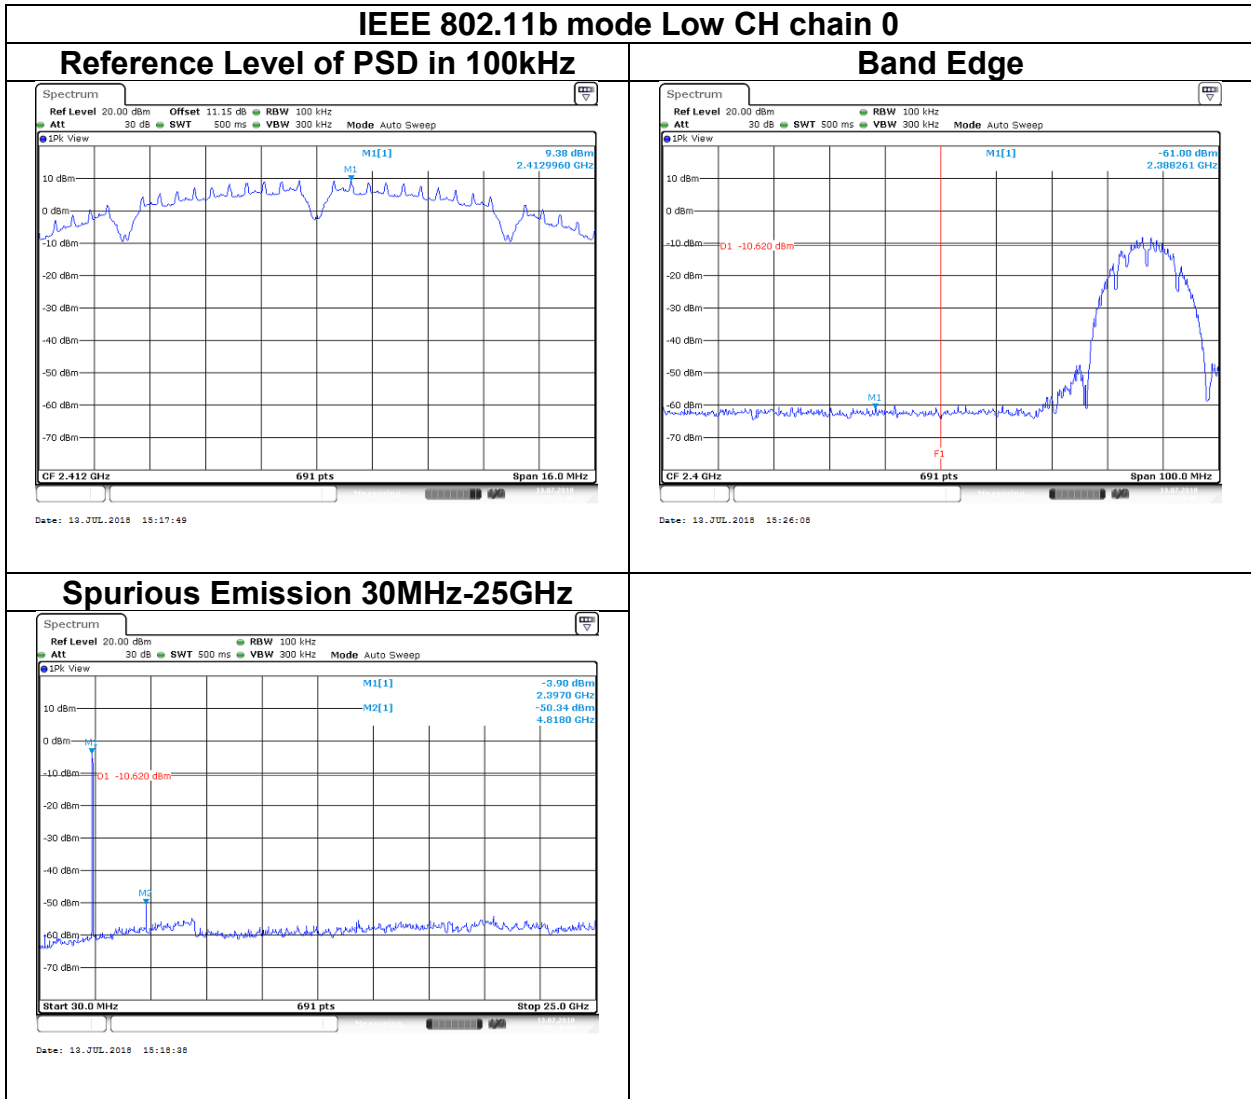


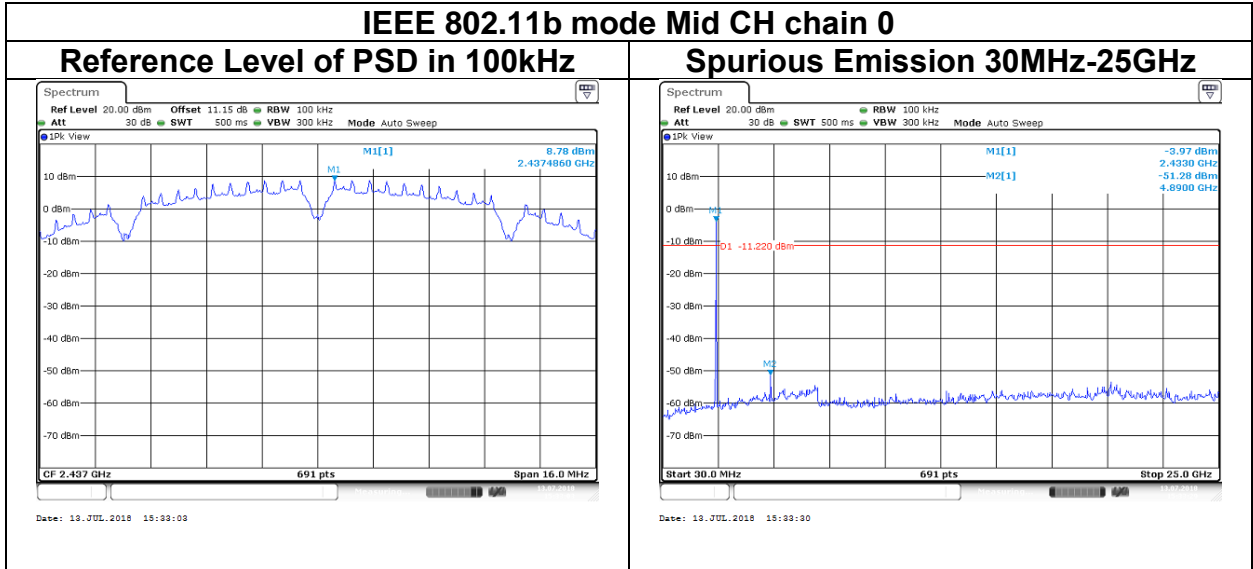

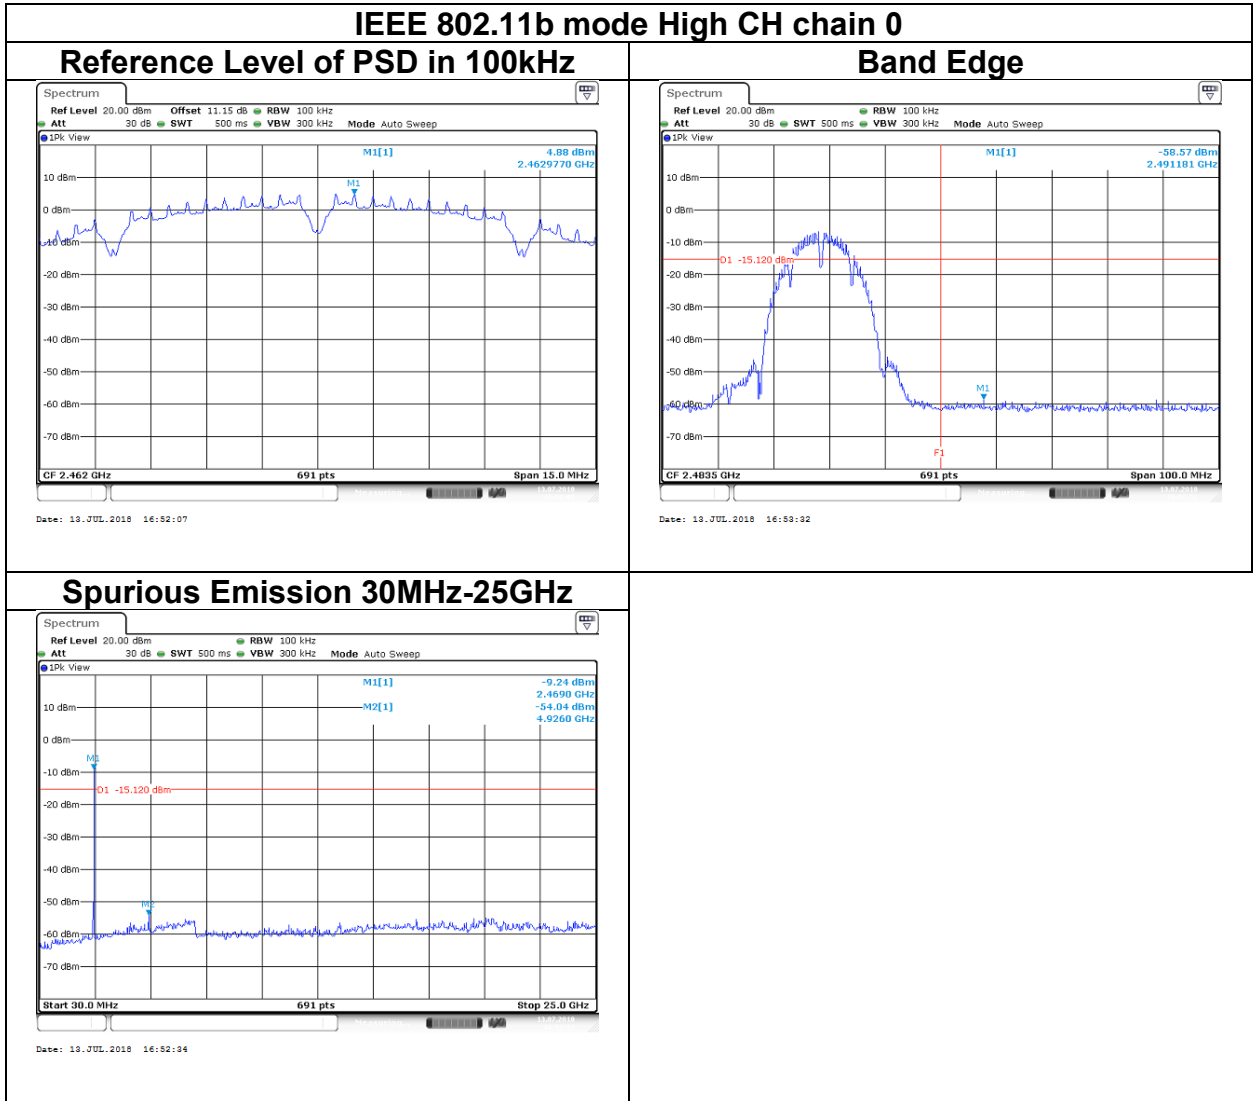




Report No.: T180703W01-RP

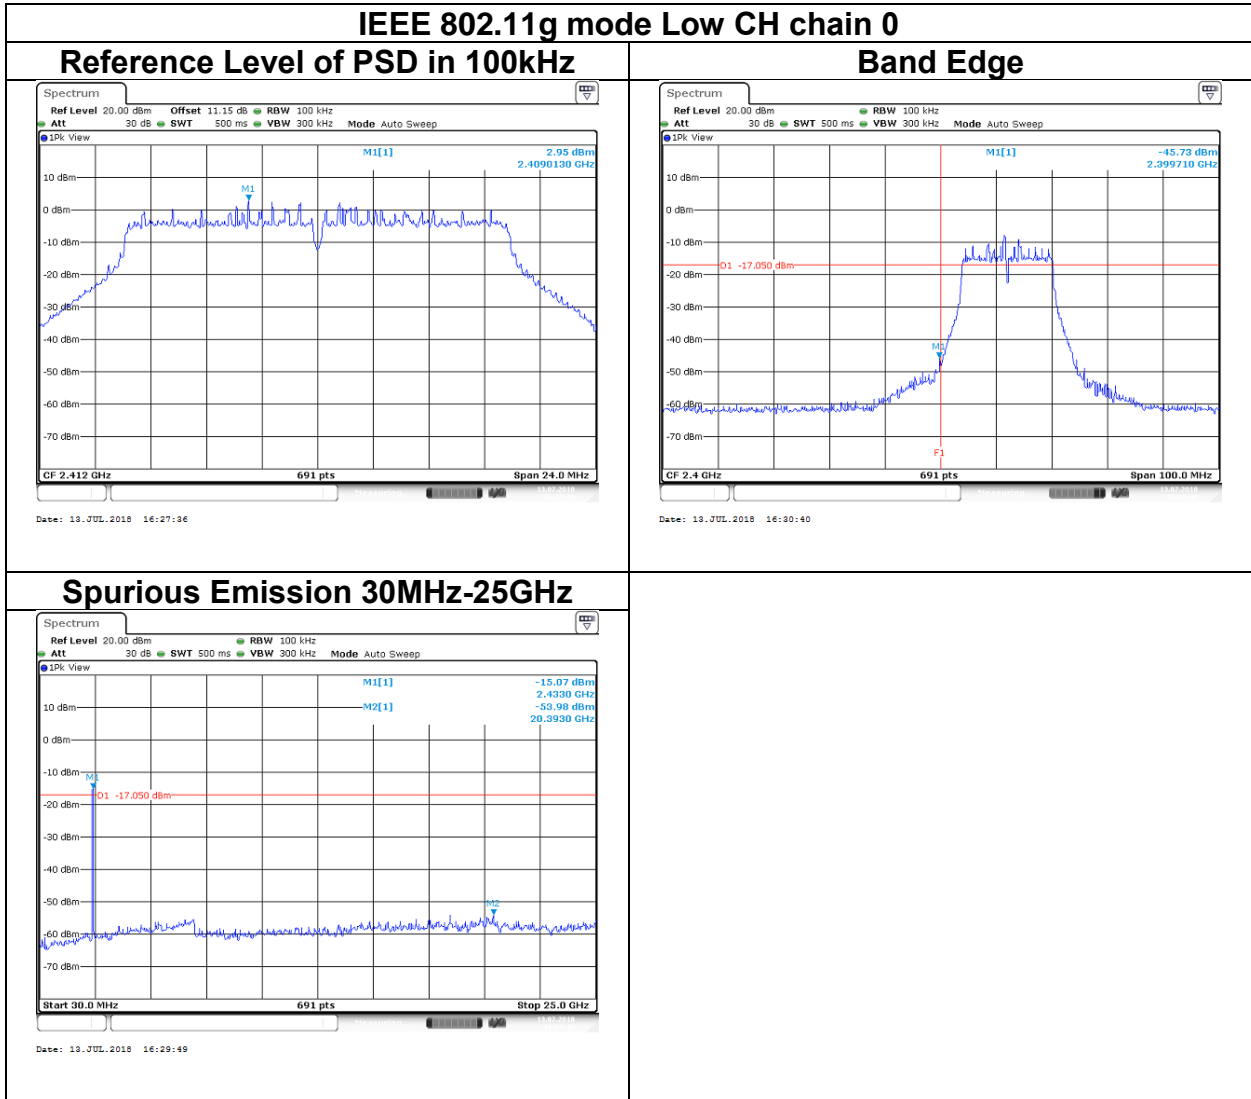






Report No.: T180703W01-RP

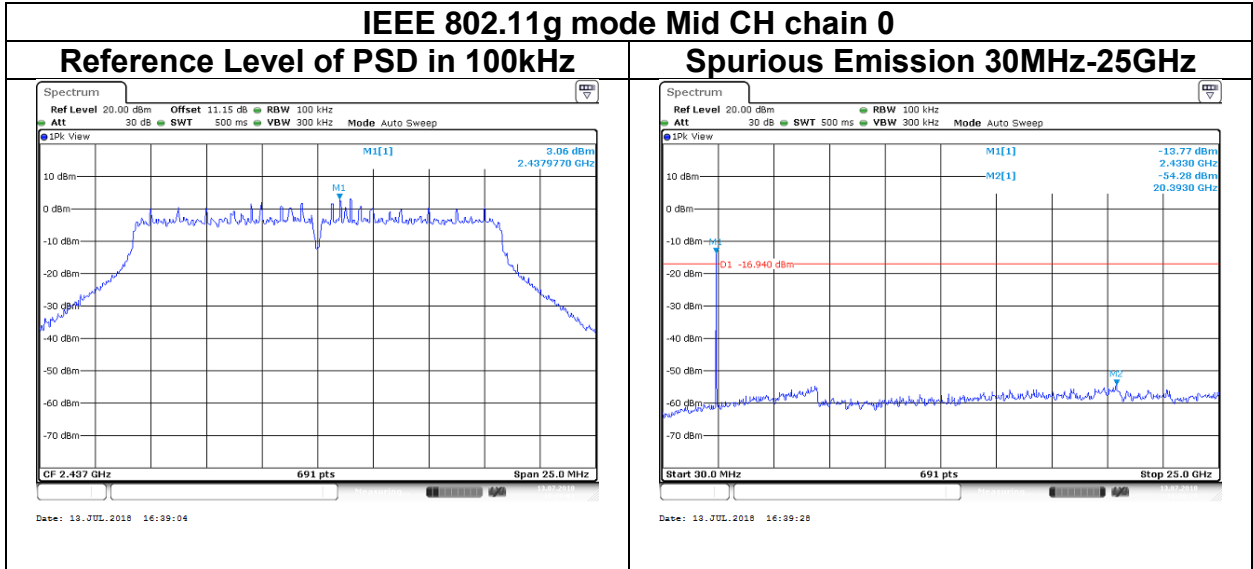





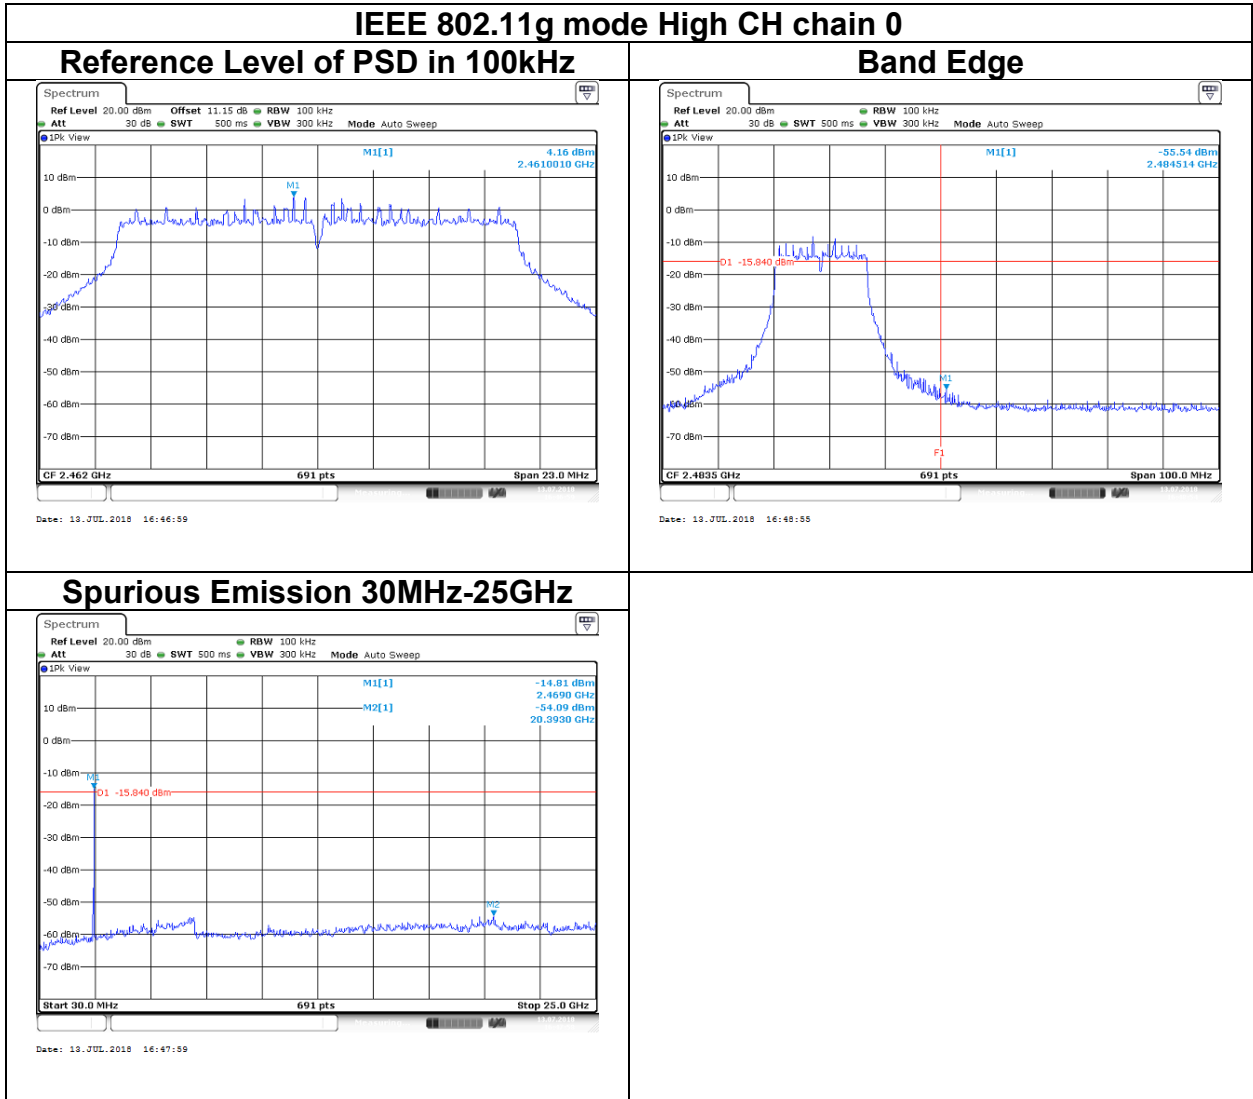


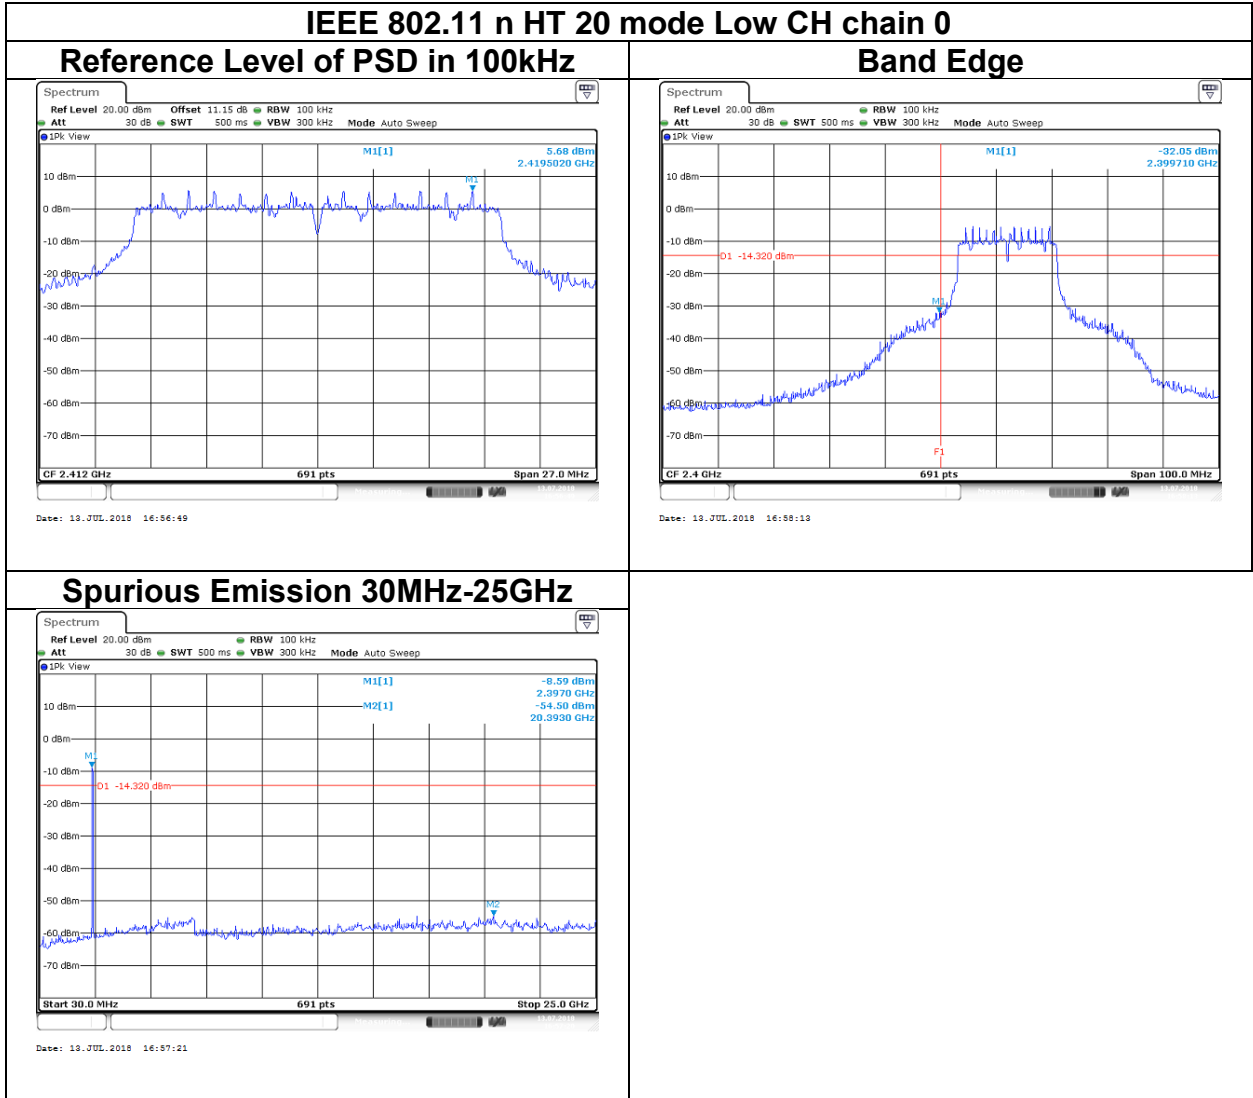


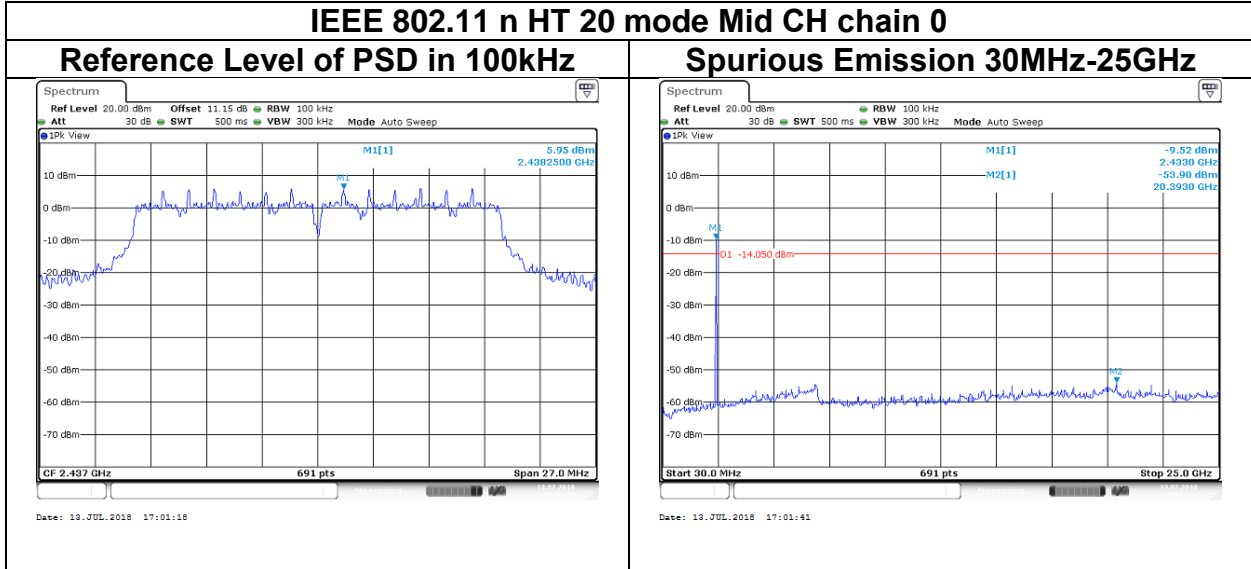

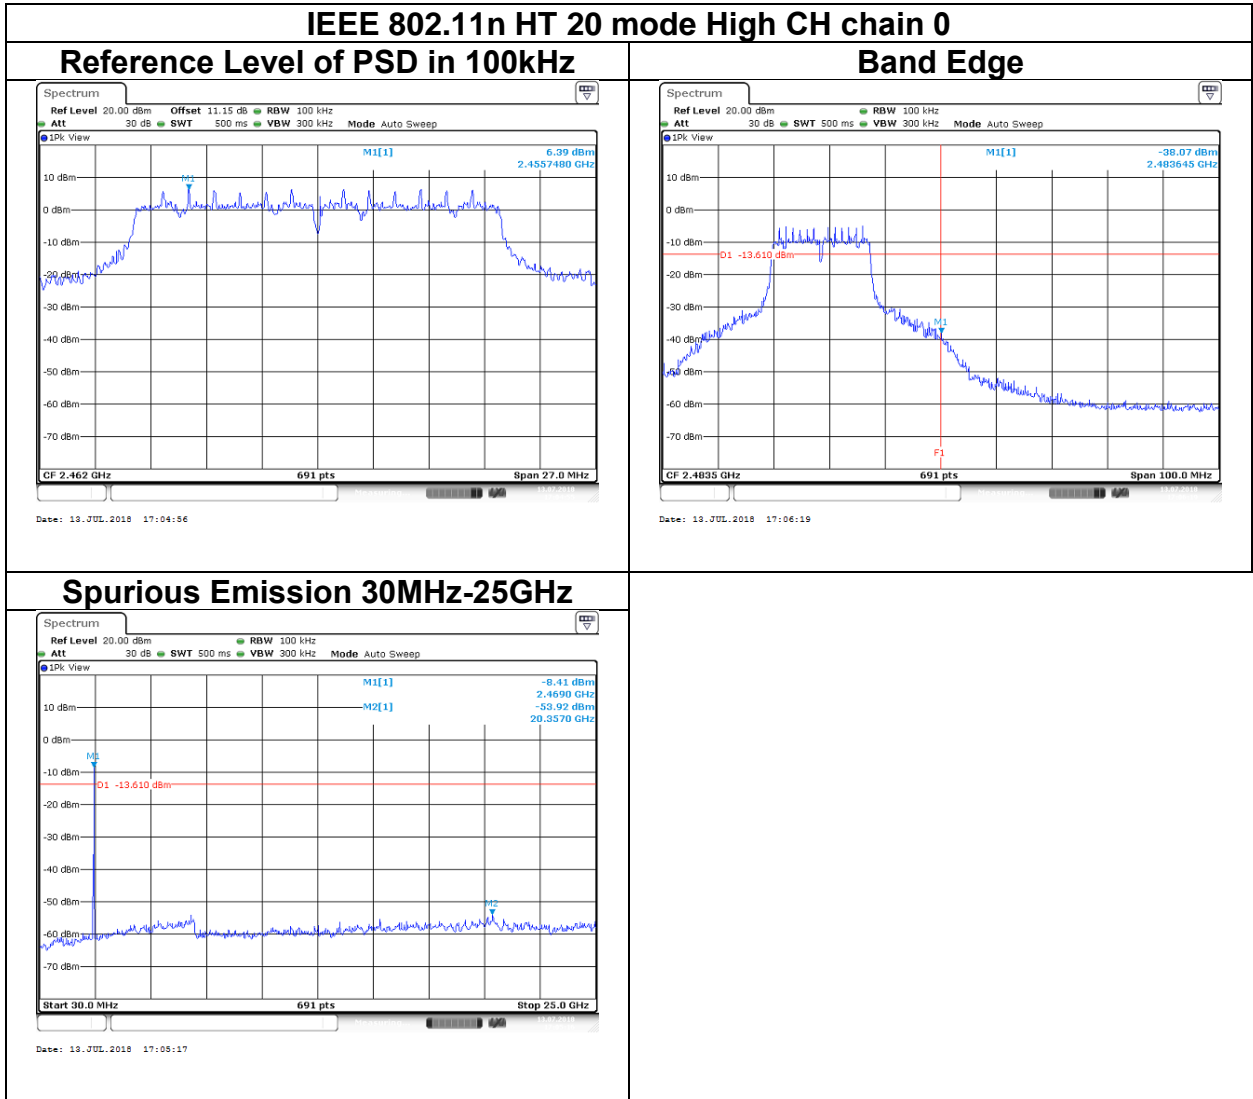

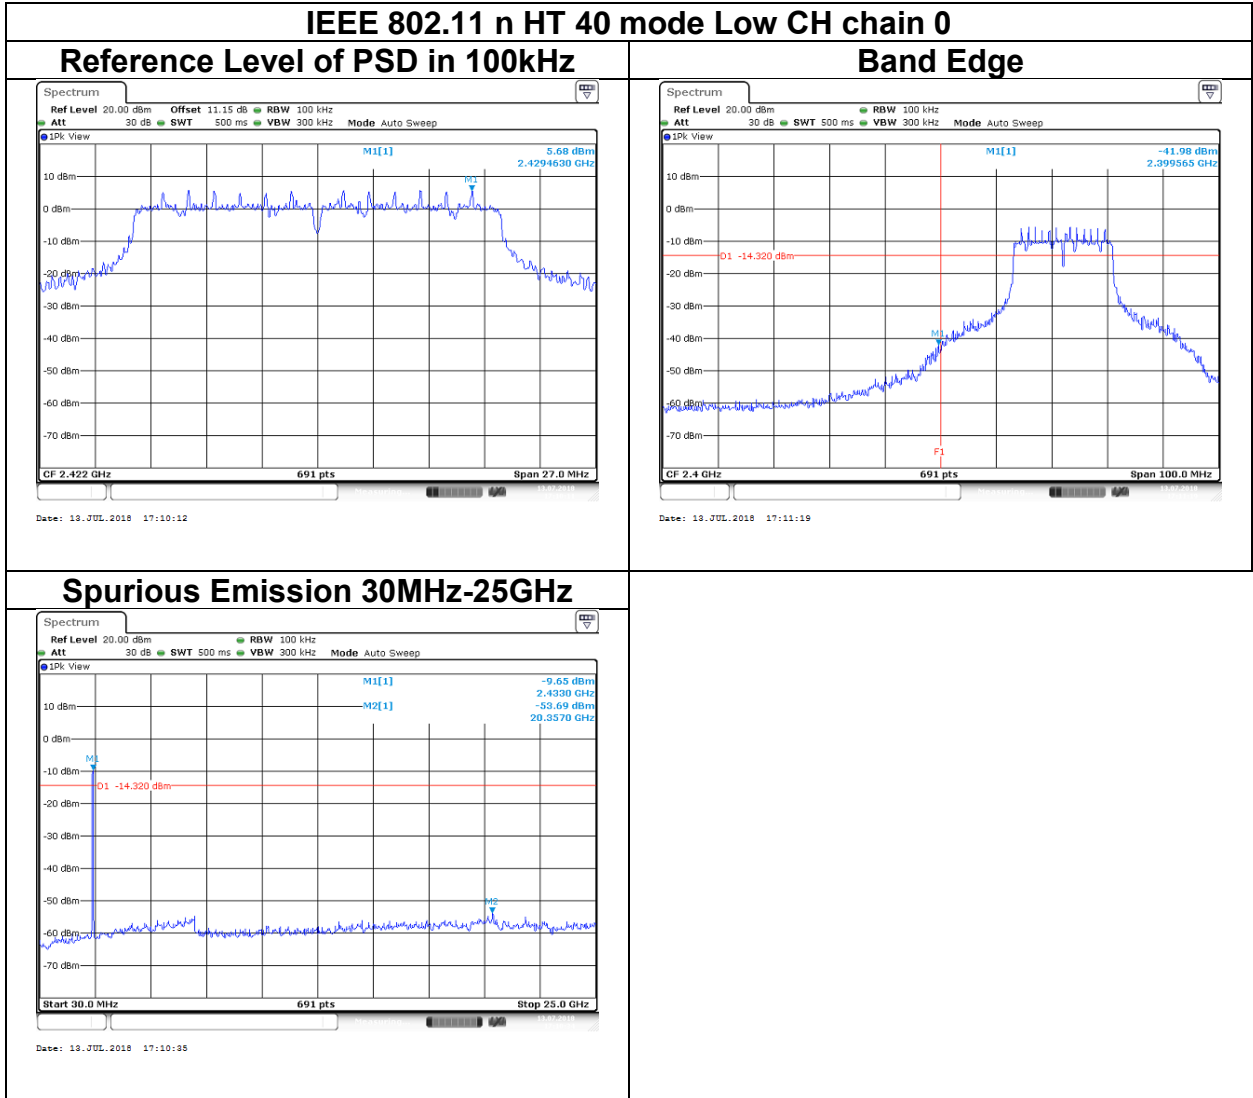

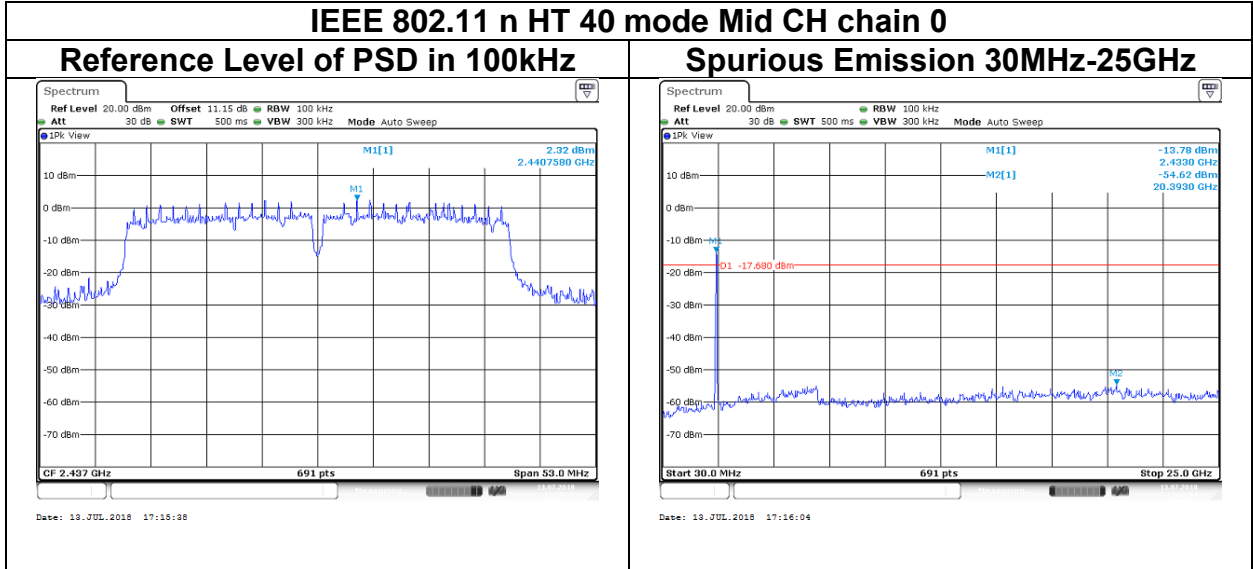

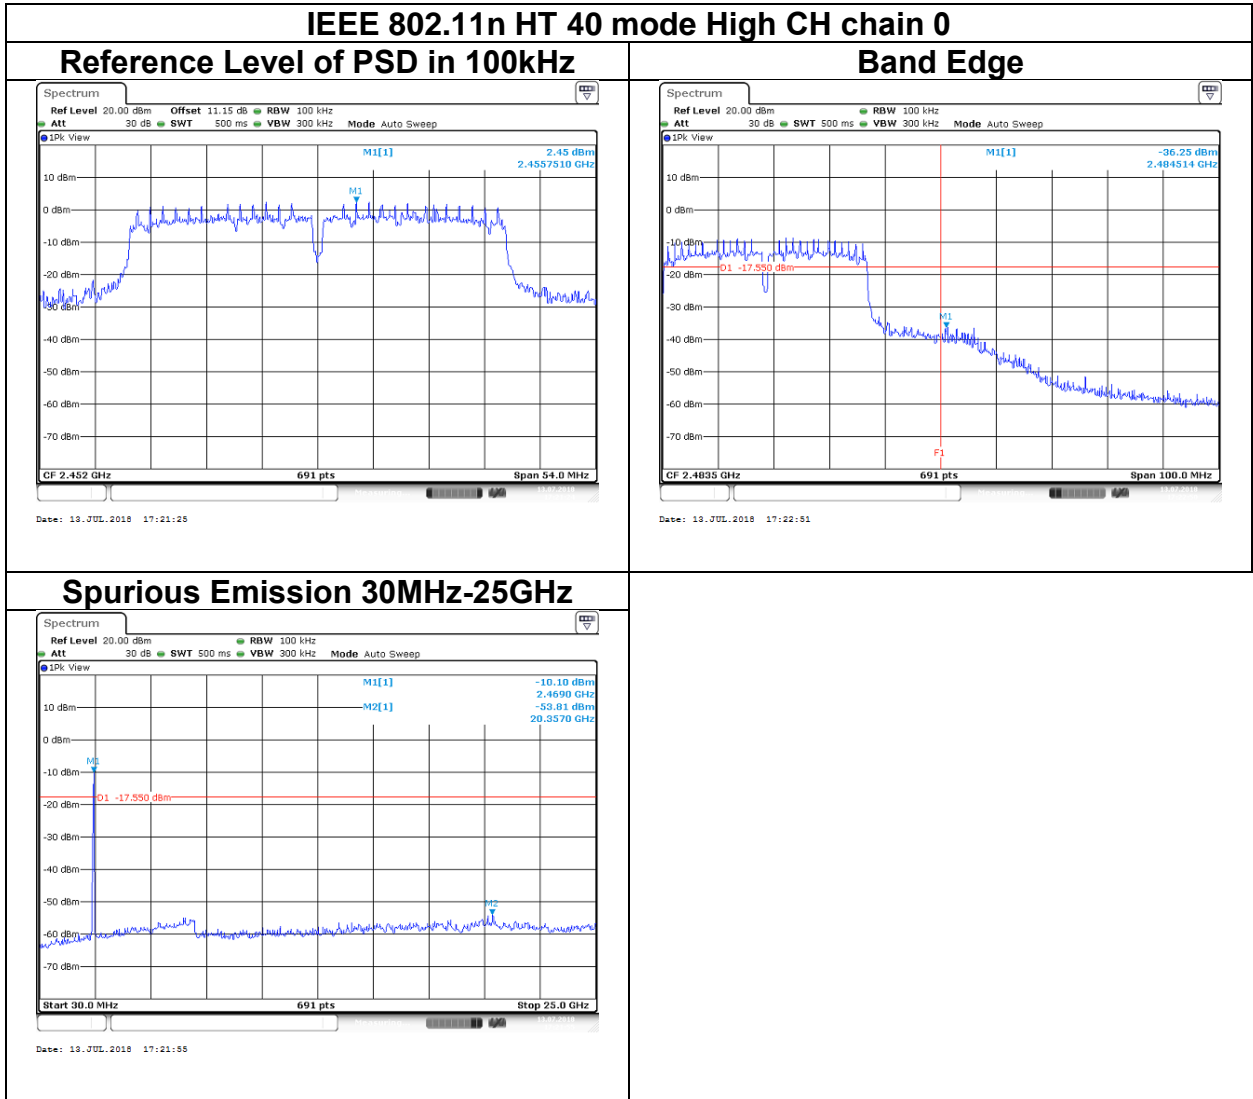

Report No.: T180703W01-RP

## 4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

### 4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

#### Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

#### Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3



Report No.: T180703W01-RP

### 4.6.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 12.1.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.


4. The SA setting following :

- (1) Below 1G : RBW = 100kHz, VBW ≥ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
  - (2.1) For Peak measurement : RBW = 1MHz, VBW ≥ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
  - (2.2) For Average measurement : RBW = 1MHz, VBW
    - If Duty Cycle ≥ 98%, VBW=10Hz.
    - If Duty Cycle < 98%, VBW=1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW Setting
802.11b	97%	1.8800	0.532	560Hz
802.11g	93%	2.0900	0.478	510Hz
802.11n HT 20	66%	0.4200	2.381	2.4KHz
802.11n HT40	51%	0.2100	4.762	5.1KHz

### 4.6.3 Test Setup


#### 9kHz ~ 30MHz

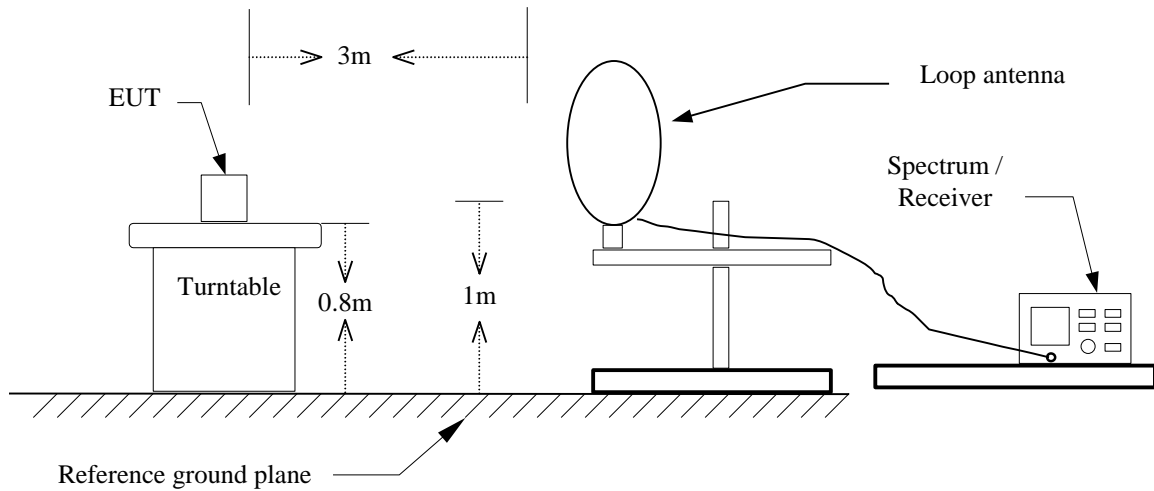

#### 30MHz ~ 1GHz

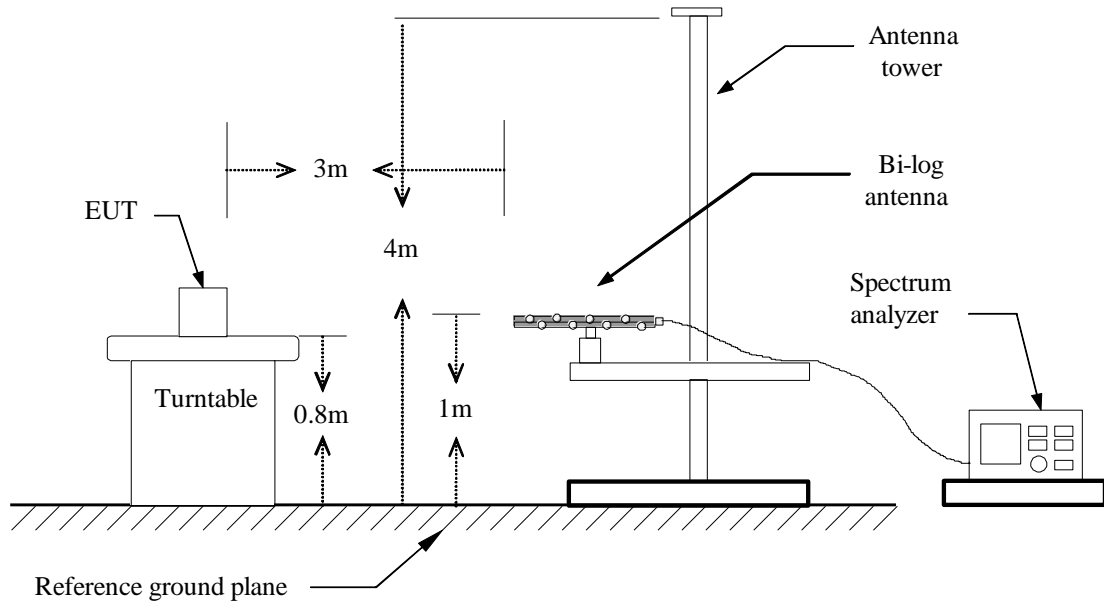

## Above 1 GHz

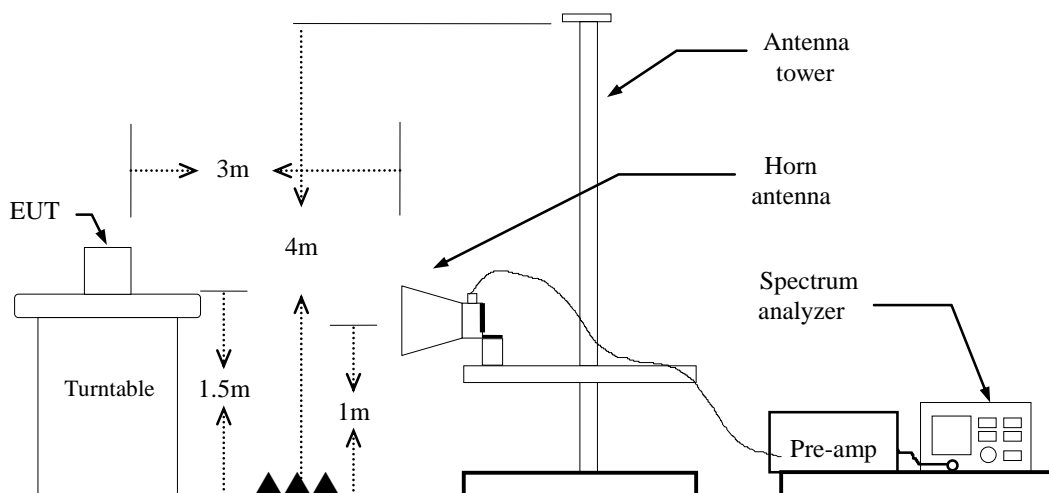


Report No.: T180703W01-RP

### 4.6.4 Test Result

#### Band Edge Test Data


Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

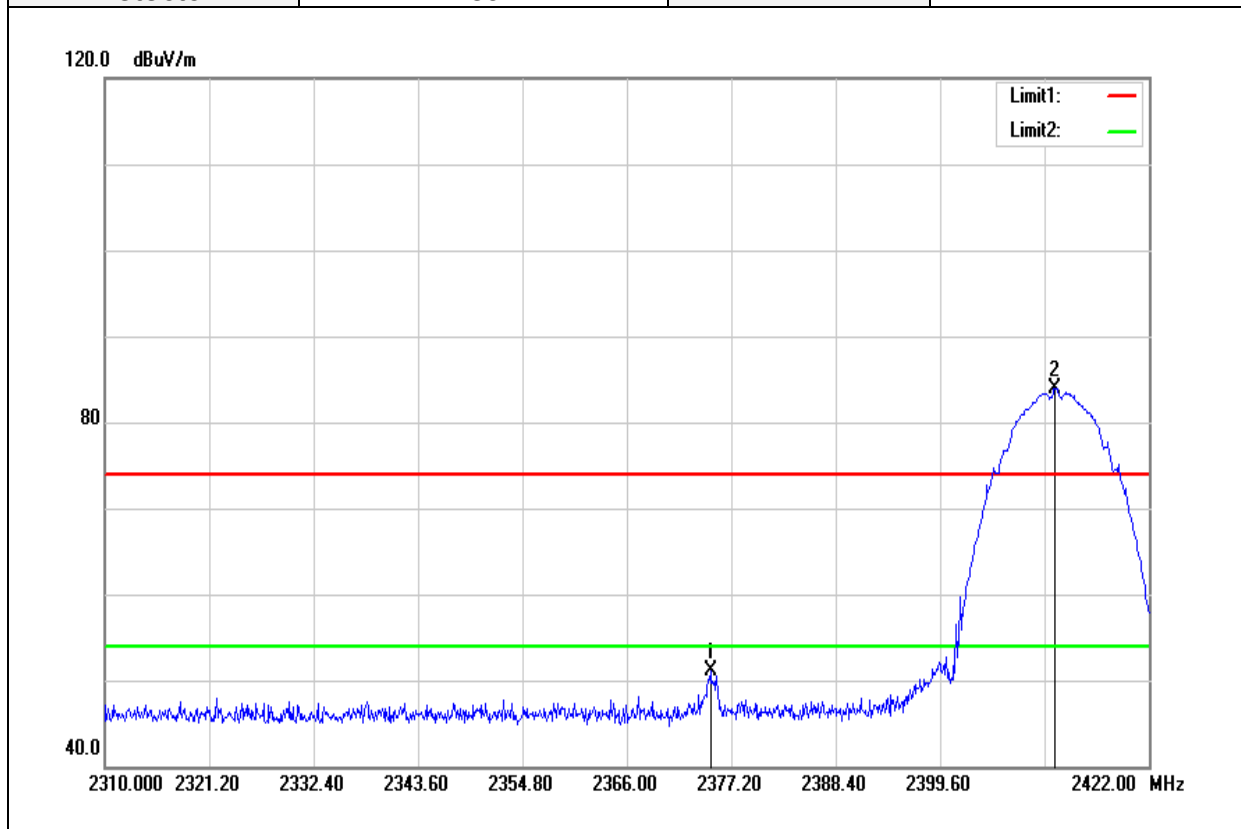

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2374.960	54.22	-3.04	51.18	74.00	-22.82	peak
2411.920	86.90	-2.92	83.98	--	--	peak

Report No.: T180703W01-RP


Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

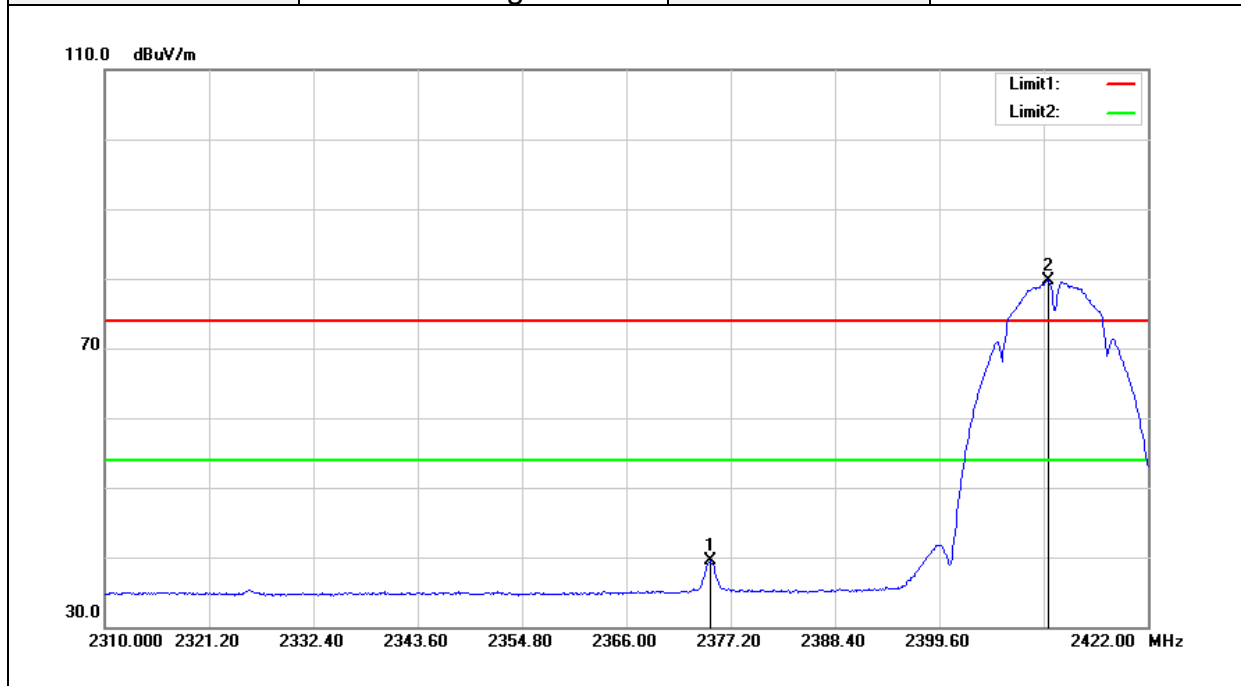

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2374.960	42.53	-3.04	39.49	54.00	-14.51	AVG
2411.248	82.56	-2.92	79.64	--	--	AVG

Report No.: T180703W01-RP


Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

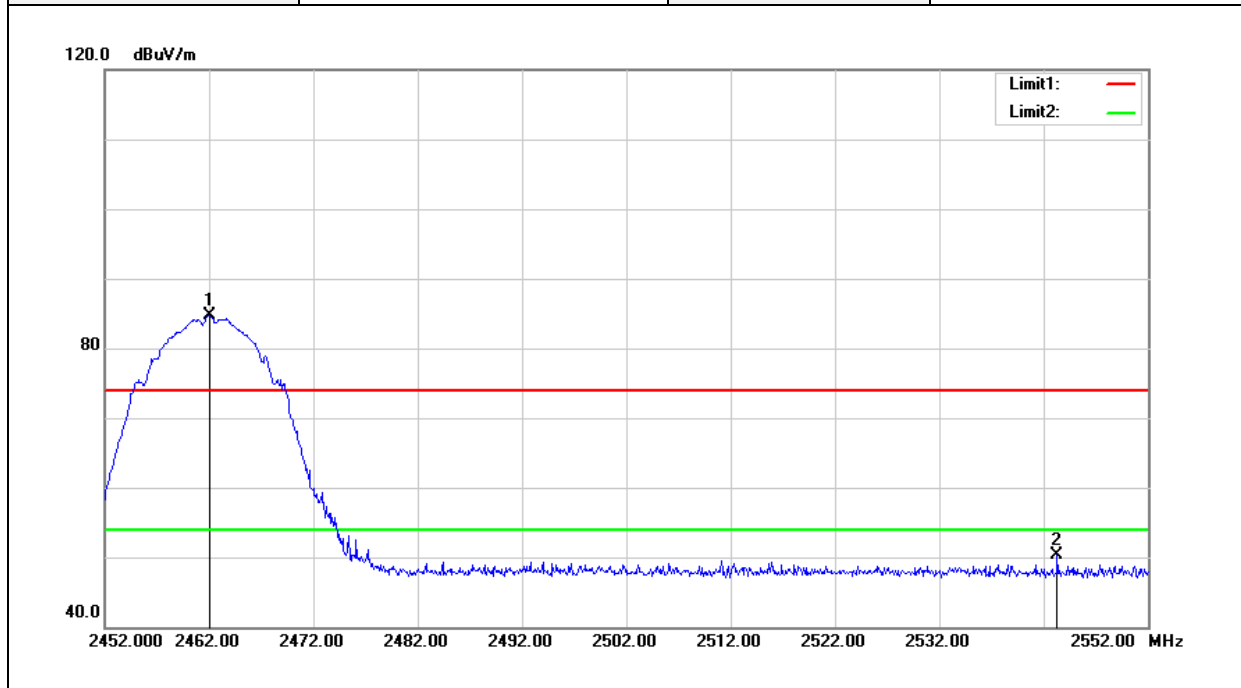

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2462.100	87.51	-2.76	84.75	--	--	peak
2543.300	52.78	-2.56	50.22	74.00	-23.78	peak

Report No.: T180703W01-RP


Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

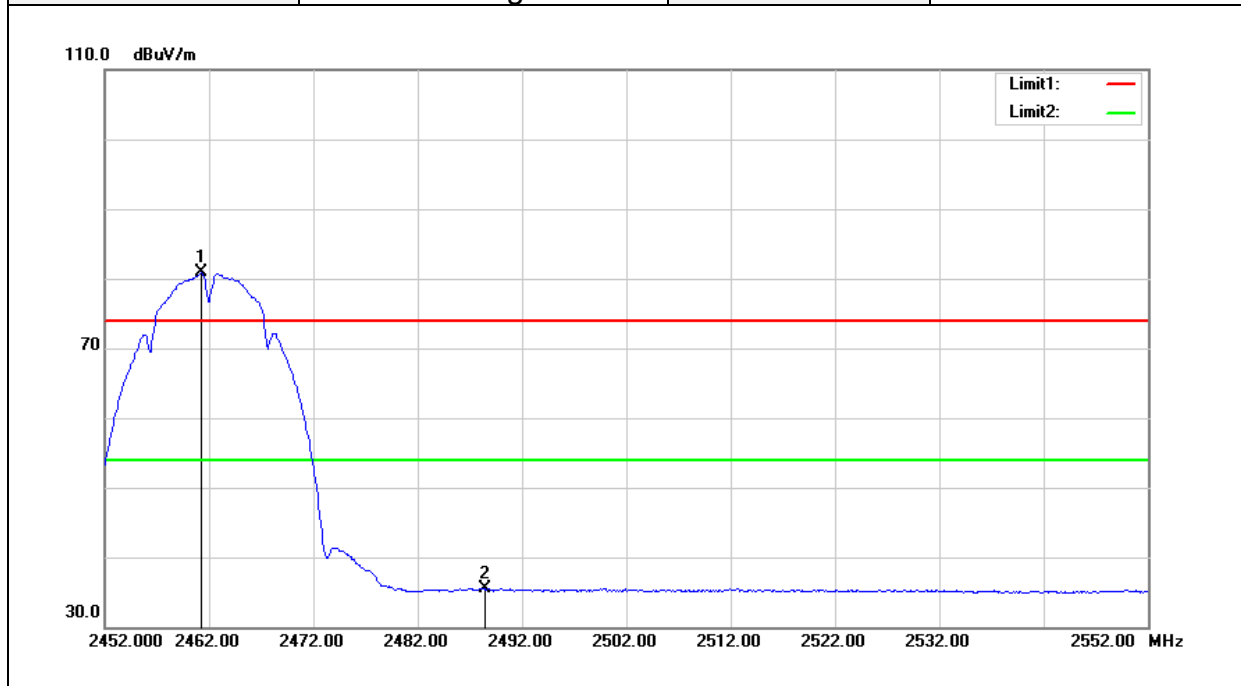

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.200	83.59	-2.76	80.83	--	--	AVG
2488.400	38.21	-2.67	35.54	54.00	-18.46	AVG

Report No.: T180703W01-RP

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

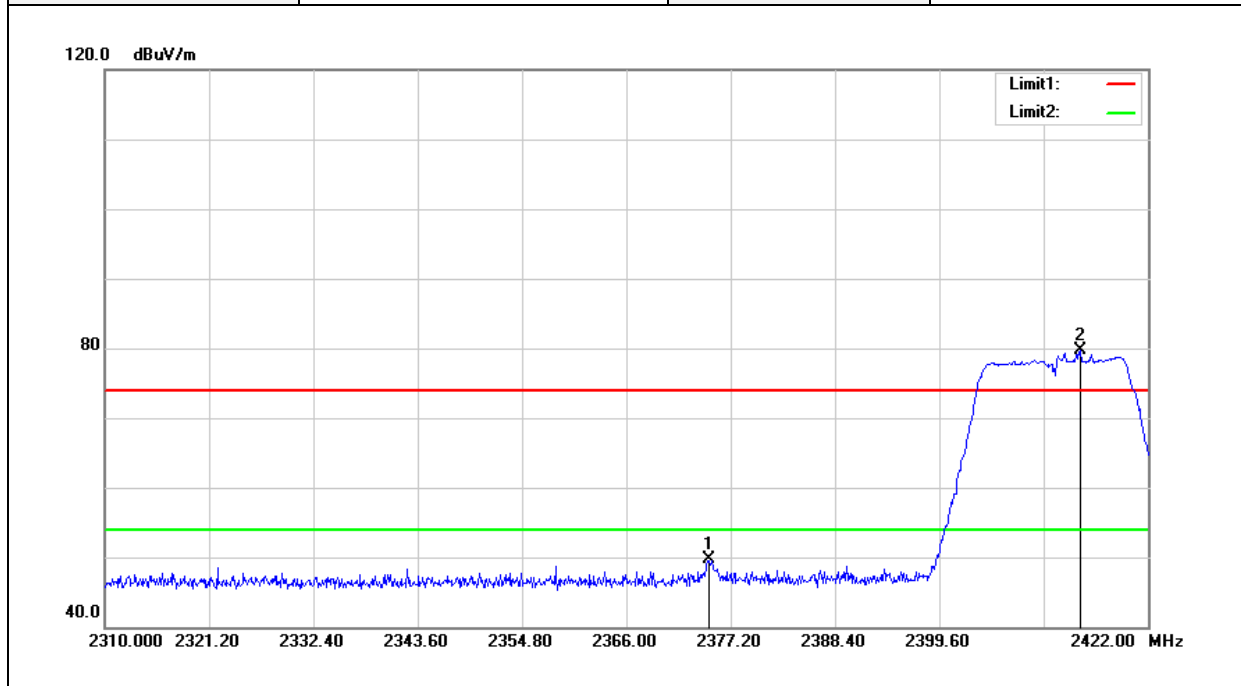


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2374.848	52.64	-3.04	49.60	74.00	-24.40	peak
2414.720	82.54	-2.90	79.64	--	--	peak



Report No.: T180703W01-RP


Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

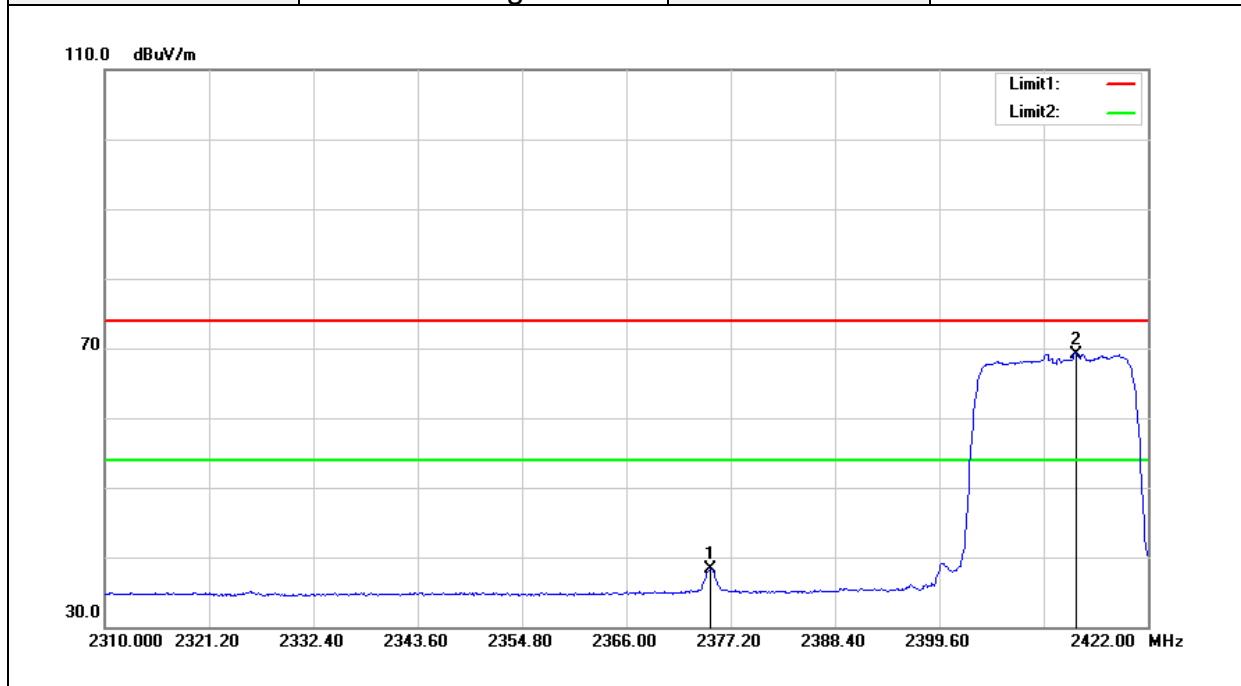

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2375.072	41.36	-3.02	38.34	54.00	-15.66	AVG
2414.272	72.10	-2.90	69.20	--	--	AVG

Report No.: T180703W01-RP


Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

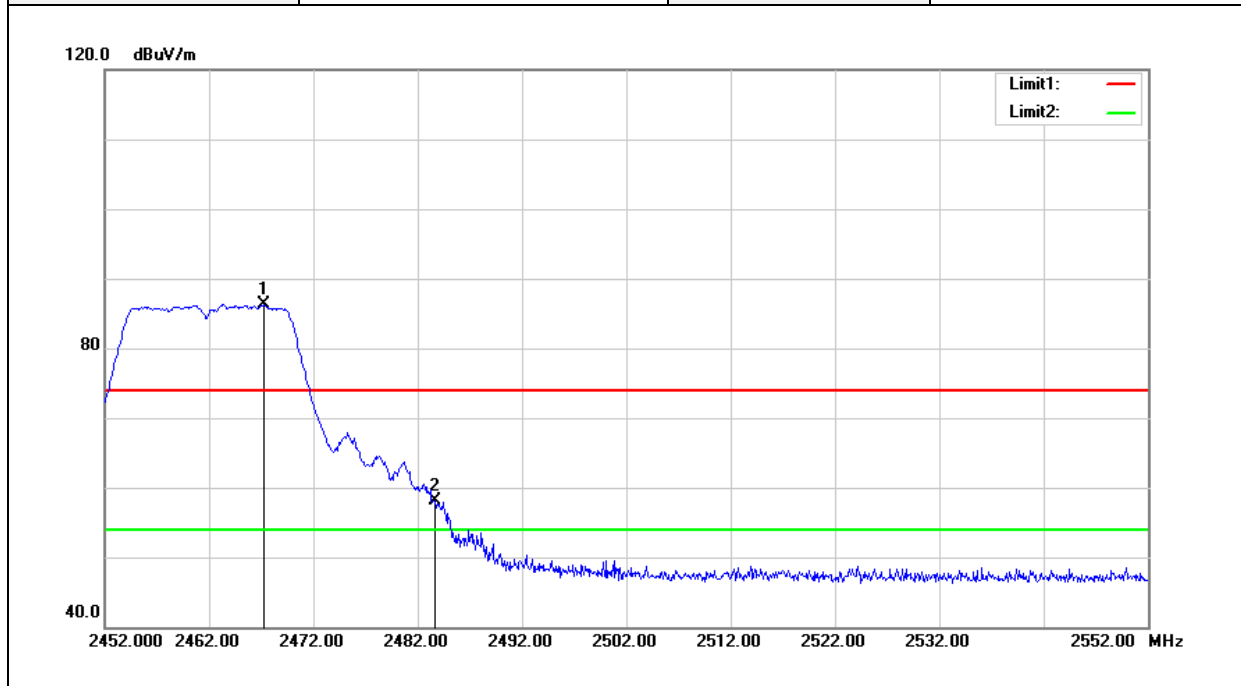

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2467.200	89.02	-2.75	86.27	--	--	peak
2483.700	60.82	-2.69	58.13	74.00	-15.87	peak

Report No.: T180703W01-RP

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

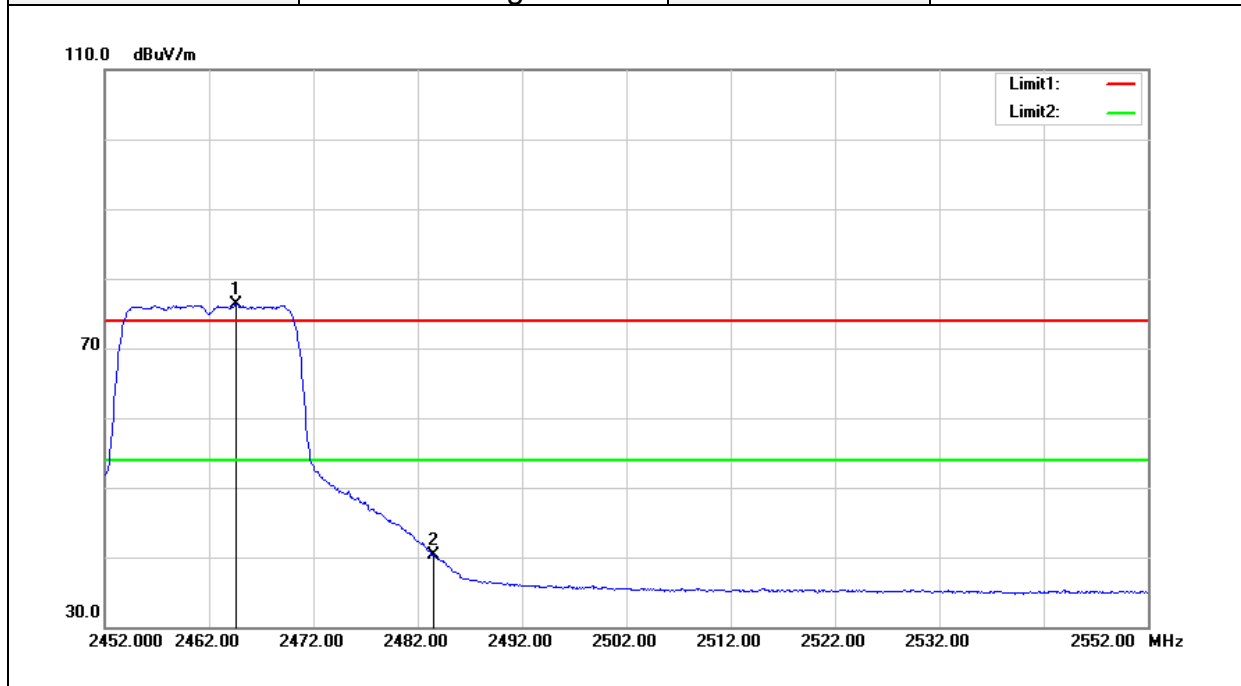

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2464.600	79.00	-2.75	76.25	--	--	AVG
2483.500	43.05	-2.69	40.36	54.00	-13.64	AVG

Report No.: T180703W01-RP


Test Mode	IEEE 802.11n HT 20 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		



Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2374.624	52.64	-3.04	49.60	74.00	-24.40	peak
2417.184	86.73	-2.90	83.83	--	--	peak

Report No.: T180703W01-RP


Test Mode	IEEE 802.11n HT 20 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

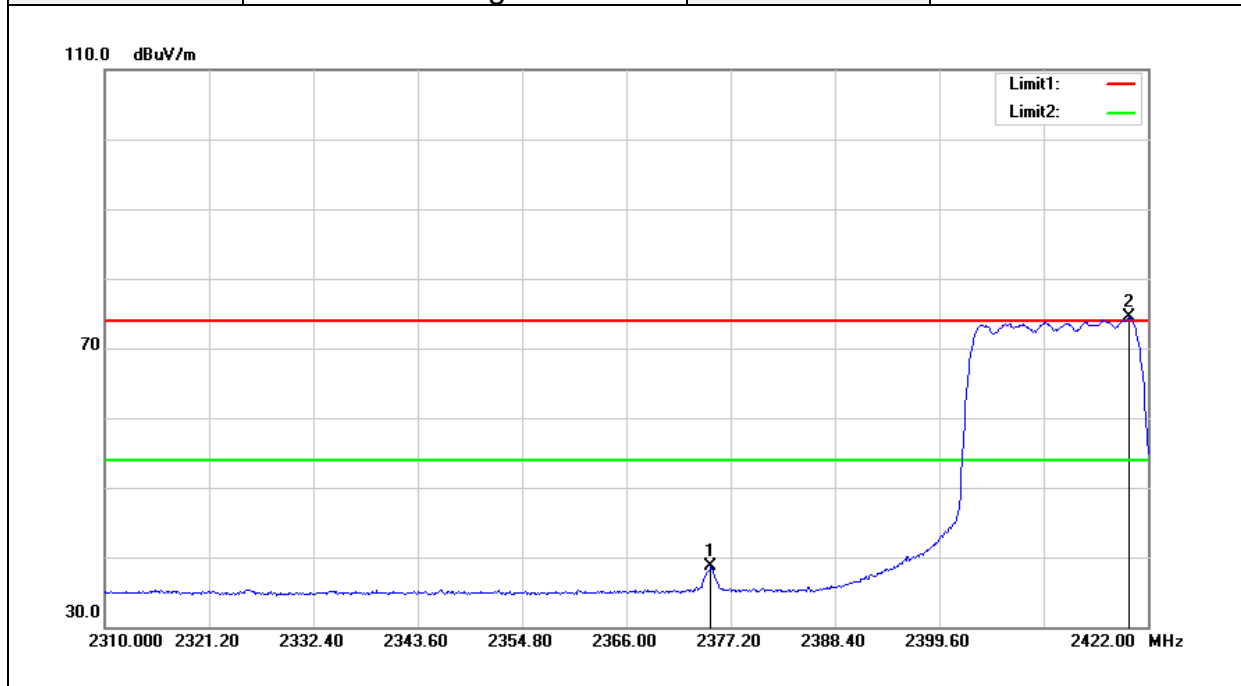

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2375.072	41.73	-3.02	38.71	54.00	-15.29	AVG
2419.984	77.32	-2.89	74.43	--	--	AVG

Report No.: T180703W01-RP


Test Mode	IEEE 802.11n HT 20 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

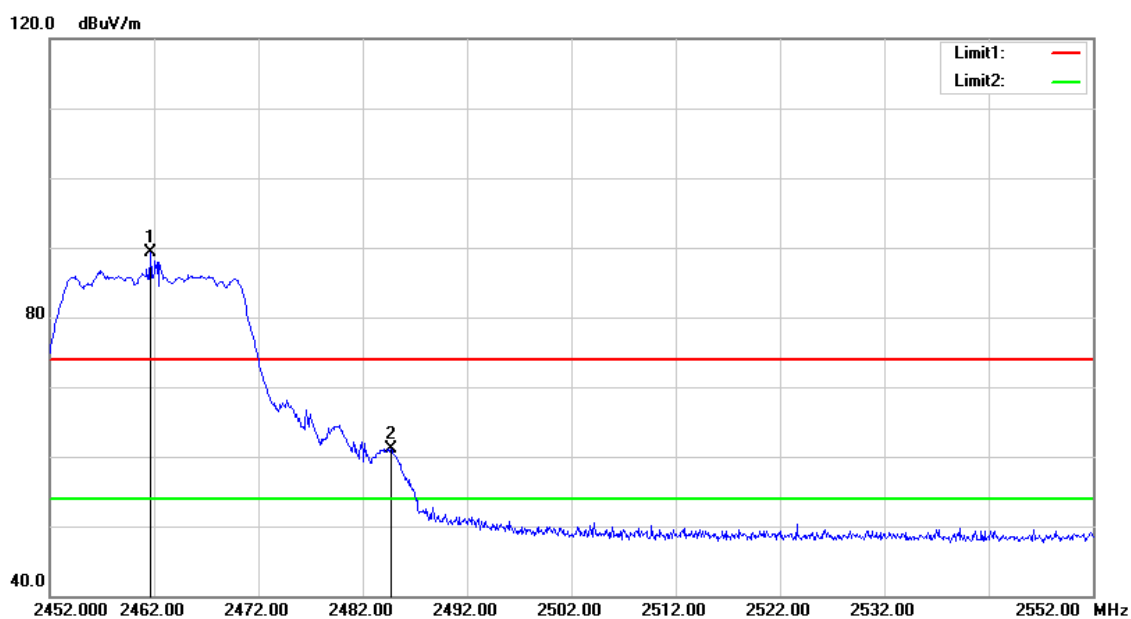

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.700	91.99	-2.76	89.23	--	--	peak
2484.700	63.84	-2.69	61.15	74.00	-12.85	peak

Report No.: T180703W01-RP


Test Mode	IEEE 802.11n HT 20 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

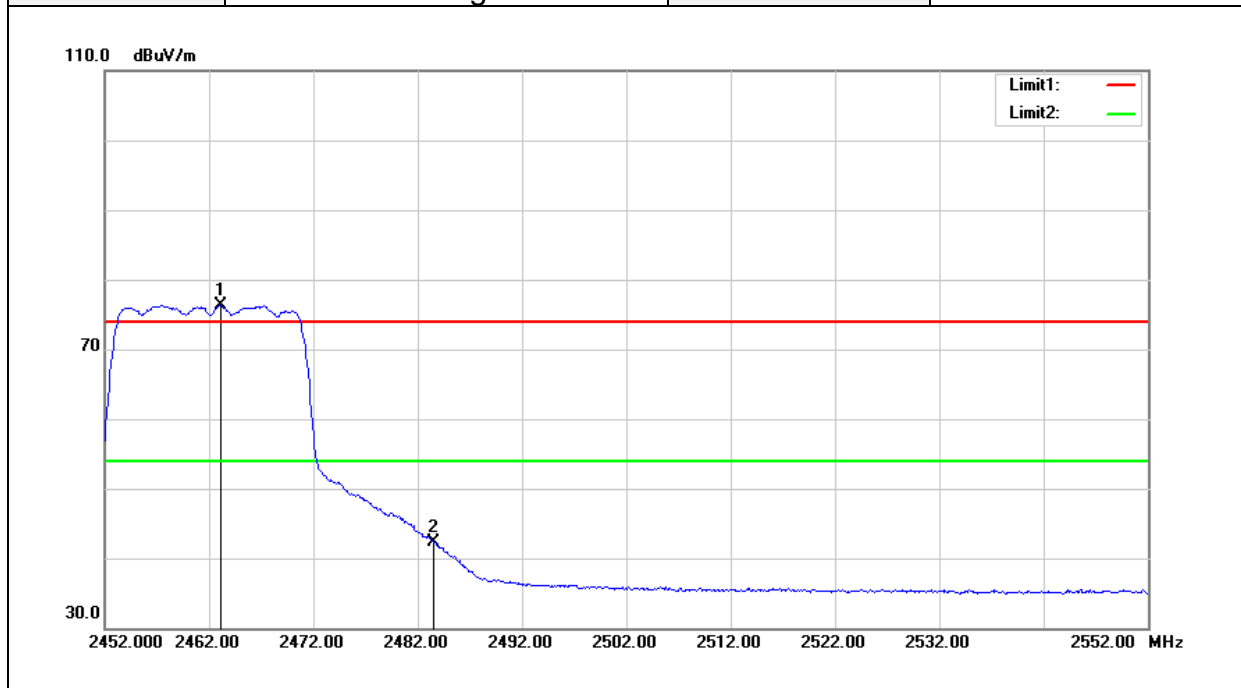

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2463.100	79.02	-2.75	76.27	--	--	AVG
2483.500	44.91	-2.69	42.22	54.00	-11.78	AVG

Report No.: T180703W01-RP


Test Mode	IEEE 802.11n HT 40 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

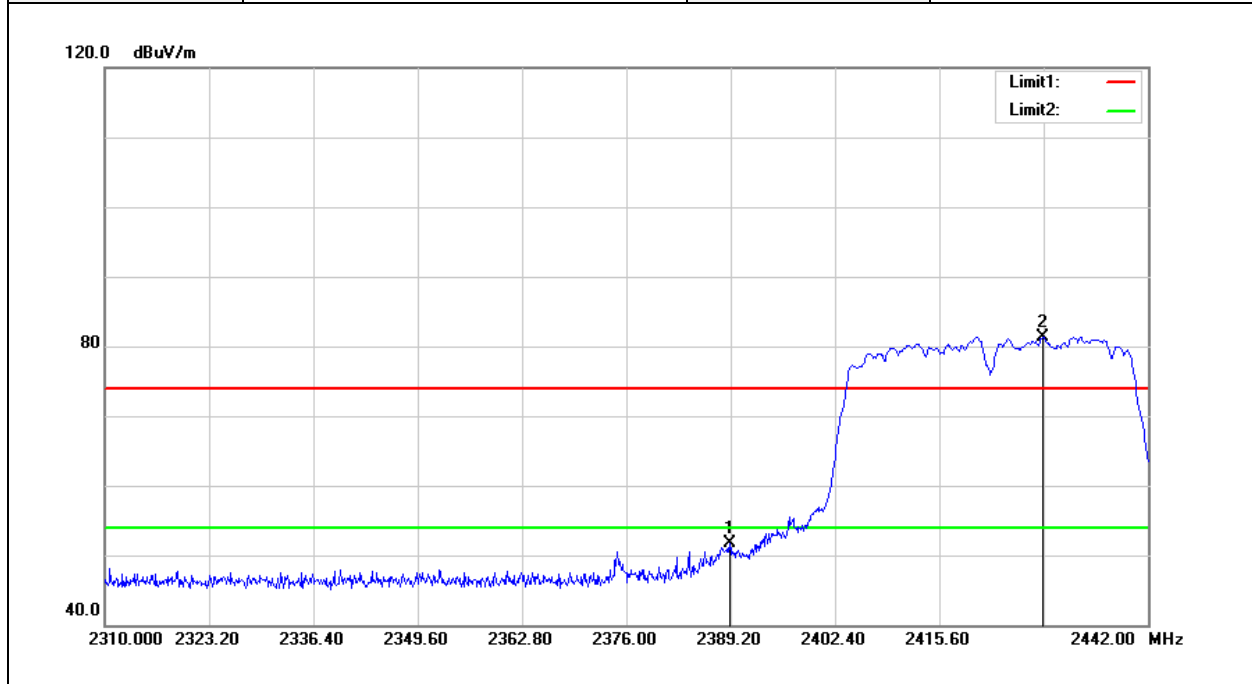

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2389.068	54.67	-2.98	51.69	74.00	-22.31	peak
2428.668	84.17	-2.86	81.31	--	--	peak




Test Mode	IEEE 802.11n HT 40 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

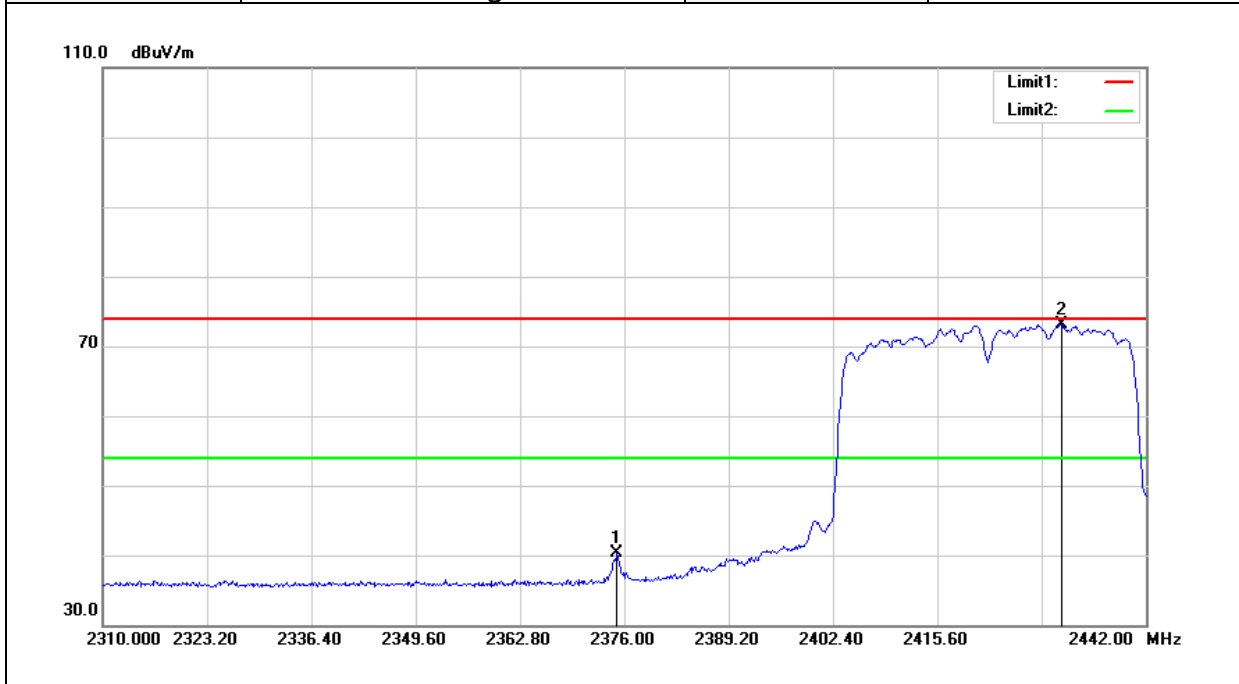

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2375.076	43.23	-3.02	40.21	54.00	-13.79	AVG
2431.308	76.02	-2.85	73.17	--	--	AVG

Report No.: T180703W01-RP


Test Mode	IEEE 802.11n HT 40 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

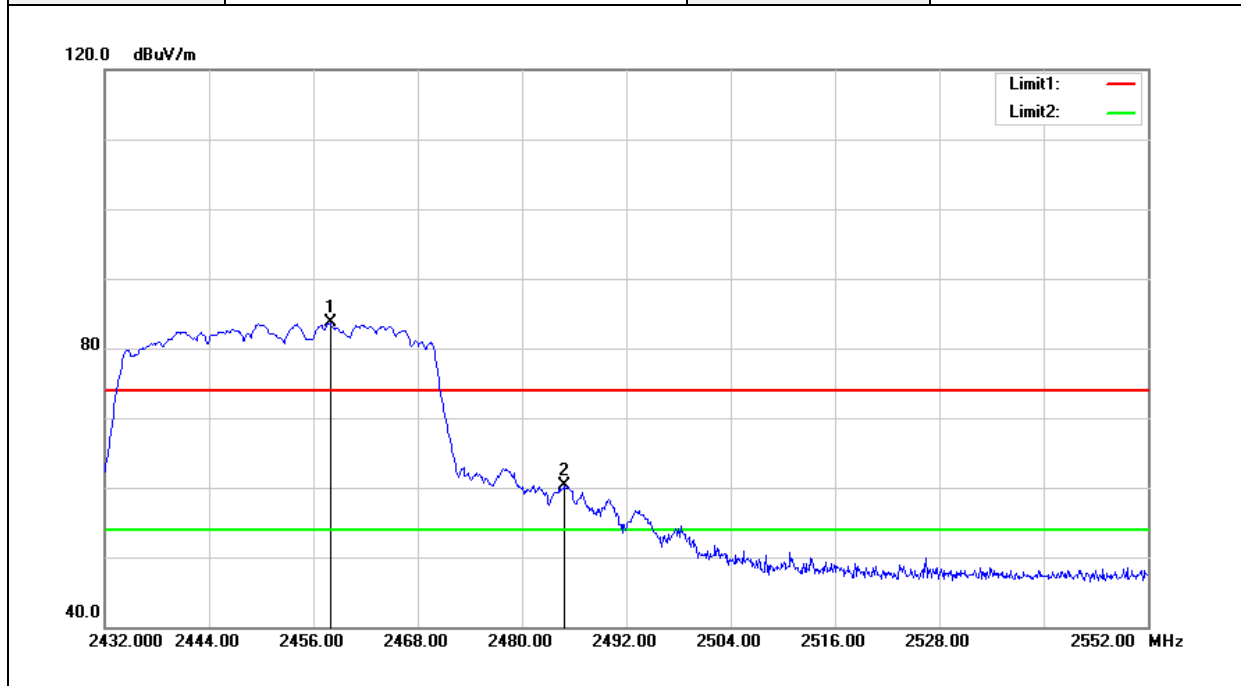

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2457.920	86.40	-2.77	83.63	--	--	peak
2484.920	63.04	-2.69	60.35	74.00	-13.65	peak

Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 40 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

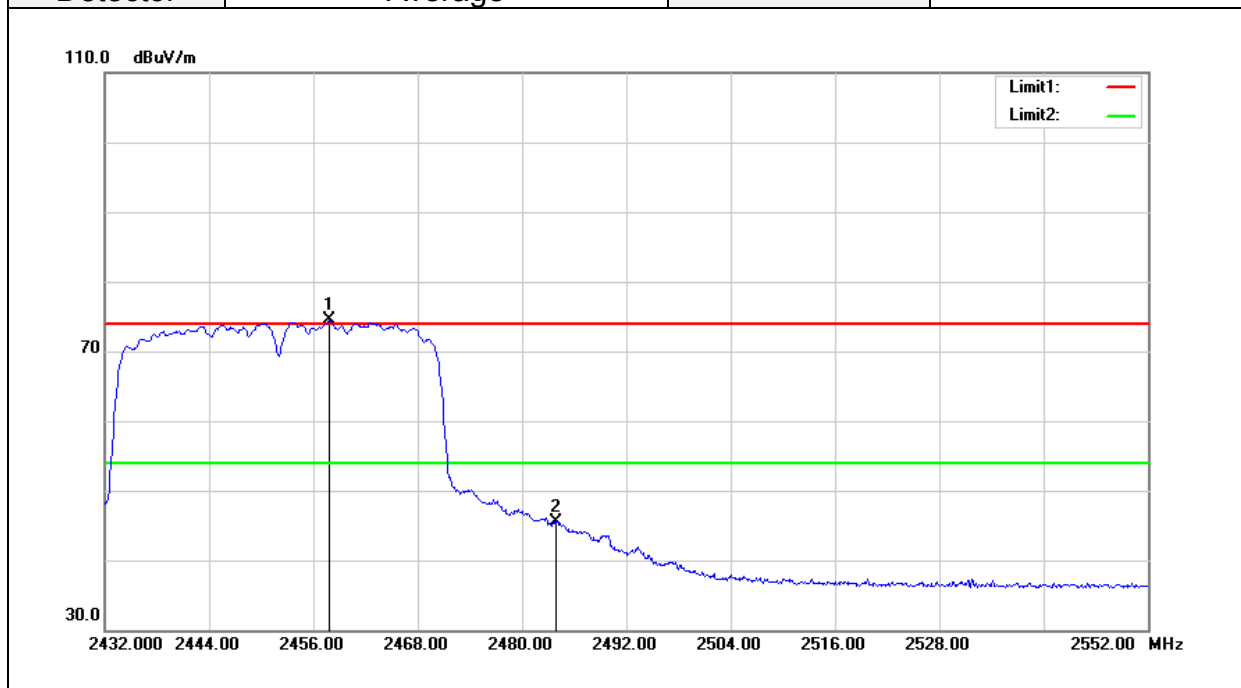


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2457.800	77.20	-2.77	74.43	--	--	AVG
2483.960	48.29	-2.69	45.60	54.00	-8.40	AVG

Report No.: T180703W01-RP

**Below 1G Test Data**


Test Mode	Mode 2	Temp/Hum	22(°C) / 34%RH
Test Item	30MHz-1GHz	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Quasi-peak & Peak		

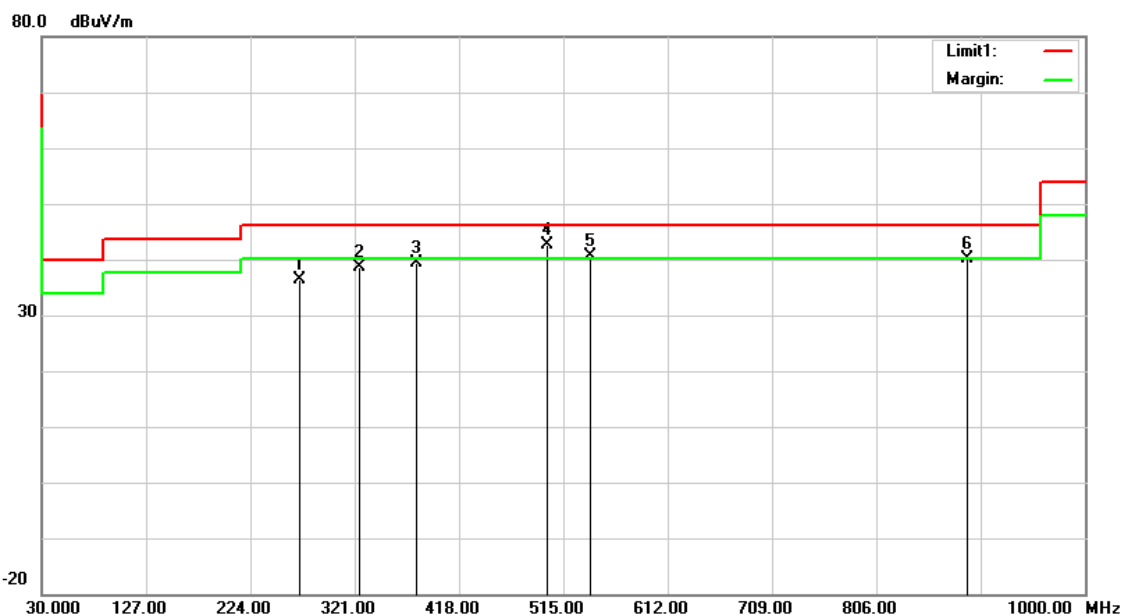

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
269.5900	45.26	-8.88	36.38	46.02	-9.64	peak
324.8800	45.98	-7.38	38.60	46.02	-7.42	peak
378.2300	45.25	-5.93	39.32	46.02	-6.70	peak
500.4500	45.13	-2.58	42.55	46.02	-3.47	QP
540.2200	42.61	-1.92	40.69	46.02	-5.33	QP
890.3900	35.98	4.27	40.25	46.02	-5.77	QP

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Test Mode	Mode 2	Temp/Hum	22(°C) / 34%RH
Test Item	30MHz-1GHz	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Quasi-peak.		

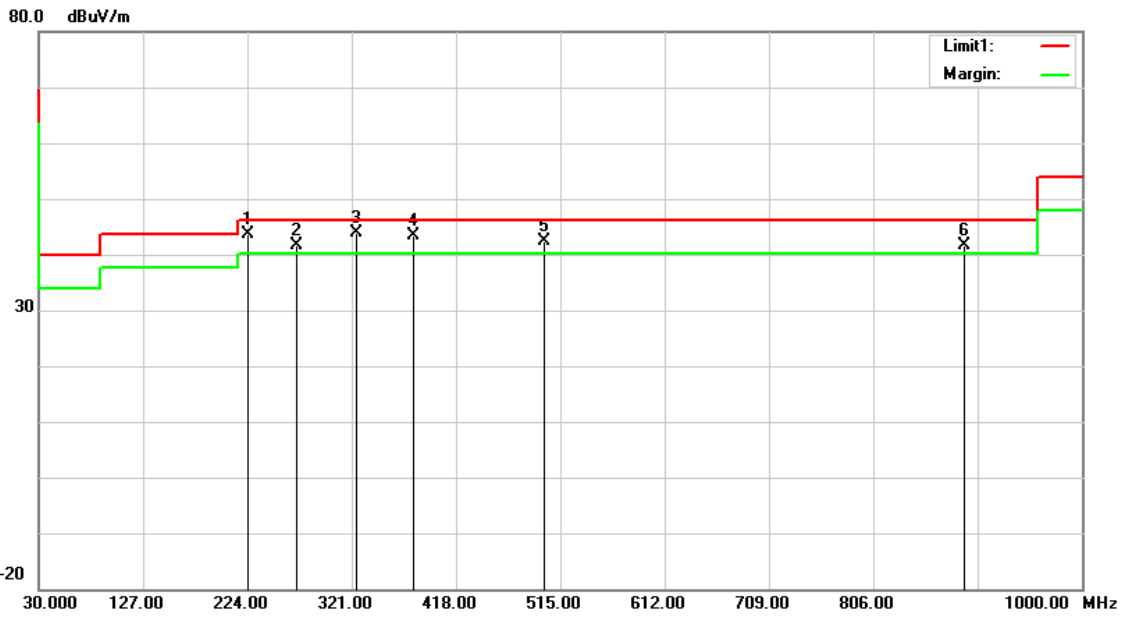


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
224.9700	54.50	-10.97	43.53	46.02	-2.49	QP
269.5900	50.57	-8.88	41.69	46.02	-4.33	QP
324.8800	51.20	-7.38	43.82	46.02	-2.20	QP
378.2300	49.29	-5.93	43.36	46.02	-2.66	QP
500.4500	45.04	-2.58	42.46	46.02	-3.56	QP
890.3900	37.42	4.27	41.69	46.02	-4.33	QP

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: T180703W01-RP

**Above 1G Test Data**

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

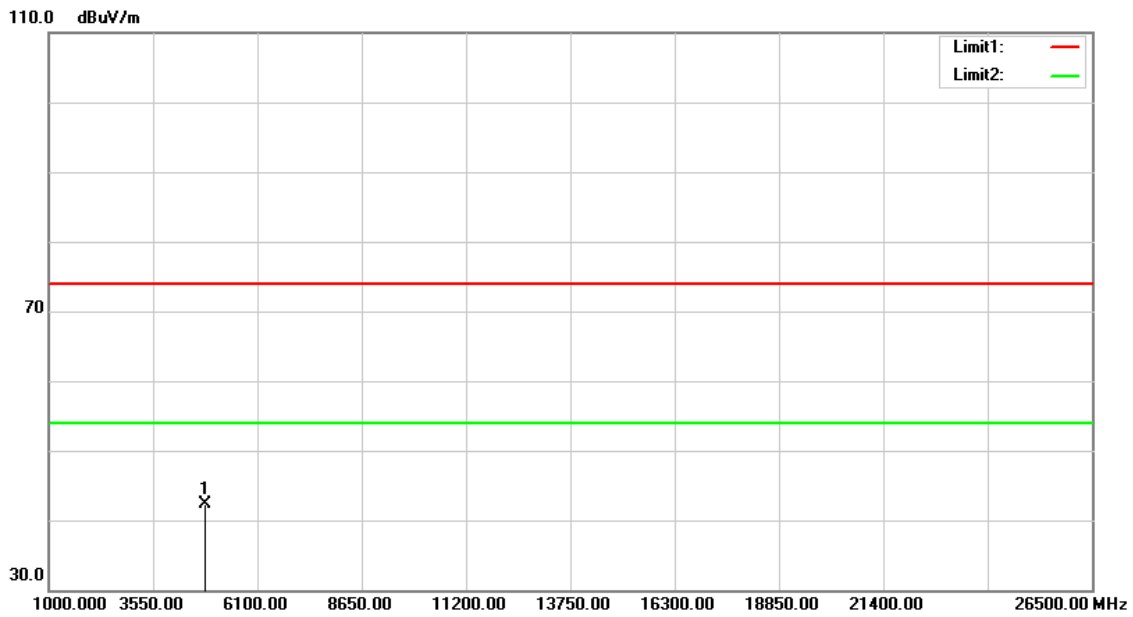


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	37.82	4.38	42.20	74.00	-31.80	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

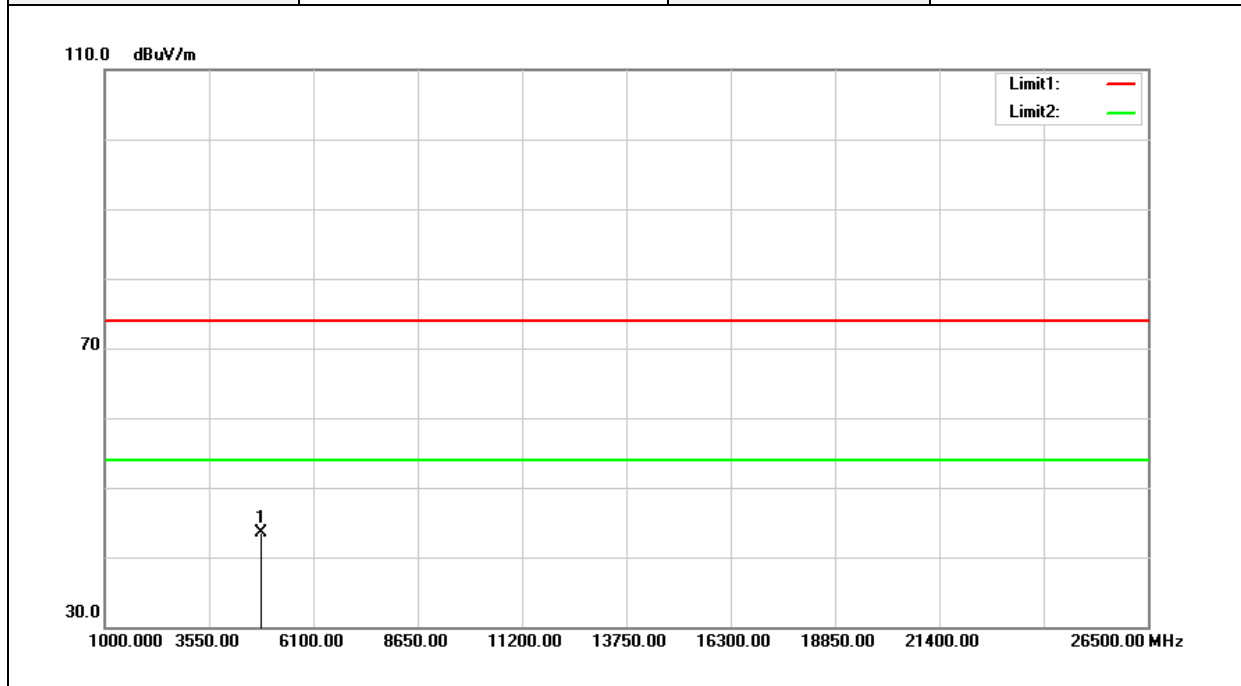


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	39.09	4.38	43.47	74.00	-30.53	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

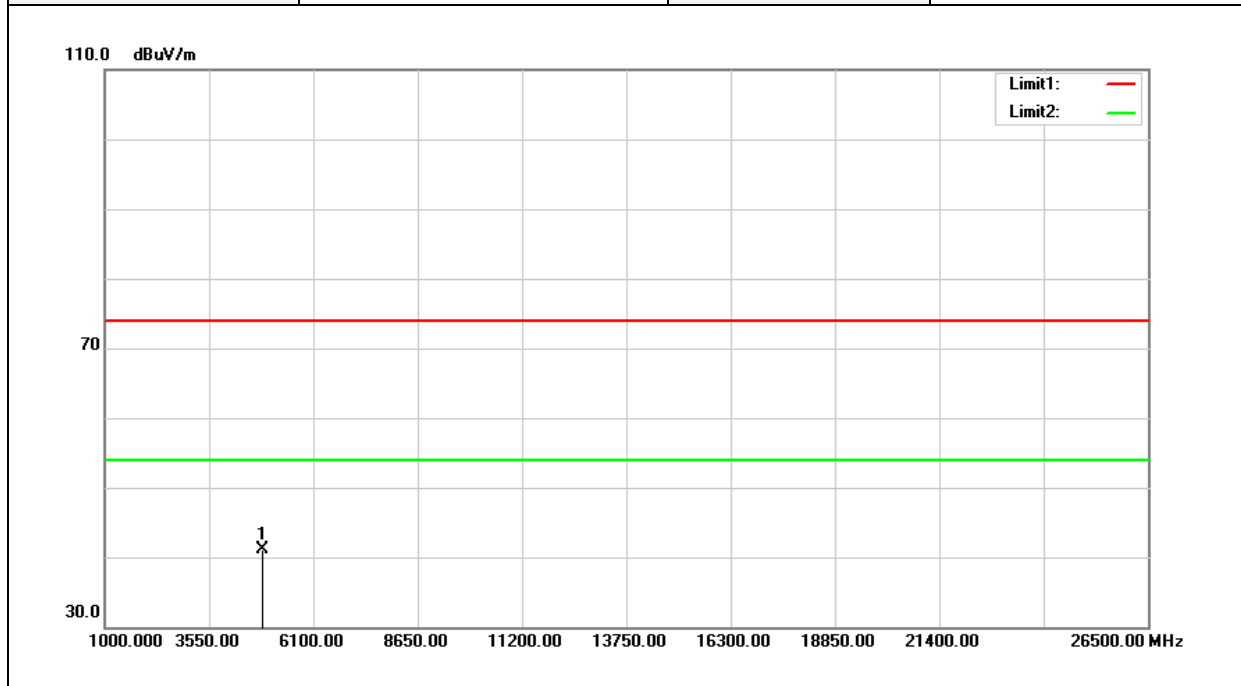

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	36.69	4.47	41.16	74.00	-32.84	peak


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180703W01-RP

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

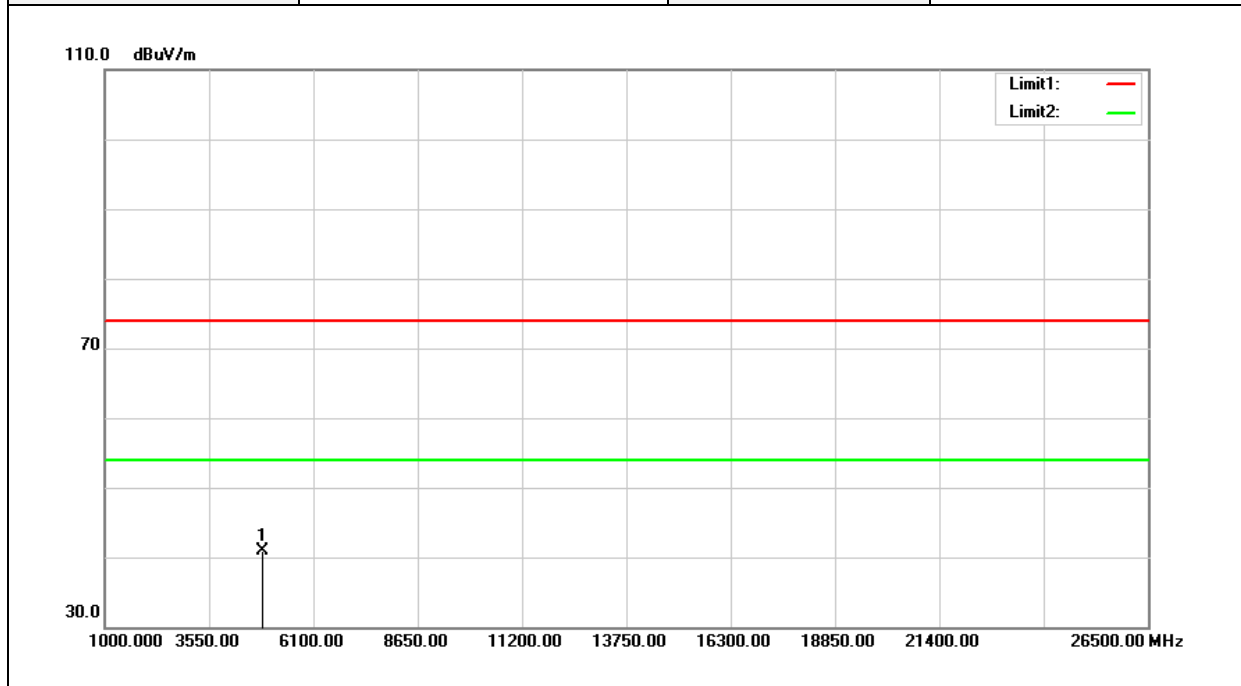


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	36.36	4.47	40.83	74.00	-33.17	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

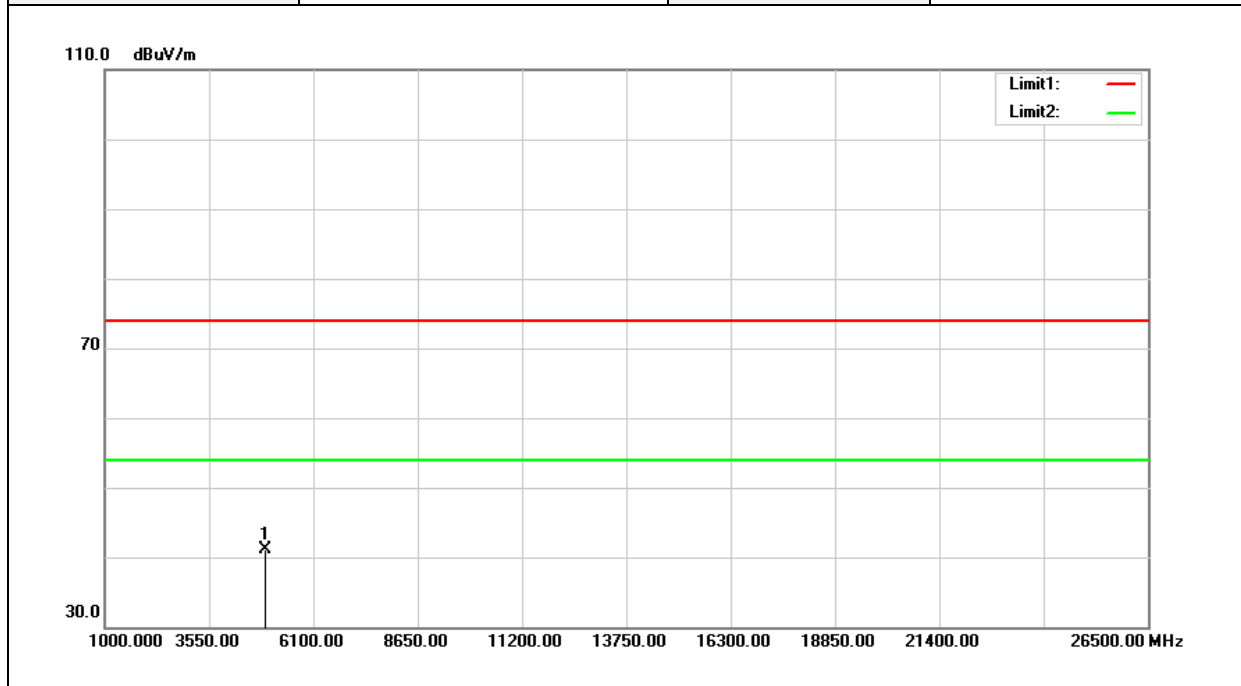


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	36.64	4.55	41.19	74.00	-32.81	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11b High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

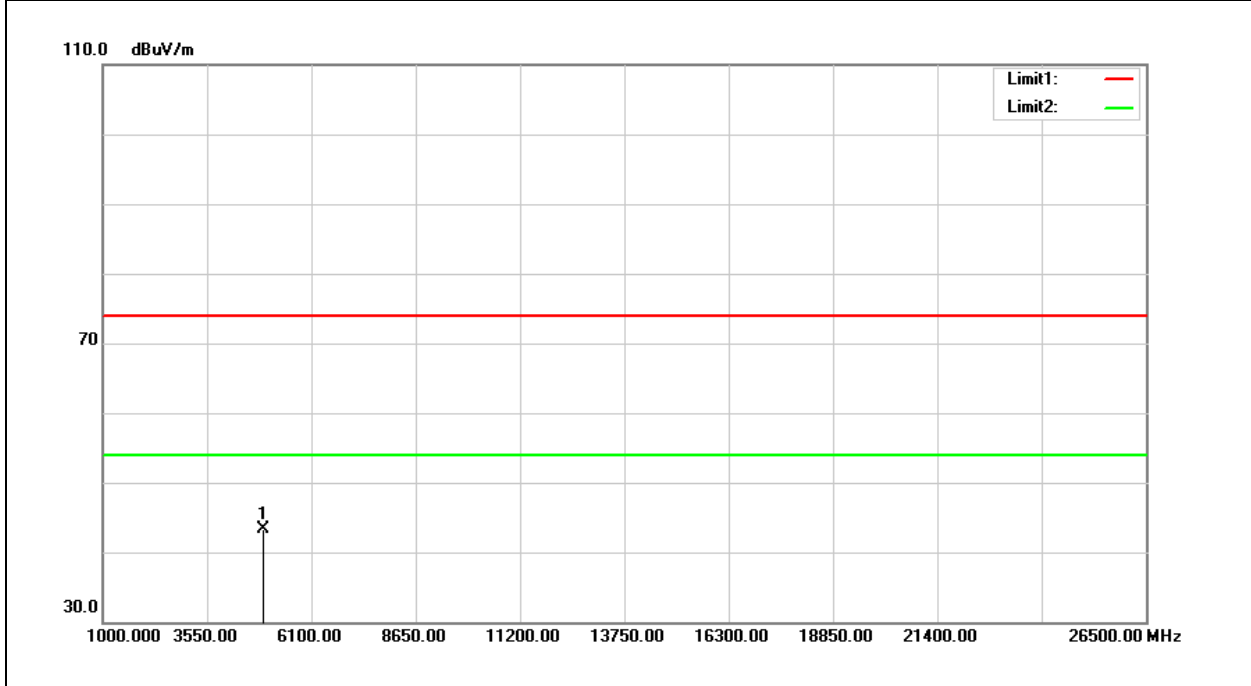


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	38.67	4.55	43.22	74.00	-30.78	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

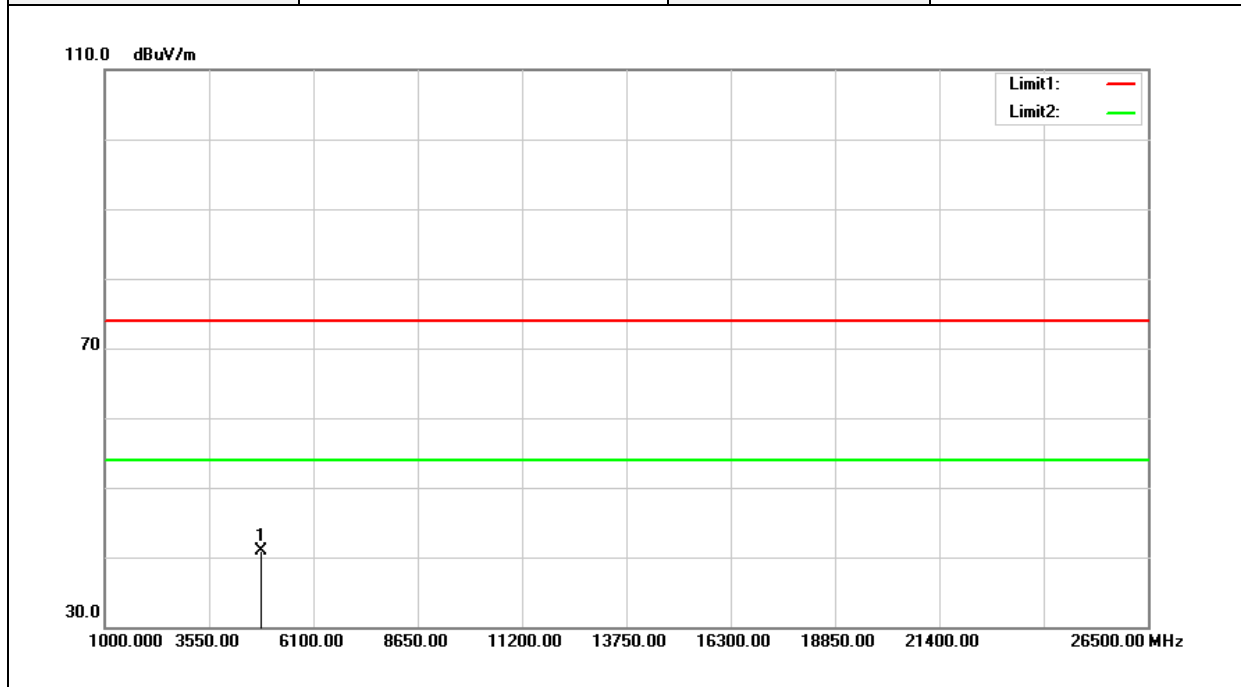


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	36.47	4.38	40.85	74.00	-33.15	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11g Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

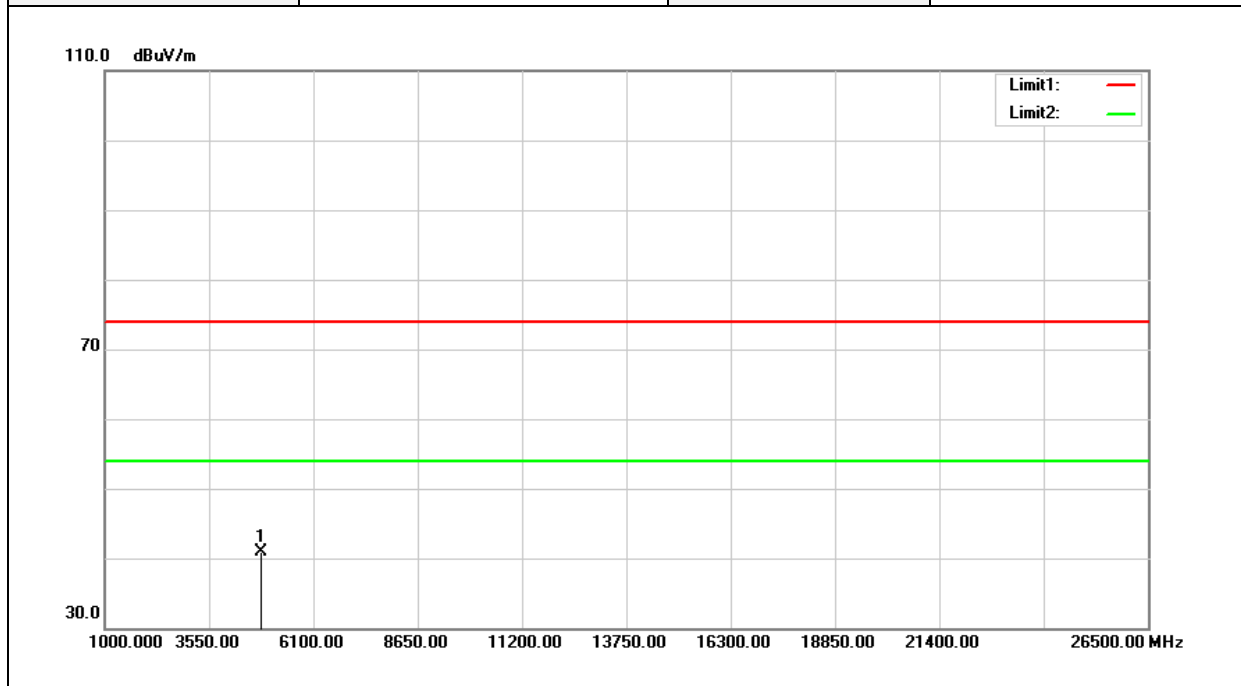


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	36.52	4.38	40.90	74.00	-33.10	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

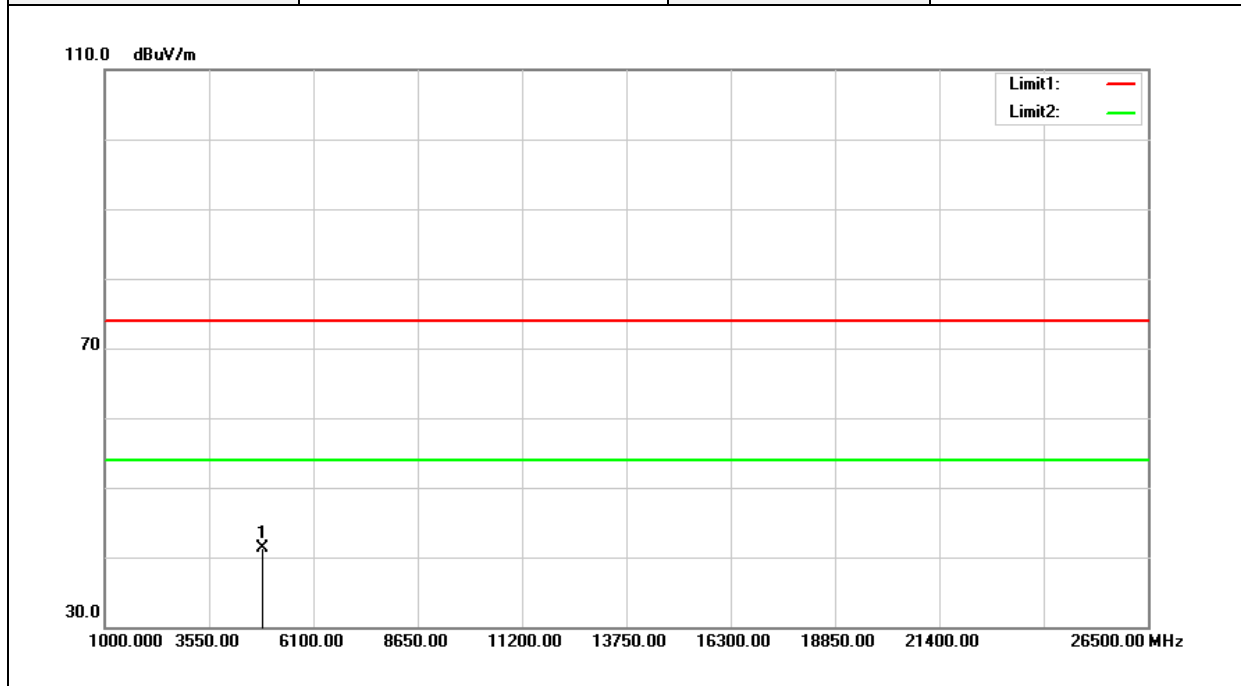


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	36.83	4.47	41.30	74.00	-32.70	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

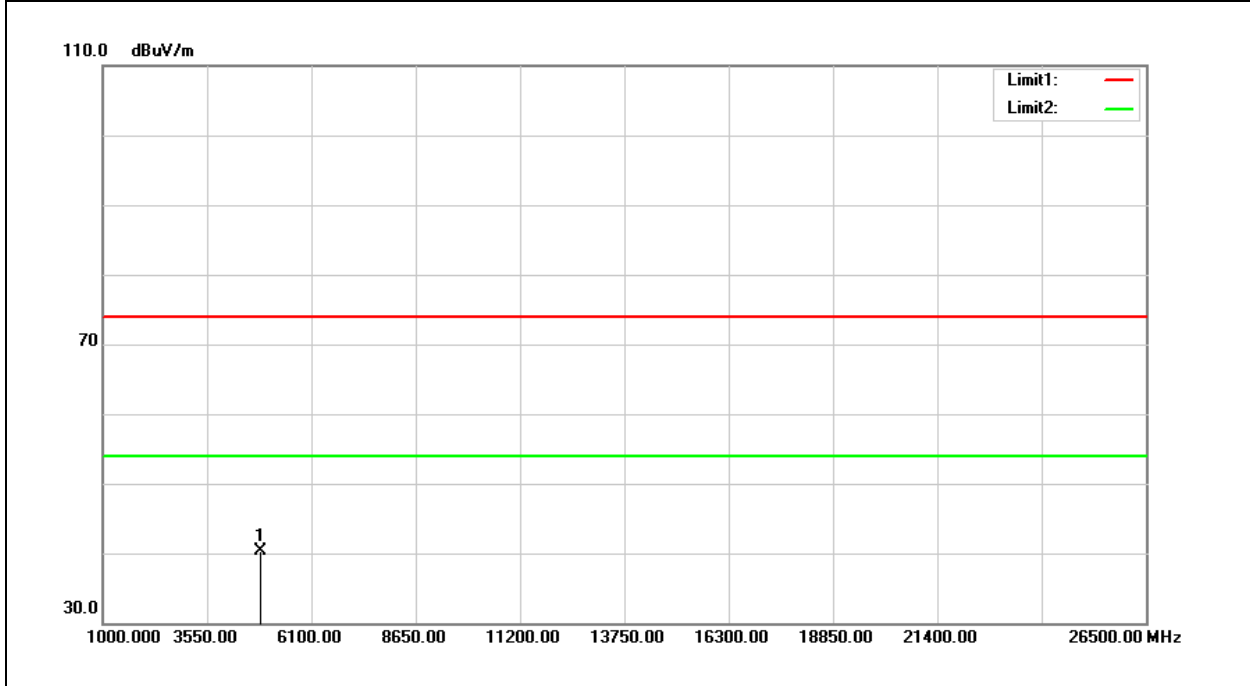


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	35.74	4.47	40.21	74.00	-33.79	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

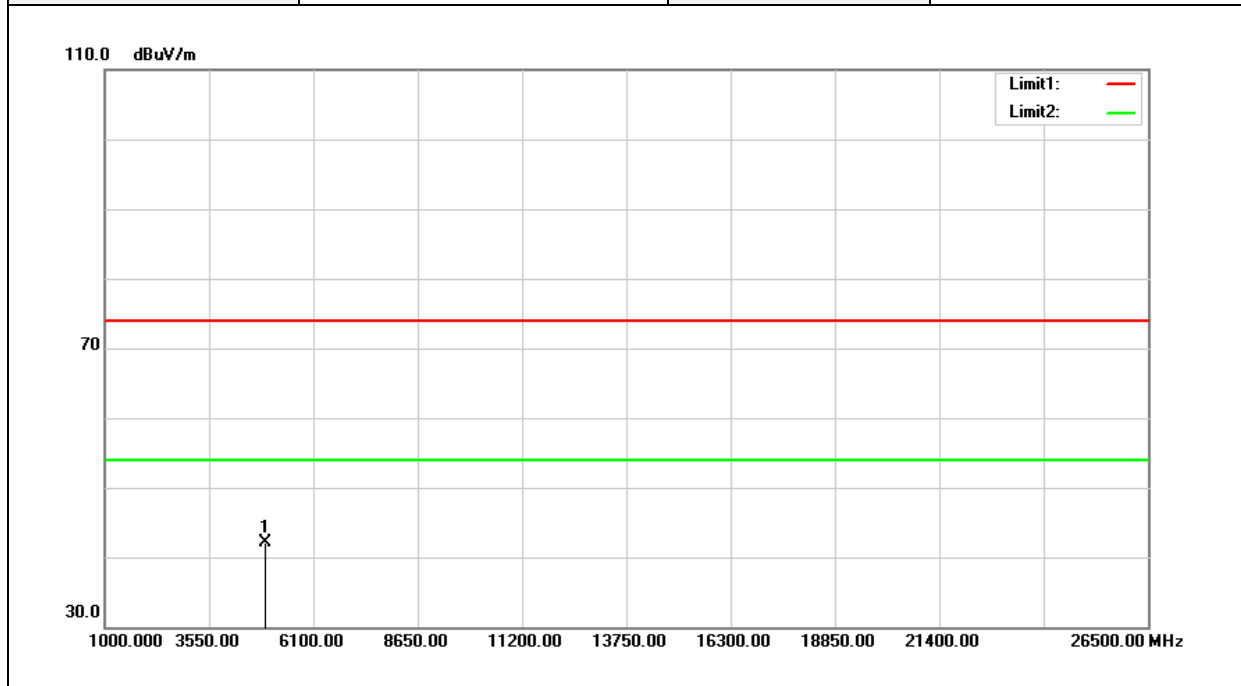

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	37.46	4.55	42.01	74.00	-31.99	peak


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180703W01-RP

Test Mode	IEEE 802.11g High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

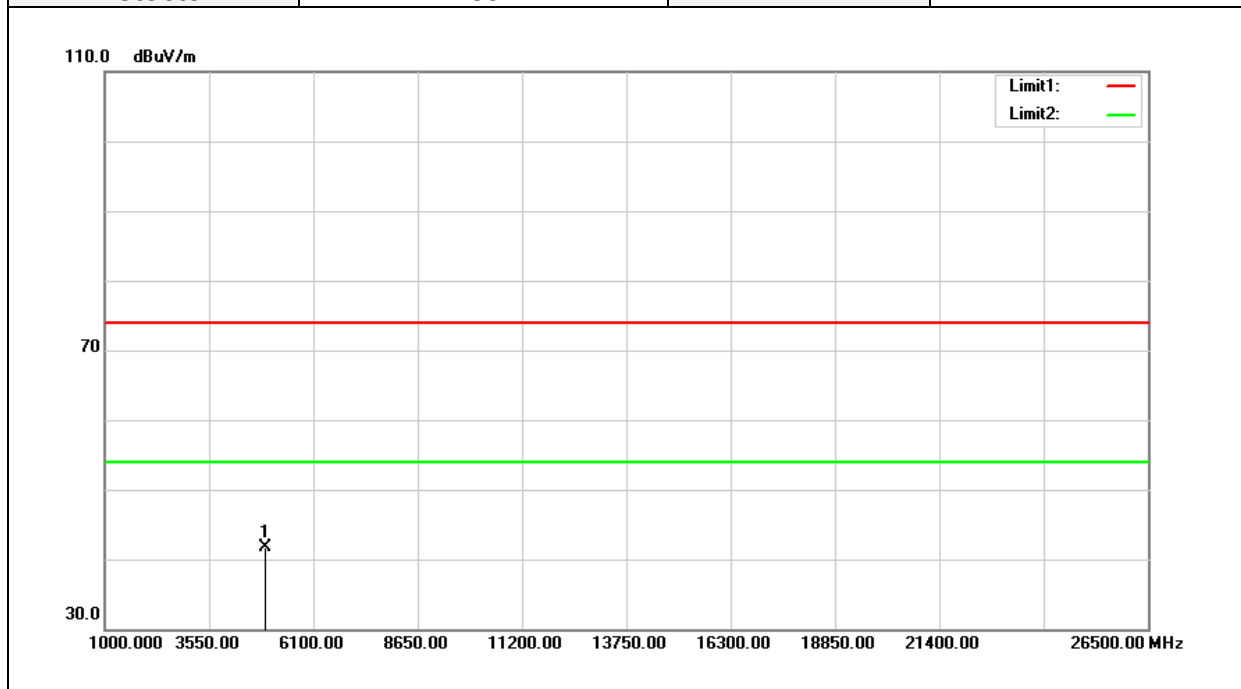


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	37.18	4.55	41.73	74.00	-32.27	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 20 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

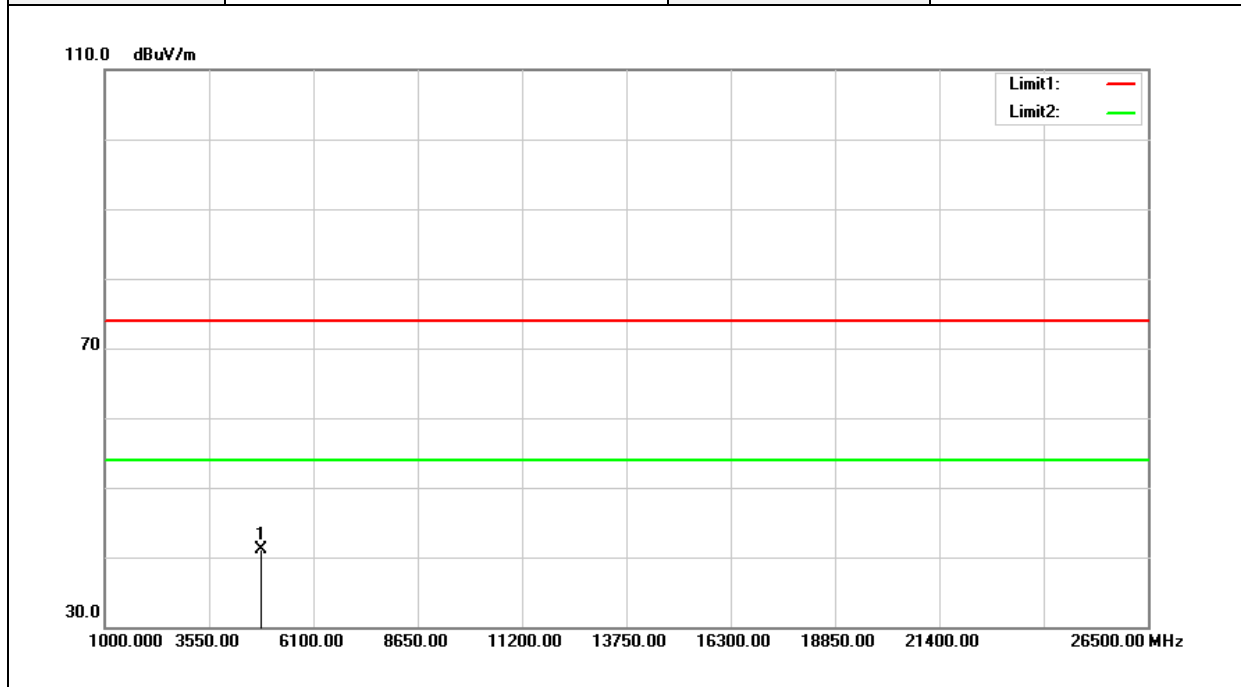


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	36.71	4.38	41.09	74.00	-32.91	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 20 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

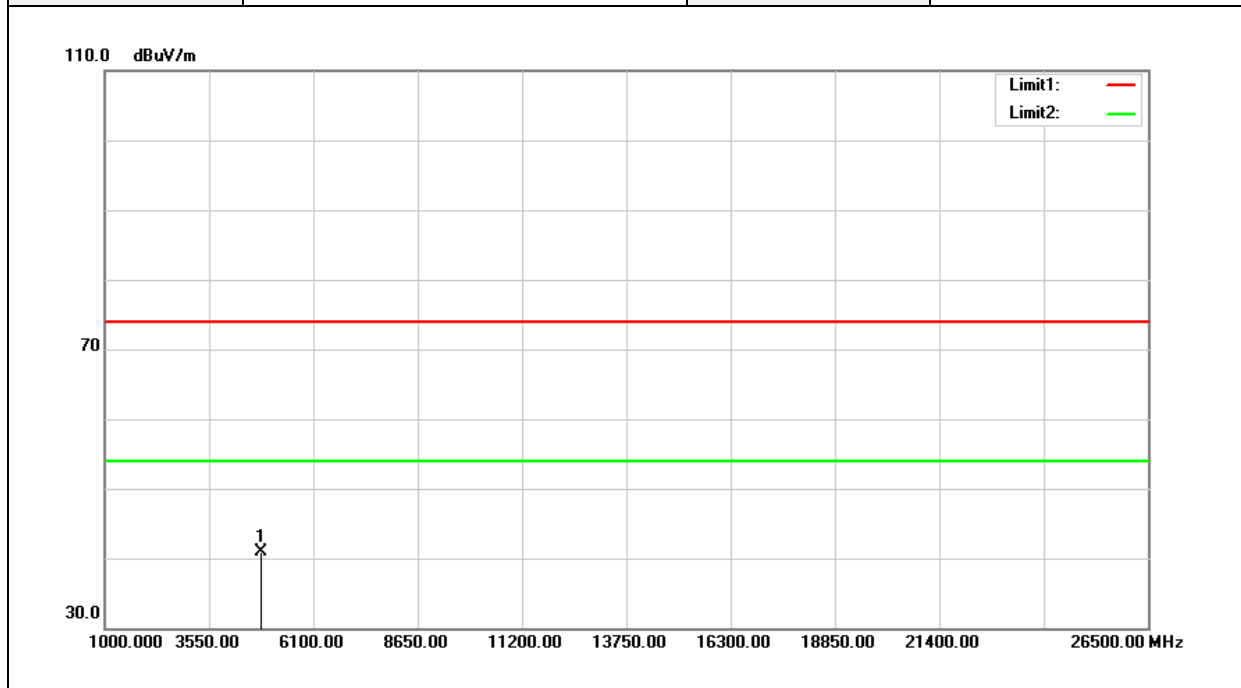


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	36.43	4.38	40.81	74.00	-33.19	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT 20 Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

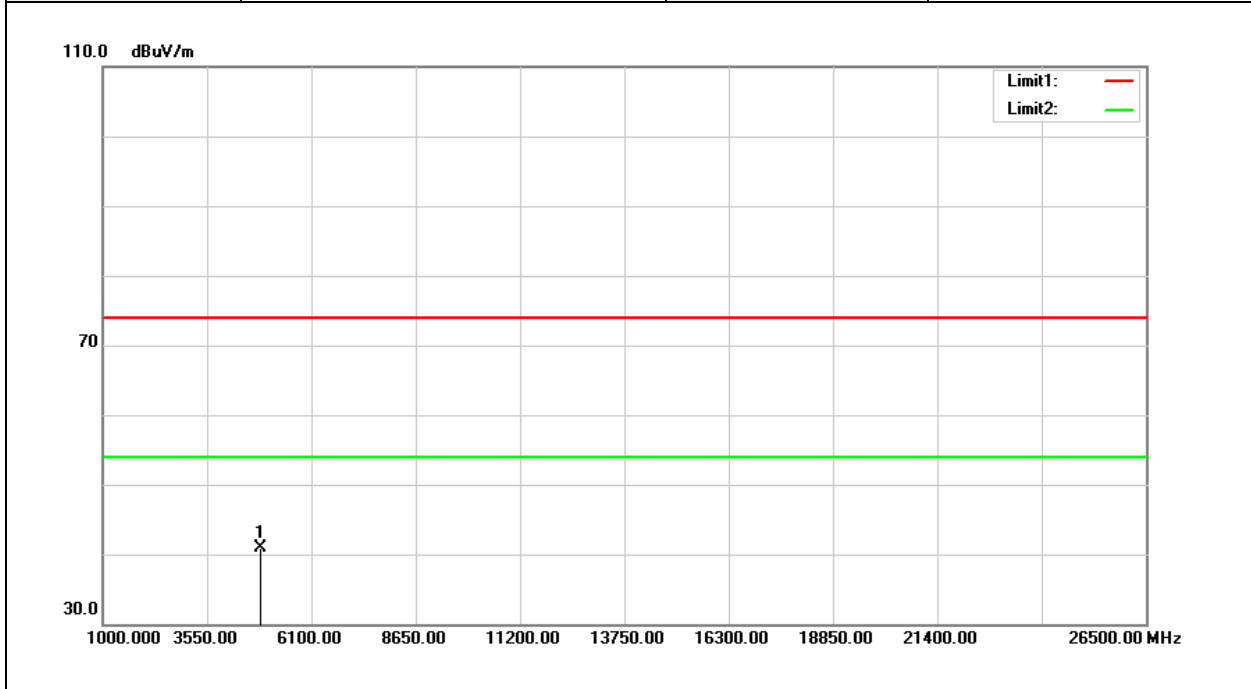


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	36.39	4.47	40.86	74.00	-33.14	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT 20 Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

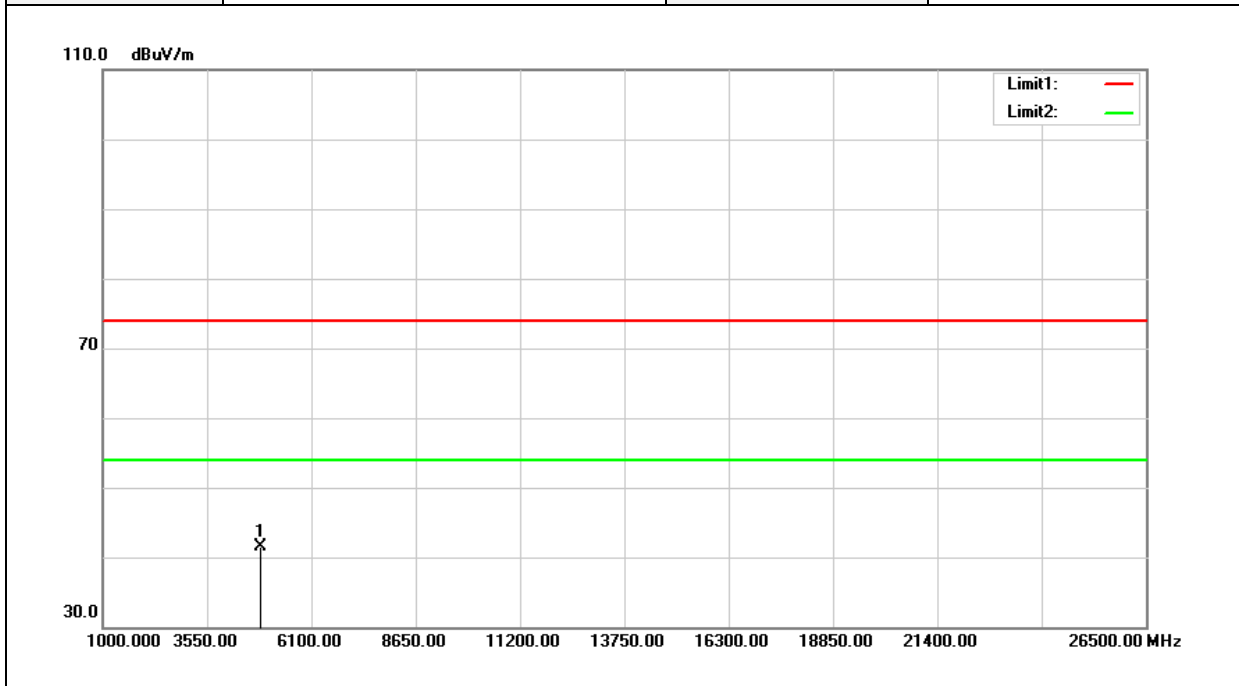


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	37.08	4.47	41.55	74.00	-32.45	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT 20 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

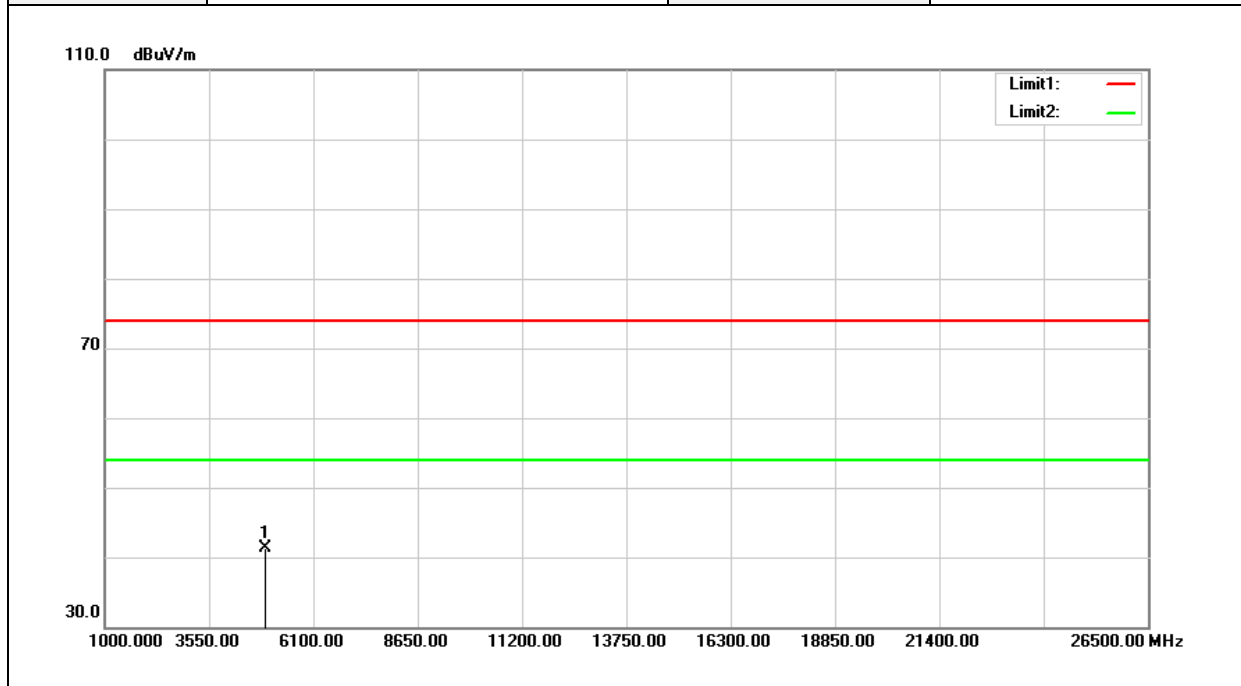


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	36.80	4.55	41.35	74.00	-32.65	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 20 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

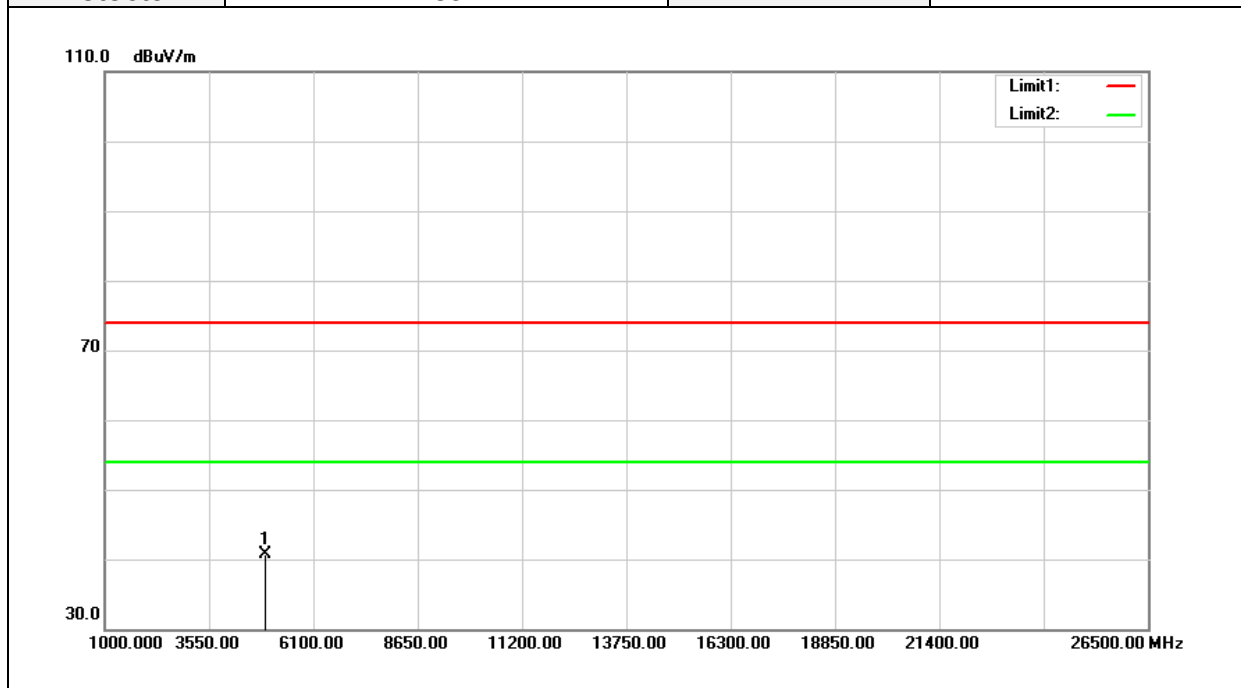


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	36.20	4.55	40.75	74.00	-33.25	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 40 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

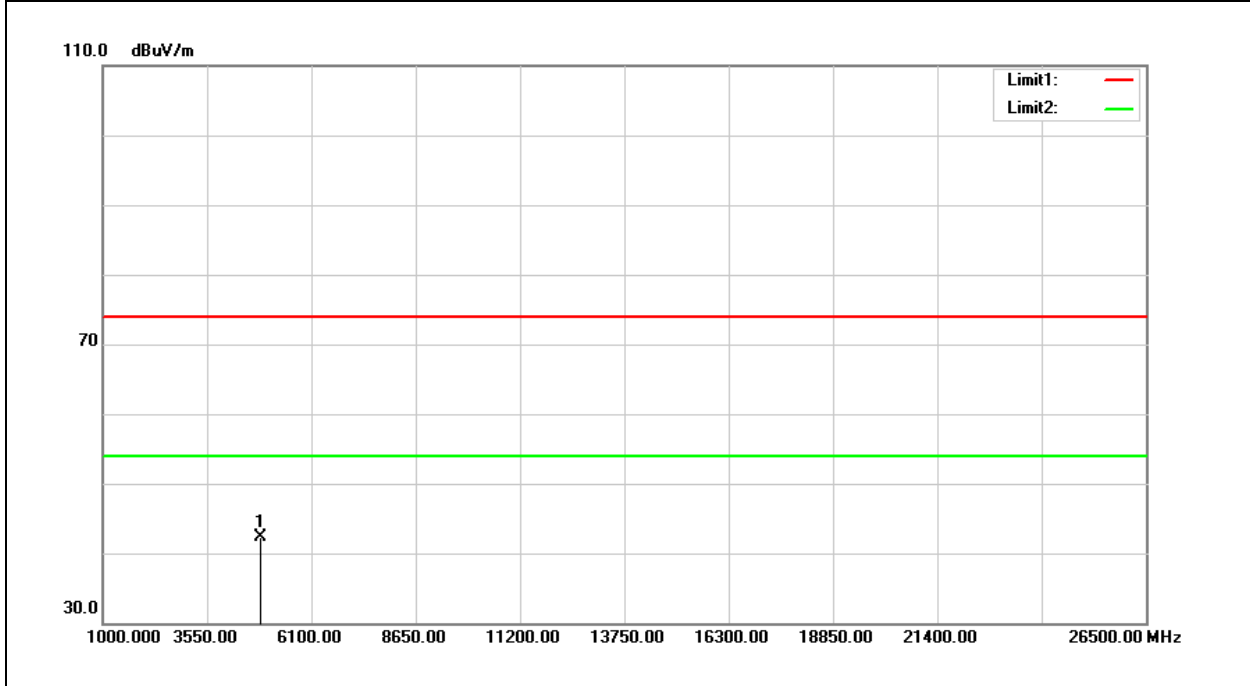

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844.000	37.88	4.41	42.29	74.00	-31.71	peak


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 40 Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

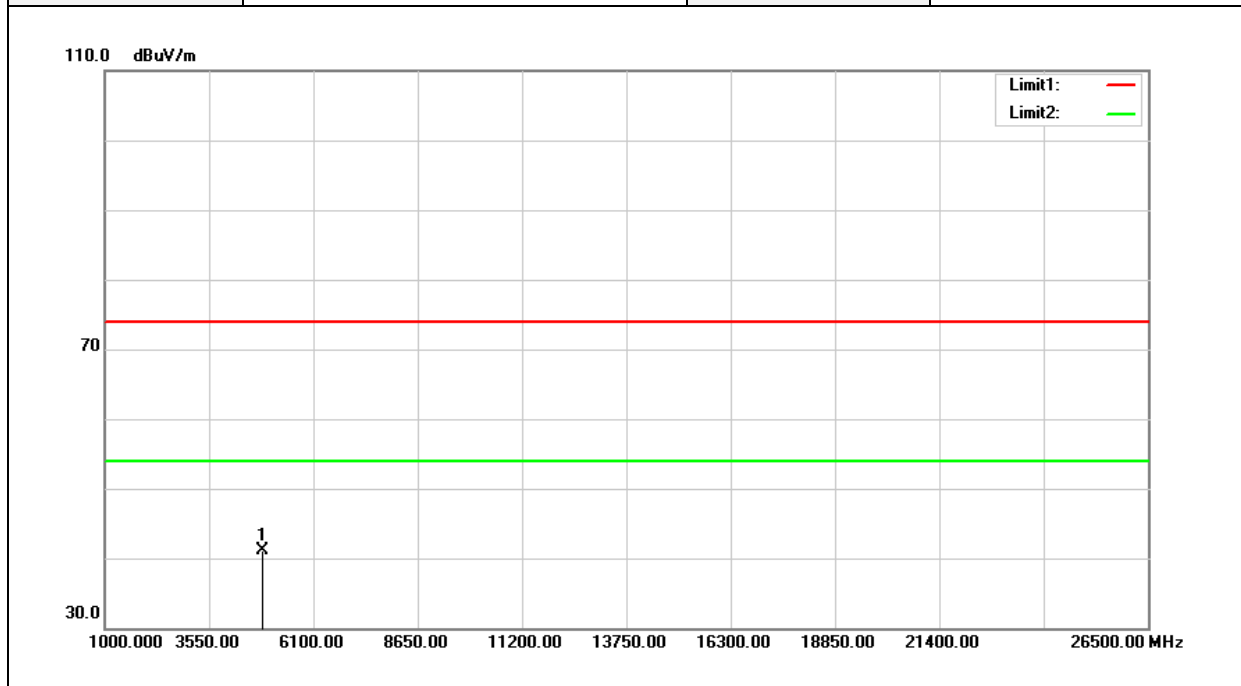


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844.000	36.71	4.41	41.12	74.00	-32.88	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 40 Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

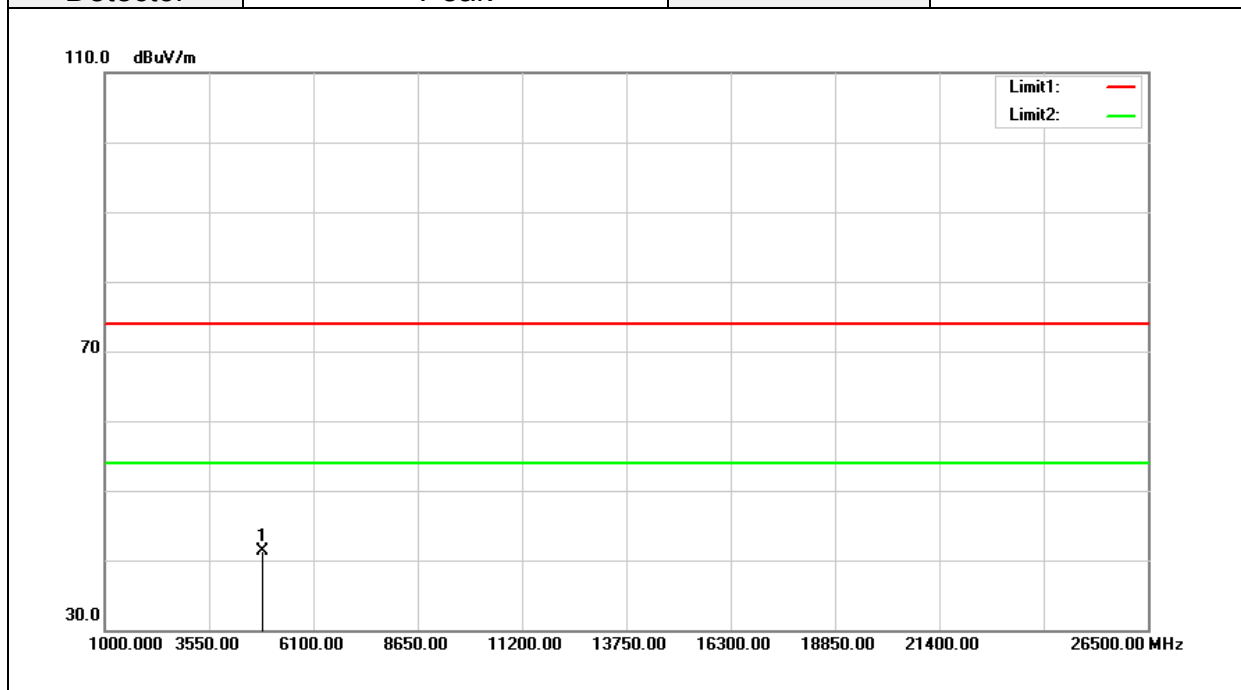


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	36.80	4.47	41.27	74.00	-32.73	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT 40 Mid CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

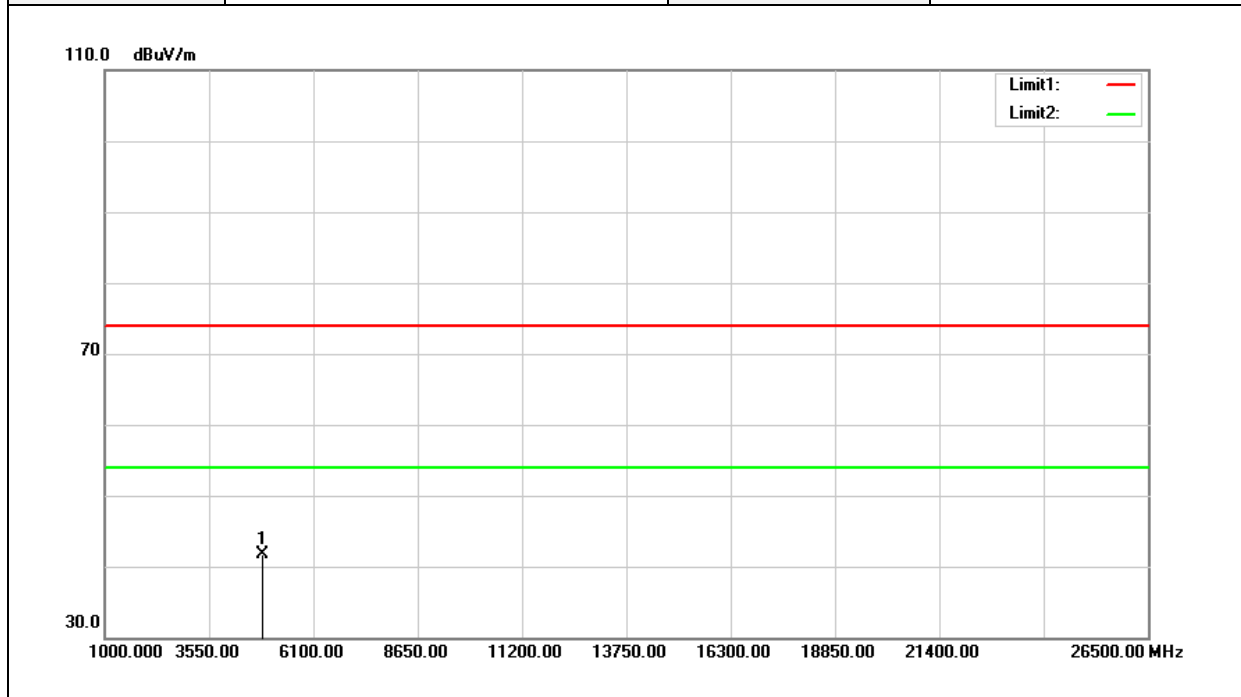


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	37.33	4.47	41.80	74.00	-32.20	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT 40 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

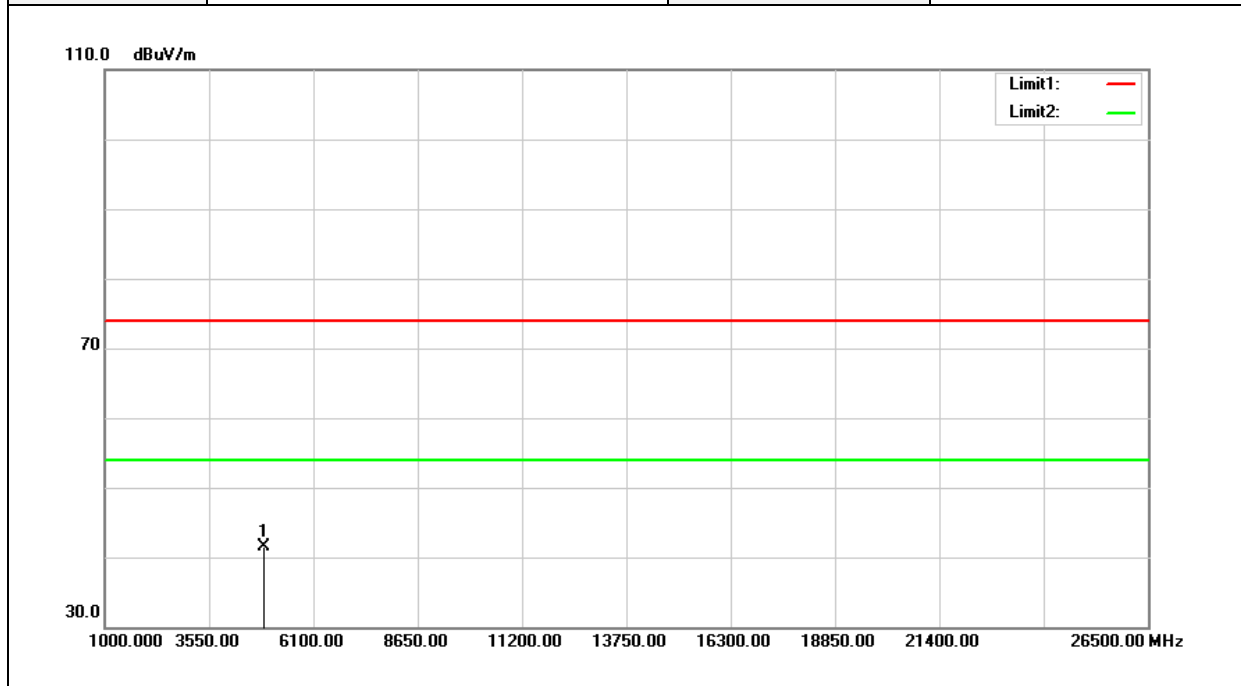


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4904.000	36.94	4.51	41.45	74.00	-32.55	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T180703W01-RP

Test Mode	IEEE 802.11n HT 40 High CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 18, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

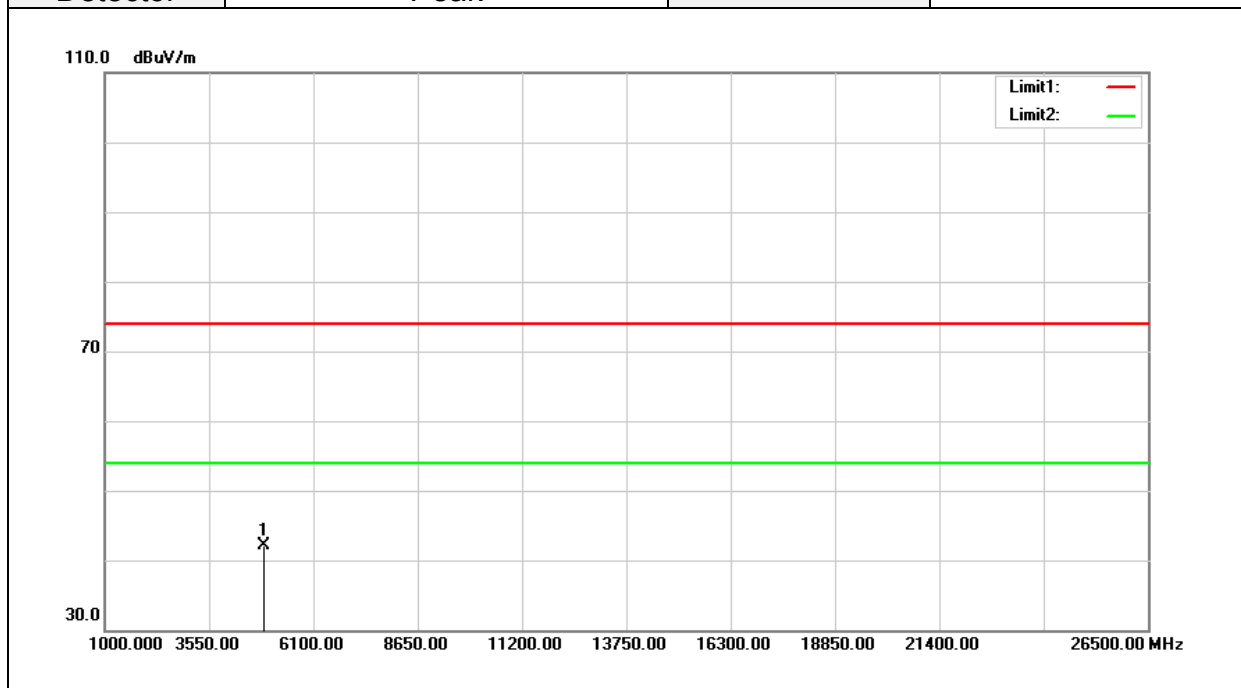

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4904.000	37.51	4.51	42.02	74.00	-31.98	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

**--End of Test Report--**