



Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

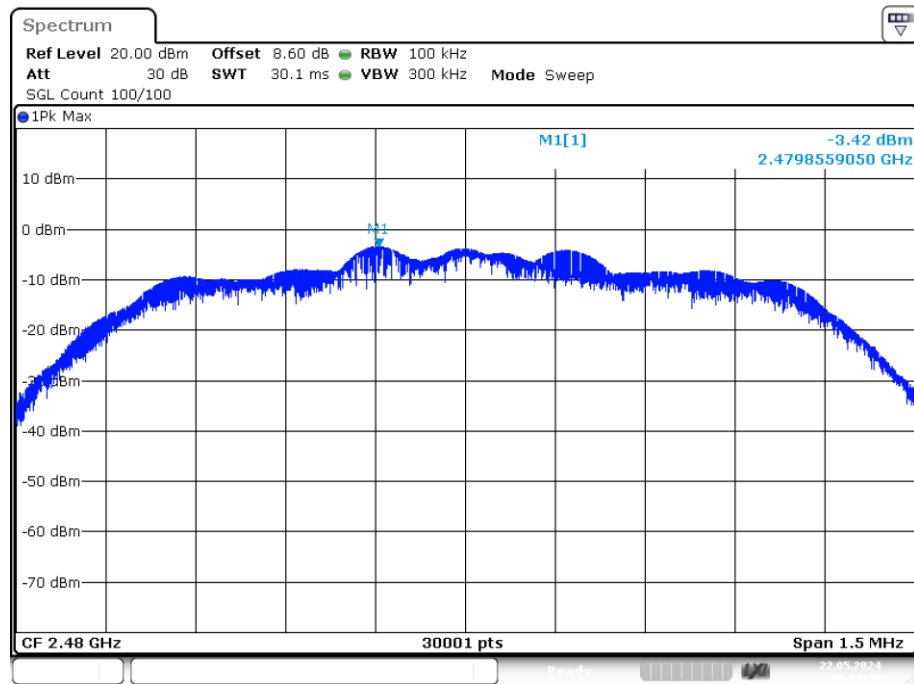

Date: 22.MAY.2024 16:39:28


Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

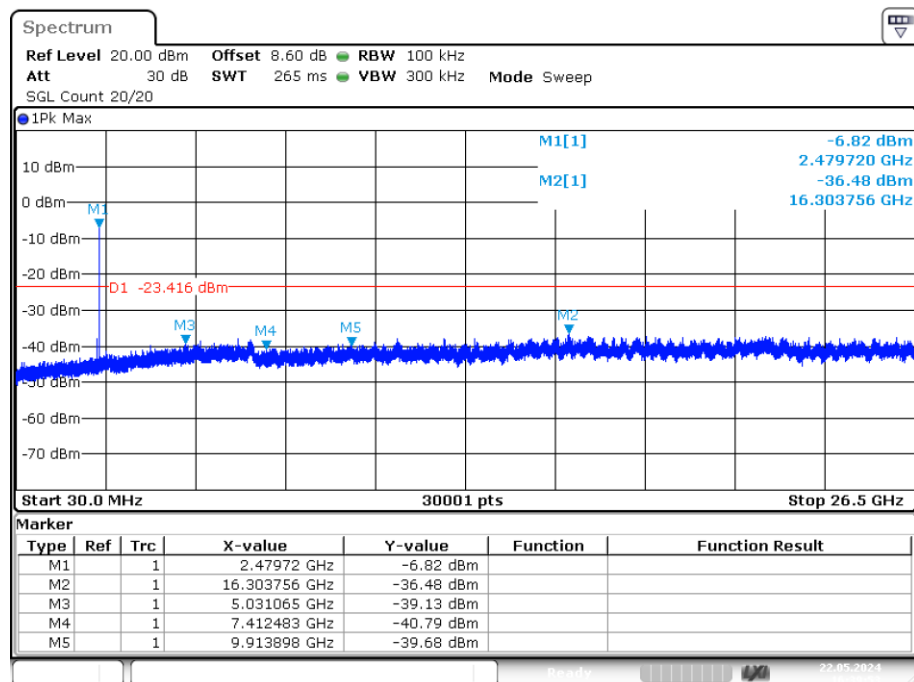

Date: 22.MAY.2024 16:39:53

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

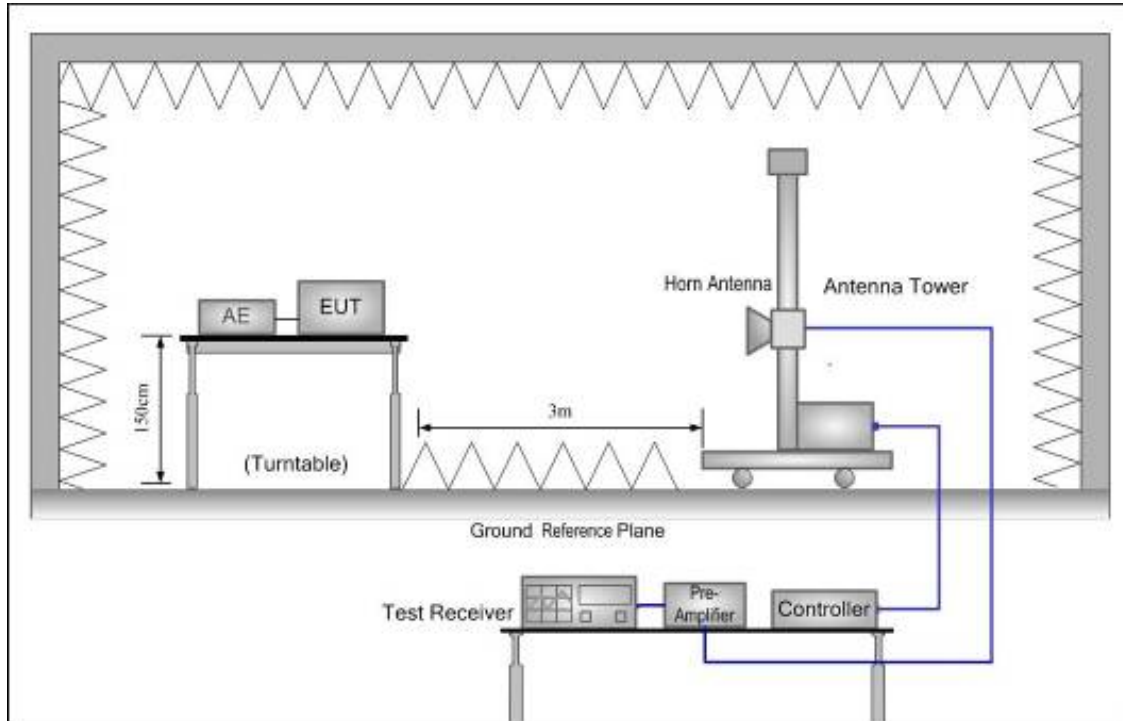

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 and RSS-GEN limits.


9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

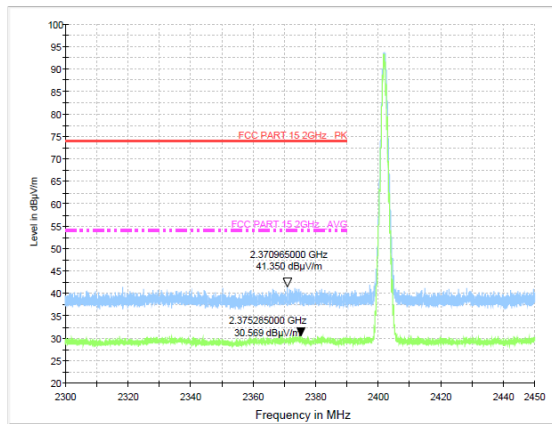


Test Mode: GFSK-High Hopping-off

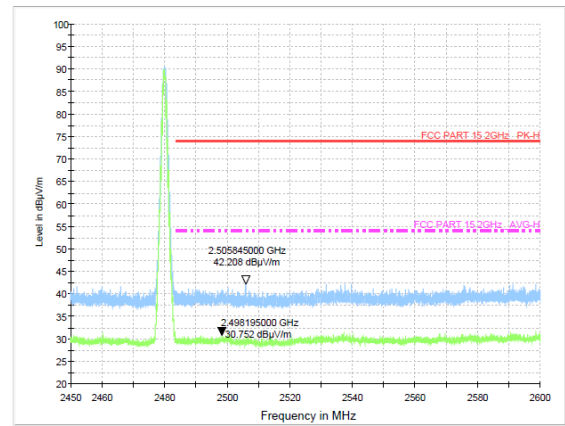

Test Mode: GFSK-Low Hopping-on




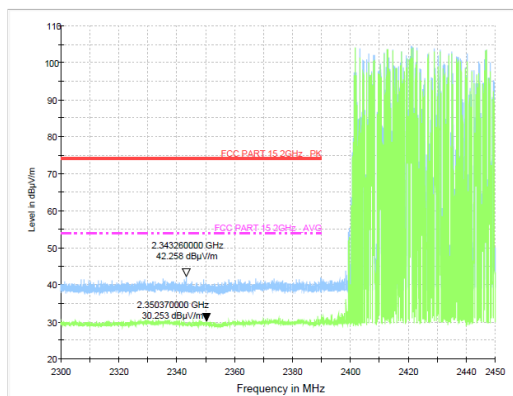


Test Mode: GFSK-High Hopping-on

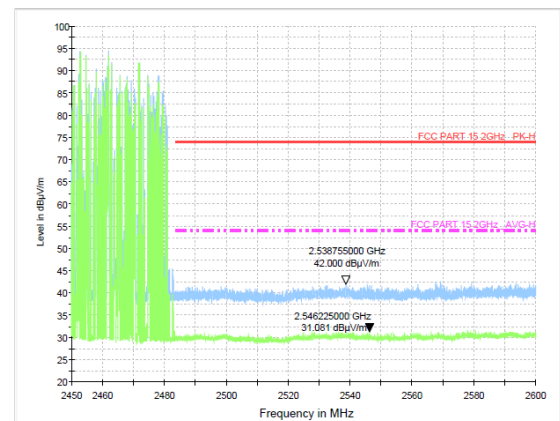

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

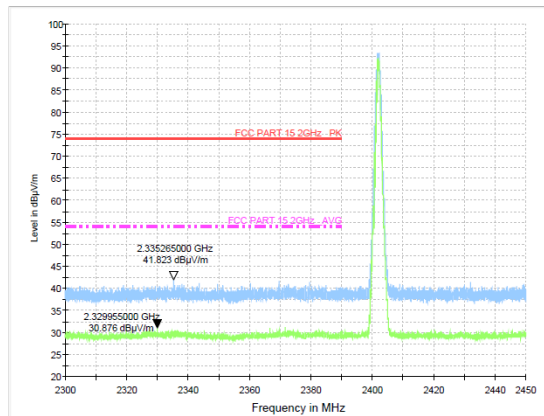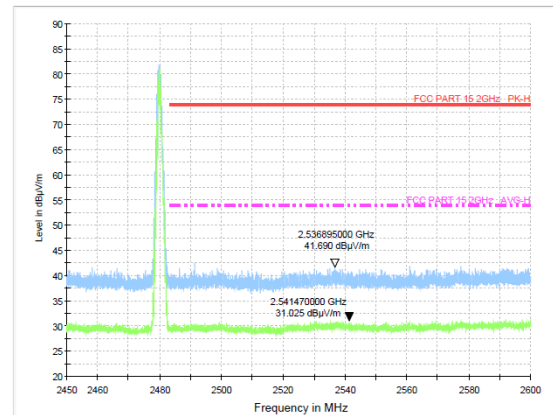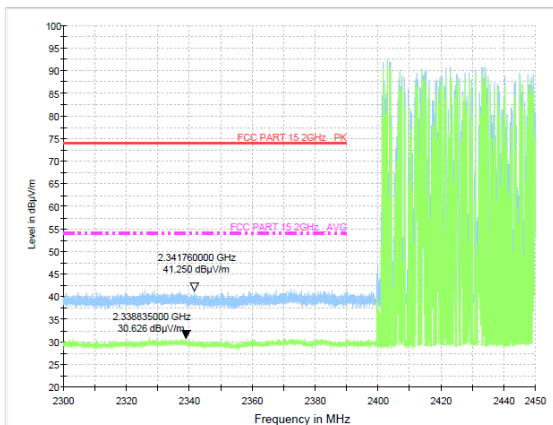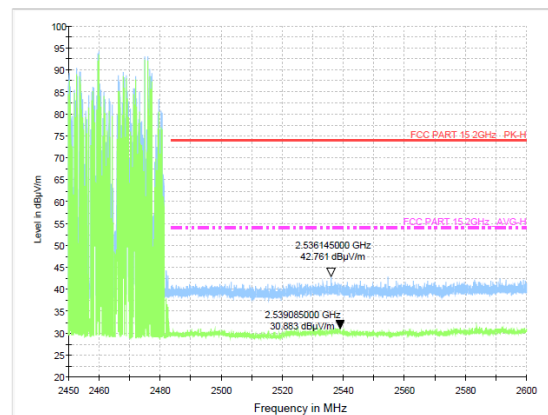Test Mode: $\pi/4$ DQPSK-Low Hopping-offTest Mode: $\pi/4$ DQPSK-High Hopping-offTest Mode: $\pi/4$ DQPSK-Low Hopping-onTest Mode: $\pi/4$ DQPSK-High Hopping-on


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: 8DPSK-Low Hopping-off

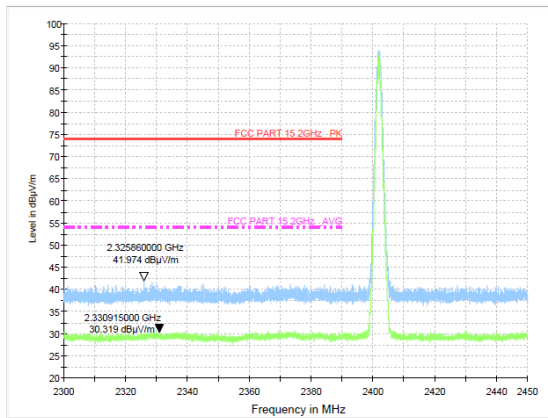


Test Mode: 8DPSK-High Hopping-off

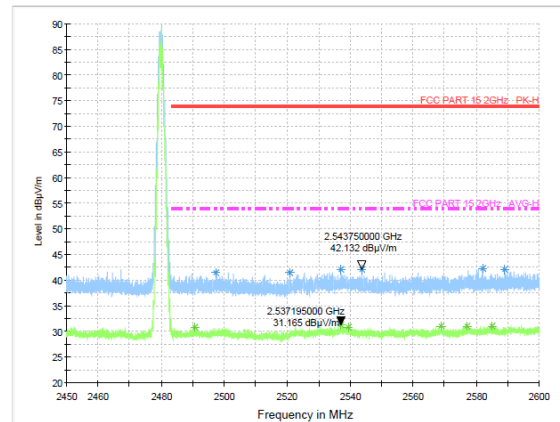

Test Mode: 8DPSK-Low Hopping-on

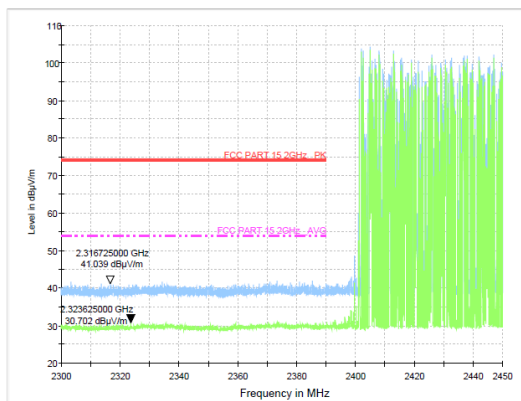

Test Mode: 8DPSK-High Hopping-on

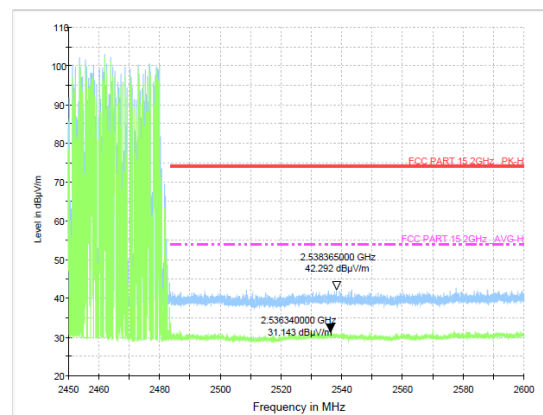


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

GFSK Mode:

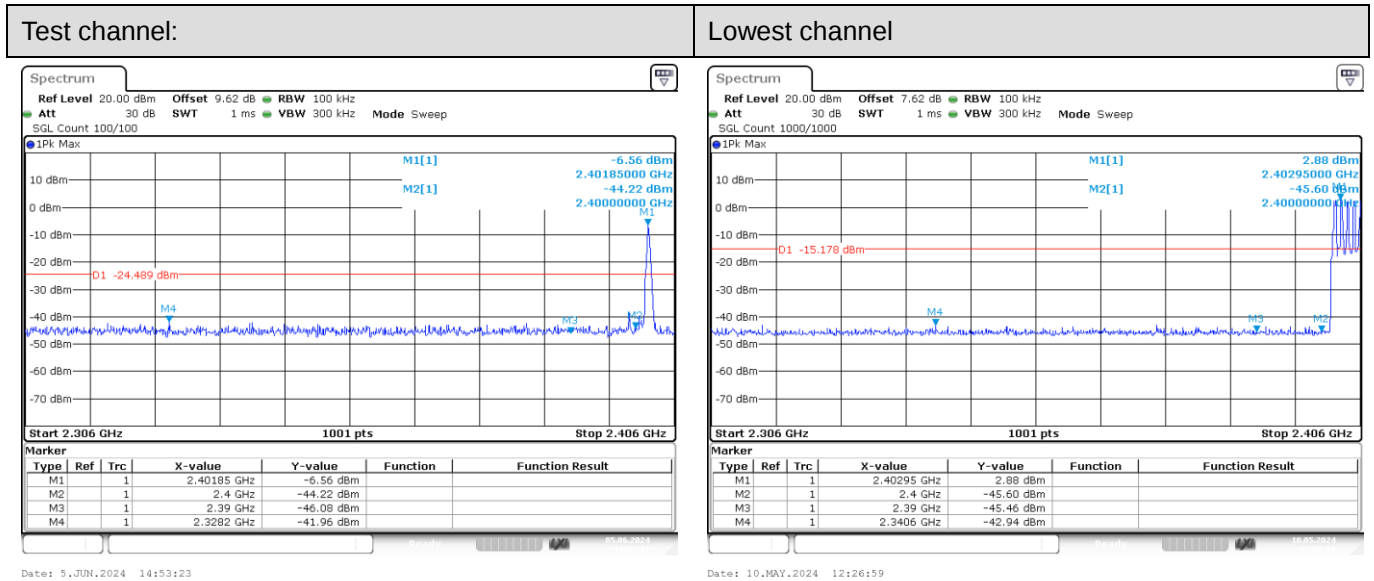

No-hopping mode

Hopping mode

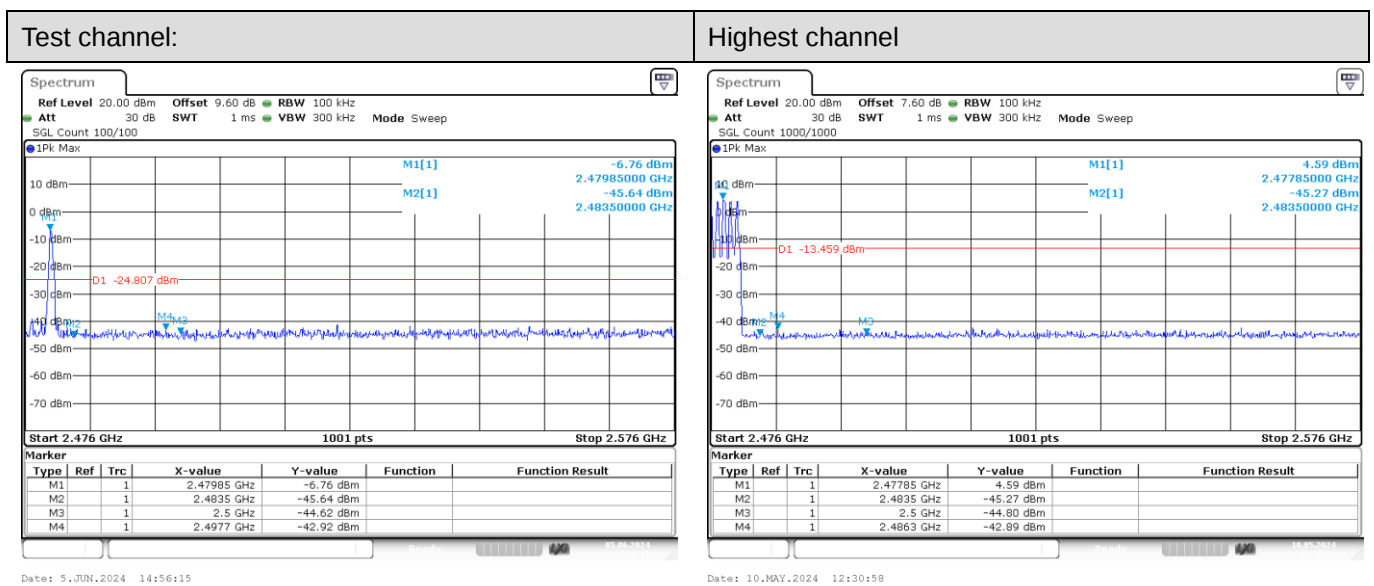


No-hopping mode

Hopping mode


$\pi/4$ DQPSK Mode:

Test channel:

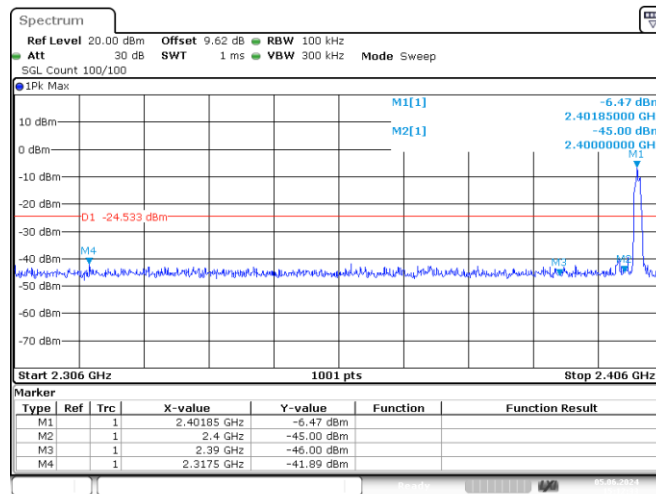


No-hopping mode

Lowest channel

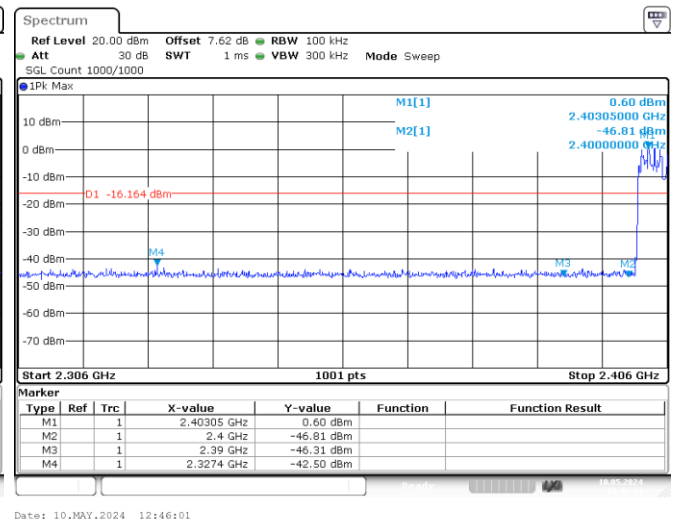


Hopping mode

Test channel:

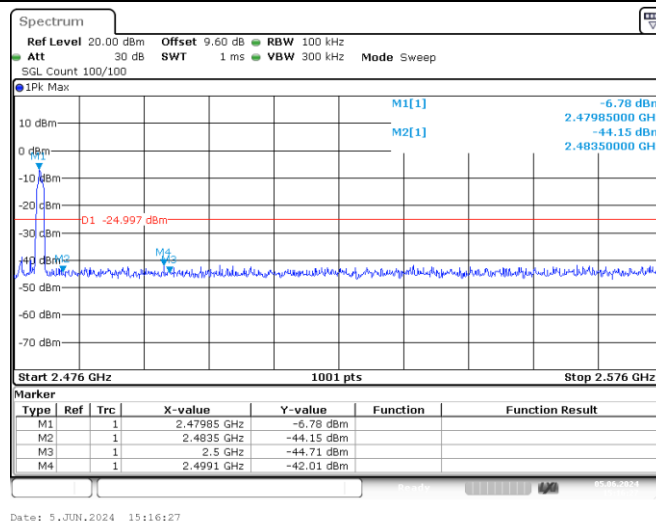


No-hopping mode

Highest channel

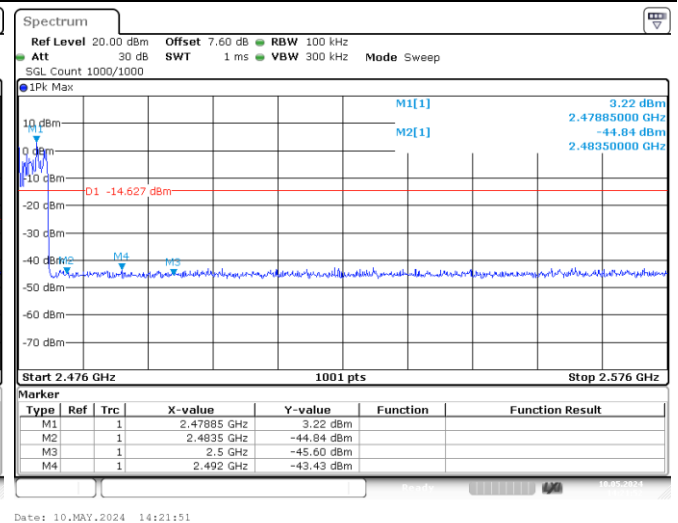


Hopping mode

8DPSK Mode:

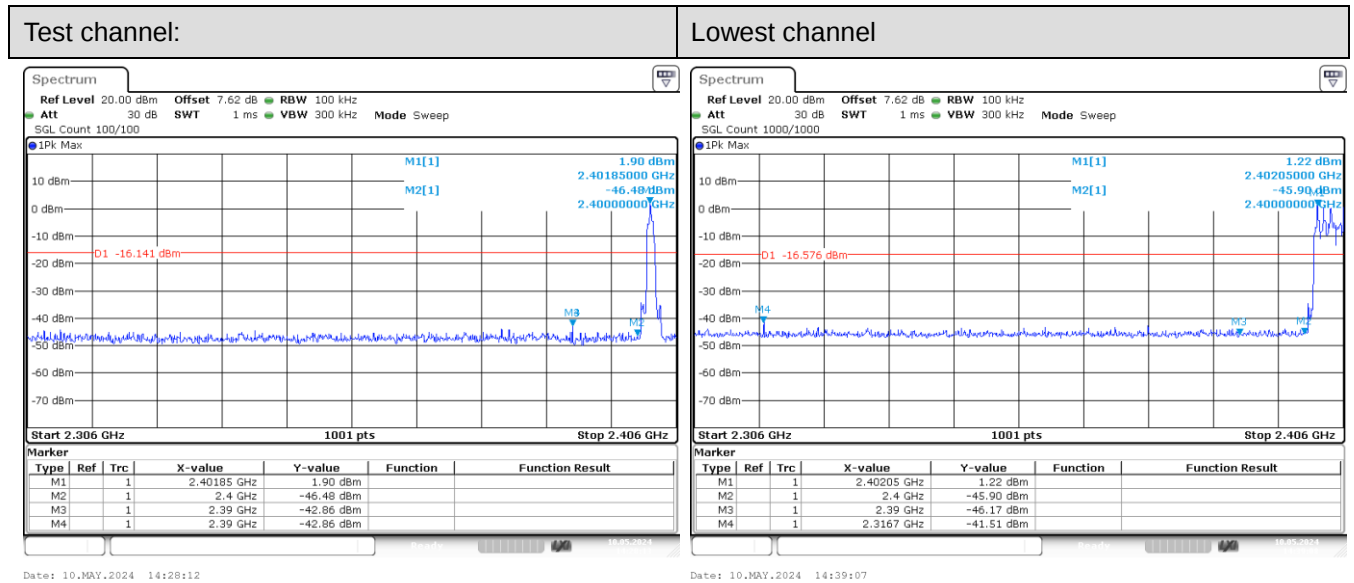

No-hopping mode

Hopping mode

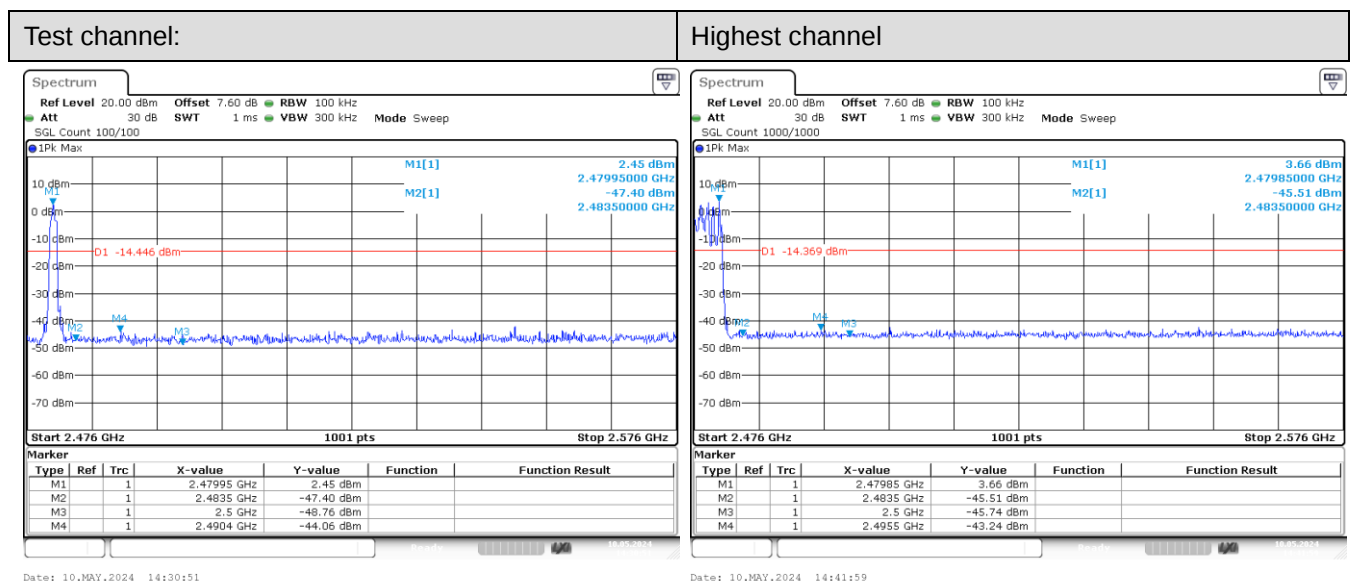


No-hopping mode

Hopping mode

10. POWER LINE CONDUCTED EMISSIONS

10.1. Block Diagram of Test Setup

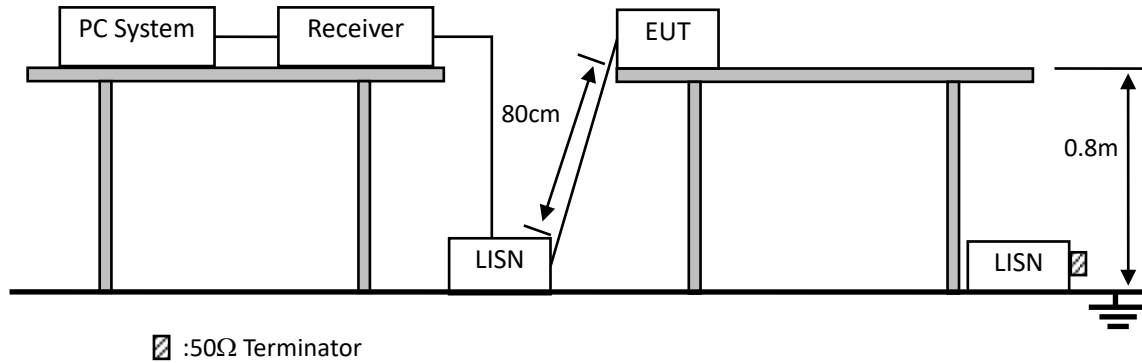

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

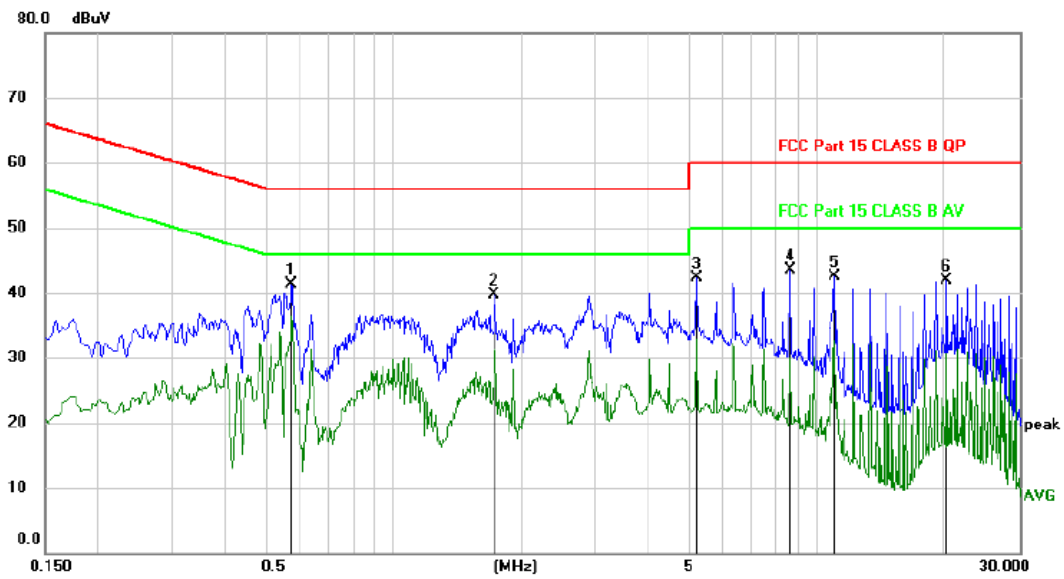


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.5756	41.30	0.00	41.30	56.00	-14.70	peak	
2		1.7309	39.61	0.00	39.61	56.00	-16.39	peak	
3		5.1900	42.22	0.00	42.22	60.00	-17.78	peak	
4		8.6370	43.47	0.00	43.47	60.00	-16.53	peak	
5		10.9679	42.53	0.00	42.53	60.00	-17.47	peak	
6		20.2408	41.92	0.00	41.92	60.00	-18.08	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

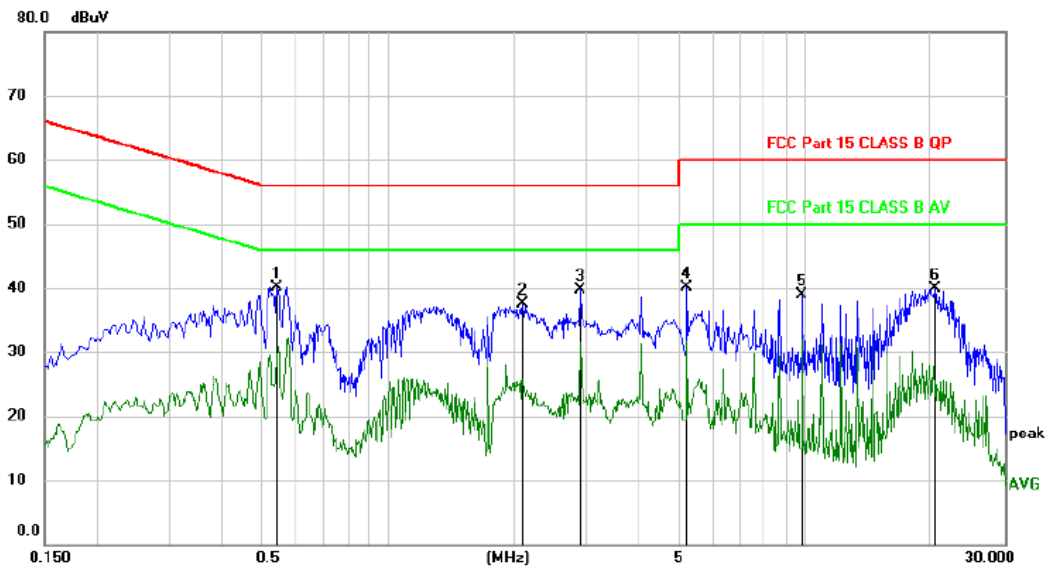

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.5429	40.10	0.00	40.10	56.00	-15.90	peak	
2		2.1000	37.59	0.00	37.59	56.00	-18.41	peak	
3		2.8947	39.72	0.00	39.72	56.00	-16.28	peak	
4		5.2110	40.17	0.00	40.17	60.00	-19.83	peak	
5		9.8460	38.88	0.00	38.88	60.00	-21.12	peak	
6		20.4690	39.82	0.00	39.82	60.00	-20.18	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz mode with the worst data is listed.

11. ANTENNA REQUIREMENTS

11.1.Limit

For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi..

11.2.Result

The EUT antenna is Internal Antenna. It complies with the standard requirement.


12. TEST SETUP PHOTO

12.1. Photo of Radiated Emission test






12.2.Photo of Conducted Emission test



13. PHOTOS OF EUT


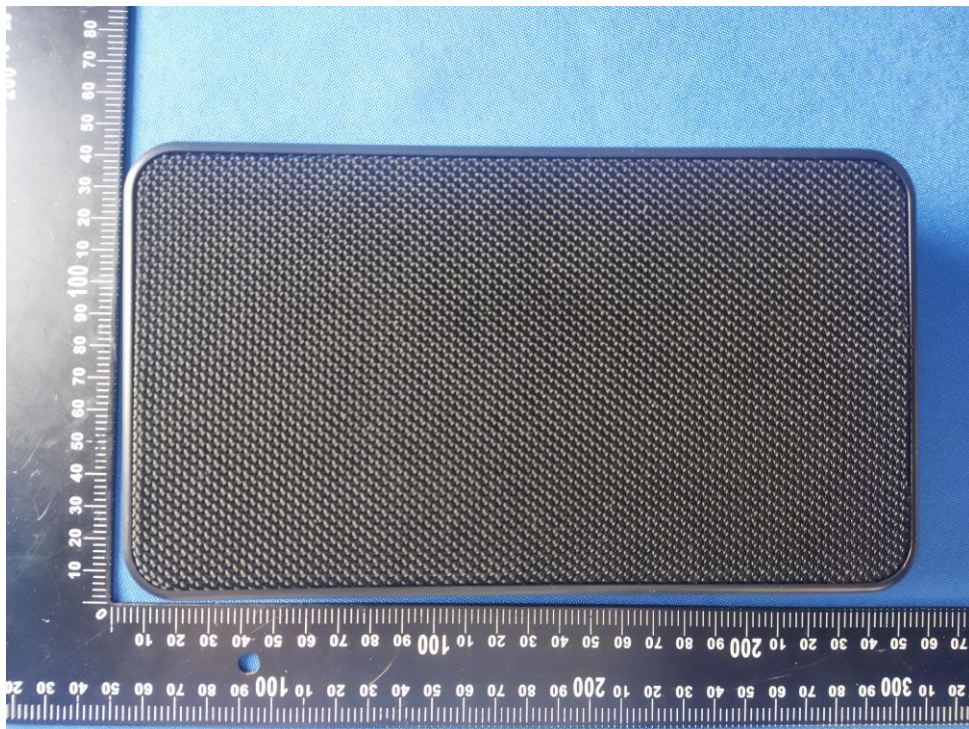





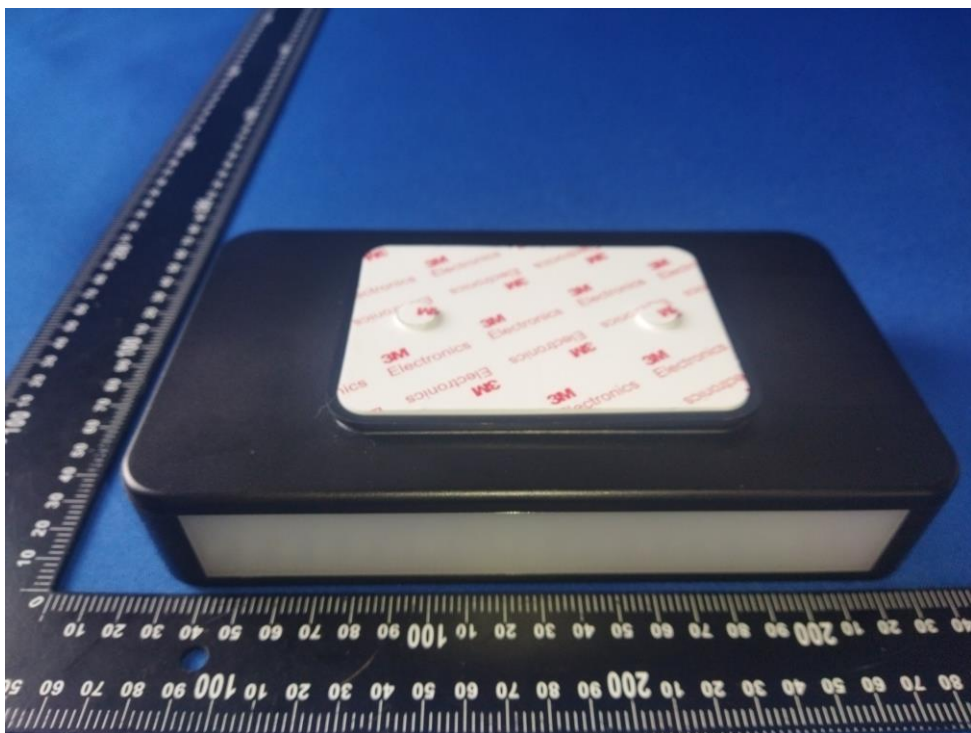
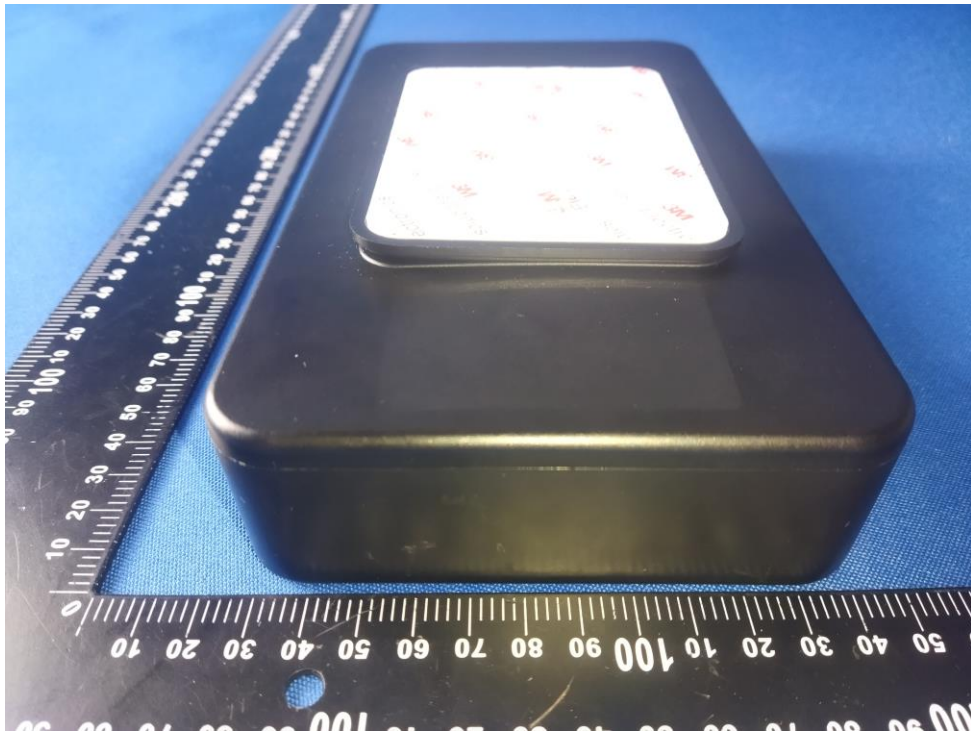



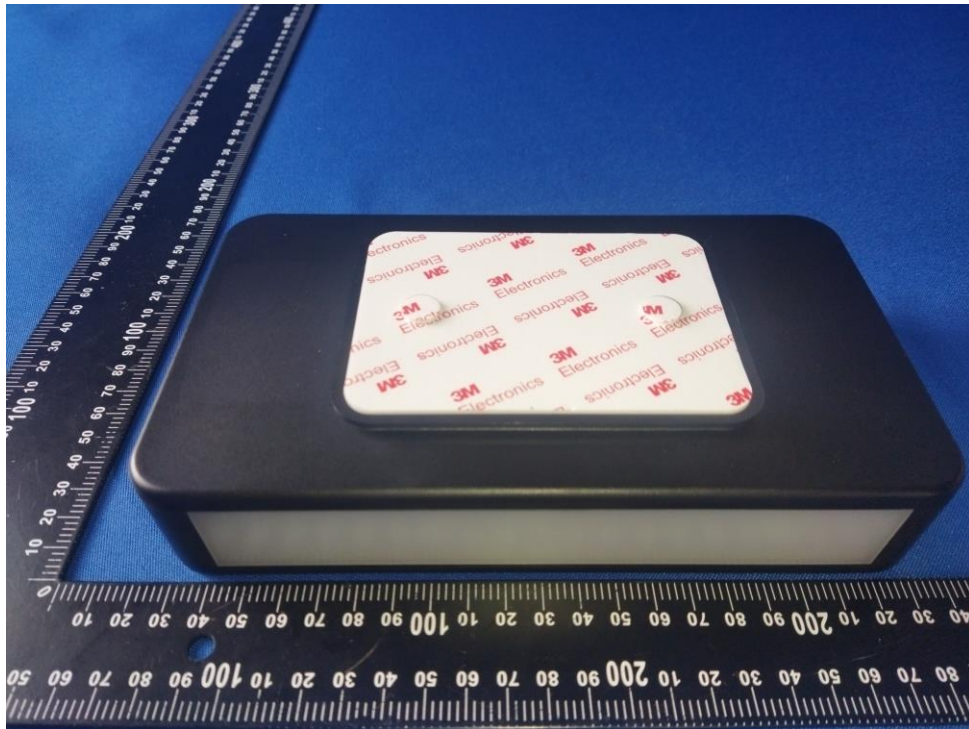


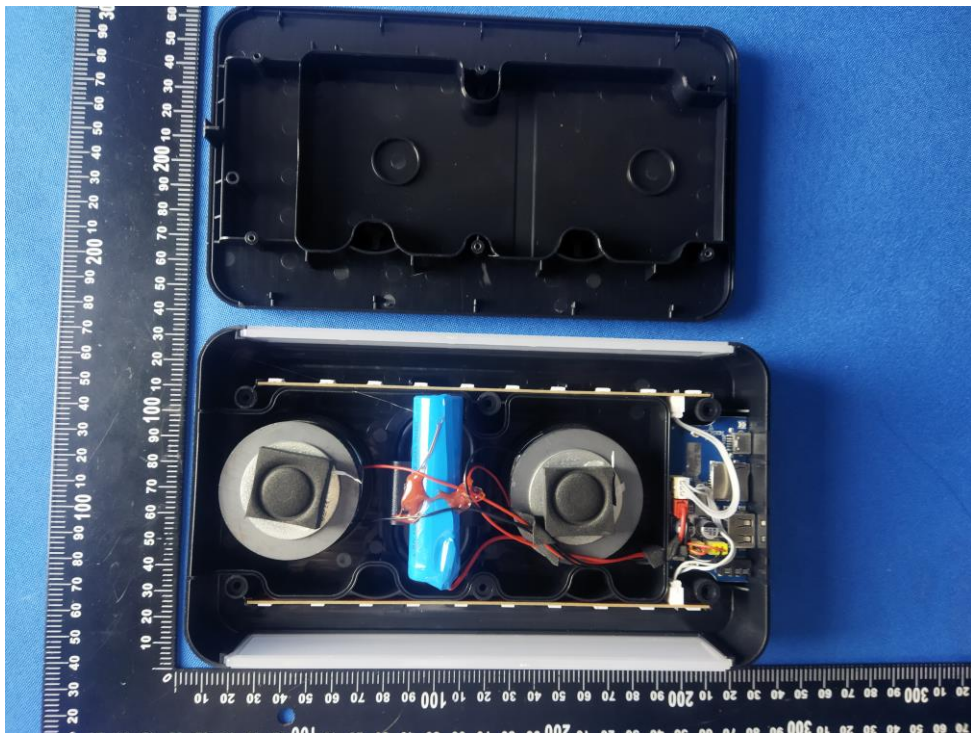
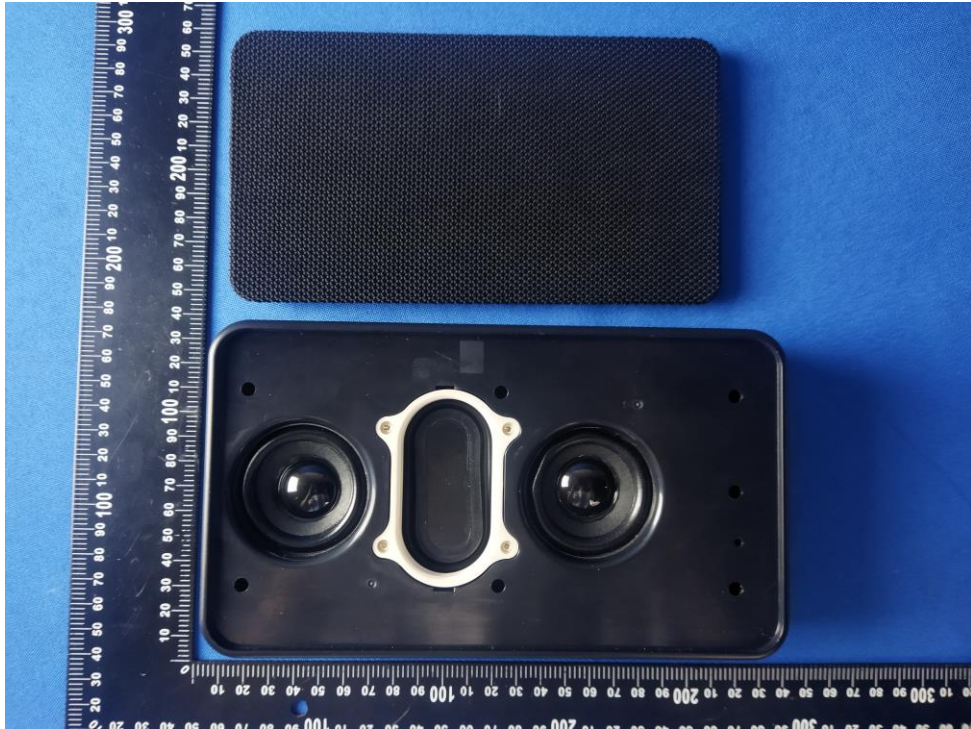


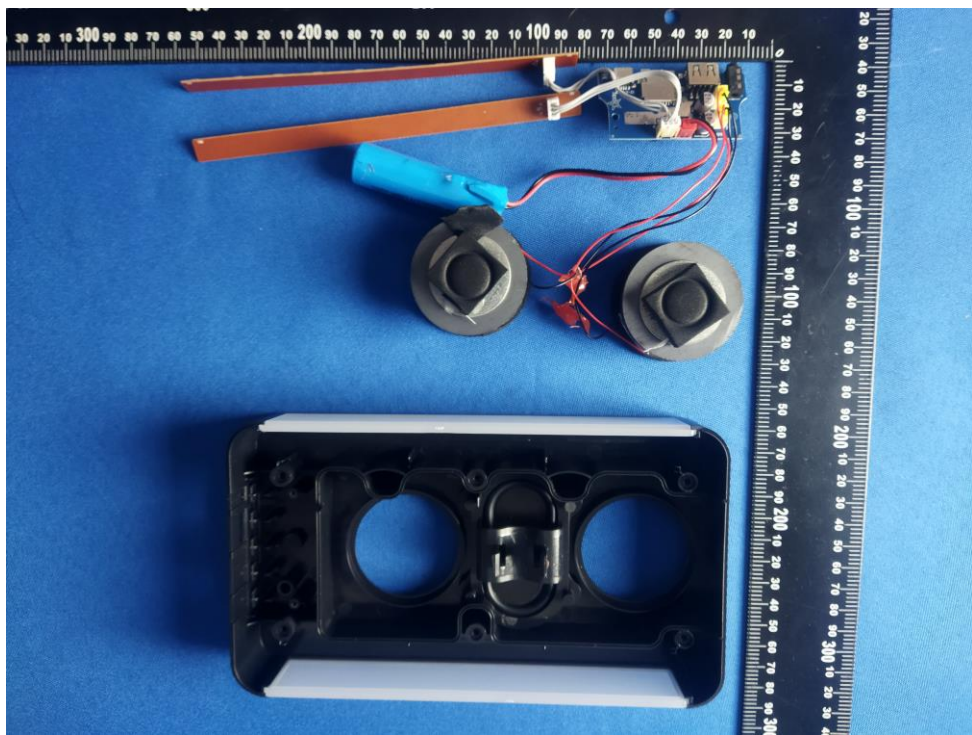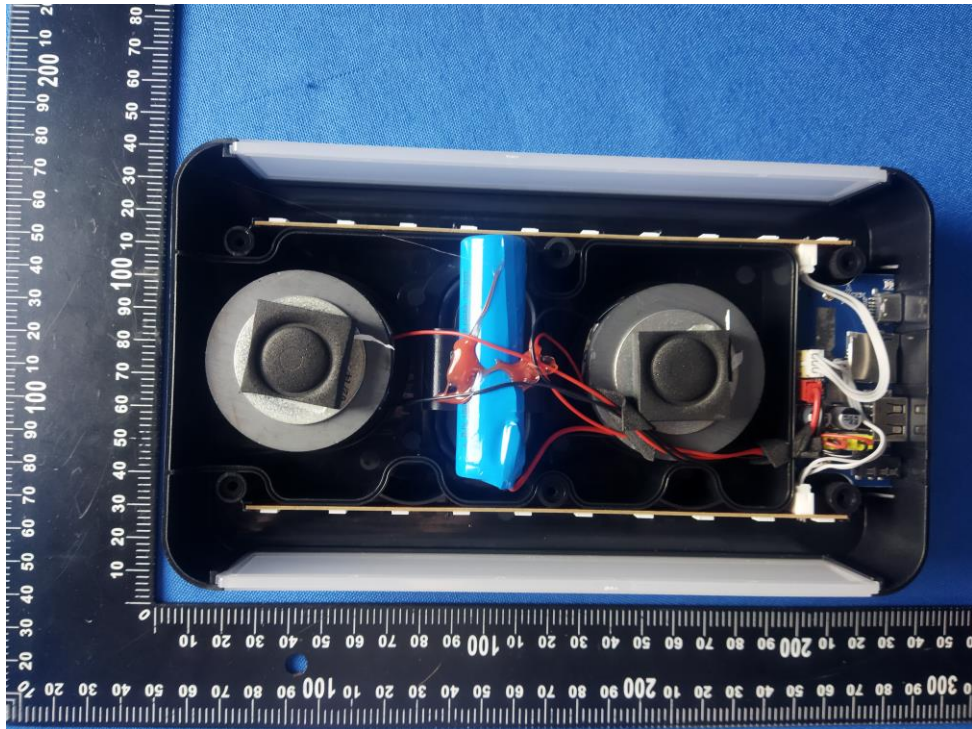

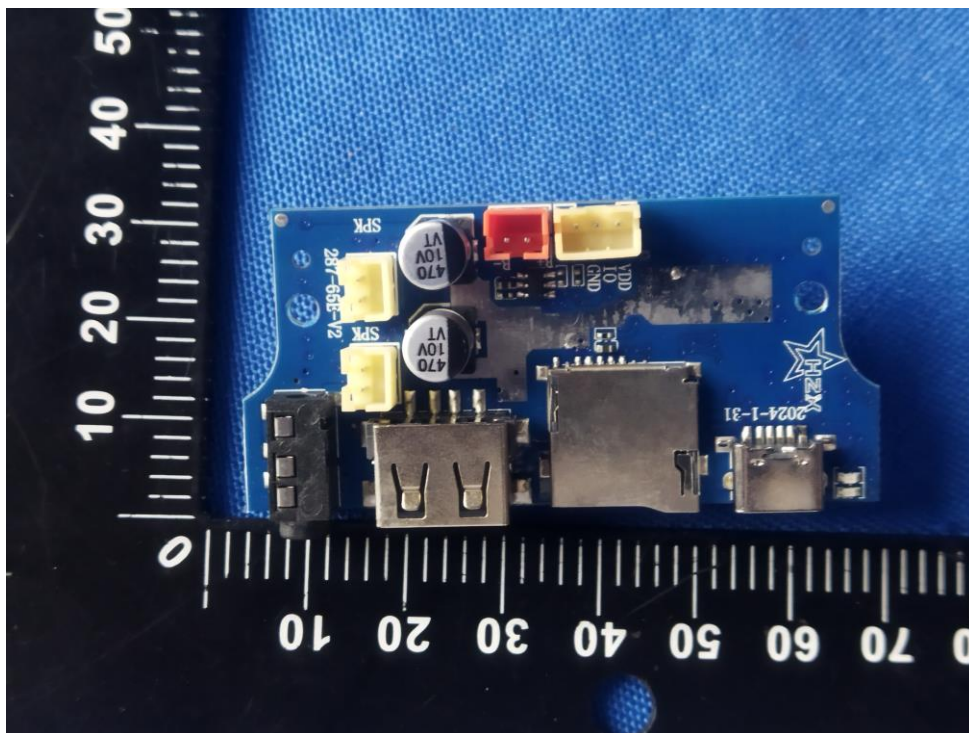

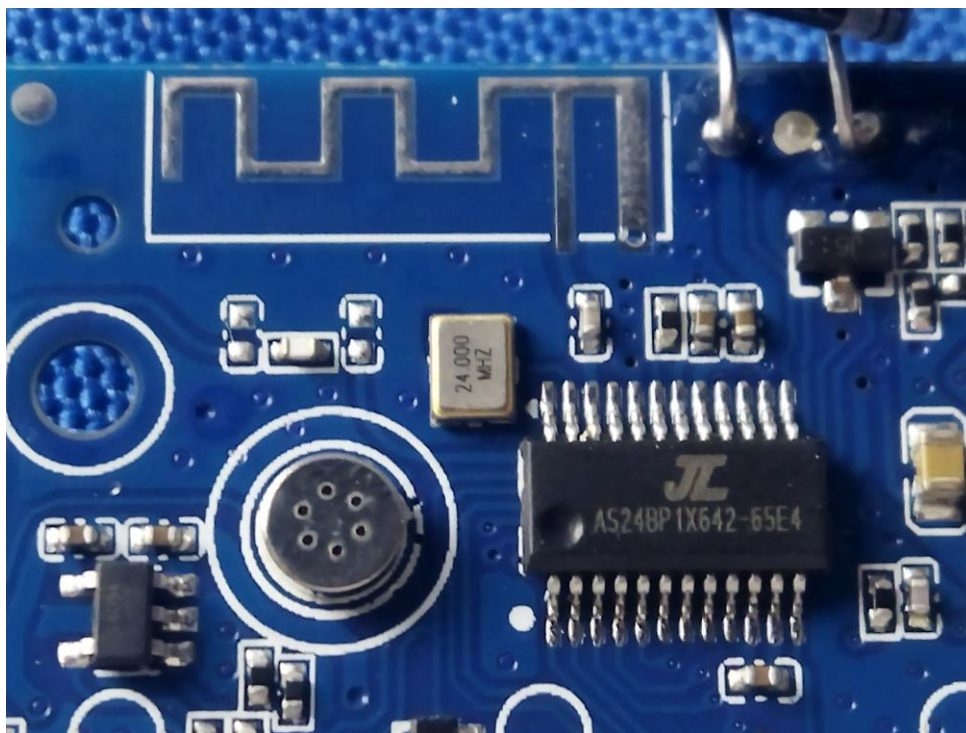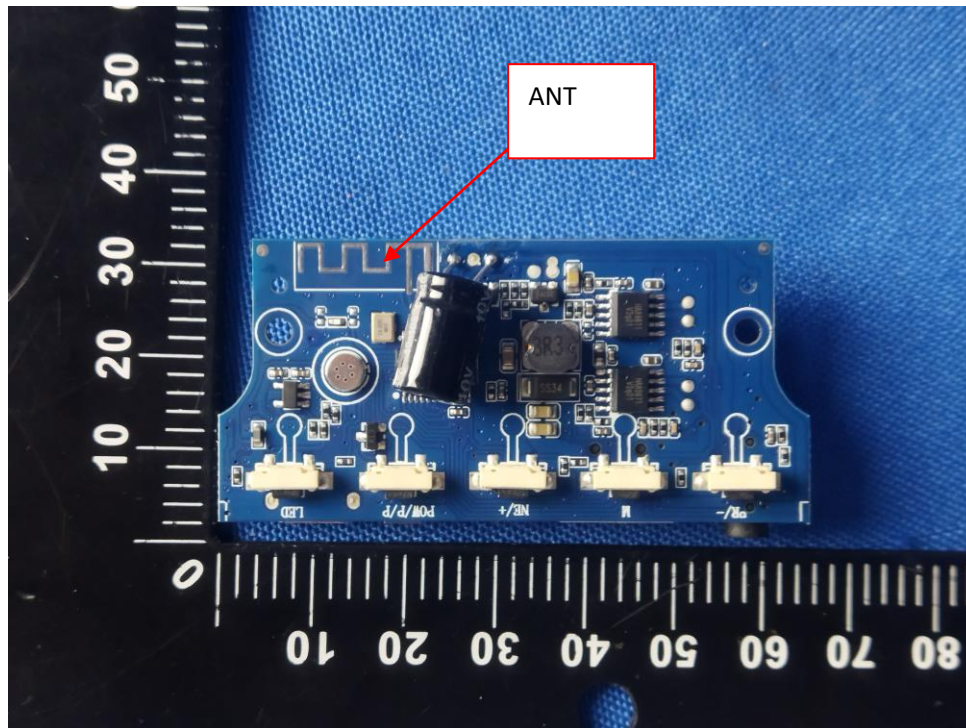

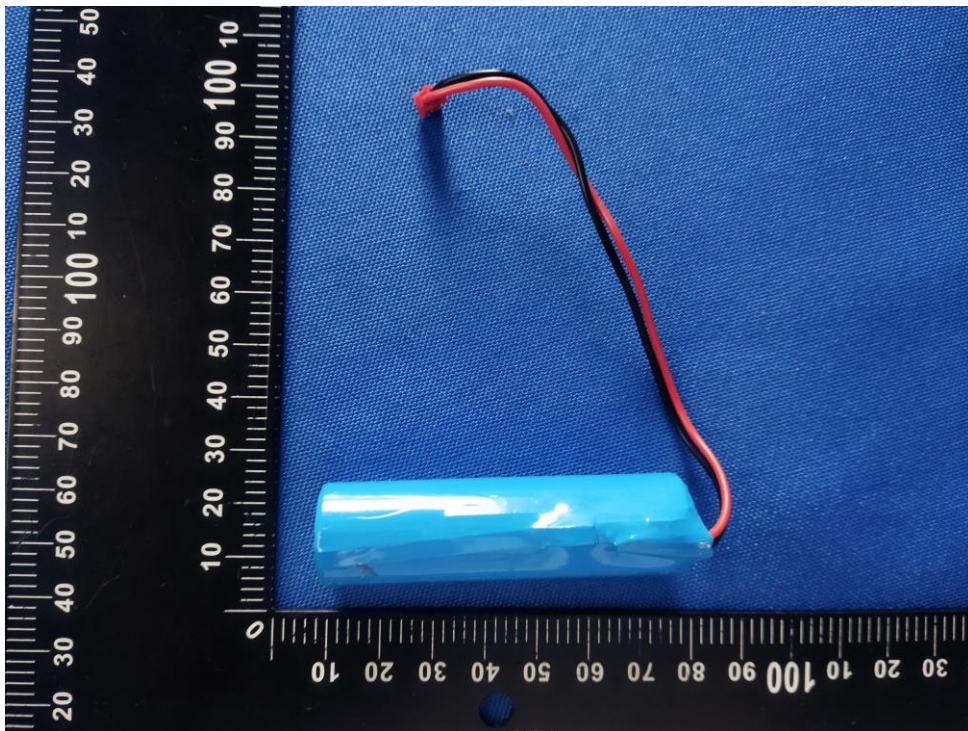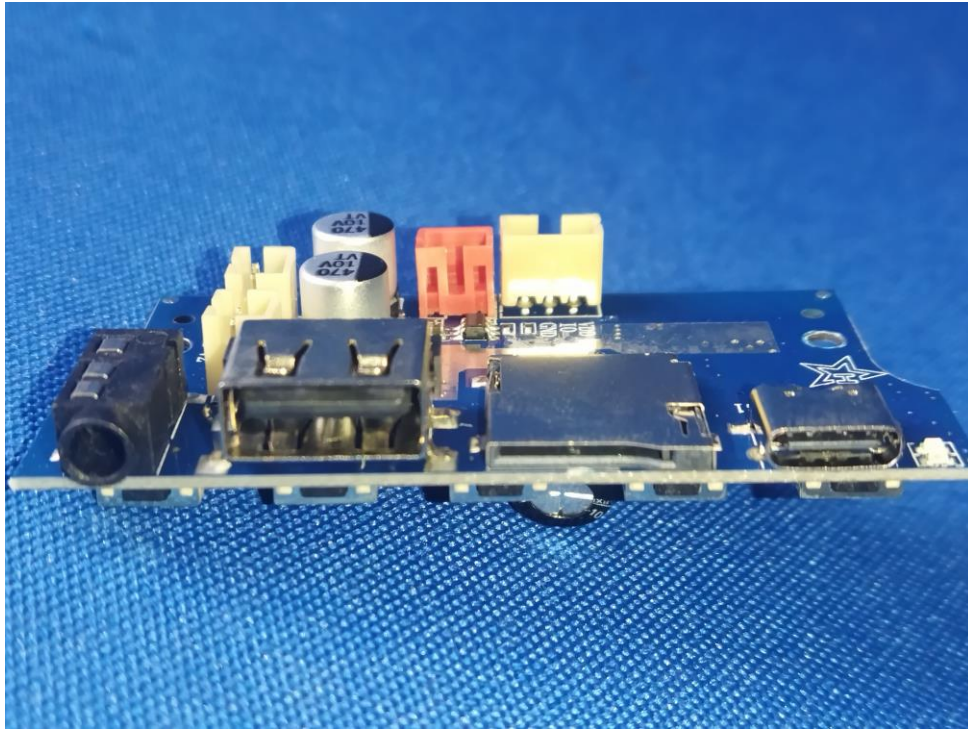

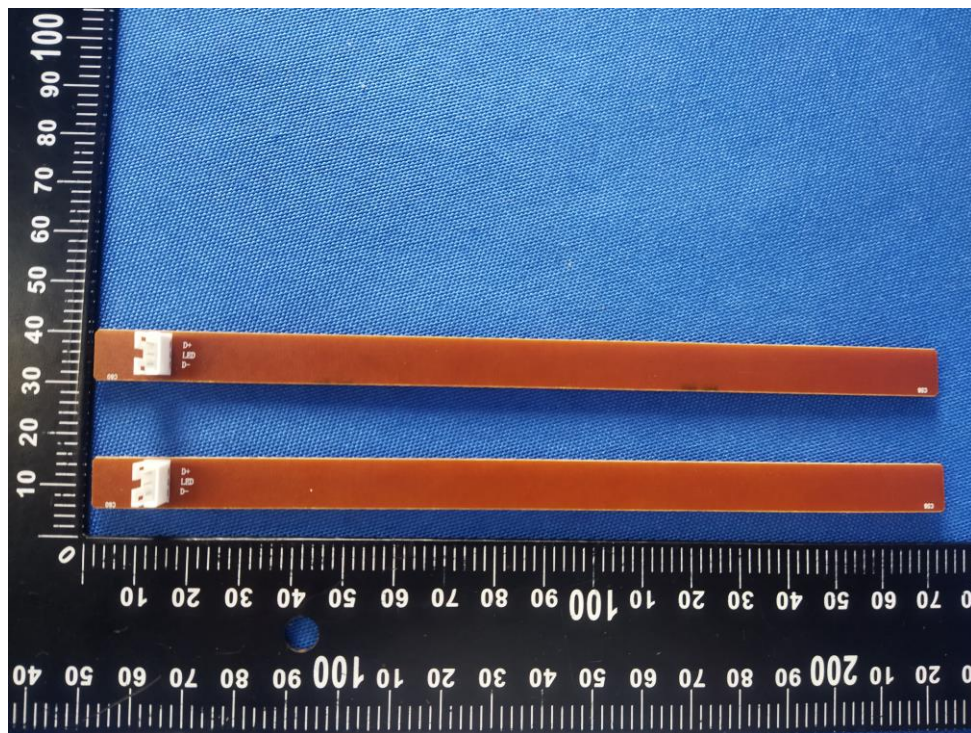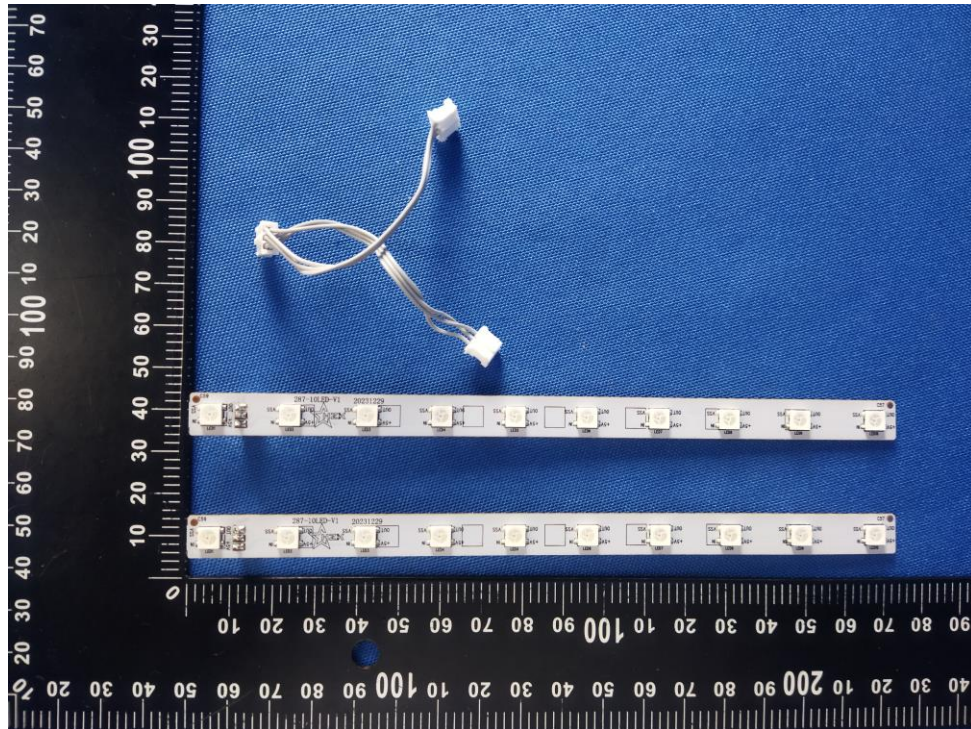

-----END OF REPORT-----