


## Maximum Permissible Exposure Report

### Product Information

|                              |  |
|------------------------------|--|
| EUT                          | : 4K ATV Stick   |
| Model Number                 | : SN8B6BX(X=A TO Z)  |
| Model Declaration            | : PCB board, structure and internal of these model(s) are the same,<br>: Only models name is different for these models.   |
| Test Model                   | : SN8B6BB  |
| Power Supply                 | : DC 5V by adapter   |
| Hardware version             | : SMB.189.04   |
| Software version             | : 8.0.0  |
| Bluetooth Version            | : V4.1   |
| Channel Number               | : 79 Channels for Bluetooth V3.0(DSS)<br>: 40 Channels for Bluetooth V4.1(DTS)   |
| Modulation Technology        | : GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V3.0(DSS)<br>: GFSK for Bluetooth V4.1(DTS)   |
| Data Rates                   | : Bluetooth V3.0(DSS): 1~3Mbps<br>: Bluetooth V4.1(DTS): 1Mbps   |
| WLAN                         | : Supported IEEE 802.11a/b/g/n/ac<br><br>IEEE 802.11b:2412-2462MHz<br>IEEE 802.11g:2412-2462MHz<br>IEEE 802.11n HT20:2412-2462MHz / 5180-5240MHz /<br>5745-5825MHz   |
| WLAN FCC Operation Frequency | : IEEE 802.11n HT40:2422-2452MHz / 5190-5230MHz /<br>5755-5795MHz<br>IEEE 802.11a: 5180-5240MHz / 5745-5825MHz<br>IEEE 802.11ac VHT20: 5180-5240MHz / 5745-5825MHz<br>IEEE 802.11ac VHT40: 5190-5230MHz / 5755-5795MHz<br>IEEE 802.11ac VHT80: 5210MHz / 5775MHz   |
| WLAN Channel Number          | : 11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20)<br>7 Channels for 2422-2452MHz(IEEE 802.11n HT40)<br>4 Channels for 5180-5240MHz (IEEE 802.11a/ac VHT20/n HT20)<br>2 Channels for 5190-5230MHz (IEEE 802.11ac VHT40/n HT40)<br>1 Channels for 5210MHz (IEEE 802.11ac VHT80)<br>5 Channels for 5745-5825MHz(IEEE 802.11a/ac VHT20/n HT20)<br>2 Channels for 5755-5795MHz(IEEE 802.11ac VHT40/n HT40)<br>1 Channels for 5775MHz(IEEE 802.11ac VHT80) |
| WLAN Modulation Technology   | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)   |
| Antenna Type And Gain        | : Three Antennas:<br>Internal Antenna 0:<br>1.4dBi(Max.), for TX/RX (WLAN 2.4G Band),<br>2.0 dBi(Max.), for TX/RX (WLAN 5G Band)<br>Internal Antenna 1:<br>1.1dBi(Max.), for TX/RX (WLAN 2.4G Band),<br>2.58 dBi(Max.), for TX/RX (WLAN 5G Band)<br>Internal Antenna 2: 1.76dBi(Max.), for TX/RX (Bluetooth),<br>802.11n/ac support 2T2R.[Antenna 0 and Antenna 1]   |

Directional Gain : 4.26 dBi for MIMO(2.4G Band)  
: 5.31 dBi for MIMO(5G Band)

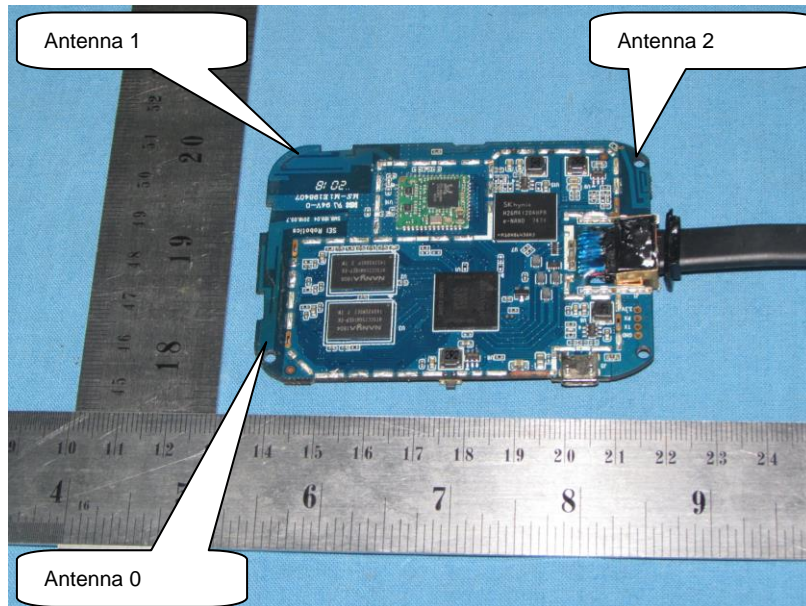

## 2. Evaluation Method

Systems operating under the provisions of FCC 47 CFR section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as mobile device whereby a distance of 0.2m normally can be maintained between the user and the device, and below RF Permissible Exposure limit shall comply with.

In accordance with KDB447498D01 for Simultaneous transmission MPE test exclusion applies when the sum of the MPE ratios for all simultaneous transmitting antennas incorporated in a host device, based on the calculated/estimated, numerically modelled or measured field strengths or power density, is  $\leq 1.0$ . The MPE ratio of each antenna is determined at the minimum test separation distance required by the operating configurations and exposure conditions of the host device, according to the ratio of field strengths or power density to MPE limit, at the test frequency. Either the maximum peak or spatially averaged results from measurements or numerical simulations may be used to determine the MPE ratios. Spatial averaging does not apply when MPE is estimated using simple calculations based on far-field plane-wave equivalent conditions. The antenna installation and operating requirements for the host device must meet the minimum test separation distances required by all antennas, in both standalone and simultaneous transmission operations, to satisfy compliance.

## 3. Limit

### 3.1 Refer evaluation method

[ANSI C95.1-1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 447498 D01 General 1 RF Exposure Guidance v06](#): Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

[FCC CFR 47 part 1.1310](#): Radiofrequency radiation exposure limits.

[FCC CFR 47 part 2.1091](#): Radiofrequency radiation exposure evaluation: mobile devices

### 3.2 Limit

#### Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

| Frequency Range(MHz)                        | Electric Field Strength(V/m) | Magnetic Field Strength(A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minute) |
|---|------------------------------|------------------------------|-------------------------------------|-------------------------|
| Limits for Occupational/Controlled Exposure |                              |                              |                                     |                         |
| 0.3 – 3.0                                   | 614                          | 1.63                         | (100) *                             | 6                       |
| 3.0 – 30                                    | 1842/f                       | 4.89/f                       | (900/f <sup>2</sup> )*              | 6                       |
| 30 – 300                                    | 61.4                         | 0.163                        | 1.0                                 | 6                       |
| 300 – 1500                                  | /                            | /                            | f/300                               | 6                       |
| 1500 – 100,000                              | /                            | /                            | 5                                   | 6                       |

#### Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

| Frequency Range(MHz)                        | Electric Field Strength(V/m) | Magnetic Field Strength(A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minute) |
|---|------------------------------|------------------------------|-------------------------------------|-------------------------|
| Limits for Occupational/Controlled Exposure |                              |                              |                                     |                         |
| 0.3 – 3.0                                   | 614                          | 1.63                         | (100) *                             | 30                      |
| 3.0 – 30                                    | 824/f                        | 2.19/f                       | (180/f <sup>2</sup> )*              | 30                      |
| 30 – 300                                    | 27.5                         | 0.073                        | 0.2                                 | 30                      |
| 300 – 1500                                  | /                            | /                            | f/1500                              | 30                      |
| 1500 – 100,000                              | /                            | /                            | 1.0                                 | 30                      |

F=frequency in MHz

\*=Plane-wave equivalent power density

### 4. MPE Calculation Method

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S=PG/4\pi R^2$$

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

### 5. Antenna Information

This Product can only use antennas certificated as follows provided by manufacturer;

| Internal Identification | Antenna Description | Antenna type and antenna number | Operate frequency band | Maximum antenna gain |
|-------------------------|---------------------|---------------------------------|------------------------|----------------------|
| Antenna 0               | WiFi Antenna        | Internal Antenna                | 2400 MHz – 2500 MHz    | 1.40 dBi             |
|                         |                     |                                 | 5150 MHz – 5900 MHz    | 2.00 dBi             |
| Antenna 1               | WiFi Antenna        | Internal Antenna                | 2400 MHz – 2500 MHz    | 1.10 dBi             |
|                         |                     |                                 | 5150 MHz – 5900 MHz    | 2.58 dBi             |
| Antenna 2               | BT Antenna          | Internal Antenna                | 2400 MHz – 2500 MHz    | 1.76 dBi             |

### 6. Conducted Power

2.4G Band:

Bluetooth(BDR+EDR)

| Test Mode      | Channel | Frequency (MHz) | Measured Peak Output Power (dBm) |
|----------------|---------|-----------------|----------------------------------|
| GFSK           | 00      | 2402            | 2.88                             |
|                | 39      | 2441            | 3.17                             |
|                | 78      | 2480            | 3.06                             |
| $\pi/4$ -DQPSK | 00      | 2402            | 2.28                             |
|                | 39      | 2441            | 2.57                             |
|                | 78      | 2480            | 2.76                             |
| 8-DPSK         | 00      | 2402            | 2.47                             |
|                | 39      | 2441            | 2.89                             |
|                | 78      | 2480            | 2.76                             |

## Bluetooth(BLE)

| Test Mode | Channel | Frequency (MHz) | Measured Peak Output Power (dBm) |
|-----------|---------|-----------------|----------------------------------|
| GFSK      | 00      | 2402            | -0.59                            |
|           | 39      | 2441            | -1.03                            |
|           | 78      | 2480            | -1.24                            |

## WiFi 2.4GHz Band

| Test Mode         | Channel | Frequency (MHz) | Measured Peak Output Power (dBm) |           |       |
|-------------------|---------|-----------------|----------------------------------|-----------|-------|
|                   |         |                 | Antenna 0                        | Antenna 1 | Sum   |
| IEEE 802.11b      | 1       | 2412            | 13.66                            | 15.29     | -/-   |
|                   | 6       | 2437            | 13.5                             | 14.66     | -/-   |
|                   | 11      | 2462            | 13.8                             | 14.76     | -/-   |
| IEEE 802.11g      | 1       | 2412            | 15.59                            | 16.74     | -/-   |
|                   | 6       | 2437            | 14.96                            | 16.29     | -/-   |
|                   | 11      | 2462            | 15.6                             | 16.00     | -/-   |
| IEEE 802.11n HT20 | 1       | 2412            | 16.49                            | 17.20     | 19.87 |
|                   | 6       | 2437            | 15.92                            | 16.75     | 19.37 |
|                   | 11      | 2462            | 16.38                            | 16.44     | 19.42 |
| IEEE 802.11n HT40 | 3       | 2422            | 14.94                            | 15.50     | 18.24 |
|                   | 6       | 2437            | 14.65                            | 16.14     | 18.47 |
|                   | 9       | 2452            | 14.85                            | 16.46     | 18.74 |

5G Band  
UNII-1 Band

| Test Mode           | Channel | Frequency (MHz) | Measured Conducted Average Power (dBm) |           |       |
|---------------------|---------|-----------------|--|-----------|-------|
|                     |         |                 | Antenna 0                              | Antenna 1 | Sum   |
| IEEE 802.11a        | 36      | 5180            | 9.83                                   | 9.93      | /     |
|                     | 40      | 5200            | 8.94                                   | 9.28      | /     |
|                     | 48      | 5240            | 9.57                                   | 9.63      | /     |
| IEEE 802.11n HT20   | 36      | 5180            | 9.11                                   | 9.97      | 12.57 |
|                     | 40      | 5200            | 8.77                                   | 9.24      | 12.02 |
|                     | 48      | 5240            | 9.19                                   | 9.60      | 12.41 |
| IEEE 802.11ac VHT20 | 36      | 5180            | 8.93                                   | 9.48      | 12.22 |
|                     | 40      | 5200            | 9.36                                   | 9.56      | 12.47 |
|                     | 48      | 5240            | 8.74                                   | 8.76      | 11.76 |
| IEEE 802.11n HT40   | 38      | 5190            | 8.69                                   | 8.70      | 11.71 |
|                     | 46      | 5230            | 8.59                                   | 8.65      | 11.63 |
| IEEE 802.11ac VHT40 | 38      | 5190            | 8.23                                   | 8.27      | 11.26 |
|                     | 46      | 5230            | 9.00                                   | 8.49      | 11.76 |
| IEEE 802.11ac VHT80 | 42      | 5210            | 9.65                                   | 9.01      | 12.35 |

## UNII-3 Band

| Test Mode           | Channel | Frequency (MHz) | Measured Conducted Average Power (dBm) |           |       |
|---------------------|---------|-----------------|--|-----------|-------|
|                     |         |                 | Antenna 0                              | Antenna 1 | Sum   |
| IEEE 802.11a        | 149     | 5745            | 10.79                                  | 10.68     | /     |
|                     | 157     | 5785            | 11.42                                  | 11.35     | /     |
|                     | 165     | 5825            | 11.96                                  | 12.11     | /     |
| IEEE 802.11n HT20   | 149     | 5745            | 10.60                                  | 10.37     | 13.50 |
|                     | 157     | 5785            | 11.19                                  | 10.93     | 14.07 |
|                     | 165     | 5825            | 11.87                                  | 11.93     | 14.91 |
| IEEE 802.11ac VHT20 | 149     | 5745            | 9.54                                   | 9.71      | 12.64 |
|                     | 157     | 5785            | 9.29                                   | 9.59      | 12.45 |
|                     | 165     | 5825            | 9.64                                   | 9.65      | 12.66 |
| IEEE 802.11n HT40   | 151     | 5755            | 9.30                                   | 10.16     | 12.76 |
|                     | 159     | 5795            | 10.66                                  | 10.39     | 13.54 |
| IEEE 802.11ac VHT40 | 151     | 5755            | 9.95                                   | 9.97      | 12.97 |
|                     | 159     | 5795            | 10.39                                  | 10.43     | 13.42 |
| IEEE 802.11ac VHT80 | 155     | 5775            | 10.83                                  | 10.80     | 13.83 |

## 7. Manufacturing Tolerance

## Bluetooth(BDR+EDR)

| GFSK (Peak)           |           |            |            |
|-----------------------|-----------|------------|------------|
| Channel               | Channel 0 | Channel 39 | Channel 78 |
| Target (dBm)          | 2.5       | 2.5        | 2.5        |
| Tolerance $\pm$ (dB)  | 1.0       | 1.0        | 1.0        |
| $\pi/4$ -DQPSK (Peak) |           |            |            |
| Channel               | Channel 0 | Channel 39 | Channel 78 |
| Target (dBm)          | 2.5       | 2.5        | 2.5        |
| Tolerance $\pm$ (dB)  | 1.0       | 1.0        | 1.0        |
| 8-DPSK (Peak)         |           |            |            |
| Channel               | Channel 0 | Channel 39 | Channel 78 |
| Target (dBm)          | 2.5       | 2.5        | 2.5        |
| Tolerance $\pm$ (dB)  | 1.0       | 1.0        | 1.0        |

Bluetooth(BLE)

| GFSK (Peak)     |           |            |            |
|-----------------|-----------|------------|------------|
| Channel         | Channel 0 | Channel 39 | Channel 78 |
| Target (dBm)    | -1.0      | -1.0       | -1.0       |
| Tolerance ±(dB) | 1.0       | 1.0        | 1.0        |

WiFi 2.4GHz Band – Antenna 0

| IEEE 802.11b (Peak)      |           |           |            |
|--------------------------|-----------|-----------|------------|
| Channel                  | Channel 1 | Channel 6 | Channel 11 |
| Target (dBm)             | 13.5      | 13.5      | 13.5       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |
| IEEE 802.11g (Peak)      |           |           |            |
| Channel                  | Channel 1 | Channel 6 | Channel 11 |
| Target (dBm)             | 15.0      | 15.0      | 15.0       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |
| IEEE 802.11n HT20 (Peak) |           |           |            |
| Channel                  | Channel 1 | Channel 6 | Channel 11 |
| Target (dBm)             | 16.0      | 16.0      | 16.0       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |
| IEEE 802.11n HT40 (Peak) |           |           |            |
| Channel                  | Channel 3 | Channel 6 | Channel 9  |
| Target (dBm)             | 14.5      | 14.5      | 14.5       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |

WiFi 2.4GHz Band – Antenna 1

| IEEE 802.11b (Peak)      |           |           |            |
|--------------------------|-----------|-----------|------------|
| Channel                  | Channel 1 | Channel 6 | Channel 11 |
| Target (dBm)             | 15.0      | 15.0      | 15.0       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |
| IEEE 802.11g (Peak)      |           |           |            |
| Channel                  | Channel 1 | Channel 6 | Channel 11 |
| Target (dBm)             | 16.0      | 16.0      | 16.0       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |
| IEEE 802.11n HT20 (Peak) |           |           |            |
| Channel                  | Channel 1 | Channel 6 | Channel 11 |
| Target (dBm)             | 16.5      | 16.5      | 16.5       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |
| IEEE 802.11n HT40 (Peak) |           |           |            |
| Channel                  | Channel 3 | Channel 6 | Channel 9  |
| Target (dBm)             | 16.0      | 16.0      | 16.0       |
| Tolerance ±(dB)          | 1.0       | 1.0       | 1.0        |

UNII-1 Band – Antenna 0

| IEEE 802.11a (Maximum)        |            |            |            |
|-------------------------------|------------|------------|------------|
| Channel                       | Channel 36 | Channel 40 | Channel 48 |
| Target (dBm)                  | 9.5        | 9.5        | 9.5        |
| Tolerance ±(dB)               | 1.0        | 1.0        | 1.0        |
| IEEE 802.11n HT20 (Maximum)   |            |            |            |
| Channel                       | Channel 36 | Channel 40 | Channel 48 |
| Target (dBm)                  | 9.5        | 9.5        | 9.5        |
| Tolerance ±(dB)               | 1.0        | 1.0        | 1.0        |
| IEEE 802.11ac VHT20 (Maximum) |            |            |            |
| Channel                       | Channel 36 | Channel 40 | Channel 48 |
| Target (dBm)                  | 9.5        | 9.5        | 9.5        |
| Tolerance ±(dB)               | 1.0        | 1.0        | 1.0        |
| IEEE 802.11n HT40 (Maximum)   |            |            |            |
| Channel                       | Channel 38 | Channel 46 | --         |
| Target (dBm)                  | 8.5        | 8.5        | --         |
| Tolerance ±(dB)               | 1.0        | 1.0        | --         |
| IEEE 802.11ac VHT40 (Maximum) |            |            |            |
| Channel                       | Channel 38 | Channel 46 | --         |
| Target (dBm)                  | 8.5        | 8.5        | --         |
| Tolerance ±(dB)               | 1.0        | 1.0        | --         |
| IEEE 802.11ac VHT80 (Maximum) |            |            |            |
| Channel                       | Channel 42 | --         | --         |
| Target (dBm)                  | 9.5        | --         | --         |
| Tolerance ±(dB)               | 1.0        | --         | --         |

UNII-1 Band – Antenna 1

| IEEE 802.11a (Maximum)        |            |            |            |
|-------------------------------|------------|------------|------------|
| Channel                       | Channel 36 | Channel 40 | Channel 48 |
| Target (dBm)                  | 9.5        | 9.5        | 9.5        |
| Tolerance ±(dB)               | 1.0        | 1.0        | 1.0        |
| IEEE 802.11n HT20 (Maximum)   |            |            |            |
| Channel                       | Channel 36 | Channel 40 | Channel 48 |
| Target (dBm)                  | 9.5        | 9.5        | 9.5        |
| Tolerance ±(dB)               | 1.0        | 1.0        | 1.0        |
| IEEE 802.11ac VHT20 (Maximum) |            |            |            |
| Channel                       | Channel 36 | Channel 40 | Channel 48 |
| Target (dBm)                  | 9.5        | 9.5        | 9.5        |
| Tolerance ±(dB)               | 1.0        | 1.0        | 1.0        |
| IEEE 802.11n HT40 (Maximum)   |            |            |            |
| Channel                       | Channel 38 | Channel 46 | --         |
| Target (dBm)                  | 8.5        | 8.5        | --         |
| Tolerance ±(dB)               | 1.0        | 1.0        | --         |
| IEEE 802.11ac VHT40 (Maximum) |            |            |            |
| Channel                       | Channel 38 | Channel 46 | --         |
| Target (dBm)                  | 8.5        | 8.5        | --         |
| Tolerance ±(dB)               | 1.0        | 1.0        | --         |
| IEEE 802.11ac VHT80 (Maximum) |            |            |            |
| Channel                       | Channel 42 | --         | --         |
| Target (dBm)                  | 9.5        | --         | --         |
| Tolerance ±(dB)               | 1.0        | --         | --         |

## UNII-3 Band – Antenna 0

| IEEE 802.11a (Maximum)        |             |             |             |
|-------------------------------|-------------|-------------|-------------|
| Channel                       | Channel 149 | Channel 157 | Channel 165 |
| Target (dBm)                  | 11.5        | 11.5        | 11.5        |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | 1.0         |
| IEEE 802.11n HT20 (Maximum)   |             |             |             |
| Channel                       | Channel 149 | Channel 157 | Channel 165 |
| Target (dBm)                  | 11.5        | 11.5        | 11.5        |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | 1.0         |
| IEEE 802.11ac VHT20 (Maximum) |             |             |             |
| Channel                       | Channel 149 | Channel 157 | Channel 165 |
| Target (dBm)                  | 10.0        | 10.0        | 10.0        |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | 1.0         |
| IEEE 802.11n HT40 (Maximum)   |             |             |             |
| Channel                       | Channel 151 | Channel 159 | --          |
| Target (dBm)                  | 10.0        | 10.0        | --          |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | --          |
| IEEE 802.11ac VHT40 (Maximum) |             |             |             |
| Channel                       | Channel 151 | Channel 159 | --          |
| Target (dBm)                  | 10.0        | 10.0        | --          |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | --          |
| IEEE 802.11ac VHT80 (Maximum) |             |             |             |
| Channel                       | Channel 155 | --          | --          |
| Target (dBm)                  | 10.5        | --          | --          |
| Tolerance $\pm$ (dB)          | 1.0         | --          | --          |

## UNII-3 Band – Antenna 1

| IEEE 802.11a (Maximum)        |             |             |             |
|-------------------------------|-------------|-------------|-------------|
| Channel                       | Channel 149 | Channel 157 | Channel 165 |
| Target (dBm)                  | 11.5        | 11.5        | 11.5        |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | 1.0         |
| IEEE 802.11n HT20 (Maximum)   |             |             |             |
| Channel                       | Channel 149 | Channel 157 | Channel 165 |
| Target (dBm)                  | 11.5        | 11.5        | 11.5        |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | 1.0         |
| IEEE 802.11ac VHT20 (Maximum) |             |             |             |
| Channel                       | Channel 149 | Channel 157 | Channel 165 |
| Target (dBm)                  | 10.0        | 10.0        | 10.0        |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | 1.0         |
| IEEE 802.11n HT40 (Maximum)   |             |             |             |
| Channel                       | Channel 151 | Channel 159 | --          |
| Target (dBm)                  | 10.0        | 10.0        | --          |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | --          |
| IEEE 802.11ac VHT40 (Maximum) |             |             |             |
| Channel                       | Channel 151 | Channel 159 | --          |
| Target (dBm)                  | 10.0        | 10.0        | --          |
| Tolerance $\pm$ (dB)          | 1.0         | 1.0         | --          |
| IEEE 802.11ac VHT80 (Maximum) |             |             |             |
| Channel                       | Channel 155 | --          | --          |
| Target (dBm)                  | 10.5        | --          | --          |
| Tolerance $\pm$ (dB)          | 1.0         | --          | --          |



## 8. Measurement Results

### 8.1 Standalone MPE

As declared by the Applicant, the EUT is a wireless device used in a fix application, at least 20 cm from any body part of the user or nearby persons; from the maximum EUT RF output power, the minimum separation distance,  $r = 20\text{cm}$ , as well as the gain of the used antenna refer to antenna information, the RF power density can be obtained.

#### Bluetooth(BDR+EDR)

| Modulation Type | Output power |        | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE ( $\text{mW}/\text{cm}^2$ ) | MPE Limits ( $\text{mW}/\text{cm}^2$ ) |
|-----------------|--------------|--------|--------------------|-----------------------|------------|---------------------------------|--|
|                 | dBm          | mW     |                    |                       |            |                                 |  |
| GFSK            | 3.50         | 2.2387 | 1.76               | 1.4997                | 100%       | 0.0007                          | 1.0000                                 |
| $\pi/4$ -DQPSK  | 3.50         | 2.2387 | 1.76               | 1.4997                | 100%       | 0.0007                          | 1.0000                                 |
| 8-DPSK          | 3.50         | 2.2387 | 1.76               | 1.4997                | 100%       | 0.0007                          | 1.0000                                 |

#### Bluetooth(BLE)

| Modulation Type | Output power |        | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE ( $\text{mW}/\text{cm}^2$ ) | MPE Limits ( $\text{mW}/\text{cm}^2$ ) |
|-----------------|--------------|--------|--------------------|-----------------------|------------|---------------------------------|--|
|                 | dBm          | mW     |                    |                       |            |                                 |  |
| GFSK            | 0.00         | 1.0000 | 1.76               | 1.4997                | 100%       | 0.0003                          | 1.0000                                 |

#### WiFi 2.4GHz Band – Ant 0

| Modulation Type   | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE ( $\text{mW}/\text{cm}^2$ ) | MPE Limits ( $\text{mW}/\text{cm}^2$ ) |
|-------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------------|--|
|                   | dBm          | mW      |                    |                       |            |                                 |  |
| IEEE 802.11b      | 14.50        | 28.1838 | 1.40               | 1.3804                | 100%       | 0.0077                          | 1.0000                                 |
| IEEE 802.11g      | 16.00        | 39.8107 | 1.40               | 1.3804                | 100%       | 0.0109                          | 1.0000                                 |
| IEEE 802.11n HT20 | 17.00        | 50.1187 | 1.40               | 1.3804                | 100%       | 0.0138                          | 1.0000                                 |
| IEEE 802.11n HT40 | 15.50        | 35.4813 | 1.40               | 1.3804                | 100%       | 0.0097                          | 1.0000                                 |

#### WiFi 2.4GHz Band – Ant 1

| Modulation Type   | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE ( $\text{mW}/\text{cm}^2$ ) | MPE Limits ( $\text{mW}/\text{cm}^2$ ) |
|-------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------------|--|
|                   | dBm          | mW      |                    |                       |            |                                 |  |
| IEEE 802.11b      | 16.00        | 39.8107 | 1.10               | 1.2882                | 100%       | 0.0102                          | 1.0000                                 |
| IEEE 802.11g      | 17.00        | 50.1187 | 1.10               | 1.2882                | 100%       | 0.0129                          | 1.0000                                 |
| IEEE 802.11n HT20 | 17.50        | 56.2341 | 1.10               | 1.2882                | 100%       | 0.0144                          | 1.0000                                 |
| IEEE 802.11n HT40 | 17.00        | 50.1187 | 1.10               | 1.2882                | 100%       | 0.0129                          | 1.0000                                 |

## UNII-1 Band – Ant 0

| Modulation Type     | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|---------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------|----------------------------------|
|                     | dBm          | mW      |                    |                       |            |                           |                                  |
| IEEE 802.11a        | 10.50        | 11.2202 | 2.00               | 1.5849                | 100%       | 0.0035                    | 1.0000                           |
| IEEE 802.11n HT20   | 10.50        | 11.2202 | 2.00               | 1.5849                | 100%       | 0.0035                    | 1.0000                           |
| IEEE 802.11ac VHT20 | 10.50        | 11.2202 | 2.00               | 1.5849                | 100%       | 0.0035                    | 1.0000                           |
| IEEE 802.11n HT40   | 9.50         | 8.9125  | 2.00               | 1.5849                | 100%       | 0.0028                    | 1.0000                           |
| IEEE 802.11ac VHT40 | 9.50         | 8.9125  | 2.00               | 1.5849                | 100%       | 0.0028                    | 1.0000                           |
| IEEE 802.11ac VHT80 | 10.50        | 11.2202 | 2.00               | 1.5849                | 100%       | 0.0035                    | 1.0000                           |

## UNII-1 Band – Ant 1

| Modulation Type     | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|---------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------|----------------------------------|
|                     | dBm          | mW      |                    |                       |            |                           |                                  |
| IEEE 802.11a        | 10.50        | 11.2202 | 2.58               | 1.8113                | 100%       | 0.0040                    | 1.0000                           |
| IEEE 802.11n HT20   | 10.50        | 11.2202 | 2.58               | 1.8113                | 100%       | 0.0040                    | 1.0000                           |
| IEEE 802.11ac VHT20 | 10.50        | 11.2202 | 2.58               | 1.8113                | 100%       | 0.0040                    | 1.0000                           |
| IEEE 802.11n HT40   | 9.50         | 8.9125  | 2.58               | 1.8113                | 100%       | 0.0032                    | 1.0000                           |
| IEEE 802.11ac VHT40 | 9.50         | 8.9125  | 2.58               | 1.8113                | 100%       | 0.0032                    | 1.0000                           |
| IEEE 802.11ac VHT80 | 10.50        | 11.2202 | 2.58               | 1.8113                | 100%       | 0.0040                    | 1.0000                           |

## UNII-3 Band – Ant 0

| Modulation Type     | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|---------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------|----------------------------------|
|                     | dBm          | mW      |                    |                       |            |                           |                                  |
| IEEE 802.11a        | 12.50        | 17.7828 | 2.00               | 1.5849                | 100%       | 0.0056                    | 1.0000                           |
| IEEE 802.11n HT20   | 12.50        | 17.7828 | 2.00               | 1.5849                | 100%       | 0.0056                    | 1.0000                           |
| IEEE 802.11ac VHT20 | 11.00        | 12.5893 | 2.58               | 1.8113                | 100%       | 0.0045                    | 1.0000                           |
| IEEE 802.11n HT40   | 11.00        | 12.5893 | 2.00               | 1.5849                | 100%       | 0.0040                    | 1.0000                           |
| IEEE 802.11ac VHT40 | 11.00        | 12.5893 | 2.00               | 1.5849                | 100%       | 0.0040                    | 1.0000                           |
| IEEE 802.11ac VHT80 | 11.50        | 14.1254 | 2.00               | 1.5849                | 100%       | 0.0045                    | 1.0000                           |

## UNII-3 Band – Ant 1

| Modulation Type     | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|---------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------|----------------------------------|
|                     | dBm          | mW      |                    |                       |            |                           |                                  |
| IEEE 802.11a        | 12.50        | 17.7828 | 2.58               | 1.8113                | 100%       | 0.0064                    | 1.0000                           |
| IEEE 802.11n HT20   | 12.50        | 17.7828 | 2.58               | 1.8113                | 100%       | 0.0064                    | 1.0000                           |
| IEEE 802.11ac VHT20 | 11.00        | 12.5893 | 2.58               | 1.8113                | 100%       | 0.0045                    | 1.0000                           |
| IEEE 802.11n HT40   | 11.00        | 12.5893 | 2.58               | 1.8113                | 100%       | 0.0045                    | 1.0000                           |
| IEEE 802.11ac VHT40 | 11.00        | 12.5893 | 2.58               | 1.8113                | 100%       | 0.0045                    | 1.0000                           |
| IEEE 802.11ac VHT80 | 11.50        | 14.1254 | 2.58               | 1.8113                | 100%       | 0.0051                    | 1.0000                           |

**Remark:**

1. Output power including tune-up tolerance;
2. MPE evaluate distance is 20cm from user manual provide by manufacturer;

**8.2 Simultaneous Transmission MPE**

The sample support 802.11n/ac 2T2R, need consider simultaneous transmission;

## WiFi 2.4GHz Band

| Modulation Type   | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|-------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------|----------------------------------|
|                   | dBm          | mW      |                    |                       |            |                           |                                  |
| IEEE 802.11n HT20 | 17.50        | 56.2341 | 4.26               | 2.6669                | 100%       | 0.0299                    | 1.0000                           |
| IEEE 802.11n HT40 | 17.00        | 50.1187 | 4.26               | 2.6669                | 100%       | 0.0266                    | 1.0000                           |

## UNII-1 Band

| Modulation Type     | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|---------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------|----------------------------------|
|                     | dBm          | mW      |                    |                       |            |                           |                                  |
| IEEE 802.11n HT20   | 10.50        | 11.2202 | 5.31               | 3.3963                | 100%       | 0.0076                    | 1.0000                           |
| IEEE 802.11ac VHT20 | 10.50        | 11.2202 | 5.31               | 3.3963                | 100%       | 0.0076                    | 1.0000                           |
| IEEE 802.11n HT40   | 9.50         | 8.9125  | 5.31               | 3.3963                | 100%       | 0.0060                    | 1.0000                           |
| IEEE 802.11ac VHT40 | 9.50         | 8.9125  | 5.31               | 3.3963                | 100%       | 0.0060                    | 1.0000                           |
| IEEE 802.11ac VHT80 | 10.50        | 11.2202 | 5.31               | 3.3963                | 100%       | 0.0076                    | 1.0000                           |

## UNII-3 Band

| Modulation Type     | Output power |         | Antenna Gain (dBi) | Antenna Gain (linear) | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|---------------------|--------------|---------|--------------------|-----------------------|------------|---------------------------|----------------------------------|
|                     | dBm          | mW      |                    |                       |            |                           |                                  |
| IEEE 802.11n HT20   | 12.50        | 17.7828 | 5.31               | 3.3963                | 100%       | 0.0120                    | 1.0000                           |
| IEEE 802.11ac VHT20 | 11.00        | 12.5893 | 5.31               | 3.3963                | 100%       | 0.0085                    | 1.0000                           |
| IEEE 802.11n HT40   | 12.50        | 17.7828 | 5.31               | 3.3963                | 100%       | 0.0120                    | 1.0000                           |
| IEEE 802.11ac VHT40 | 11.00        | 12.5893 | 5.31               | 3.3963                | 100%       | 0.0085                    | 1.0000                           |
| IEEE 802.11ac VHT80 | 11.00        | 12.5893 | 5.31               | 3.3963                | 100%       | 0.0085                    | 1.0000                           |

The Bluetooth can work Simultaneous with Wlan 2.4GHz Band , need consider simultaneous transmission;

| Modulation Type                                  | Output power and Antenna Gain [Bluetooth] |                   | Output power and Antenna [Wlan Ant.0] |                   | Output power and Antenna [Wlan Ant.1] |                   | Duty Cycle | MPE (mW/cm <sup>2</sup> ) | MPE Limits (mW/cm <sup>2</sup> ) |
|--|---|-------------------|---------------------------------------|-------------------|---------------------------------------|-------------------|------------|---------------------------|----------------------------------|
|  | mW  | Ant. Gain (Liner) | mW                                    | Ant. Gain (Liner) | mW                                    | Ant. Gain (Liner) |            |                           |                                  |
| Bluetooth(GFSK) and IEEE 802.11b                 | 2.2387                                    | 1.4997            | 28.1838                               | 1.3804            | --                                    | --                | 100%       | 0.0084                    | 1.0000                           |
| Bluetooth( $\pi/4$ -DQPSK) and 802.11b           | 2.2387                                    | 1.4997            | 28.1838                               | 1.3804            | --                                    | --                | 100%       | 0.0084                    | 1.0000                           |
| Bluetooth(8-DPSK) and 802.11b                    | 2.2387                                    | 1.4997            | 28.1838                               | 1.3804            | --                                    | --                | 100%       | 0.0084                    | 1.0000                           |
| Bluetooth(GFSK) and IEEE 802.11b                 | 2.2387                                    | 1.4997            | --                                    | --                | 39.8107                               | 1.2882            | 100%       | 0.0109                    | 1.0000                           |
| Bluetooth( $\pi/4$ -DQPSK) and 802.11b           | 2.2387                                    | 1.4997            | --                                    | --                | 39.8107                               | 1.2882            | 100%       | 0.0109                    | 1.0000                           |
| Bluetooth(8-DPSK) and 802.11b                    | 2.2387                                    | 1.4997            | --                                    | --                | 39.8107                               | 1.2882            | 100%       | 0.0109                    | 1.0000                           |
| Bluetooth(GFSK) and IEEE 802.11g                 | 2.2387                                    | 1.4997            | 39.8107                               | 1.3804            | --                                    | --                | 100%       | 0.0116                    | 1.0000                           |
| Bluetooth( $\pi/4$ -DQPSK) and 802.11g           | 2.2387                                    | 1.4997            | 39.8107                               | 1.3804            | --                                    | --                | 100%       | 0.0116                    | 1.0000                           |
| Bluetooth(8-DPSK) and 802.11g                    | 2.2387                                    | 1.4997            | 39.8107                               | 1.3804            | --                                    | --                | 100%       | 0.0116                    | 1.0000                           |
| Bluetooth(GFSK) and IEEE 802.11g                 | 2.2387                                    | 1.4997            | --                                    | --                | 50.1187                               | 1.2882            | 100%       | 0.0135                    | 1.0000                           |
| Bluetooth( $\pi/4$ -DQPSK) and 802.11g           | 2.2387                                    | 1.4997            | --                                    | --                | 50.1187                               | 1.2882            | 100%       | 0.0135                    | 1.0000                           |
| Bluetooth(8-DPSK) and 802.11g                    | 2.2387                                    | 1.4997            | --                                    | --                | 50.1187                               | 1.2882            | 100%       | 0.0135                    | 1.0000                           |
| Bluetooth(GFSK) and IEEE 802.11n HT20            | 2.2387                                    | 1.4997            | 50.1187                               | 1.3804            | 56.2341                               | 1.2882            | 100%       | 0.0289                    | 1.0000                           |
| Bluetooth( $\pi/4$ -DQPSK) and IEEE 802.11n HT20 | 2.2387                                    | 1.4997            | 50.1187                               | 1.3804            | 56.2341                               | 1.2882            | 100%       | 0.0289                    | 1.0000                           |
| Bluetooth(8-DPSK) and IEEE 802.11n HT20          | 2.2387                                    | 1.4997            | 50.1187                               | 1.3804            | 56.2341                               | 1.2882            | 100%       | 0.0289                    | 1.0000                           |
| Bluetooth(GFSK) and IEEE 802.11n HT40            | 2.2387                                    | 1.4997            | 35.4813                               | 1.3804            | 50.1187                               | 1.2882            | 100%       | 0.0233                    | 1.0000                           |
| Bluetooth( $\pi/4$ -DQPSK) and IEEE 802.11n HT40 | 2.2387                                    | 1.4997            | 35.4813                               | 1.3804            | 50.1187                               | 1.2882            | 100%       | 0.0233                    | 1.0000                           |
| Bluetooth(8-DPSK) and IEEE 802.11n HT40          | 2.2387                                    | 1.4997            | 35.4813                               | 1.3804            | 50.1187                               | 1.2882            | 100%       | 0.0233                    | 1.0000                           |

**Remark:**

1. Output power including tune-up tolerance;
2. MPE evaluate distance is 20cm from user manual provide by manufacturer;

**9. Conclusion**

The measurement results comply with the FCC Limit per 47 CFR 2.1091 for the uncontrolled RF Exposure of mobile device.

-----THE END OF REPORT-----