



5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz(68.2dBuV/m at 3m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz(105.2dBuV/m at 3m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6(110.8dBuV/m at 3m) dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz(122.2dBuV/m at 3m) at the band edge.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.5.4. Test Setup Layout


For radiated emissions below 30MHz

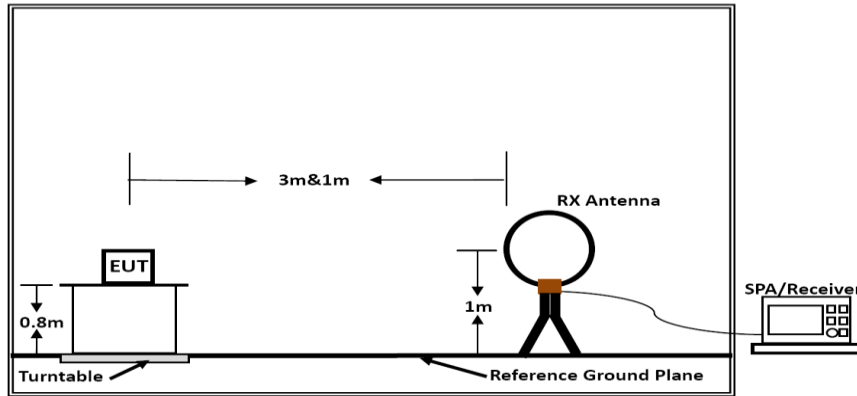

Below 30MHz

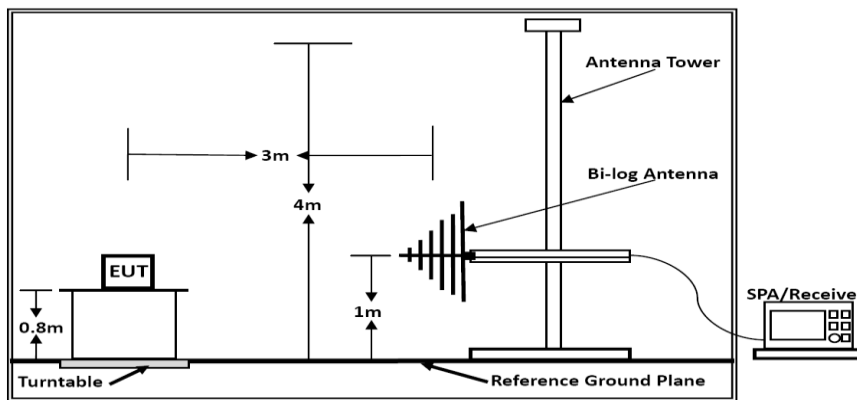

Below 1GHz

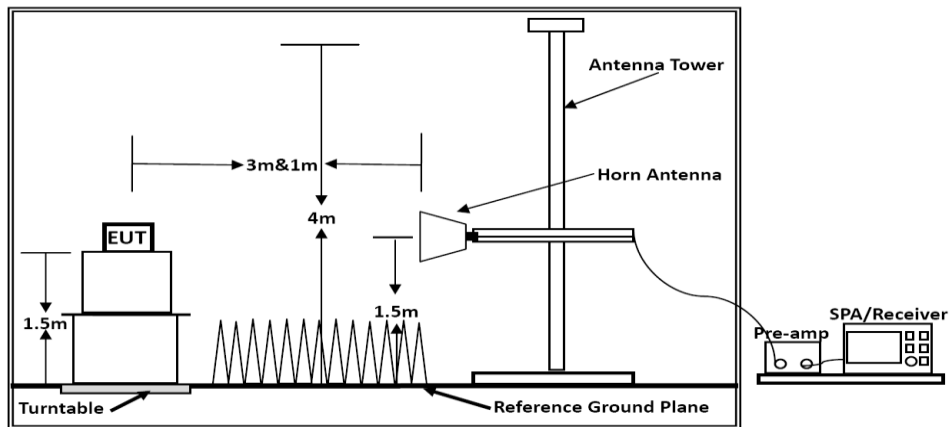

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance } [3\text{m}] / \text{test distance } [1.5\text{m}])$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	24.5°C	Humidity	56.2%
Test Engineer	Gary Qian	Configurations	IEEE 802.11a/n/ac

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


5.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.5°C	Humidity	56.2%
Test Engineer	Gary Qian	Configurations	IEEE 802.11a, 5745MHz

Test result for IEEE 802.11n HT20-5745MHz@Chain 0&Chain 1




Vertical:

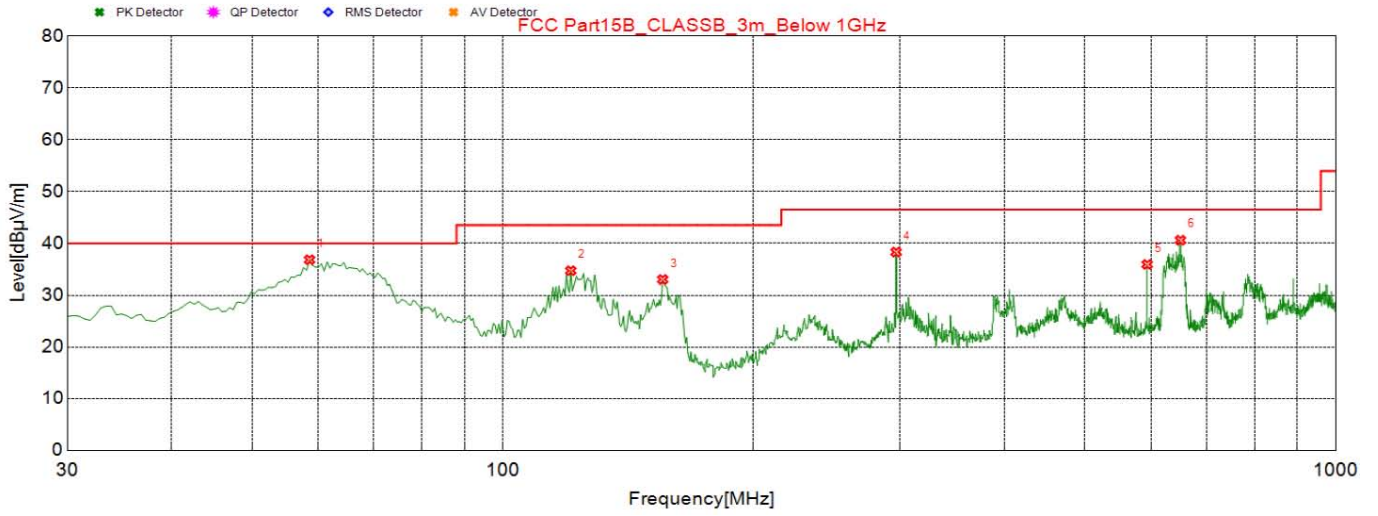

NO.	Freq. [MHz]	Result Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	58.615	36.84	-15.44	40.00	3.16	100	183	Vertical
2	120.695	34.69	-17.74	43.50	8.81	100	7	Vertical
3	155.615	32.97	-18.86	43.50	10.53	100	12	Vertical
4	296.750	38.33	-12.88	46.50	8.17	200	12	Vertical
5	594.055	35.92	-5.74	46.50	10.58	100	112	Vertical
6	651.285	40.63	-4.95	46.50	5.87	100	45	Vertical



Horizontal:

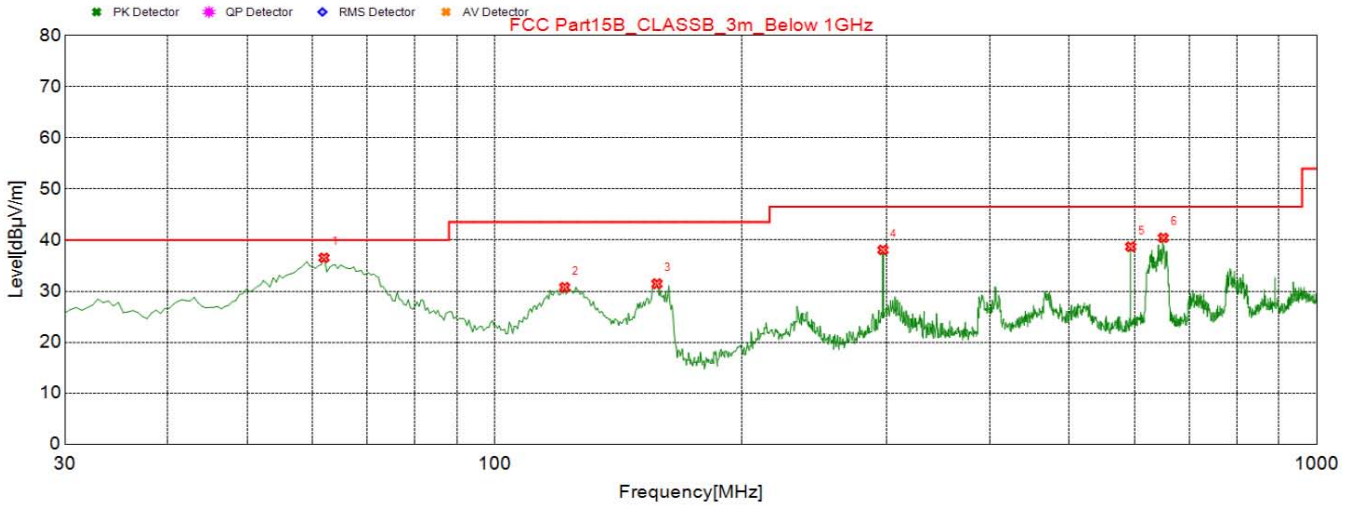

NO.	Freq. [MHz]	Result Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle[°]	Polarity
1	62.010	36.53	-16.16	40.00	3.47	100	161	Vertical
2	121.665	30.77	-17.88	43.50	12.73	100	7	Vertical
3	157.555	31.43	-18.78	43.50	12.07	100	2	Vertical
4	296.750	38.08	-12.88	46.50	8.42	200	213	Vertical
5	594.055	38.71	-5.74	46.50	7.79	100	47	Vertical
6	650.800	40.46	-4.96	46.50	6.04	100	41	Vertical

Note:

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n HT20-5745MHz) @ Chain 0&Chian 1.

Emission level (dBµV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



5.5.8. Results for Radiated Emissions (Above 1GHz)

Remark: Measured all modes and recorded worst case;

IEEE 802.11a/ Antenna Chain 0

Channel 149 / 5745 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.235	57.20	33.23	35.04	3.91	59.30	68.20	-8.90	Peak	Horizontal
17.235	41.54	33.23	35.04	3.91	43.64	54.00	-10.36	Average	Horizontal
17.235	58.99	33.23	35.04	3.91	61.09	68.20	-7.11	Peak	Vertical
17.235	44.84	33.23	35.04	3.91	46.94	54.00	-7.06	Average	Vertical

Channel 157 / 5785 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.355	57.99	33.27	35.15	3.93	60.04	68.20	-8.16	Peak	Horizontal
17.355	41.83	33.27	35.15	3.93	43.88	54.00	-10.12	Average	Horizontal
17.355	56.51	33.27	35.15	3.93	58.56	68.20	-9.64	Peak	Vertical
17.355	40.95	33.27	35.15	3.93	43.00	54.00	-11.00	Average	Vertical

Channel 163 / 5825 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.475	58.06	33.32	35.14	3.97	60.21	68.20	-7.99	Peak	Horizontal
17.475	40.88	33.32	35.14	3.97	43.03	54.00	-10.97	Average	Horizontal
17.475	54.72	33.32	35.14	3.97	56.87	68.20	-11.33	Peak	Vertical
17.475	44.09	33.32	35.14	3.97	46.24	54.00	-7.76	Average	Vertical

*IEEE 802.11n-HT20/Combined Antenna Chain 0 and Antenna Chain 1**Channel 149 / 5745 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.235	57.77	33.23	35.04	3.91	59.87	68.20	-8.33	Peak	Horizontal
17.235	43.56	33.23	35.04	3.91	45.66	54.00	-8.34	Average	Horizontal
17.235	57.14	33.23	35.04	3.91	59.24	68.20	-8.96	Peak	Vertical
17.235	42.63	33.23	35.04	3.91	44.73	54.00	-9.27	Average	Vertical

Channel 157 / 5785 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.355	58.76	33.27	35.15	3.93	60.81	68.20	-7.39	Peak	Horizontal
17.355	42.58	33.27	35.15	3.93	44.63	54.00	-9.37	Average	Horizontal
17.355	58.16	33.27	35.15	3.93	60.21	68.20	-7.99	Peak	Vertical
17.355	40.96	33.27	35.15	3.93	43.01	54.00	-10.99	Average	Vertical

Channel 163 / 5825 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.475	55.69	33.32	35.14	3.97	57.84	68.20	-10.36	Peak	Horizontal
17.475	43.78	33.32	35.14	3.97	45.93	54.00	-8.07	Average	Horizontal
17.475	58.93	33.32	35.14	3.97	61.08	68.20	-7.12	Peak	Vertical
17.475	42.19	33.32	35.14	3.97	44.34	54.00	-9.66	Average	Vertical

*IEEE 802.11ac VHT20/ Combined Antenna Chain 0 and Antenna Chain 1**Channel 149 / 5745 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.235	56.75	33.23	35.04	3.91	58.85	68.20	-9.35	Peak	Horizontal
17.235	39.93	33.23	35.04	3.91	42.03	54.00	-11.97	Average	Horizontal
17.235	56.96	33.23	35.04	3.91	59.06	68.20	-9.14	Peak	Vertical
17.235	40.57	33.23	35.04	3.91	42.67	54.00	-11.33	Average	Vertical

Channel 157 / 5785 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.355	57.56	33.27	35.15	3.93	59.61	68.20	-8.59	Peak	Horizontal
17.355	44.31	33.27	35.15	3.93	46.36	54.00	-7.64	Average	Horizontal
17.355	55.46	33.27	35.15	3.93	57.51	68.20	-10.69	Peak	Vertical
17.355	42.93	33.27	35.15	3.93	44.98	54.00	-9.02	Average	Vertical

Channel 163 / 5825 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.475	58.74	33.32	35.14	3.97	60.89	68.20	-7.31	Peak	Horizontal
17.475	42.23	33.32	35.14	3.97	44.38	54.00	-9.62	Average	Horizontal
17.475	57.09	33.32	35.14	3.97	59.24	68.20	-8.96	Peak	Vertical
17.475	43.95	33.32	35.14	3.97	46.10	54.00	-7.90	Average	Vertical

*IEEE 802.11n HT40 / Antenna Chain 0 and Antenna Chain 1**Channel 151 / 5755 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.265	56.31	33.23	35.04	3.91	58.41	68.20	-9.79	Peak	Horizontal
17.265	44.36	33.23	35.04	3.91	46.46	54.00	-7.54	Average	Horizontal
17.265	57.97	33.23	35.04	3.91	60.07	68.20	-8.13	Peak	Vertical
17.265	42.03	33.23	35.04	3.91	44.13	54.00	-9.87	Average	Vertical

Channel 159 / 5795 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.385	55.74	33.27	35.15	3.93	57.79	68.20	-10.41	Peak	Horizontal
17.385	41.06	33.27	35.15	3.93	43.11	54.00	-10.89	Average	Horizontal
17.385	57.76	33.27	35.15	3.93	59.81	68.20	-8.39	Peak	Vertical
17.385	42.00	33.27	35.15	3.93	44.05	54.00	-9.95	Average	Vertical

*IEEE 802.11ac VHT40 / Antenna Chain 0 and Antenna Chain 1**Channel 151 / 5755 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.265	57.27	33.23	35.04	3.91	59.37	68.20	-8.83	Peak	Horizontal
17.265	41.53	33.23	35.04	3.91	43.63	54.00	-10.37	Average	Horizontal
17.265	58.54	33.23	35.04	3.91	60.64	68.20	-7.56	Peak	Vertical
17.265	44.61	33.23	35.04	3.91	46.71	54.00	-7.29	Average	Vertical

Channel 159 / 5795 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.385	56.23	33.27	35.15	3.93	58.28	68.20	-9.92	Peak	Horizontal
17.385	44.93	33.27	35.15	3.93	46.98	54.00	-7.02	Average	Horizontal
17.385	56.11	33.27	35.15	3.93	58.16	68.20	-10.04	Peak	Vertical
17.385	43.15	33.27	35.15	3.93	45.20	54.00	-8.80	Average	Vertical

*IEEE 802.11ac VHT80 / Antenna Chain 0 and Antenna Chain 1**Channel 155 / 5775 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.325	58.63	33.27	35.15	3.93	60.68	68.20	-7.52	Peak	Horizontal
17.325	41.06	33.27	35.15	3.93	43.11	54.00	-10.89	Average	Horizontal
17.325	56.20	33.27	35.15	3.93	58.25	68.20	-9.95	Peak	Vertical
17.325	42.44	33.27	35.15	3.93	44.49	54.00	-9.51	Average	Vertical

Notes:

1. *Measuring frequencies from 9 KHz ~40 GHz, No emission found between lowest internal used/generated frequencies to 30MHz.*
2. *Radiated emissions measured in frequency range from 9 KHz ~40GHz were made with an instrument using Peak detector mode.*
3. *Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
4. *Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;*

5.6. Power line conducted emissions


5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.6.2 Block Diagram of Test Setup

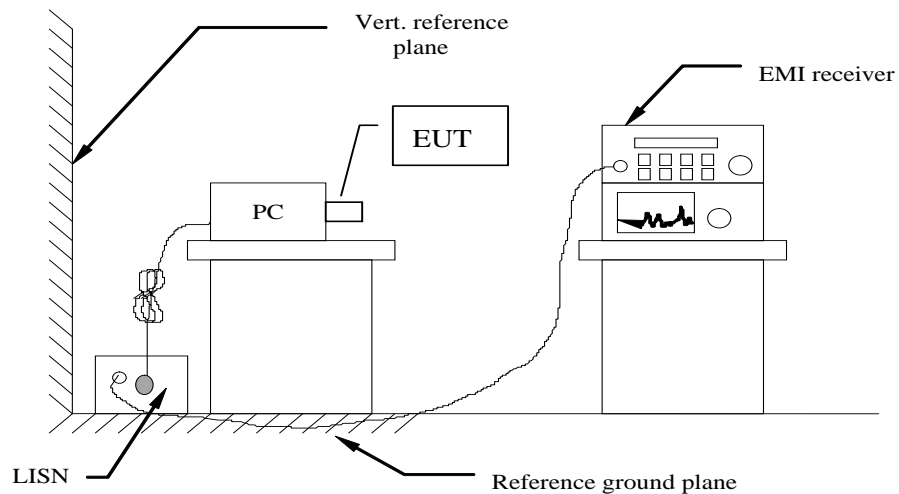

5.6.3 Test Results


PASS.

The test data please refer to following page.



The worst result for IEEE 802.11a-5745MHz @Chain 0


Line

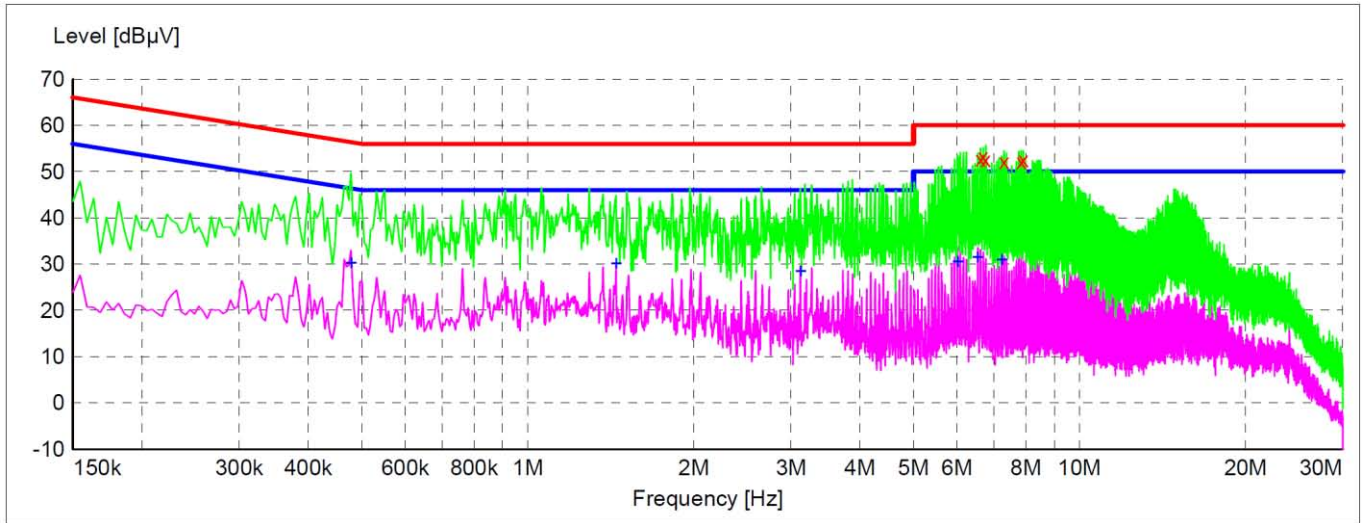

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
6.616500	52.70	9.8	60	7.3	QP	L1	GND
6.693000	53.20	9.8	60	6.8	QP	L1	GND
6.765000	52.60	9.8	60	7.4	QP	L1	GND
7.300500	52.10	9.8	60	7.9	QP	L1	GND
7.836000	52.10	9.8	60	7.9	QP	L1	GND
7.908000	52.50	9.8	60	7.5	QP	L1	GND
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.478500	30.20	10.0	46	16.2	AV	L1	GND
1.446000	30.00	9.8	46	16.0	AV	L1	GND
3.120000	28.40	9.8	46	17.6	AV	L1	GND
6.013500	30.40	9.8	50	19.6	AV	L1	GND
6.544500	31.40	9.8	50	18.6	AV	L1	GND
7.228500	30.90	9.8	50	19.1	AV	L1	GND



Neutral

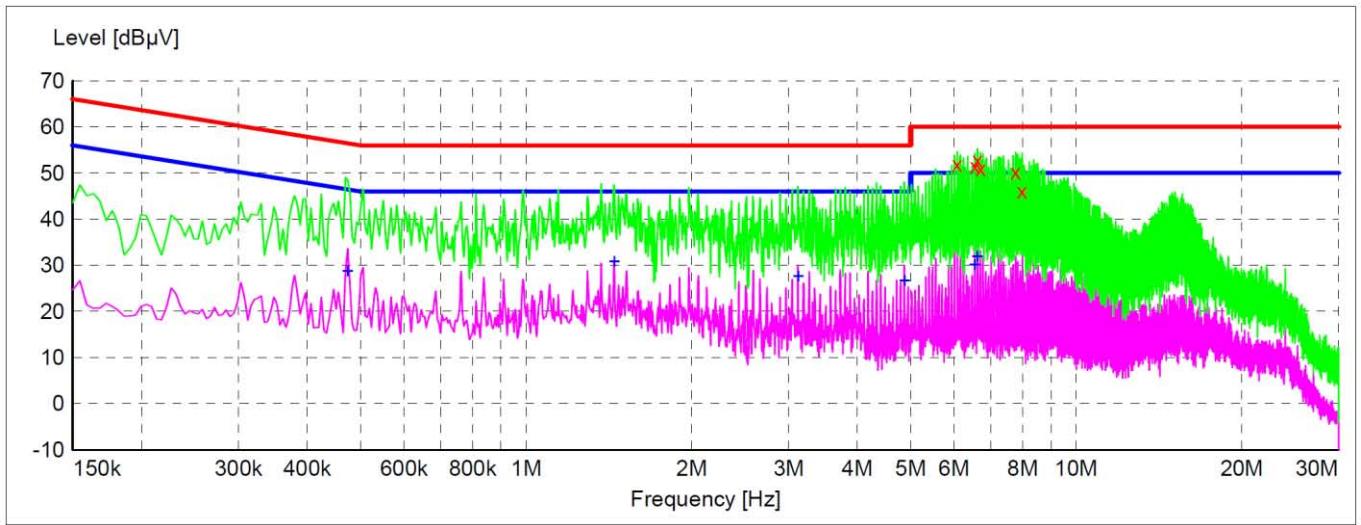

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
6.085500	51.90	9.8	60	8.1	QP	L1	GND
6.544500	51.40	9.8	60	8.6	QP	L1	GND
6.616500	52.90	9.8	60	7.1	QP	L1	GND
6.697500	50.90	9.8	60	9.1	QP	L1	GND
7.764000	50.20	9.8	60	9.8	QP	L1	GND
7.975500	46.00	9.8	60	14.0	QP	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.474000	28.70	10.0	46	17.7	AV	L1	GND
1.446000	30.70	9.8	46	15.3	AV	L1	GND
3.120000	27.50	9.8	46	18.5	AV	L1	GND
4.870500	26.50	9.8	46	19.5	AV	L1	GND
6.544500	30.10	9.8	50	19.9	AV	L1	GND
6.616500	31.80	9.8	50	18.2	AV	L1	GND

***Note: Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n HT20) @ Chain 0 & Chain 1 for 120V/60Hz.


5.7 Undesirable Emissions Measurement

5.7.1 LIMIT

According to §15.407 (b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (e) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (f) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (g) The provisions of §15.205 apply to intentional radiators operating under this section.
- (h) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

5.7.2 TEST CONFIGURATION

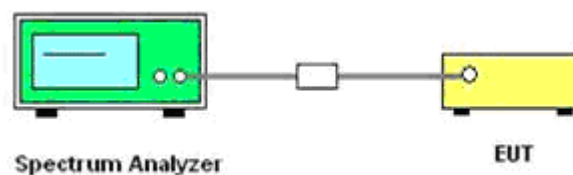

5.7.3 TEST PROCEDURE

1. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
2. Set the RBW = 1MHz.
3. Set the VBW \geq 3MHz
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
5. Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
6. Set detector = power averaging (rms).
7. Sweep time = auto couple.



8. Trace mode = max hold.

9. Allow trace to fully stabilize.

5. 7.4 Test Results

For Antenna Chain 0

IEEE 802.11a							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-49.81	1.00	-48.81	Peak	-27.00	-21.81	PASS
5700.00	-49.89	1.00	-48.89	Peak	10.00	-58.89	PASS
5720.00	-43.72	1.00	-42.72	Peak	15.60	-58.32	PASS
5725.00	-37.72	1.00	-36.72	Peak	27.00	-63.72	PASS
5850.00	-43.54	1.00	-42.54	Peak	27.00	-69.54	PASS
5855.00	-48.62	1.00	-47.62	Peak	15.60	-63.22	PASS
5875.00	-50.65	1.00	-49.65	Peak	10.00	-59.65	PASS
5925.00	-49.05	1.00	-48.05	Peak	-27.00	-21.05	PASS

IEEE 802.11n HT20							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-47.86	1.00	-46.86	Peak	-27.00	-19.86	PASS
5700.00	-49.02	1.00	-48.02	Peak	10.00	-58.02	PASS
5720.00	-42.94	1.00	-41.94	Peak	15.60	-57.54	PASS
5725.00	-35.29	1.00	-34.29	Peak	27.00	-61.29	PASS
5850.00	-42.23	1.00	-41.23	Peak	27.00	-68.23	PASS
5855.00	-46.96	1.00	-45.96	Peak	15.60	-61.56	PASS
5875.00	-47.96	1.00	-46.96	Peak	10.00	-56.96	PASS
5925.00	-51.89	1.00	-50.89	Peak	-27.00	-23.89	PASS

IEEE 802.11ac VHT20							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-51.06	1.00	-50.06	Peak	-27.00	-23.06	PASS
5700.00	-48.47	1.00	-47.47	Peak	10.00	-57.47	PASS
5720.00	-44.29	1.00	-43.29	Peak	15.60	-58.89	PASS
5725.00	-38.94	1.00	-37.94	Peak	27.00	-64.94	PASS
5850.00	-44.32	1.00	-43.32	Peak	27.00	-70.32	PASS
5855.00	-46.88	1.00	-45.88	Peak	15.60	-61.48	PASS
5875.00	-49.68	1.00	-48.68	Peak	10.00	-58.68	PASS
5925.00	-50.79	1.00	-49.79	Peak	-27.00	-22.79	PASS

IEEE 802.11n HT40							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-50.52	1.00	-49.52	Peak	-27.00	-22.52	PASS
5700.00	-45.42	1.00	-44.42	Peak	10.00	-54.42	PASS
5720.00	-32.53	1.00	-31.53	Peak	15.60	-47.13	PASS
5725.00	-32.60	1.00	-31.60	Peak	27.00	-58.60	PASS
5850.00	-49.52	1.00	-48.52	Peak	27.00	-75.52	PASS
5855.00	-47.51	1.00	-46.51	Peak	15.60	-62.11	PASS
5875.00	-48.29	1.00	-47.29	Peak	10.00	-57.29	PASS
5925.00	-52.41	1.00	-51.41	Peak	-27.00	-24.41	PASS



IEEE 802.11ac VHT40							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-51.26	1.00	-50.26	Peak	-27.00	-23.26	PASS
5700.00	-47.62	1.00	-46.62	Peak	10.00	-56.62	PASS
5720.00	-33.77	1.00	-32.77	Peak	15.60	-48.37	PASS
5725.00	-29.54	1.00	-28.54	Peak	27.00	-55.54	PASS
5850.00	-46.94	1.00	-45.94	Peak	27.00	-72.94	PASS
5855.00	-49.85	1.00	-48.85	Peak	15.60	-64.45	PASS
5875.00	-50.38	1.00	-49.38	Peak	10.00	-59.38	PASS
5925.00	-51.68	1.00	-50.68	Peak	-27.00	-23.68	PASS

IEEE 802.11ac VHT80							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-48.50	1.00	-47.50	Peak	-27.00	-20.50	PASS
5700.00	-35.88	1.00	-34.88	Peak	10.00	-44.88	PASS
5720.00	-31.71	1.00	-30.71	Peak	15.60	-46.31	PASS
5725.00	-28.30	1.00	-27.30	Peak	27.00	-54.30	PASS
5850.00	-37.56	1.00	-36.56	Peak	27.00	-63.56	PASS
5855.00	-40.86	1.00	-39.86	Peak	15.60	-55.46	PASS
5875.00	-44.45	1.00	-43.45	Peak	10.00	-53.45	PASS
5925.00	-50.23	1.00	-49.23	Peak	-27.00	-22.23	PASS

For Antenna Chain 1

IEEE 802.11a							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-48.96	1.00	-47.96	Peak	-27.00	-20.96	PASS
5700.00	-48.71	1.00	-47.71	Peak	10.00	-57.71	PASS
5720.00	-44.41	1.00	-43.41	Peak	15.60	-59.01	PASS
5725.00	-34.88	1.00	-33.88	Peak	27.00	-60.88	PASS
5850.00	-43.26	1.00	-42.26	Peak	27.00	-69.26	PASS
5855.00	-48.39	1.00	-47.39	Peak	15.60	-62.99	PASS
5875.00	-50.00	1.00	-49.00	Peak	10.00	-59.00	PASS
5925.00	-49.91	1.00	-48.91	Peak	-27.00	-21.91	PASS

IEEE 802.11n HT20							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-50.05	1.00	-49.05	Peak	-27.00	-22.05	PASS
5700.00	-49.78	1.00	-48.78	Peak	10.00	-58.78	PASS
5720.00	-38.80	1.00	-37.80	Peak	15.60	-53.40	PASS
5725.00	-37.10	1.00	-36.10	Peak	27.00	-63.10	PASS
5850.00	-43.26	1.00	-42.26	Peak	27.00	-69.26	PASS
5855.00	-47.24	1.00	-46.24	Peak	15.60	-61.84	PASS
5875.00	-50.34	1.00	-49.34	Peak	10.00	-59.34	PASS
5925.00	-49.01	1.00	-48.01	Peak	-27.00	-21.01	PASS



IEEE 802.11ac VHT20							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-49.73	1.00	-48.73	Peak	-27.00	-21.73	PASS
5700.00	-47.13	1.00	-46.13	Peak	10.00	-56.13	PASS
5720.00	-40.91	1.00	-39.91	Peak	15.60	-55.51	PASS
5725.00	-35.82	1.00	-34.82	Peak	27.00	-61.82	PASS
5850.00	-45.38	1.00	-44.38	Peak	27.00	-71.38	PASS
5855.00	-48.30	1.00	-47.30	Peak	15.60	-62.90	PASS
5875.00	-50.50	1.00	-49.50	Peak	10.00	-59.50	PASS
5925.00	-50.66	1.00	-49.66	Peak	-27.00	-22.66	PASS

IEEE 802.11n HT40							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-50.75	1.00	-49.75	Peak	-27.00	-22.75	PASS
5700.00	-47.09	1.00	-46.09	Peak	10.00	-56.09	PASS
5720.00	-24.36	1.00	-23.36	Peak	15.60	-38.96	PASS
5725.00	-30.79	1.00	-29.79	Peak	27.00	-56.79	PASS
5850.00	-42.37	1.00	-41.37	Peak	27.00	-68.37	PASS
5855.00	-49.94	1.00	-48.94	Peak	15.60	-64.54	PASS
5875.00	-49.99	1.00	-48.99	Peak	10.00	-58.99	PASS
5925.00	-49.48	1.00	-48.48	Peak	-27.00	-21.48	PASS

IEEE 802.11ac VHT40							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-48.31	1.00	-47.31	Peak	-27.00	-20.31	PASS
5700.00	-46.40	1.00	-45.40	Peak	10.00	-55.40	PASS
5720.00	-33.57	1.00	-32.57	Peak	15.60	-48.17	PASS
5725.00	-30.74	1.00	-29.74	Peak	27.00	-56.74	PASS
5850.00	-47.42	1.00	-46.42	Peak	27.00	-73.42	PASS
5855.00	-49.50	1.00	-48.50	Peak	15.60	-64.10	PASS
5875.00	-47.36	1.00	-46.36	Peak	10.00	-56.36	PASS
5925.00	-50.26	1.00	-49.26	Peak	-27.00	-22.26	PASS

IEEE 802.11ac VHT80							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
5650.00	-46.26	1.00	-45.26	Peak	-27.00	-18.26	PASS
5700.00	-36.63	1.00	-35.63	Peak	10.00	-45.63	PASS
5720.00	-29.53	1.00	-28.53	Peak	15.60	-44.13	PASS
5725.00	-33.10	1.00	-32.10	Peak	27.00	-59.10	PASS
5850.00	-33.19	1.00	-32.19	Peak	27.00	-59.19	PASS
5855.00	-38.29	1.00	-37.29	Peak	15.60	-52.89	PASS
5875.00	-44.84	1.00	-43.84	Peak	10.00	-53.84	PASS
5925.00	-51.19	1.00	-50.19	Peak	-27.00	-23.19	PASS



For Combined Antenna Chain 0 and Antenna Chain 1

IEEE 802.11n HT20									
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum						
5650.00	-47.86	-50.05	-45.81	4.00	-41.81	Peak	-27.00	-14.81	PASS
5700.00	-49.02	-49.78	-46.37	4.00	-42.37	Peak	-27.00	-15.37	PASS
5720.00	-42.94	-38.80	-37.38	4.00	-33.38	Peak	-17.00	-16.38	PASS
5725.00	-35.29	-37.10	-33.09	4.00	-29.09	Peak	-17.00	-12.09	PASS
5850.00	-42.23	-43.26	-39.70	4.00	-35.70	Peak	-17.00	-18.70	PASS
5855.00	-46.96	-47.24	-44.09	4.00	-40.09	Peak	-17.00	-23.09	PASS
5875.00	-47.96	-50.34	-45.98	4.00	-41.98	Peak	-27.00	-14.98	PASS
5925.00	-51.89	-49.01	-47.21	4.00	-43.21	Peak	-27.00	-16.21	PASS

IEEE 802.11ac VHT20									
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum						
5650.00	-51.06	-49.73	-47.33	4.00	-43.33	Peak	-27.00	-16.33	PASS
5700.00	-48.47	-47.13	-44.74	4.00	-40.74	Peak	-27.00	-13.74	PASS
5720.00	-44.29	-40.91	-39.27	4.00	-35.27	Peak	-17.00	-18.27	PASS
5725.00	-38.94	-35.82	-34.10	4.00	-30.10	Peak	-17.00	-13.10	PASS
5850.00	-44.32	-45.38	-41.81	4.00	-37.81	Peak	-17.00	-20.81	PASS
5855.00	-46.88	-48.3	-44.52	4.00	-40.52	Peak	-17.00	-23.52	PASS
5875.00	-49.68	-50.5	-47.06	4.00	-43.06	Peak	-27.00	-16.06	PASS
5925.00	-50.79	-50.66	-47.71	4.00	-43.71	Peak	-27.00	-16.71	PASS

IEEE 802.11n HT40									
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum						
5650.00	-50.52	-50.75	-47.62	4.00	-43.62	Peak	-27.00	-16.62	PASS
5700.00	-45.42	-47.09	-43.16	4.00	-39.16	Peak	-27.00	-12.16	PASS
5720.00	-32.53	-24.36	-23.74	4.00	-19.74	Peak	-17.00	-2.74	PASS
5725.00	-32.60	-30.79	-28.59	4.00	-24.59	Peak	-17.00	-7.59	PASS
5850.00	-49.52	-42.37	-41.60	4.00	-37.60	Peak	-17.00	-20.60	PASS
5855.00	-47.51	-49.94	-45.55	4.00	-41.55	Peak	-17.00	-24.55	PASS
5875.00	-48.29	-49.99	-46.05	4.00	-42.05	Peak	-27.00	-15.05	PASS
5925.00	-52.41	-49.48	-47.69	4.00	-43.69	Peak	-27.00	-16.69	PASS

IEEE 802.11ac VHT40									
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum						
5650.00	-51.26	-48.31	-46.53	4.00	-42.53	Peak	-27.00	-15.53	PASS
5700.00	-47.62	-46.40	-43.96	4.00	-39.96	Peak	-27.00	-12.96	PASS
5720.00	-33.77	-33.57	-30.66	4.00	-26.66	Peak	-17.00	-9.66	PASS
5725.00	-29.54	-30.74	-27.09	4.00	-23.09	Peak	-17.00	-6.09	PASS
5850.00	-46.94	-47.42	-44.16	4.00	-40.16	Peak	-17.00	-23.16	PASS
5855.00	-49.85	-49.50	-46.66	4.00	-42.66	Peak	-17.00	-25.66	PASS
5875.00	-50.38	-47.36	-45.60	4.00	-41.60	Peak	-27.00	-14.60	PASS
5925.00	-51.68	-50.26	-47.90	4.00	-43.90	Peak	-27.00	-16.90	PASS



IEEE 802.11ac VHT80									
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	EIRP (dBm/1MHz)	Detector	Limit (dBm/1MHz)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum						
5650.00	-48.50	-46.26	-44.23	4.00	-40.23	Peak	-27.00	-13.23	PASS
5700.00	-35.88	-36.63	-33.23	4.00	-29.23	Peak	-27.00	-2.23	PASS
5720.00	-31.71	-29.53	-27.47	4.00	-23.47	Peak	-17.00	-6.47	PASS
5725.00	-28.30	-33.10	-27.06	4.00	-23.06	Peak	-17.00	-6.06	PASS
5850.00	-37.56	-33.19	-31.84	4.00	-27.84	Peak	-17.00	-10.84	PASS
5855.00	-40.86	-38.29	-36.38	4.00	-32.38	Peak	-17.00	-15.38	PASS
5875.00	-44.45	-44.84	-41.63	4.00	-37.63	Peak	-27.00	-10.63	PASS
5925.00	-50.23	-51.19	-47.67	4.00	-43.67	Peak	-27.00	-16.67	PASS


Remark:

1. Measured unwanted emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. For MIMO with CCD technology device:
$$\text{Directional gain} = 10 \log[(10G1/10 + 10G2/10 + \dots + 10GN/10)/NANT] \text{ dBi, where antenna gains given by } G1, G2, \dots, GN \text{ dBi, NANT is the antennas total Number}$$
5. E.I.R.P = Conducted power + Directional Gain
6. Please refer to following test plots;




Unwanted emission IEEE 802.11a


Antenna Chain 0

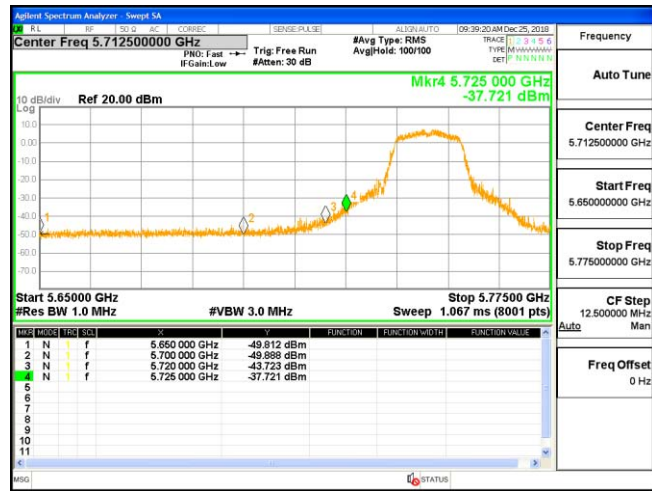


Antenna Chain 1

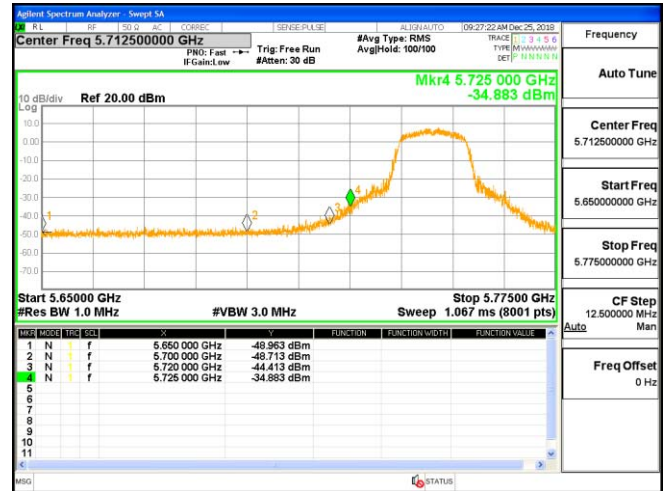


Channel 149 / 5745 MHz – Peak

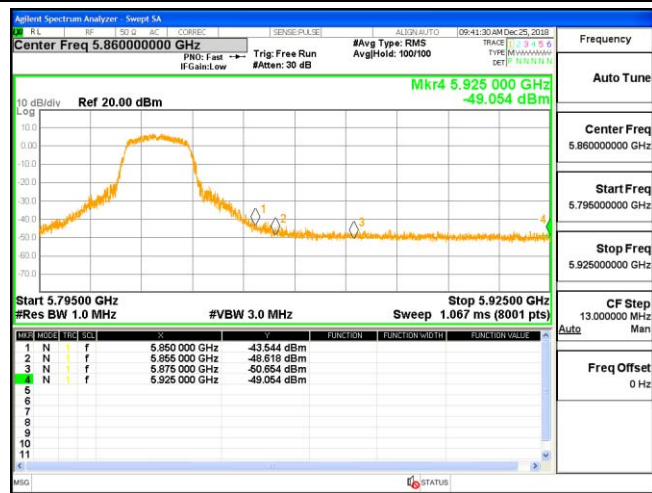


Channel 149 / 5745 MHz – Peak

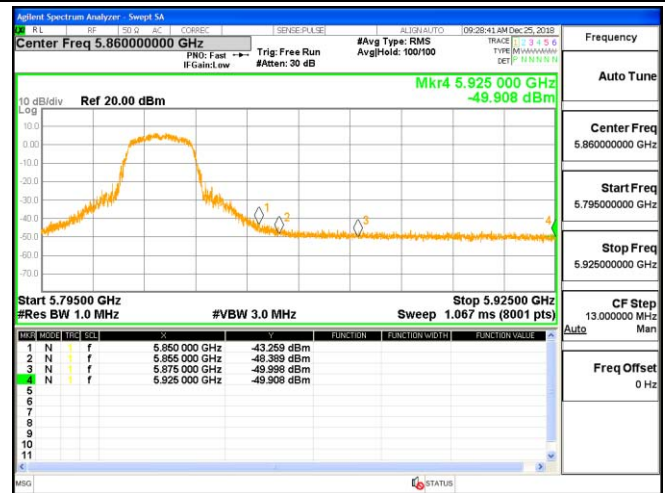

Channel 165 / 5825 MHz – Peak

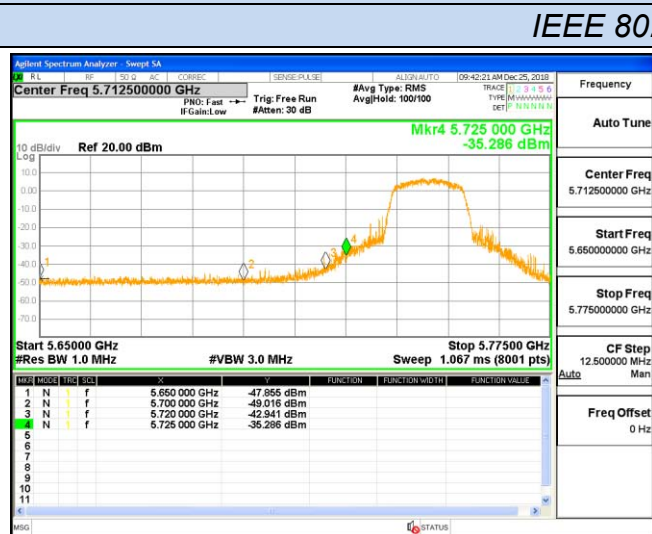

Channel 165 / 5825 MHz – Peak

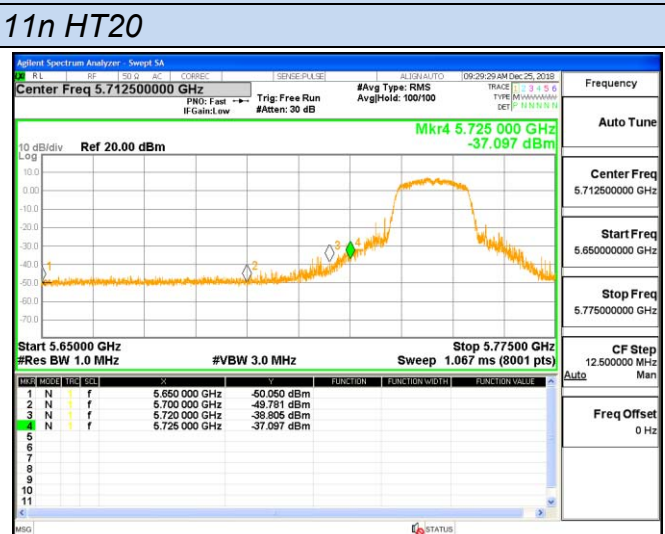

IEEE 802.11n HT20


Channel 149 / 5745 MHz – Peak

Channel 149 / 5745 MHz – Peak




Unwanted emission IEEE 802.11n HT20

Antenna Chain 0

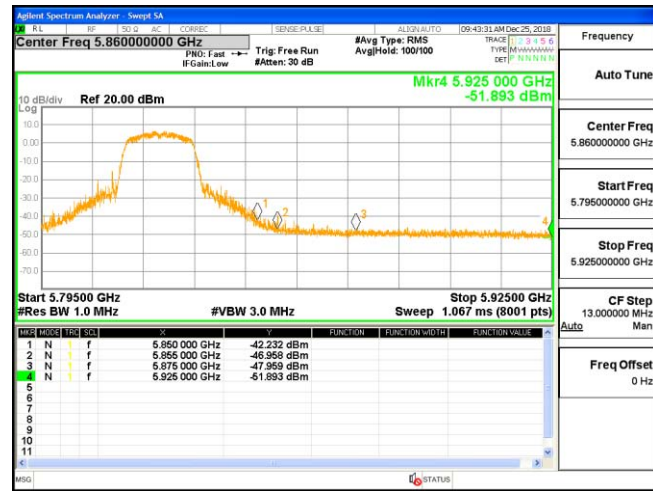



Antenna Chain 1

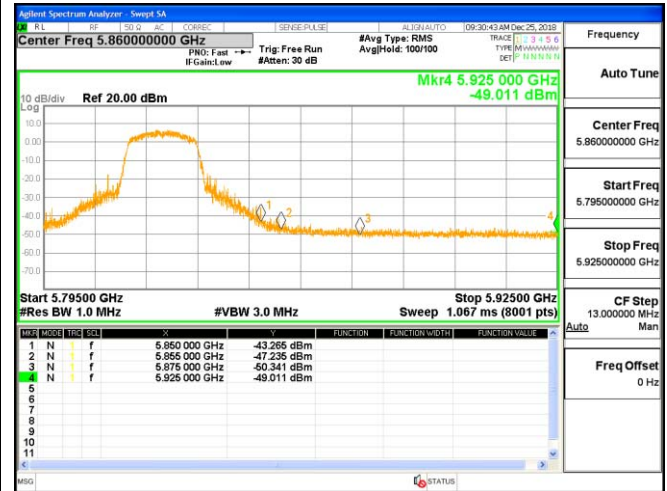

Channel 165 / 5825 MHz – Peak



Channel 165 / 5825 MHz – Peak

IEEE 802.11ac VHT20

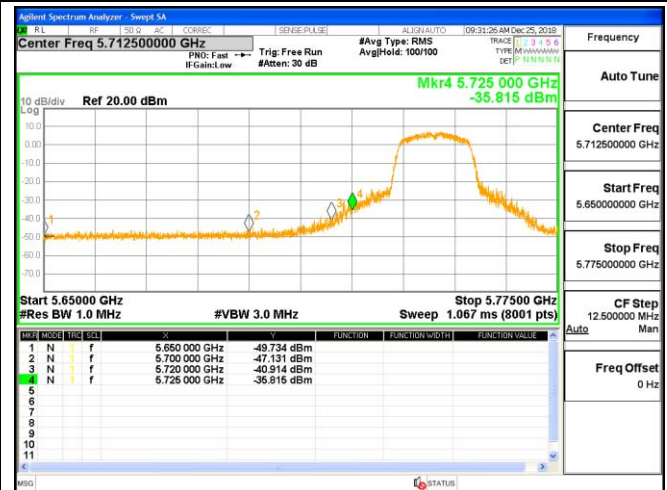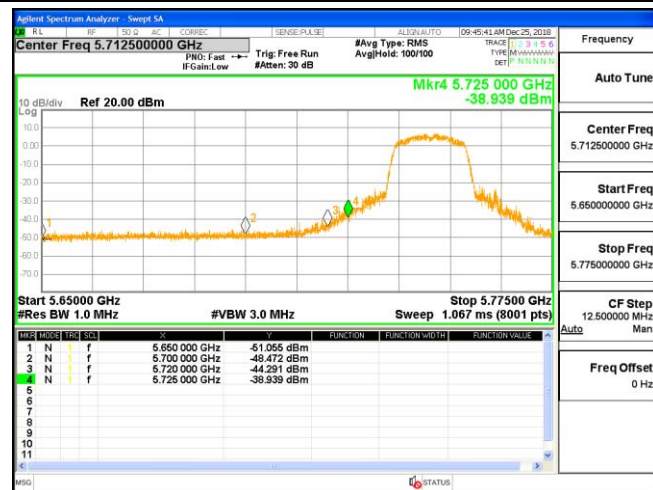

Channel 149 / 5745 MHz – Peak

Channel 149 / 5745 MHz – Peak

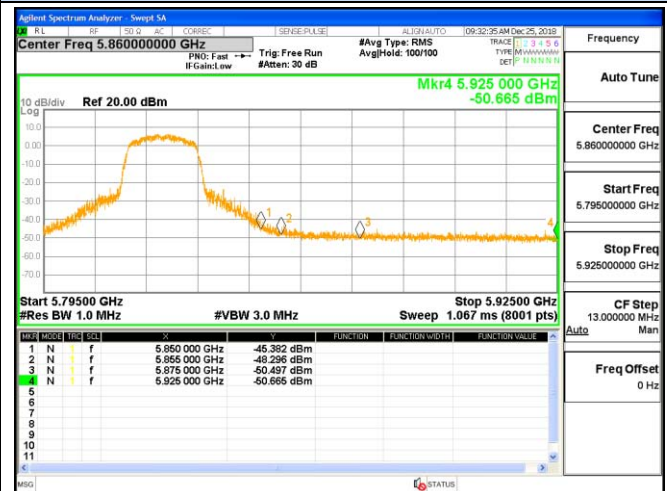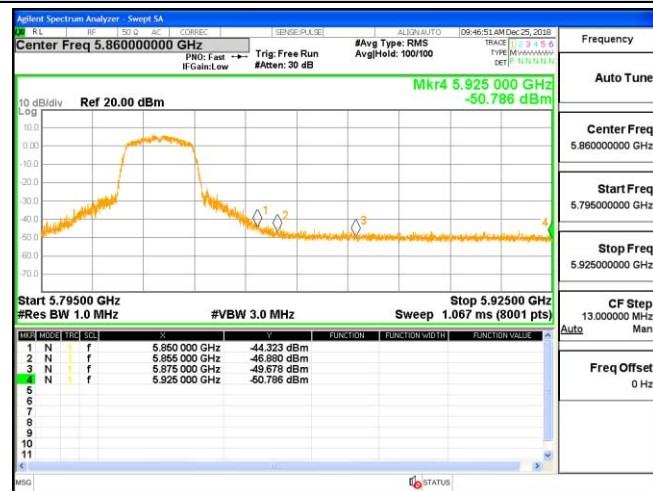


Channel 165 / 5825 MHz – Peak

Channel 165 / 5825 MHz – Peak




Unwanted emission IEEE 802.11n HT40


Antenna Chain 0

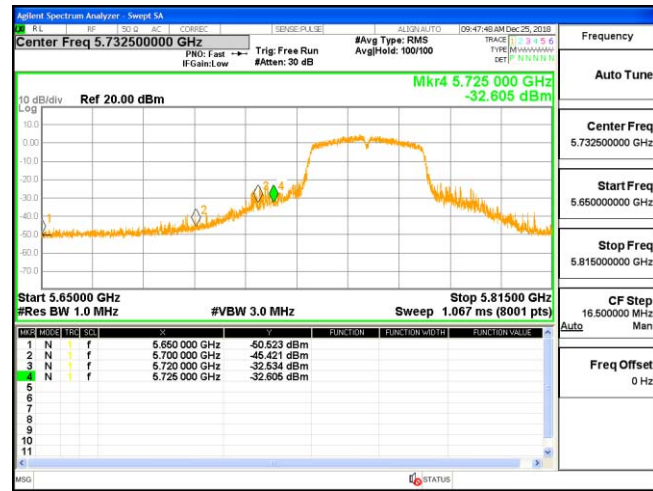


Antenna Chain 1

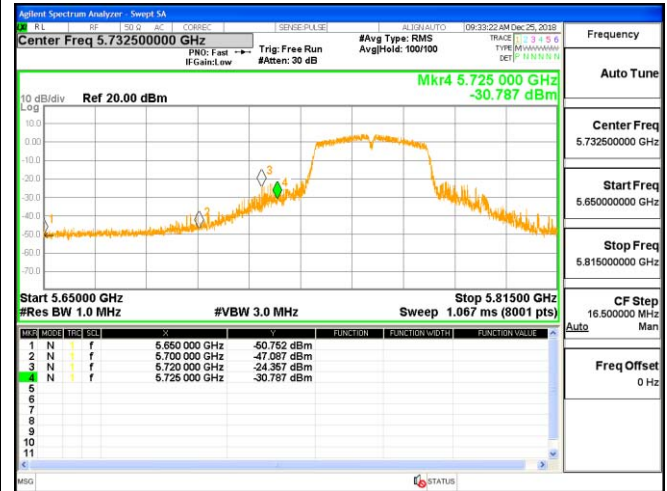

Channel 151 / 5755 MHz – Peak

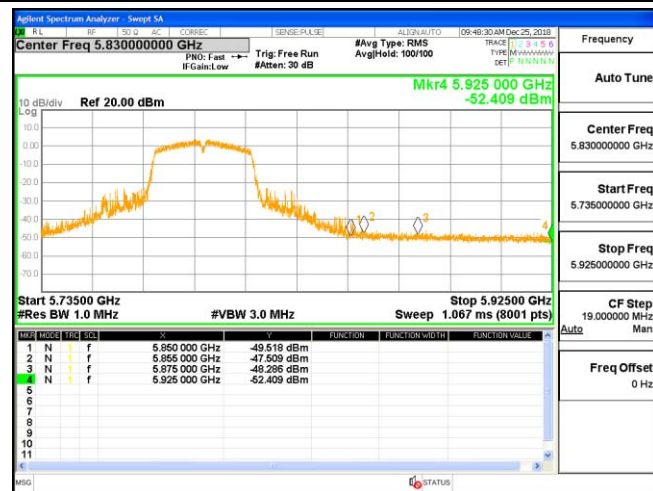

Channel 151 / 5755 MHz – Peak

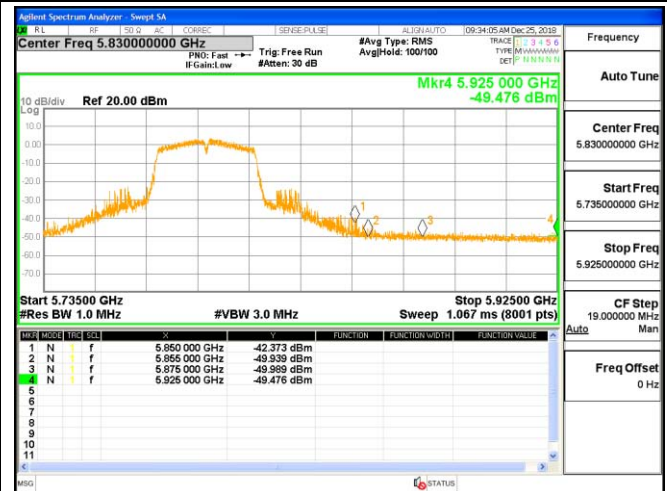

Channel 159 / 5795 MHz – Peak



Channel 159 / 5795 MHz – Peak



IEEE 802.11ac VHT40

Channel 151 / 5755 MHz – Peak



Channel 151 / 5755 MHz – Peak



Unwanted emission
IEEE 802.11ac VHT40

Antenna Chain 0



Antenna Chain 1

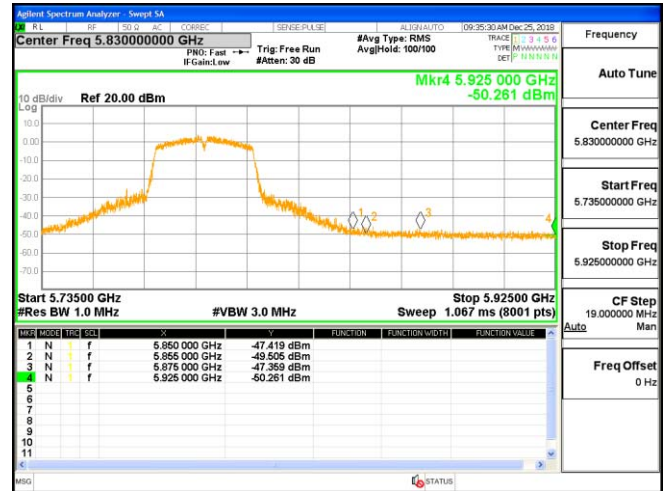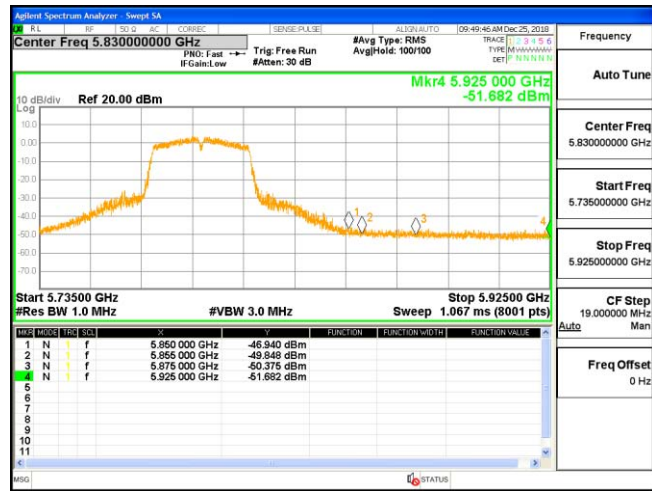

Channel 159 / 5795 MHz – Peak

Channel 159 / 5795 MHz – Peak

IEEE 802.11ac VHT80

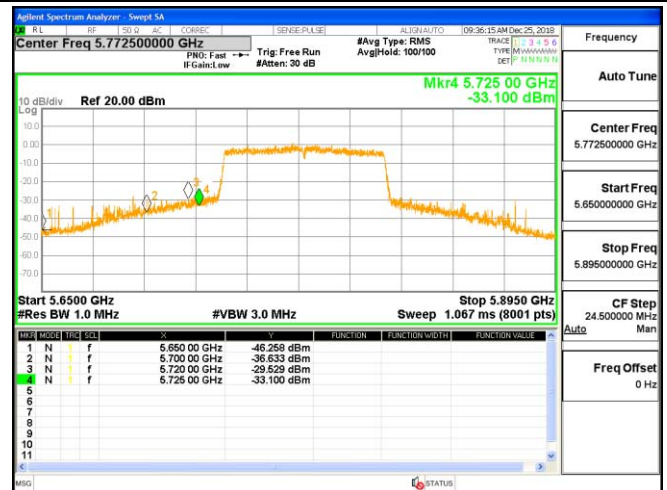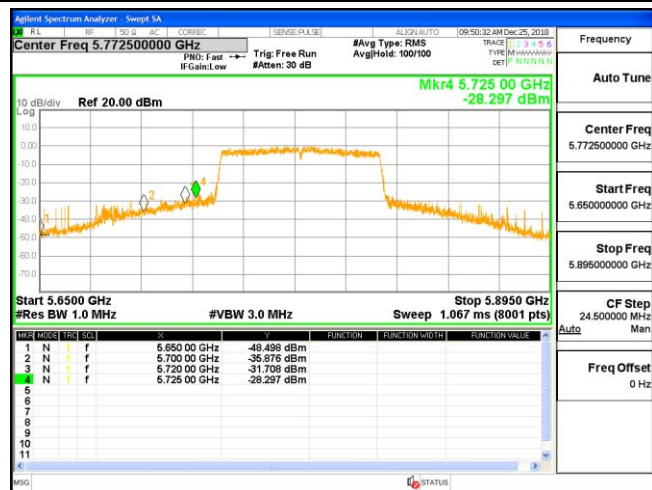

Channel 155 / 5775 MHz – Peak

Channel 155 / 5775 MHz – Peak



Channel 155 / 5775 MHz – Peak

Channel 155 / 5775 MHz – Peak



5.8. Antenna Requirements

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connector Construction

The directional gains of antenna used for transmitting refer to section 1.1 of this report , and the antenna is an internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.8.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for UNII devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For 5G WLAN devices, the IEEE 802.11a mode is used.

Limits

FCC	ISED
Antenna Gain	
6 dBi	

**Antenna Chain 0**

T_{nom}	V_{nom}	Lowest Channel 5745 MHz	Middle Channel 5785 MHz	Highest Channel 5825 MHz
Conducted power [dBm] Measured with OFDM modulation		9.81	8.78	8.90
Radiated power [dBm] Measured with OFDM modulation		8.81	8.21	8.19
Gain [dBi] Calculated		-1.00	-0.57	-0.71
Measurement uncertainty		± 1.6 dB (cond.) / ± 3.8 dB (rad.)		

Antenna Chain 1

T_{nom}	V_{nom}	Lowest Channel 5745 MHz	Middle Channel 5785 MHz	Highest Channel 5825 MHz
Conducted power [dBm] Measured with OFDM modulation		9.73	9.49	8.49
Radiated power [dBm] Measured with OFDM modulation		8.23	8.59	7.82
Gain [dBi] Calculated		-1.50	-0.90	-0.67
Measurement uncertainty		± 1.6 dB (cond.) / ± 3.8 dB (rad.)		



6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Broadband Horn Antenna	Schwarzbeck	BBHA 9170	HKE-017	Dec. 28, 2017	1 Year
12.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2017	1 Year
13.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
14.	EMI Test Software EZ-EMC	Tonscend	JS1120-B	HKE-083	Dec. 28, 2017	N/A
15.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2017	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2017	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2017	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year
19.	Horn Antenna	ETS	3117	HKE-040	Dec. 28, 2017	1 Year
20.	RF Cable(below 1GHz)	HUBER+SUHNER	RG214	HKE-055	Dec. 28, 2017	1 Year
21.	RF Cable(above 1GHz)	HUBER+SUHNER	RG214	HKE-056	Dec. 28, 2017	1 Year

-----THE END OF REPORT-----