

TEST REPORT

Applicant: Shenzhen SEI Robotics Co., Ltd.
Address: 4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China
Equipment Type: Set Top Box
Model Name: SEI800 (refer to section 2.3)
Brand Name: WOW
FCC ID: 2AOVU-SX6BLGN
Test Standard: 47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date: Apr. 19, 2024
Test Date: Apr. 29, 2024 - May 31, 2024
Date of Issue: Jun. 07, 2024

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Si Xiao

Checked by: Ye Hongji

Approved by: Liao Jianming
(Technical Director)

Si Xiao

Ye Hongji

Liao Jianming

Revision History		
<u>Version</u>	<u>Issue Date</u>	<u>Revisions</u>
<u>Rev. 01</u>	<u>May 21, 2024</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 07, 2024</u>	<u>Updated the Model Name;</u> <u>Updated Section 2.4 Technical</u> <u>Information;</u> <u>Update the Test Date and Test</u> <u>Equipment List;</u> <u>Added RU data for Output Power and</u> <u>Radiated Spurious Emission</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	11
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	12
4.6	Measurement Results Explanation Example	15
5	TEST ITEMS	16
5.1	Antenna Requirements	16

5.2	Output Power	17
5.3	Occupied Bandwidth	19
5.4	Conducted Spurious Emission	20
5.5	Band Edge (Authorized-band band-edge).....	22
5.6	Conducted Emission	24
5.7	Radiated Spurious Emission	25
5.8	Band Edge (Restricted-band band-edge).....	30
5.9	Power Spectral density (PSD).....	31
ANNEX A	TEST RESULT	32
A.1	Output Power	32
A.2	Occupied Bandwidth	53
A.3	Conducted Spurious Emissions	58
A.4	Band Edge (Authorized-band band-edge).....	67
A.5	Conducted Emissions.....	71
A.6	Radiated Emission	73
A.7	Band Edge (Restricted-band band-edge).....	90
A.8	Power Spectral Density (PSD)	100
ANNEX B	TEST SETUP PHOTOS	104
ANNEX C	EUT EXTERNAL PHOTOS	104
ANNEX D	EUT INTERNAL PHOTOS	104

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen SEI Robotics Co., Ltd.
Address	4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

2.2 Manufacturer Information

Manufacturer	Shenzhen SEI Robotics Co., Ltd.
Address	4th Floor, Productivity Building D, #5 Hi-Tech Middle 2nd Road, Shenzhen Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Set Top Box
Model Name Under Test	SEI800
Series Model Name	SX6BLGX (X:A-Z)
Description of Model name differentiation	The circuit, PCB layout, electrical components and appearance of the above model are exactly the same as the basic model, except the model names are different due to different market and customer needs. (this information provided by the applicant)
Hardware Version	SMB.280.08E
Software Version	SEI800WOW_v12.8.4833
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac and 802.11ax U-NII-1/3/5/6
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n/ax(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11.	
Modulation Type	DSSS, OFDM, OFDMA	
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11b/g Multi Input Multi Output (MIMO) for 802.11n/ax	
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated for 802.11b/g Categorization as Uncorrelated for 802.11n/ax	
Antenna Type	SISO-Antenna 1	PIFA Antenna
	SISO-Antenna 2	
Antenna Gain	SISO-Antenna 1	3.45 dBi
	SISO-Antenna 2	3.98 dBi
Total directional gain	For power spectral density (PSD) measurements	Correlated: 6.73 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / \text{NANT}] \text{ dBi}$ Uncorrelated: 3.72 dBi Formulas: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / \text{NANT}] \text{ dBi}$
	For power measurements	Correlated: 6.73 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / \text{NANT}] \text{ dBi}$ Uncorrelated: 3.72 dBi Formulas: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / \text{NANT}] \text{ dBi}$
	For	Correlated:

Conducted Out-of-Band and Spurious Measurements	6.73 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$ dBi Uncorrelated: 3.72 dBi Formulas: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / NANT]$ dBi
About the Product	Only the WIFI 802.11b, 802.11g, 802.11n (HT20), and 802.11ax (HE20) was tested in this report.

Mode	Antenna		
	SISO-Antenna 1	SISO-Antenna 2	MIMO
802.11b	√	√	√
802.11g	√	√	√
802.11n20	√	√	√
802.11ax20	√	√	√

Note: All the configurations were tested, but only the worst data was shown in this report.

Mode	Full RU (SU)	RU_26	RU_52	RU_106
802.11ax20	√	√	√	√

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDMA (802.11ax-20 MHz)	BPSK	4
	QPSK	16/24/17/26
	16QAM	33/49/34/52
	64QAM	65/73/81/69/77/86
	256QAM	98/108/103/115
	1024QAM	122/135/129/143

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Output Power	11b/11g/11n20/11ax20	1/6/6.5/4 Mbps	1/6/11
Occupied Bandwidth	11b/11g/11n20/11ax20	1/6/6.5/4 Mbps	1/6/11
Conducted Spurious Emission	11b/11g/11n20/11ax20	1/6/6.5/4 Mbps	1/6/11
Conducted Emission	11b/11g/11n20/11ax20	1/6/6.5/4 Mbps	1/6/11
Radiated Spurious Emission	11b/11g/11n20/11ax20	1/6/6.5/4 Mbps	1/6/11
Band Edge	11b/11g/11n20/11ax20	1/6/6.5/4 Mbps	1/6/11
Power spectral density (PSD)	11b/11g/11n20/11ax20	1/6/6.5/4 Mbps	1/6/11

Note: The above EUT information in section 2.3 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
4	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note 1}
2	Output Power	15.247 (b)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	ANNEX A.8	Pass

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	60% to 69%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.8°C to +24.7°C
Working Voltage of the EUT	NV (Normal Voltage)	12.0 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2023.07.25	2024.07.24
Power Sensor	KEYSIGHT	U2063XA	MY58000251	2023.07.12	2024.07.11
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2023.09.05	2024.09.04
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2023.06.19	2024.06.18
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2021.05.20	2024.05.19
				2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2022.02.19	2024.08.15
Amplifier	COM-MV	LSCX_LNA1-12G-01	7210214	2023.09.05	2024.09.04
Amplifier	COM-MV	XKu_LNA7-18G-01	7210209	2023.09.05	2024.09.04
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2023.12.06	2024.12.05
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2023.09.05	2024.09.04
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2024.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2025.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2023.12.05	2024.12.04
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2021.08.15	2024.08.14
EMI Receiver	Agilent	N9038A	MY55330120	2023.09.05	2024.09.04
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-00867	2022.04.12	2025.04.11
Amplifier	COM-MV	ZT30-1000M	B2017119081	2023.12.05	2024.12.04
Anechoic Chamber	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2023.09.05	2024.09.04
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15
				2024.05.09	2025.05.08
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

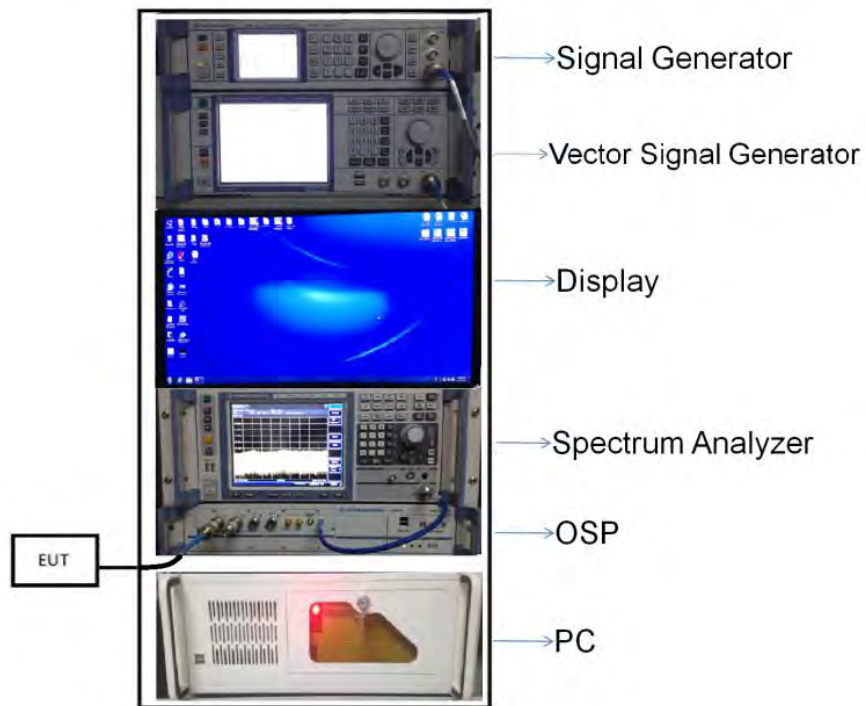


(Diagram 1)

4.5.2 For AC Power Supply Port Test

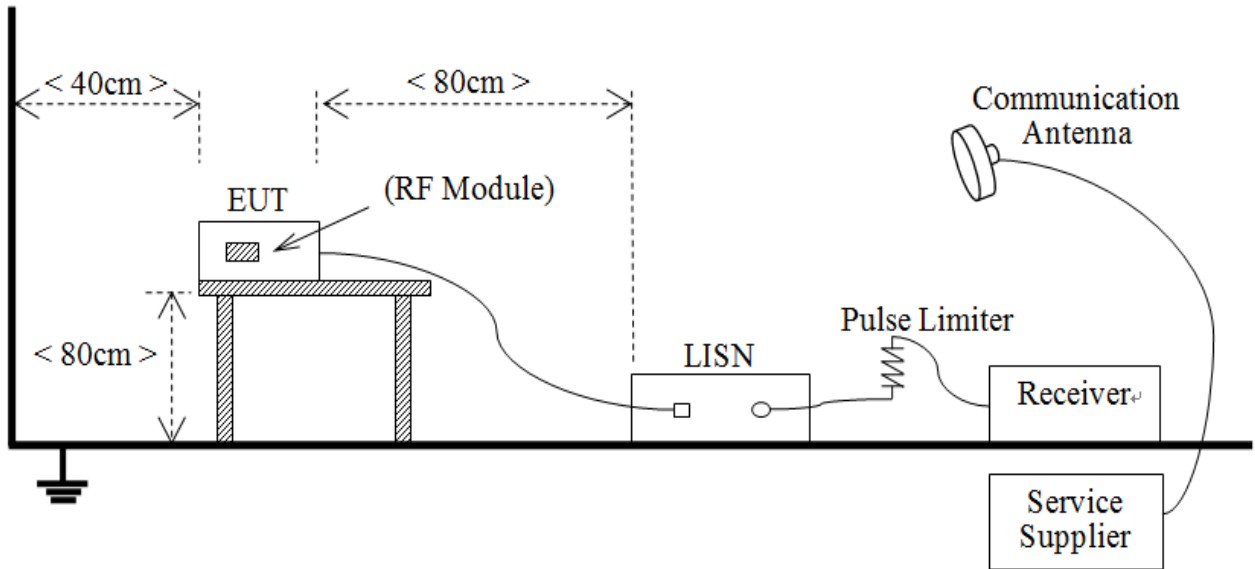


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

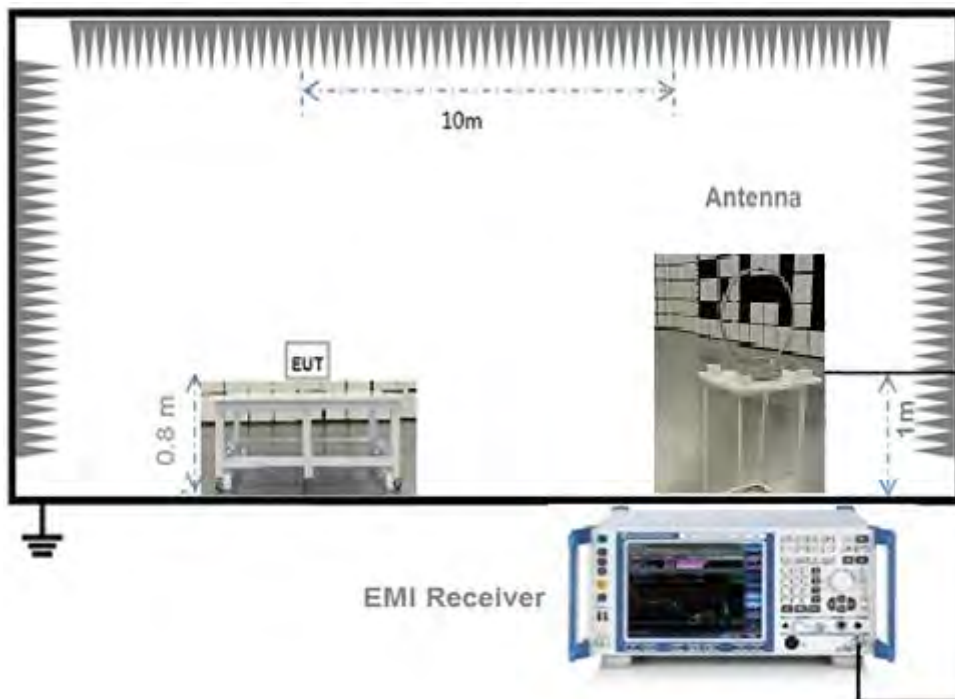


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

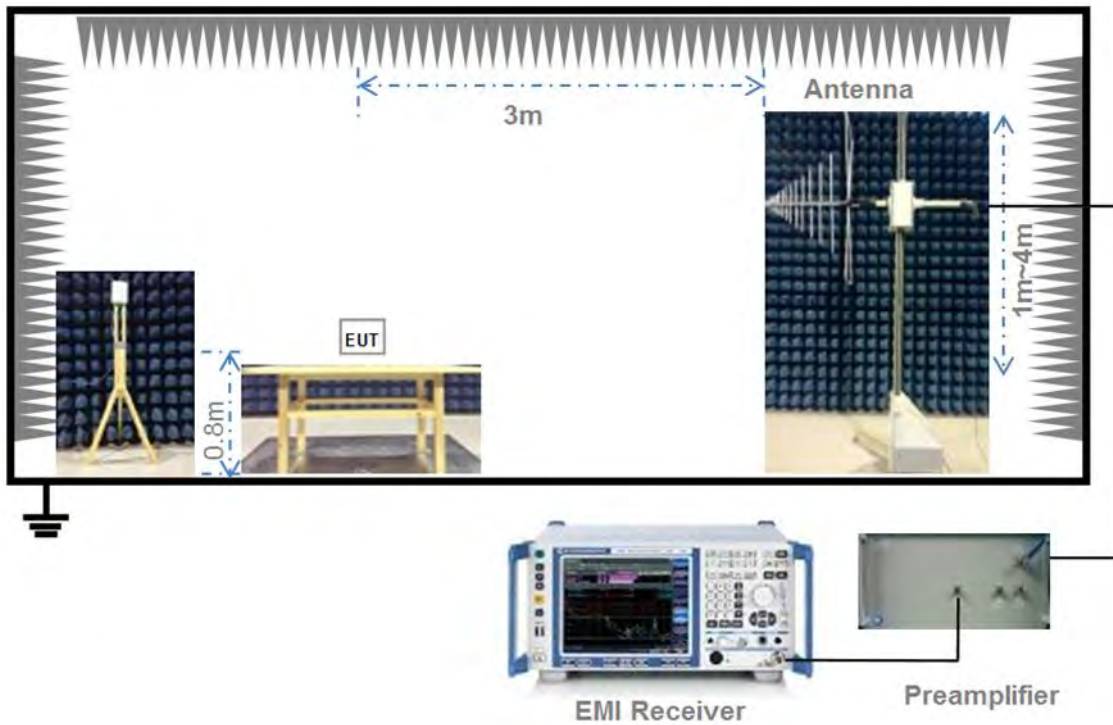

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

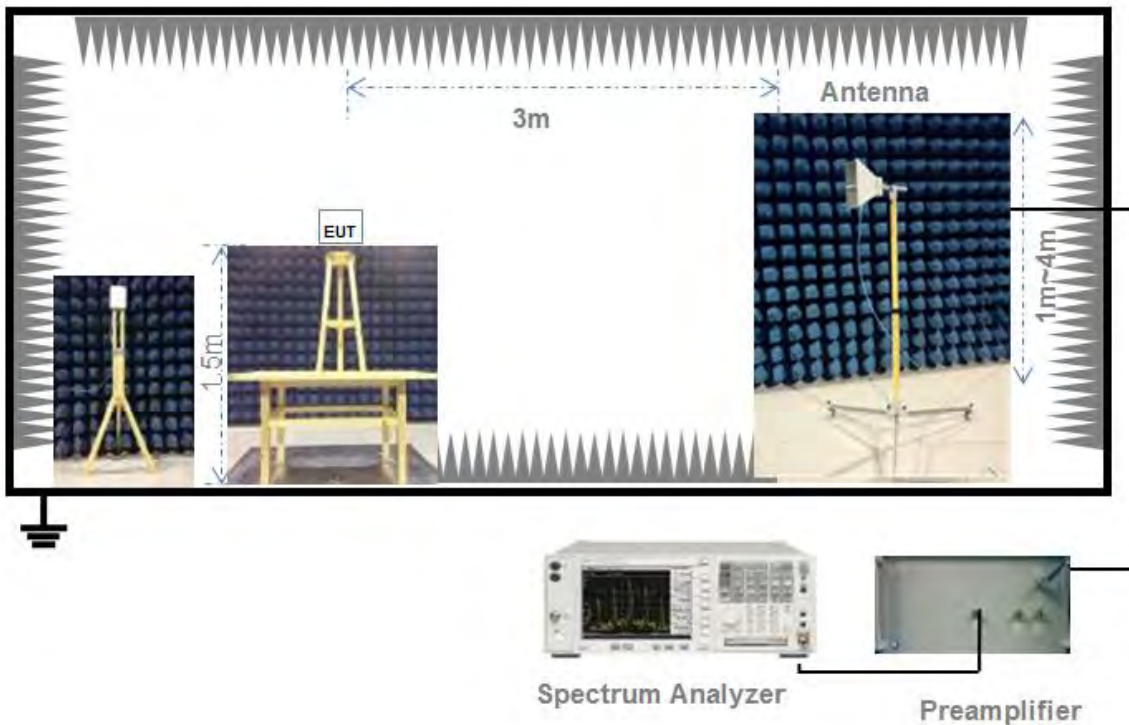

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The EUT shall be transmitted at its maximum power control level.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between

bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) \geq 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

- For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Note: The total directional gain is greater than 6 dBi, so the maximum conducted output power shall be reduced by 1 dB for every 3 dB.

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle	Duty Factor
802.11b	8.402	8.504	98.80%	0.05
802.11g	2.057	2.095	98.19%	0.08
802.11n-20 MHz	1.910	1.946	98.15%	0.08
802.11ax-20 MHz	1.017	1.121	90.72%	0.42

Peak Power Test Data**SISO-Antenna 1****802.11b Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.31	170.22	30	1000	Pass
Middle	22.44	175.39			Pass
High	22.73	187.50			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.28	267.92	30	1000	Pass
Middle	26.42	438.53			Pass
High	22.14	163.68			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.51	224.39	30	1000	Pass
Middle	26.50	446.68			Pass
High	21.29	134.59			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.01	316.96	30	1000	Pass
Middle	28.26	669.88			Pass
High	23.38	217.77			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	26.34	430.53	30	1000	Pass
Middle	26.19	415.91			Pass
High	25.42	348.34			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.31	339.63	30	1000	Pass
Middle	25.34	341.98			Pass
High	24.87	306.90			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.89	308.32	30	1000	Pass
Middle	24.79	301.30			Pass
High	24.68	293.76			Pass

SISO-Antenna 2

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.67	146.89	30	1000	Pass
Middle	21.57	143.55			Pass
High	21.59	144.21			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.69	233.88	30	1000	Pass
Middle	25.17	328.85			Pass
High	21.66	146.55			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.58	181.13	30	1000	Pass
Middle	25.05	319.89			Pass
High	20.90	123.03			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.70	186.21	30	1000	Pass
Middle	25.14	326.59			Pass
High	21.29	134.59			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.13	258.82	30	1000	Pass
Middle	23.85	242.66			Pass
High	23.58	228.03			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.59	228.56	30	1000	Pass
Middle	23.77	238.23			Pass
High	23.58	228.03			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.01	199.99	30	1000	Pass
Middle	23.17	207.49			Pass
High	24.01	251.77			Pass

MIMO-Antenna 1**802.11b Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.21	83.37	29	794.33	Pass
Middle	19.13	81.85			Pass
High	18.17	65.61			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.15	130.32	29	794.33	Pass
Middle	23.12	205.12			Pass
High	18.72	74.47			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.30	107.15	30	1000	Pass
Middle	23.34	215.77			Pass
High	17.97	62.66			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.63	115.61	30	1000	Pass
Middle	23.99	250.61			Pass
High	18.18	65.77			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.11	162.55	30	1000	Pass
Middle	21.10	128.82			Pass
High	21.62	145.21			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.98	157.76	30	1000	Pass
Middle	20.68	116.95			Pass
High	20.89	122.74			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.65	146.22	30	1000	Pass
Middle	20.56	113.76			Pass
High	20.84	121.34			Pass

MIMO-Antenna 2

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.28	67.30	29	794.33	Pass
Middle	18.37	68.71			Pass
High	18.43	69.66			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.92	123.59	29	794.33	Pass
Middle	23.17	207.49			Pass
High	19.00	79.43			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.88	97.27	30	1000	Pass
Middle	23.24	210.86			Pass
High	18.06	63.97			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.08	101.86	30	1000	Pass
Middle	23.89	244.91			Pass
High	18.05	63.83			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.92	123.59	30	1000	Pass
Middle	21.16	130.62			Pass
High	20.84	121.34			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.05	101.16	30	1000	Pass
Middle	20.22	105.20			Pass
High	20.17	103.99			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.98	99.54	30	1000	Pass
Middle	20.87	122.18			Pass
High	20.05	101.16			Pass

MIMO**802.11b Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.78	150.67	29	794.33	Pass
Middle	21.78	150.55			Pass
High	21.31	135.28			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.05	253.91	29	794.33	Pass
Middle	26.16	412.61			Pass
High	21.87	153.91			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.11	204.43	30	1000	Pass
Middle	26.30	426.64			Pass
High	21.03	126.63			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.37	217.47	30	1000	Pass
Middle	26.95	495.52			Pass
High	21.13	129.59			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.57	286.15	30	1000	Pass
Middle	24.14	259.44			Pass
High	24.26	266.55			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	24.13	258.92	30	1000	Pass
Middle	23.47	222.15			Pass
High	23.56	226.74			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.91	245.76	30	1000	Pass
Middle	23.73	235.94			Pass
High	23.47	222.50			Pass

Average Power Test DataSISO-Antenna 1

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.27	84.53	30	1000	Pass
Middle	19.14	82.04			Pass
High	19.38	86.70			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.28	42.46	30	1000	Pass
Middle	18.18	65.77			Pass
High	13.90	24.55			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.93	31.12	30	1000	Pass
Middle	18.23	66.53			Pass
High	12.98	19.86			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.61	28.91	30	1000	Pass
Middle	17.91	61.80			Pass
High	12.94	19.68			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.15	32.73	30	1000	Pass
Middle	15.07	32.14			Pass
High	14.48	28.05			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.22	26.42	30	1000	Pass
Middle	14.17	26.12			Pass
High	13.36	21.68			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.59	22.86	30	1000	Pass
Middle	13.48	22.28			Pass
High	13.54	22.59			Pass

SISO-Antenna 2**802.11b Mode:**

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.41	69.34	30	1000	Pass
Middle	18.53	71.29			Pass
High	18.39	69.02			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.26	33.57	30	1000	Pass
Middle	17.41	55.08			Pass
High	13.05	20.18			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.98	25.00	30	1000	Pass
Middle	17.46	55.72			Pass
High	12.09	16.18			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.04	25.35	30	1000	Pass
Middle	17.88	61.38			Pass
High	12.35	17.18			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.07	25.53	30	1000	Pass
Middle	14.03	25.29			Pass
High	13.46	22.18			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.51	22.44	30	1000	Pass
Middle	13.15	20.65			Pass
High	12.57	18.07			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.57	18.07	30	1000	Pass
Middle	12.81	19.10			Pass
High	12.65	18.41			Pass

MIMO-Antenna 1

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.40	34.67	29	794.33	Pass
Middle	15.46	35.16			Pass
High	15.37	34.43			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.10	16.22	29	794.33	Pass
Middle	14.50	28.18			Pass
High	9.64	9.20			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.63	11.56	30	1000	Pass
Middle	14.41	27.61			Pass
High	8.99	7.93			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.99	12.56	30	1000	Pass
Middle	14.87	30.69			Pass
High	9.19	8.30			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.04	12.71	30	1000	Pass
Middle	10.93	12.39			Pass
High	10.45	11.09			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.24	10.57	30	1000	Pass
Middle	9.23	8.38			Pass
High	9.41	8.73			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.14	10.33	30	1000	Pass
Middle	9.44	8.79			Pass
High	9.18	8.28			Pass

MIMO-Antenna 2

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.38	34.51	29	794.33	Pass
Middle	15.34	34.20			Pass
High	15.49	35.40			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.00	15.85	29	794.33	Pass
Middle	14.51	28.25			Pass
High	9.26	8.43			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.25	10.59	30	1000	Pass
Middle	14.26	26.67			Pass
High	9.00	7.94			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.64	11.59	30	1000	Pass
Middle	14.79	30.13			Pass
High	9.30	8.51			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	11.01	12.62	30	1000	Pass
Middle	11.00	12.59			Pass
High	10.44	11.07			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.17	10.40	30	1000	Pass
Middle	9.91	9.79			Pass
High	9.68	9.29			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	9.99	9.98	30	1000	Pass
Middle	10.15	10.35			Pass
High	9.71	9.35			Pass

MIMO**802.11b Mode:**

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.40	69.19	29	794.33	Pass
Middle	18.41	69.35			Pass
High	18.44	69.83			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.06	32.07	29	794.33	Pass
Middle	17.52	56.43			Pass
High	12.46	17.64			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.45	22.15	30	1000	Pass
Middle	17.35	54.27			Pass
High	12.01	15.87			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.83	24.15	30	1000	Pass
Middle	17.84	60.82			Pass
High	12.26	16.81			Pass

802.11ax-20 MHz(RU26) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.04	25.32	30	1000	Pass
Middle	13.98	24.98			Pass
High	13.46	22.16			Pass

802.11ax-20 MHz(RU52) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.22	20.97	30	1000	Pass
Middle	12.59	18.17			Pass
High	12.56	18.02			Pass

802.11ax-20 MHz(RU106) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.08	20.30	30	1000	Pass
Middle	12.82	19.14			Pass
High	12.46	17.63			Pass

A.2 Occupied Bandwidth

Note 1: All antenna were tested, but only the worst case has been reported in this report.

Note 2: All the configurations were pre tested, only the worst configuration has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	7.700000	10.964000	≥500
Middle	7.200000	10.884000	≥500
High	8.200000	11.024000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.500000	17.710000	≥500
Middle	16.500000	17.665000	≥500
High	16.500000	17.594000	≥500

802.11n-20 MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	17.800000	18.547000	≥500
Middle	17.800000	18.634000	≥500
High	17.800000	18.650000	≥500

802.11ax-20 MHz(SU) Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	19.000000	19.107000	≥500
Middle	19.000000	19.064000	≥500
High	18.400000	19.113000	≥500

Test Plots

6 dB Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL



802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL



802.11ax-20 MHz(SU) LOW CHANNEL



802.11ax-20 MHz(SU) MIDDLE CHANNEL



802.11ax-20 MHz(SU) HIGH CHANNEL



99% Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL




802.11g LOW CHANNEL




802.11g MIDDLE CHANNEL




802.11g HIGH CHANNEL

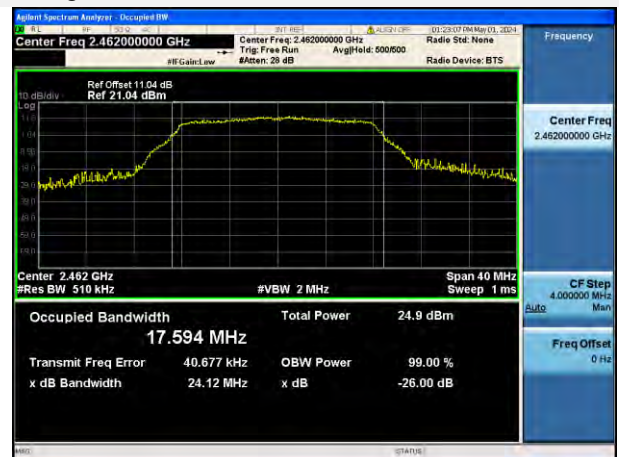


802.11n-20 MHz LOW CHANNEL

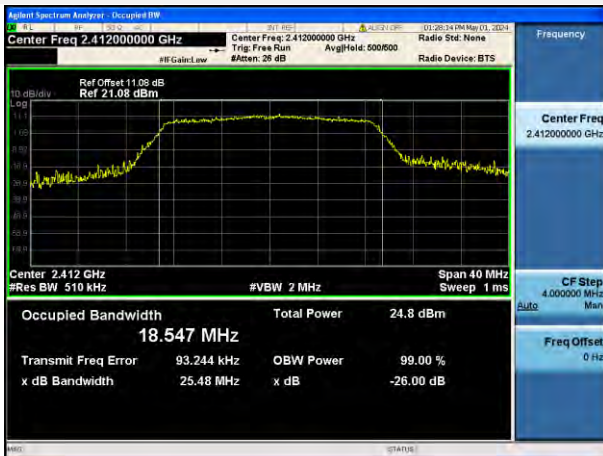


802.11n-20 MHz MIDDLE CHANNEL

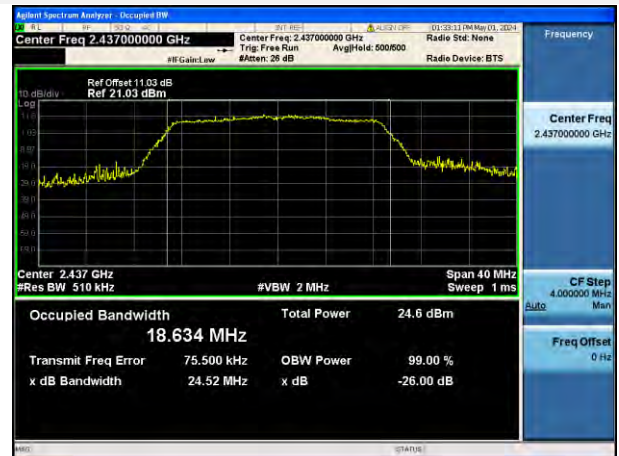


802.11n-20 MHz HIGH CHANNEL

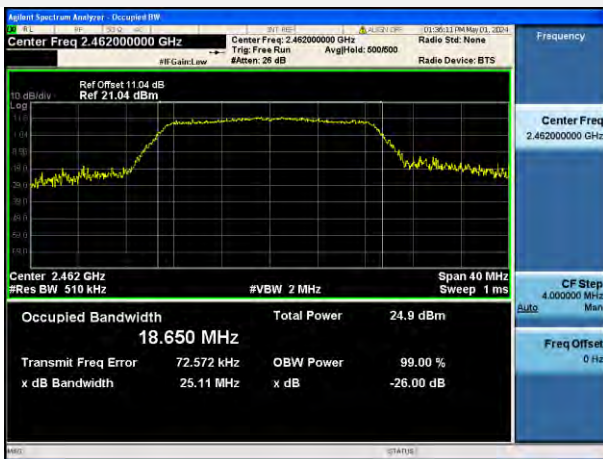

802.11ax-20 MHz(SU) LOW CHANNEL

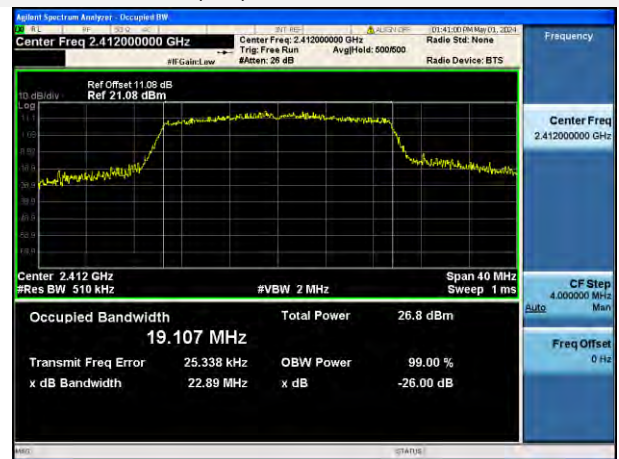

802.11ax-20 MHz(SU) MIDDLE CHANNEL

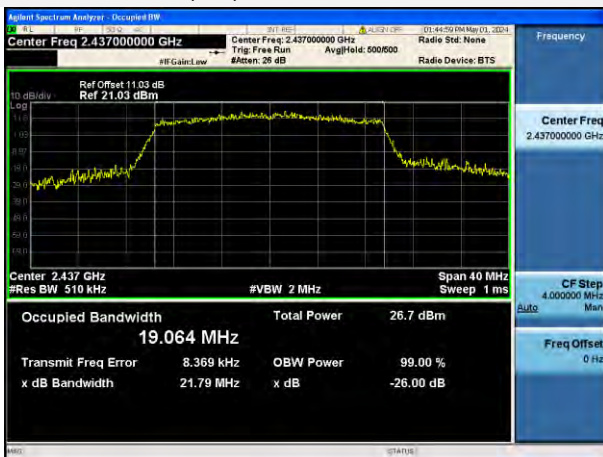

802.11ax-20 MHz(SU) HIGH CHANNEL



A.3 Conducted Spurious Emissions

Note 1: All antenna were tested, but only the worst case has been reported in this report.

Note 2: All the configurations were pre tested, only the worst configuration has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.19	11.66	-8.34	Pass
Middle	-39.43	11.38	-8.62	Pass
High	-39.40	11.93	-8.07	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-38.63	4.75	-15.25	Pass
Middle	-39.22	5.91	-14.09	Pass
High	-39.13	2.44	-17.56	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.05	3.14	-16.86	Pass
Middle	-40.40	5.95	-14.05	Pass
High	-39.35	1.40	-18.60	Pass

802.11ax-20 MHz(SU) Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-38.77	3.24	-16.76	Pass
Middle	-38.82	6.19	-13.81	Pass
High	-39.84	1.79	-18.21	Pass

Test Plots


802.11b LOW CHANNEL CARRIER LEVEL



802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

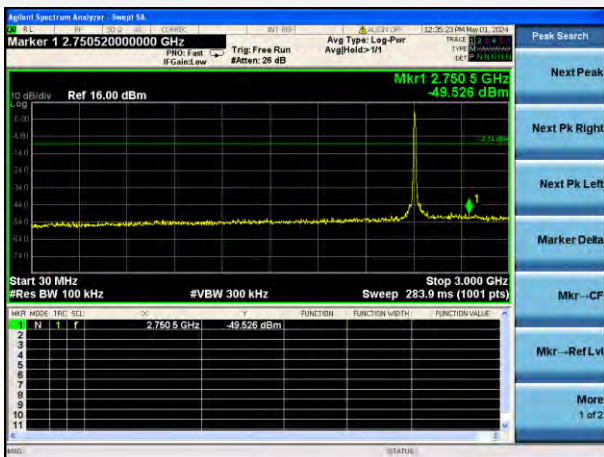


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

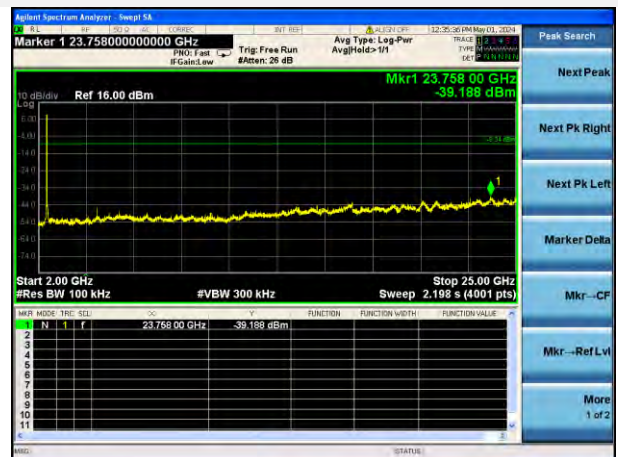


802.11b MIDDLE CHANNEL CARRIER LEVEL



802.11b MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

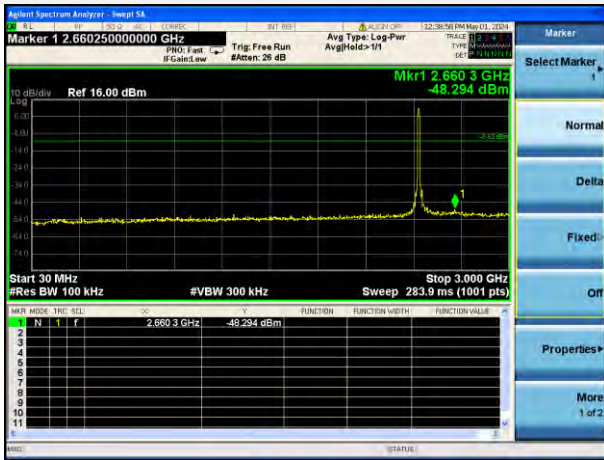


802.11b MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

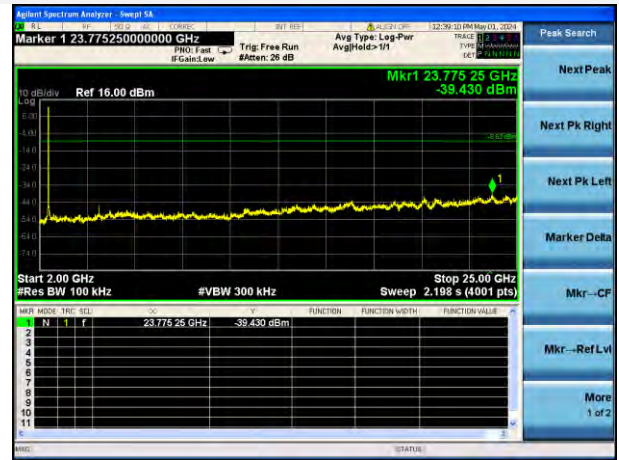


802.11b HIGH CHANNEL CARRIER LEVEL



802.11b HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

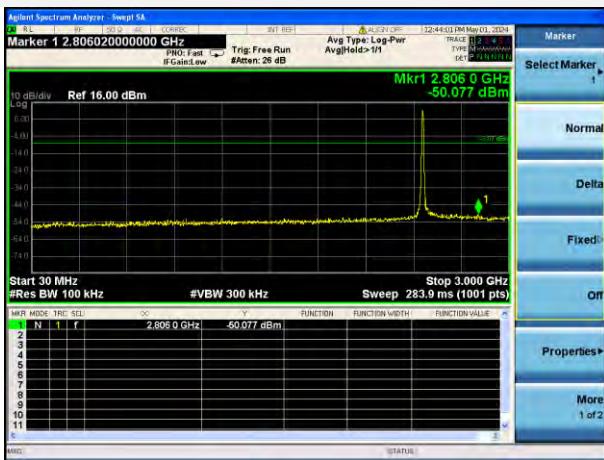



802.11b HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

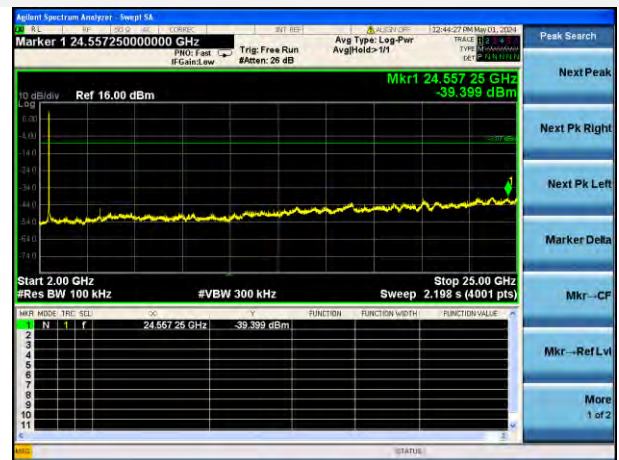

802.11g LOW CHANNEL CARRIER LEVEL




802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

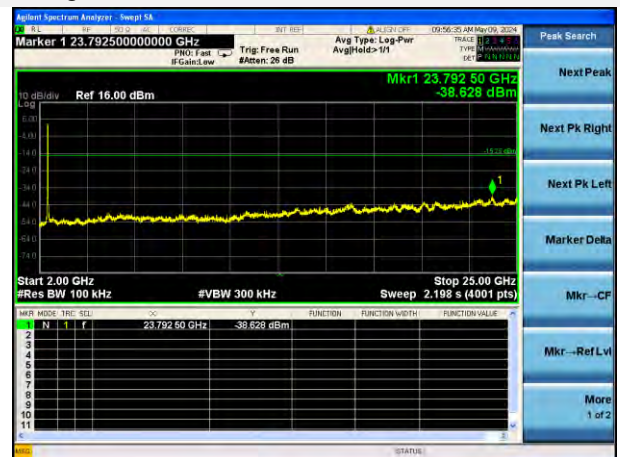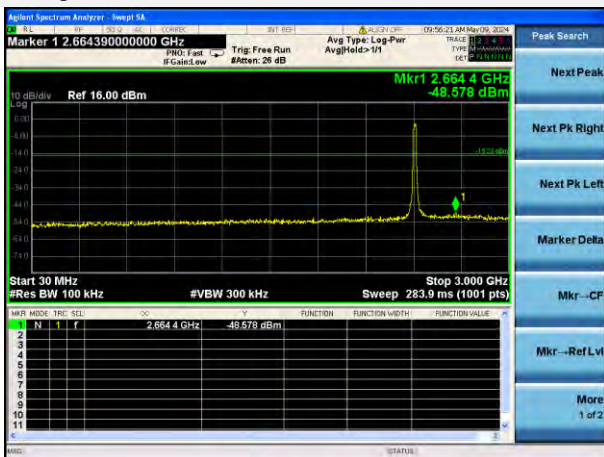


802.11g MIDDLE CHANNEL CARRIER LEVEL



802.11g MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

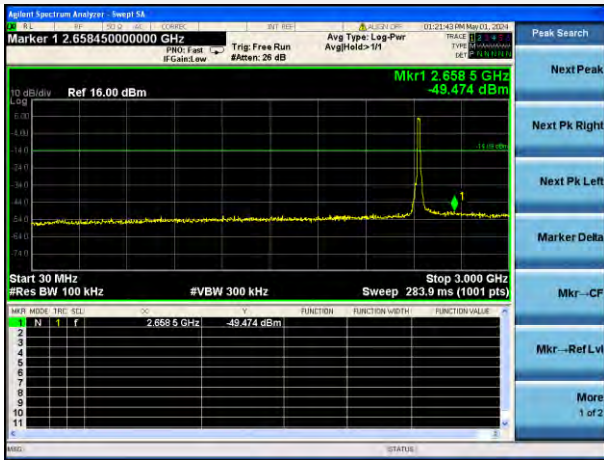


802.11g MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

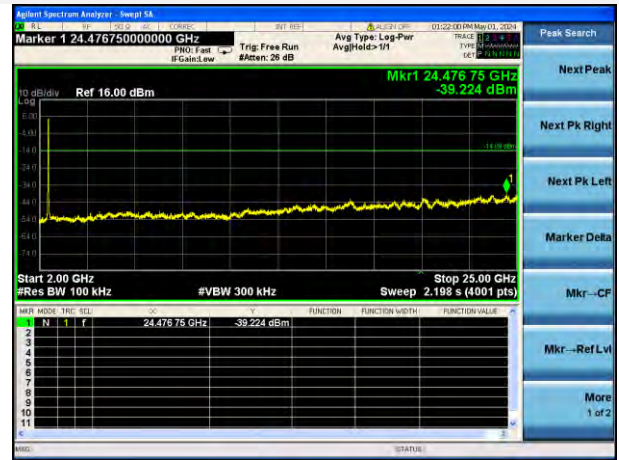


802.11g HIGH CHANNEL CARRIER LEVEL



802.11g HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

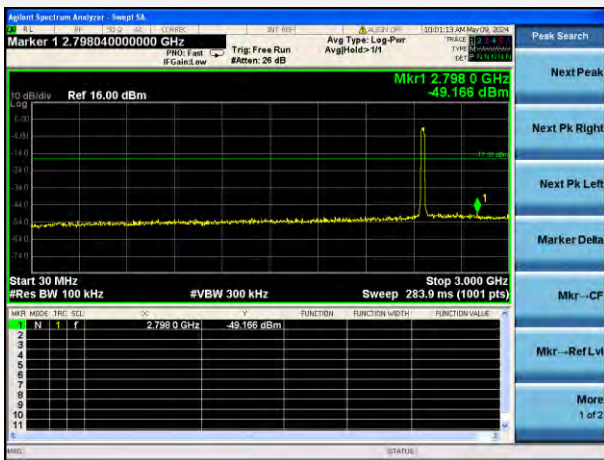


802.11g HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

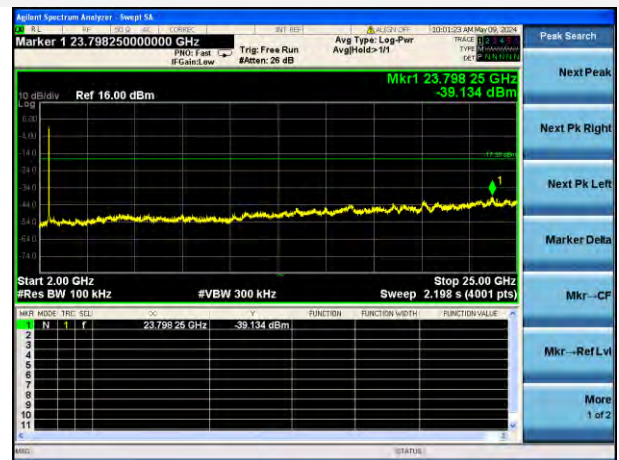


802.11n-20 MHz LOW CHANNEL CARRIER LEVEL




802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

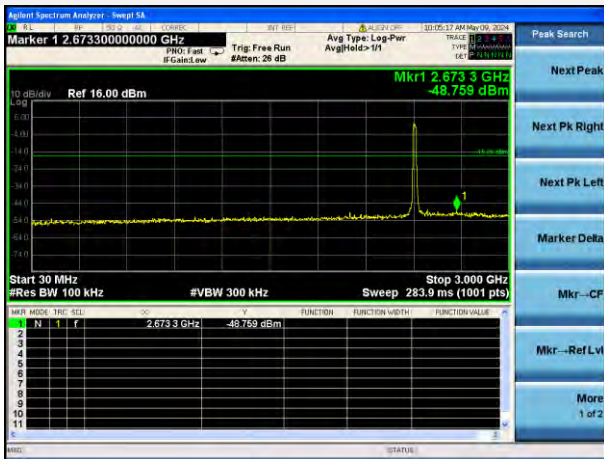


802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

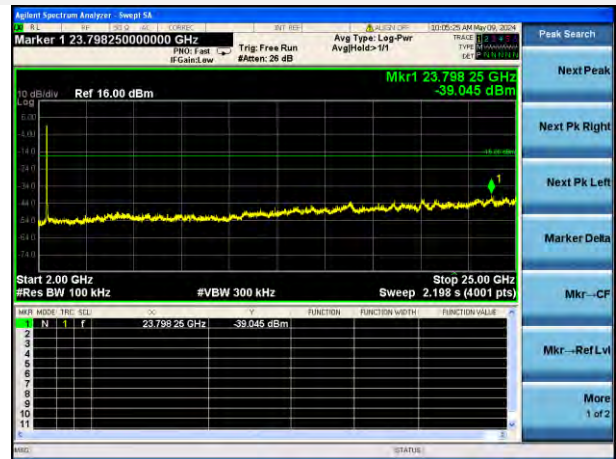


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

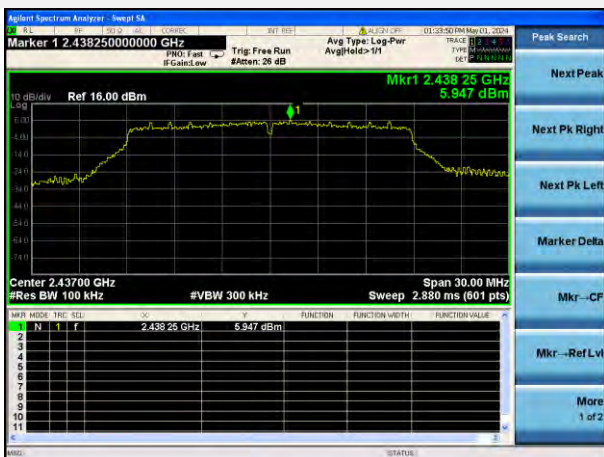

802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

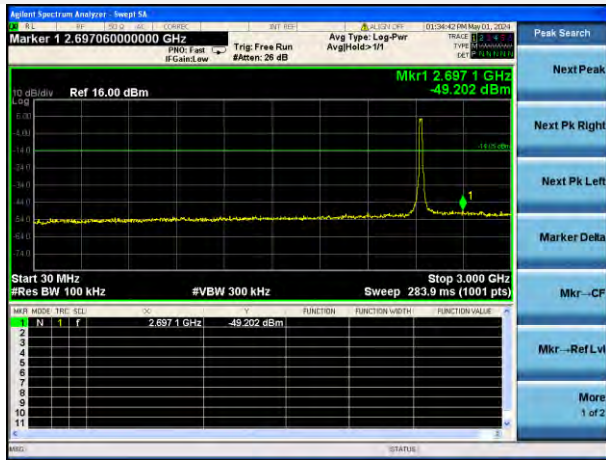


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

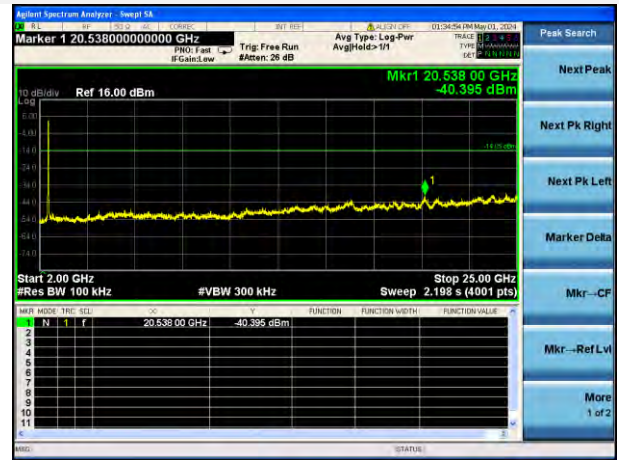


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL



802.11n-20 MHz HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

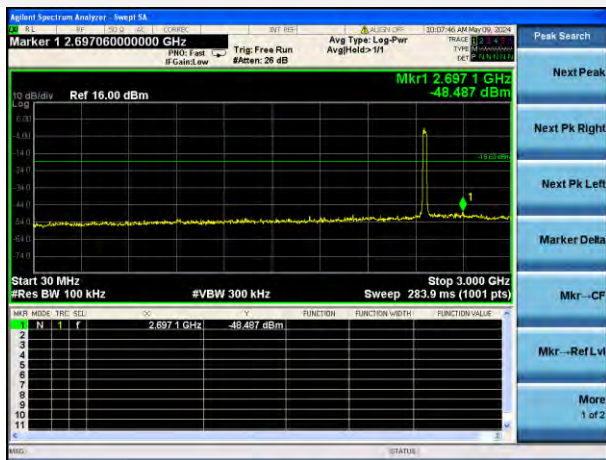


802.11n-20 MHz HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

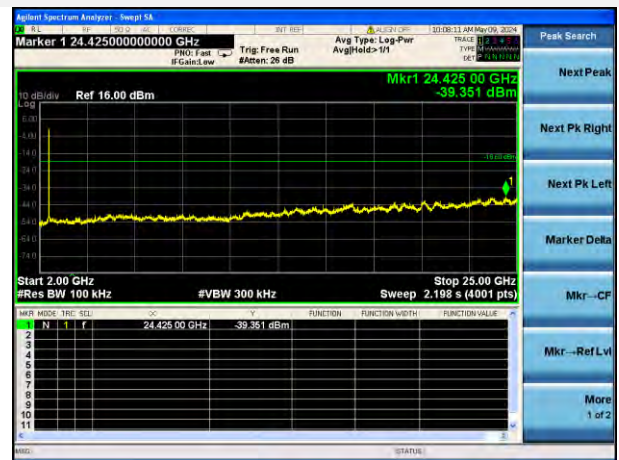


802.11ax-20 MHz(SU) LOW CHANNEL CARRIER LEVEL




802.11ax-20 MHz(SU) LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

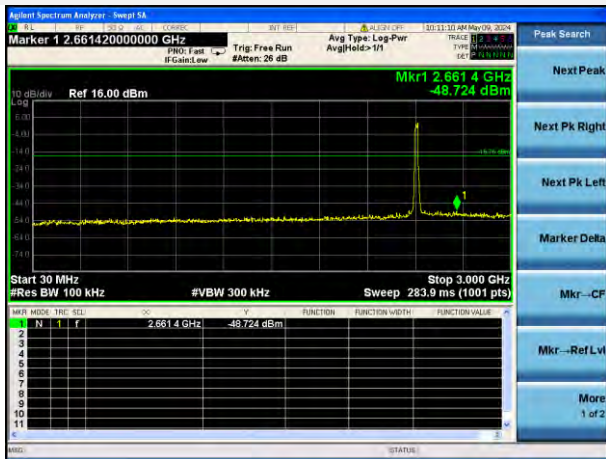


802.11ax-20 MHz(SU) LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

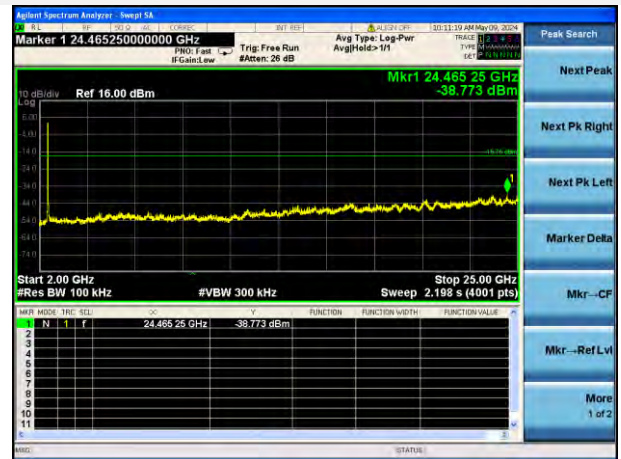


802.11ax-20 MHz(SU) MIDDLE CHANNEL CARRIER
LEVEL

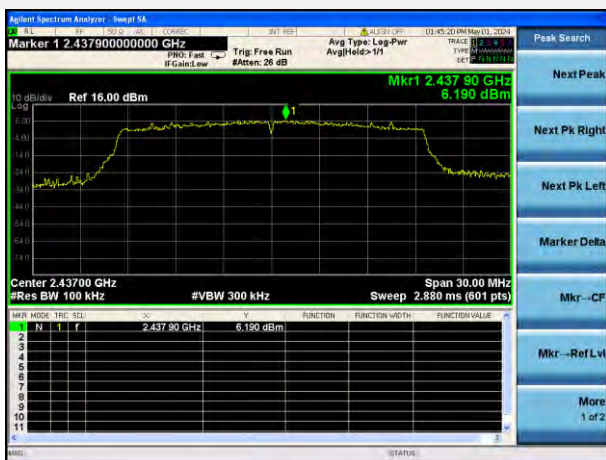

802.11ax-20 MHz(SU) MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

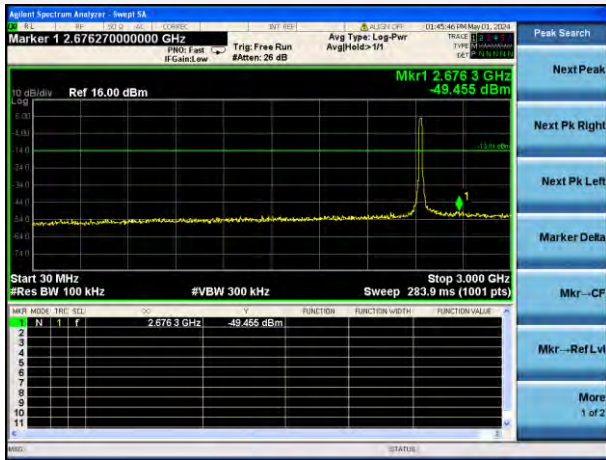


802.11ax-20 MHz(SU) MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

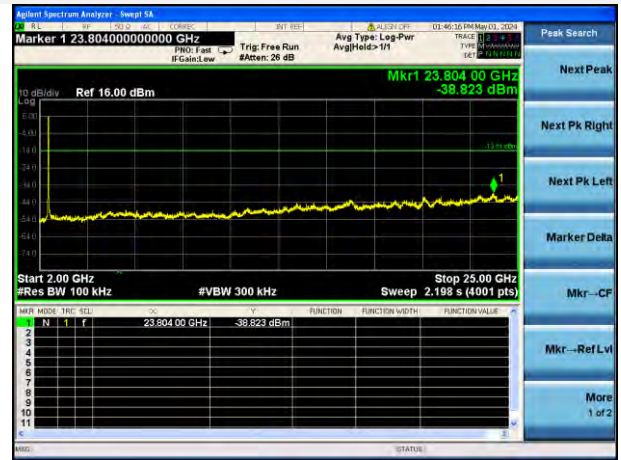


802.11ax-20 MHz(SU) HIGH CHANNEL CARRIER
LEVEL



802.11ax-20 MHz(SU) HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

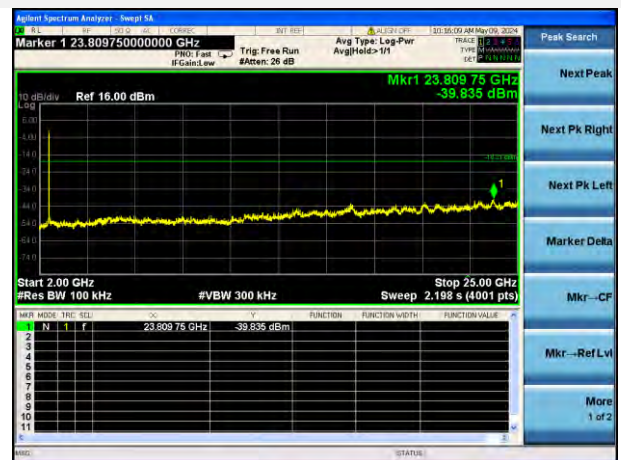

802.11ax-20 MHz(SU) HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

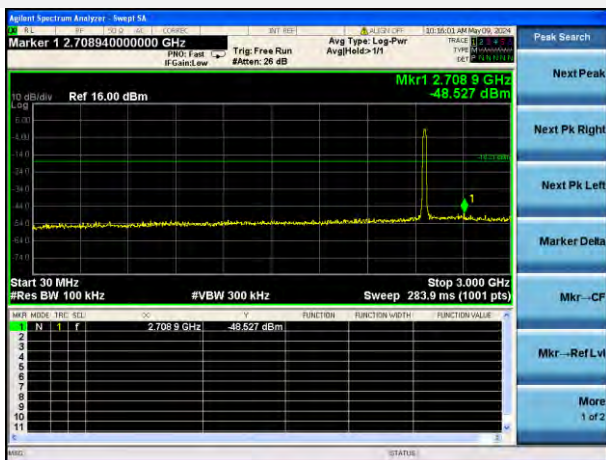

A.4 Band Edge (Authorized-band band-edge)

Note 1: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Note 2: All antenna were tested, but only the worst case has been reported in this report.

Note 3: All the configurations were pre tested, only the worst configuration has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.51	11.66	-8.34	Pass
High Channel	-42.79	11.93	-8.07	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-29.49	4.75	-15.25	Pass
High Channel	-44.72	2.44	-17.56	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.46	3.14	-16.86	Pass
High Channel	-45.74	1.40	-18.60	Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.47	3.24	-16.76	Pass
High Channel	-43.33	1.79	-18.21	Pass

Test Plots

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE



802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE

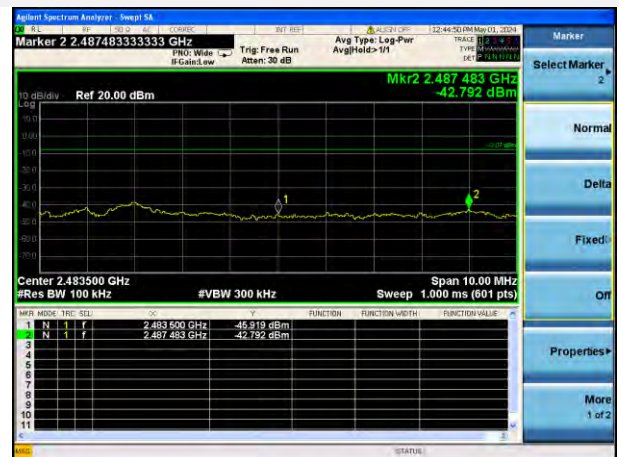

802.11g LOW CHANNEL, CARRIER LEVEL




802.11g LOW CHANNEL, BAND EDGE



802.11g HIGH CHANNEL, CARRIER LEVEL



802.11g HIGH CHANNEL, BAND EDGE

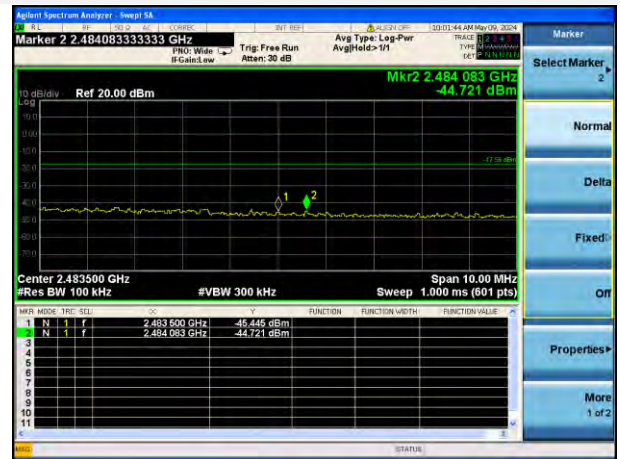


802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL




802.11n-20 MHz LOW CHANNEL, BAND EDGE



802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

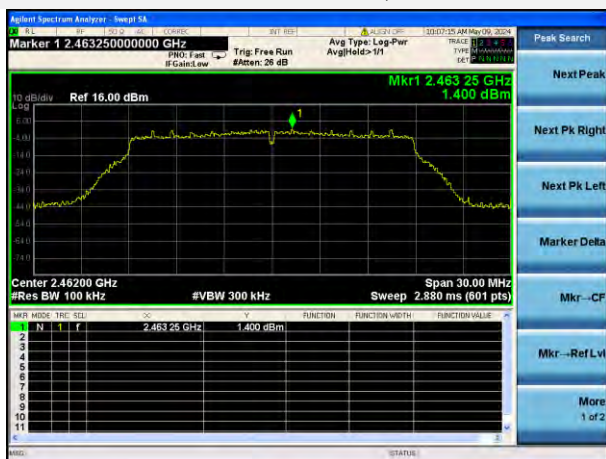

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

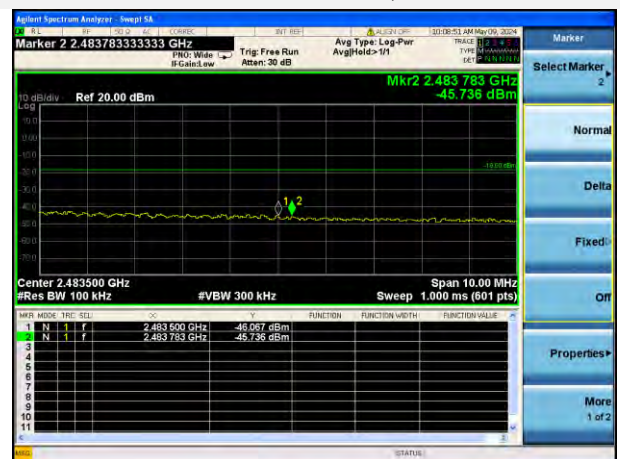

802.11ax-20 MHz(SU) LOW CHANNEL, CARRIER LEVEL




802.11ax-20 MHz(SU) LOW CHANNEL, BAND EDGE LEVEL



802.11ax-20 MHz(SU) HIGH CHANNEL, CARRIER LEVEL



802.11ax-20 MHz(SU) HIGH CHANNEL, BAND EDGE LEVEL

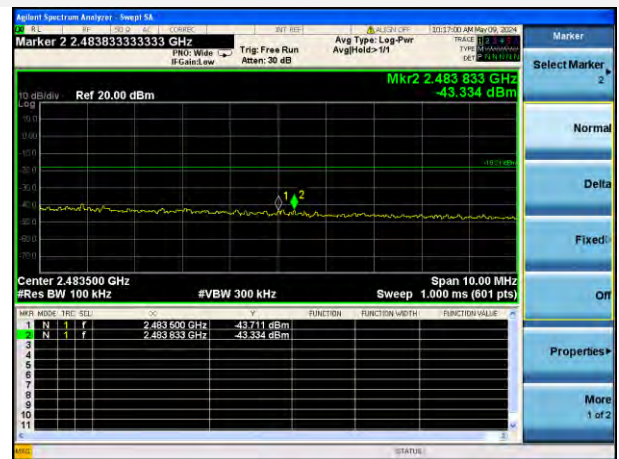

A.5 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)


Test Data and Plots

PHASE L

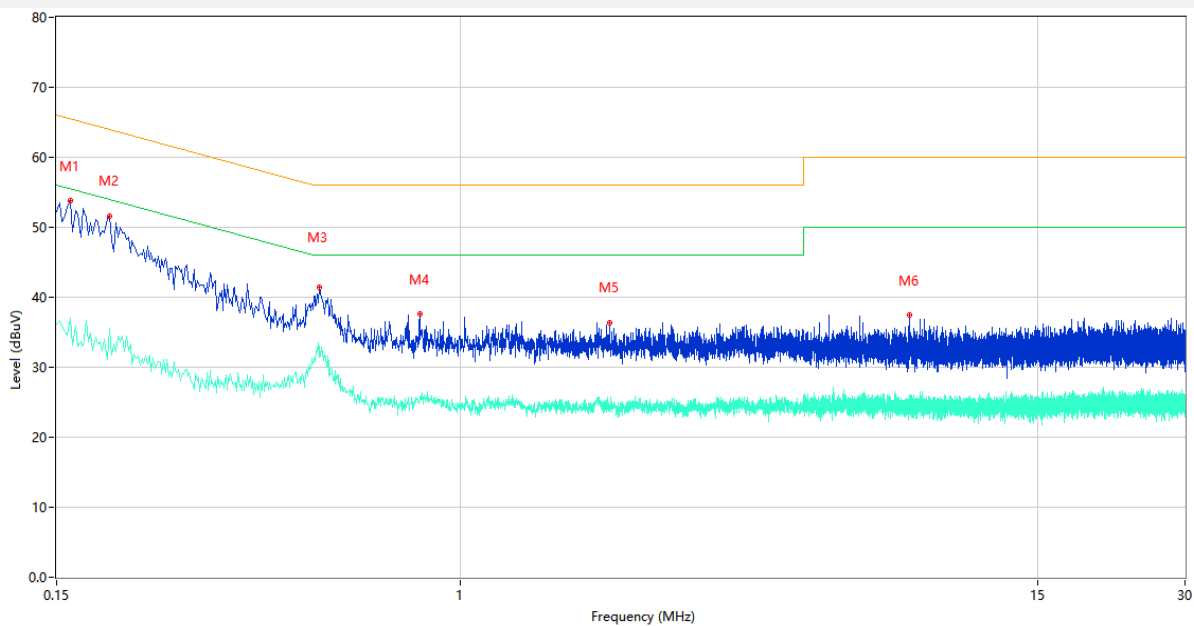

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	53.80	9.78	65.46	11.66	Peak	L	Pass
1**	0.160	36.96	9.78	55.46	18.50	AV	L	Pass
2	0.192	51.60	9.77	63.95	12.35	Peak	L	Pass
2**	0.192	35.63	9.77	53.95	18.32	AV	L	Pass
3	0.514	41.43	9.99	56.00	14.57	Peak	L	Pass
3**	0.514	31.46	9.99	46.00	14.54	AV	L	Pass
4	0.826	37.62	10.58	56.00	18.38	Peak	L	Pass
4**	0.826	25.49	10.58	46.00	20.51	AV	L	Pass
5	2.010	36.40	10.28	56.00	19.60	Peak	L	Pass
5**	2.010	24.67	10.28	46.00	21.33	AV	L	Pass
6	8.224	37.43	10.50	60.00	22.57	Peak	L	Pass
6**	8.224	25.40	10.50	50.00	24.60	AV	L	Pass

PHASE N

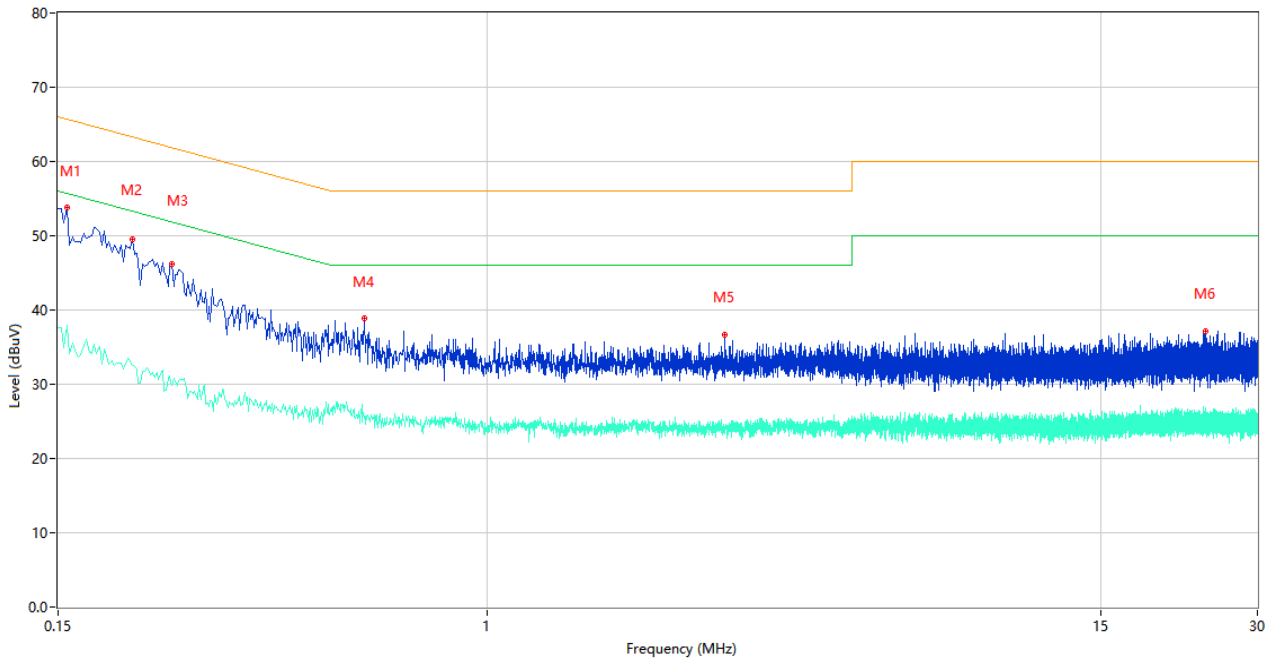

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	53.78	9.78	65.67	11.89	Peak	N	Pass
1**	0.156	37.96	9.78	55.67	17.71	AV	N	Pass
2	0.208	49.59	9.77	63.28	13.69	Peak	N	Pass
2**	0.208	32.56	9.77	53.28	20.72	AV	N	Pass
3	0.248	46.18	9.77	61.82	15.64	Peak	N	Pass
3**	0.248	29.83	9.77	51.82	21.99	AV	N	Pass
4	0.580	38.84	10.11	56.00	17.16	Peak	N	Pass
4**	0.580	25.42	10.11	46.00	20.58	AV	N	Pass
5	2.854	36.74	9.80	56.00	19.26	Peak	N	Pass
5**	2.854	24.31	9.80	46.00	21.69	AV	N	Pass
6	23.882	37.21	11.02	60.00	22.79	Peak	N	Pass
6**	23.882	24.08	11.02	50.00	25.92	AV	N	Pass

A.6 Radiated Emission

Note ¹: The symbol of "--" in the table which means not application.


Note ²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note ⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.


Test Data and Plots

30 MHz to 1 GHz, ANT H

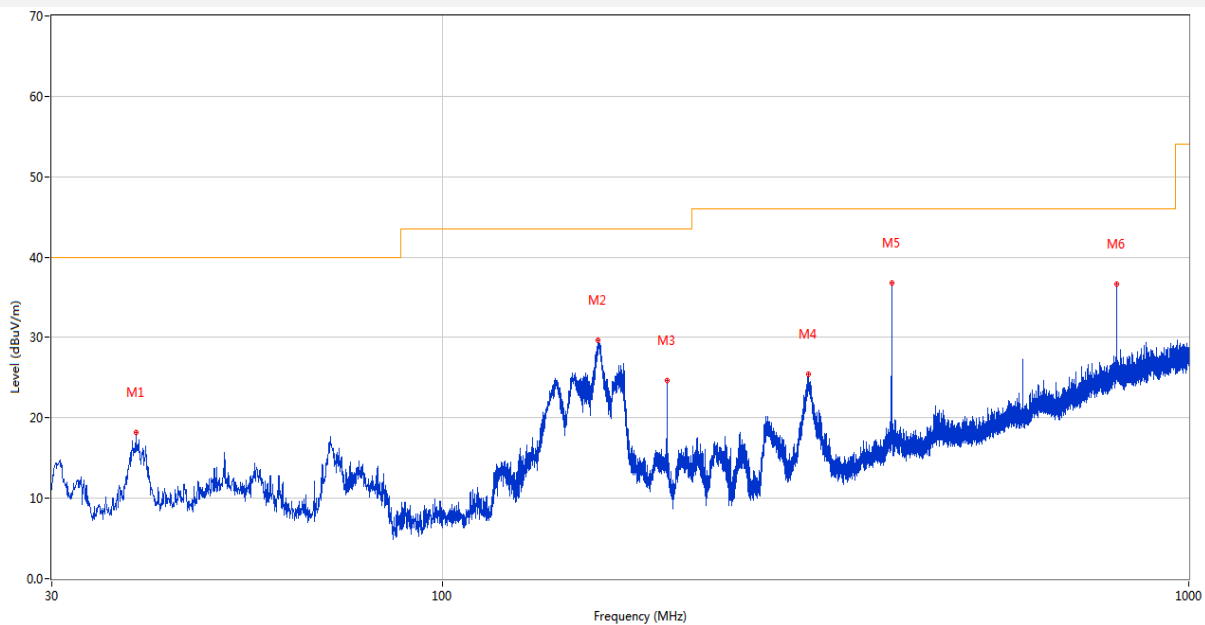

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.876	18.25	-26.83	40.0	21.75	Peak	211.00	100	Horizontal	Pass
2	161.629	29.62	-25.35	43.5	13.88	Peak	216.00	200	Horizontal	Pass
3	199.992	24.64	-28.75	43.5	18.86	Peak	26.00	100	Horizontal	Pass
4	309.651	25.40	-24.07	46.0	20.60	Peak	179.00	100	Horizontal	Pass
5	400.006	36.83	-21.35	46.0	9.17	Peak	212.00	100	Horizontal	Pass
6	800.034	36.60	-11.77	46.0	9.40	Peak	146.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

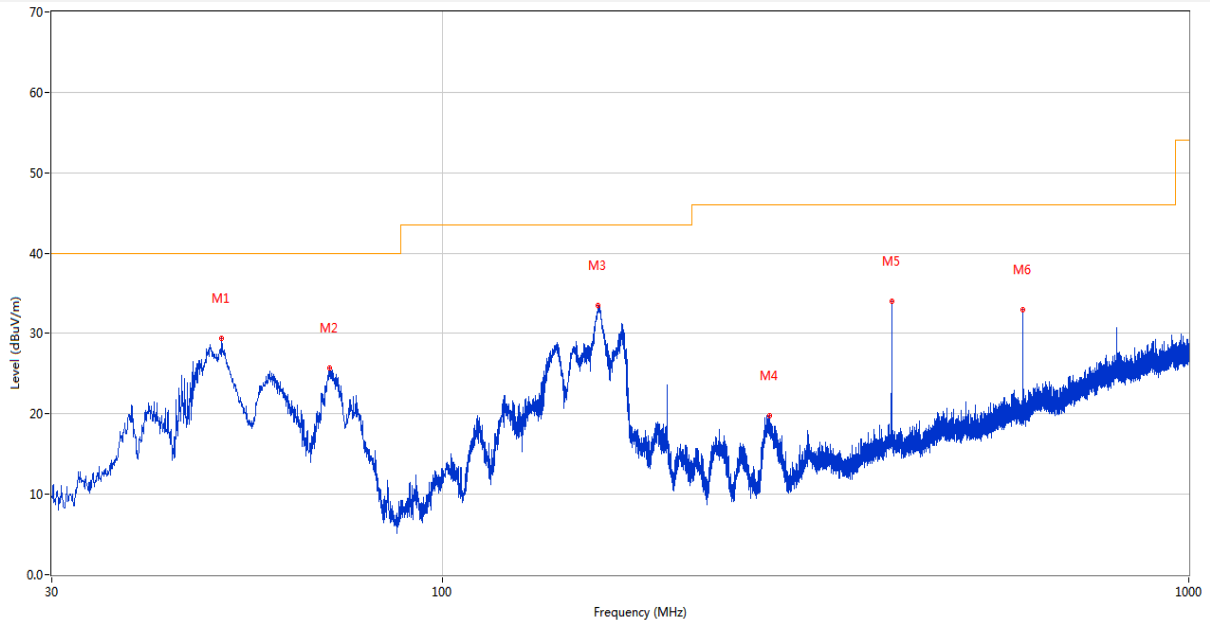

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.709	29.35	-26.44	40.0	10.65	Peak	51.00	100	Vertical	Pass
2	70.643	25.75	-28.87	40.0	14.25	Peak	26.00	100	Vertical	Pass
3	161.920	33.45	-25.35	43.5	10.05	Peak	296.00	100	Vertical	Pass
4	274.392	19.80	-25.95	46.0	26.20	Peak	196.00	100	Vertical	Pass
5	400.006	34.05	-21.35	46.0	11.95	Peak	192.00	200	Vertical	Pass
6	600.020	32.98	-16.91	46.0	13.02	Peak	354.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3: All antenna were tested, but only the worst case has been reported in this report.

Note 4: All the configurations were pre tested, only the worst configuration has been reported in this report.

SISO-Antenna 1

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1311.900	42.09	-16.98	74.0	31.91	Peak	119.00	200	Horizontal	Pass
1**	1311.900	33.40	-16.98	54.0	20.60	AV	119.00	200	Horizontal	Pass
2	2411.900	108.51	-10.20	74.0	-34.51	Peak	170.00	200	Horizontal	N/A
2**	2411.900	104.66	-10.20	54.0	-50.66	AV	170.00	200	Horizontal	N/A
3	4824.000	52.19	-3.61	74.0	21.81	Peak	157.00	100	Horizontal	Pass
3**	4824.000	47.32	-3.61	54.0	6.68	AV	157.00	100	Horizontal	Pass
4	4824.250	50.75	-3.48	74.0	23.25	Peak	179.00	100	Horizontal	Pass
4**	4824.250	48.71	-3.48	54.0	5.29	AV	179.00	100	Horizontal	Pass
5	12931.125	52.63	1.39	74.0	21.37	Peak	277.00	100	Horizontal	Pass
5**	12931.125	43.17	1.39	54.0	10.83	AV	277.00	100	Horizontal	Pass
6	17403.599	56.34	5.44	74.0	17.66	Peak	218.00	300	Horizontal	Pass
6**	17403.599	46.96	5.44	54.0	7.04	AV	218.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.300	44.42	-17.07	74.0	29.58	Peak	0.00	400	Vertical	Pass
1**	1328.300	32.22	-17.07	54.0	21.78	AV	0.00	400	Vertical	Pass
2	2411.900	102.65	-10.20	74.0	-28.65	Peak	312.00	200	Vertical	N/A
2**	2411.900	98.74	-10.20	54.0	-44.74	AV	312.00	200	Vertical	N/A
3	4824.000	50.47	-3.61	74.0	23.53	Peak	135.00	100	Vertical	Pass
3**	4824.000	45.75	-3.61	54.0	8.25	AV	135.00	100	Vertical	Pass
4	7420.250	53.62	1.47	74.0	20.38	Peak	179.00	100	Vertical	Pass
4**	7420.250	44.42	1.47	54.0	9.58	AV	179.00	100	Vertical	Pass
5	11787.175	52.70	-0.16	74.0	21.30	Peak	305.00	100	Vertical	Pass
5**	11787.175	44.02	-0.16	54.0	9.98	AV	305.00	100	Vertical	Pass
6	17418.824	56.02	5.48	74.0	17.98	Peak	72.00	300	Vertical	Pass
6**	17418.824	47.42	5.48	54.0	6.58	AV	72.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1585.100	42.01	-17.08	74.0	31.99	Peak	46.00	200	Horizontal	Pass
1**	1585.100	33.23	-17.08	54.0	20.77	AV	46.00	200	Horizontal	Pass
2	2438.300	108.69	-10.02	74.0	-34.69	Peak	197.00	150	Horizontal	N/A
2**	2438.300	105.98	-10.02	54.0	-51.98	AV	197.00	150	Horizontal	N/A
3	4874.250	53.19	-3.45	74.0	20.81	Peak	189.00	100	Horizontal	Pass
3**	4874.250	49.66	-3.45	54.0	4.34	AV	189.00	100	Horizontal	Pass
4	6894.000	54.18	0.81	74.0	19.82	Peak	60.00	300	Horizontal	Pass
4**	6894.000	45.05	0.81	54.0	8.95	AV	60.00	300	Horizontal	Pass
5	11726.375	53.13	-0.35	74.0	20.87	Peak	135.00	300	Horizontal	Pass
5**	11726.375	42.96	-0.35	54.0	11.04	AV	135.00	300	Horizontal	Pass
6	17454.000	57.13	5.49	74.0	16.87	Peak	136.00	400	Horizontal	Pass
6**	17454.000	47.94	5.49	54.0	6.06	AV	136.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.900	43.43	-16.95	74.0	30.57	Peak	0.00	100	Vertical	Pass
1**	1327.900	34.51	-16.95	54.0	19.49	AV	0.00	100	Vertical	Pass
2	2438.400	104.04	-9.92	74.0	-30.04	Peak	312.00	150	Vertical	N/A
2**	2438.400	101.21	-9.92	54.0	-47.21	AV	312.00	150	Vertical	N/A
3	4874.250	51.15	-3.45	74.0	22.85	Peak	147.00	200	Vertical	Pass
3**	4874.250	46.31	-3.45	54.0	7.69	AV	147.00	200	Vertical	Pass
4	7708.000	54.59	1.69	74.0	19.41	Peak	206.00	400	Vertical	Pass
4**	7708.000	44.72	1.69	54.0	9.28	AV	206.00	400	Vertical	Pass
5	12962.888	52.84	1.70	74.0	21.16	Peak	102.00	100	Vertical	Pass
5**	12962.888	43.39	1.70	54.0	10.61	AV	102.00	100	Vertical	Pass
6	16428.151	56.14	2.79	74.0	17.86	Peak	360.00	200	Vertical	Pass
6**	16428.151	46.49	2.79	54.0	7.51	AV	360.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1503.200	41.78	-16.95	74.0	32.22	Peak	156.00	200	Horizontal	Pass
1**	1503.200	32.26	-16.95	54.0	21.74	AV	156.00	200	Horizontal	Pass
2	2463.300	107.75	-11.34	74.0	-33.75	Peak	177.00	200	Horizontal	N/A
2**	2463.300	105.02	-11.34	54.0	-51.02	AV	177.00	200	Horizontal	N/A
3	4924.250	54.07	-3.53	74.0	19.93	Peak	185.00	150	Horizontal	Pass
3**	4924.250	50.94	-3.53	54.0	3.06	AV	185.00	150	Horizontal	Pass
4	7507.750	53.28	0.22	74.0	20.72	Peak	29.00	400	Horizontal	Pass
4**	7507.750	44.13	0.22	54.0	9.87	AV	29.00	400	Horizontal	Pass
5	12437.213	53.11	1.06	74.0	20.89	Peak	327.00	300	Horizontal	Pass
5**	12437.213	42.84	1.06	54.0	11.16	AV	327.00	300	Horizontal	Pass
6	16432.613	56.36	2.73	74.0	17.64	Peak	211.00	100	Horizontal	Pass
6**	16432.613	46.80	2.73	54.0	7.20	AV	211.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.000	43.09	-17.16	74.0	30.91	Peak	0.00	300	Vertical	Pass
1**	1327.000	32.85	-17.16	54.0	21.15	AV	0.00	300	Vertical	Pass
2	2460.800	103.44	-11.30	74.0	-29.44	Peak	310.00	150	Vertical	N/A
2**	2460.800	100.53	-11.30	54.0	-46.53	AV	310.00	150	Vertical	N/A
3	4924.000	51.57	-3.57	74.0	22.43	Peak	228.00	200	Vertical	Pass
3**	4924.000	47.10	-3.57	54.0	6.90	AV	228.00	200	Vertical	Pass
4	4924.250	50.69	-3.53	74.0	23.31	Peak	145.00	200	Vertical	Pass
4**	4924.250	47.41	-3.53	54.0	6.59	AV	145.00	200	Vertical	Pass
5	12219.425	52.83	0.68	74.0	21.17	Peak	156.00	400	Vertical	Pass
5**	12219.425	43.78	0.68	54.0	10.22	AV	156.00	400	Vertical	Pass
6	17407.537	56.17	5.45	74.0	17.83	Peak	198.00	200	Vertical	Pass
6**	17407.537	47.61	5.45	54.0	6.39	AV	198.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1559.000	42.61	-17.14	74.0	31.39	Peak	133.00	200	Horizontal	Pass
1**	1559.000	32.05	-17.14	54.0	21.95	AV	133.00	200	Horizontal	Pass
2	2410.600	110.61	-10.39	74.0	-36.61	Peak	179.00	100	Horizontal	N/A
2**	2410.600	103.06	-10.39	54.0	-49.06	AV	179.00	100	Horizontal	N/A
3	4826.000	49.92	-3.85	74.0	24.08	Peak	24.00	200	Horizontal	Pass
3**	4826.000	40.35	-3.85	54.0	13.65	AV	24.00	200	Horizontal	Pass
4	7901.500	54.13	0.71	74.0	19.87	Peak	165.00	100	Horizontal	Pass
4**	7901.500	44.03	0.71	54.0	9.97	AV	165.00	100	Horizontal	Pass
5	12990.975	53.22	1.96	74.0	20.78	Peak	11.00	100	Horizontal	Pass
5**	12990.975	43.37	1.96	54.0	10.63	AV	11.00	100	Horizontal	Pass
6	17438.251	56.40	5.53	74.0	17.60	Peak	270.00	100	Horizontal	Pass
6**	17438.251	47.48	5.53	54.0	6.52	AV	270.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.200	42.65	-17.09	74.0	31.35	Peak	1.00	100	Vertical	Pass
1**	1332.200	34.41	-17.09	54.0	19.59	AV	1.00	100	Vertical	Pass
2	2410.500	103.97	-10.41	74.0	-29.97	Peak	320.00	150	Vertical	N/A
2**	2410.500	96.96	-10.41	54.0	-42.96	AV	320.00	150	Vertical	N/A
3	4984.750	49.82	-3.36	74.0	24.18	Peak	273.00	100	Vertical	Pass
3**	4984.750	40.38	-3.36	54.0	13.62	AV	273.00	100	Vertical	Pass
4	6894.750	54.67	0.60	74.0	19.33	Peak	341.00	200	Vertical	Pass
4**	6894.750	45.09	0.60	54.0	8.91	AV	341.00	200	Vertical	Pass
5	11747.512	53.48	-0.21	74.0	20.52	Peak	36.00	100	Vertical	Pass
5**	11747.512	43.58	-0.21	54.0	10.42	AV	36.00	100	Vertical	Pass
6	17456.626	56.88	5.44	74.0	17.12	Peak	183.00	100	Vertical	Pass
6**	17456.626	47.55	5.44	54.0	6.45	AV	183.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1518.700	42.19	-16.91	74.0	31.81	Peak	233.00	400	Horizontal	Pass
1**	1518.700	33.18	-16.91	54.0	20.82	AV	233.00	400	Horizontal	Pass
2	2438.100	111.18	-10.22	74.0	-37.18	Peak	205.00	200	Horizontal	N/A
2**	2438.100	103.64	-10.22	54.0	-49.64	AV	205.00	200	Horizontal	N/A
3	4986.750	49.33	-3.08	74.0	24.67	Peak	177.00	100	Horizontal	Pass
3**	4986.750	40.22	-3.08	54.0	13.78	AV	177.00	100	Horizontal	Pass
4	7882.000	54.08	1.96	74.0	19.92	Peak	336.00	300	Horizontal	Pass
4**	7882.000	44.77	1.96	54.0	9.23	AV	336.00	300	Horizontal	Pass
5	12238.425	53.14	0.94	74.0	20.86	Peak	339.00	200	Horizontal	Pass
5**	12238.425	44.11	0.94	54.0	9.89	AV	339.00	200	Horizontal	Pass
6	17454.524	56.49	5.48	74.0	17.51	Peak	29.00	300	Horizontal	Pass
6**	17454.524	46.97	5.48	54.0	7.03	AV	29.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.700	42.15	-16.94	74.0	31.85	Peak	1.00	300	Vertical	Pass
1**	1484.700	33.56	-16.94	54.0	20.44	AV	1.00	300	Vertical	Pass
2	2438.400	105.48	-9.92	74.0	-31.48	Peak	320.00	100	Vertical	N/A
2**	2438.400	98.42	-9.92	54.0	-44.42	AV	320.00	100	Vertical	N/A
3	4995.500	48.94	-3.18	74.0	25.06	Peak	0.00	100	Vertical	Pass
3**	4995.500	40.04	-3.18	54.0	13.96	AV	0.00	100	Vertical	Pass
4	7769.000	53.82	1.54	74.0	20.18	Peak	113.00	200	Vertical	Pass
4**	7769.000	44.25	1.54	54.0	9.75	AV	113.00	200	Vertical	Pass
5	11772.925	53.15	-0.17	74.0	20.85	Peak	360.00	200	Vertical	Pass
5**	11772.925	43.50	-0.17	54.0	10.50	AV	360.00	200	Vertical	Pass
6	16391.663	57.59	2.85	74.0	16.41	Peak	266.00	300	Vertical	Pass
6**	16391.663	46.78	2.85	54.0	7.22	AV	266.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1514.200	42.44	-17.06	74.0	31.56	Peak	0.00	200	Horizontal	Pass
1**	1514.200	32.23	-17.06	54.0	21.77	AV	0.00	200	Horizontal	Pass
2	2460.000	110.32	-11.31	74.0	-36.32	Peak	179.00	100	Horizontal	N/A
2**	2460.000	102.33	-11.31	54.0	-48.33	AV	179.00	100	Horizontal	N/A
3	4919.750	50.59	-3.68	74.0	23.41	Peak	172.00	100	Horizontal	Pass
3**	4919.750	41.40	-3.68	54.0	12.60	AV	172.00	100	Horizontal	Pass
4	7704.750	54.60	2.00	74.0	19.40	Peak	55.00	200	Horizontal	Pass
4**	7704.750	45.14	2.00	54.0	8.86	AV	55.00	200	Horizontal	Pass
5	12967.349	53.52	1.74	74.0	20.48	Peak	89.00	300	Horizontal	Pass
5**	12967.349	44.24	1.74	54.0	9.76	AV	89.00	300	Horizontal	Pass
6	16386.150	56.57	2.64	74.0	17.43	Peak	131.00	300	Horizontal	Pass
6**	16386.150	47.06	2.64	54.0	6.94	AV	131.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1271.500	42.13	-17.23	74.0	31.87	Peak	93.00	200	Vertical	Pass
1**	1271.500	31.98	-17.23	54.0	22.02	AV	93.00	200	Vertical	Pass
2	2460.500	103.60	-11.29	74.0	-29.60	Peak	279.00	100	Vertical	N/A
2**	2460.500	96.61	-11.29	54.0	-42.61	AV	279.00	100	Vertical	N/A
3	4941.250	49.82	-3.57	74.0	24.18	Peak	360.00	150	Vertical	Pass
3**	4941.250	40.47	-3.57	54.0	13.53	AV	360.00	150	Vertical	Pass
4	7868.000	54.40	1.51	74.0	19.60	Peak	139.00	100	Vertical	Pass
4**	7868.000	44.01	1.51	54.0	9.99	AV	139.00	100	Vertical	Pass
5	11759.388	53.40	-0.19	74.0	20.60	Peak	264.00	100	Vertical	Pass
5**	11759.388	43.57	-0.19	54.0	10.43	AV	264.00	100	Vertical	Pass
6	17413.839	56.13	5.47	74.0	17.87	Peak	324.00	300	Vertical	Pass
6**	17413.839	46.60	5.47	54.0	7.40	AV	324.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1594.300	42.21	-16.97	74.0	31.79	Peak	32.00	400	Horizontal	Pass
1**	1594.300	33.63	-16.97	54.0	20.37	AV	32.00	400	Horizontal	Pass
2	2415.000	110.61	-10.48	74.0	-36.61	Peak	198.00	150	Horizontal	N/A
2**	2415.000	101.80	-10.48	54.0	-47.80	AV	198.00	150	Horizontal	N/A
3	4819.000	49.76	-3.40	74.0	24.24	Peak	153.00	100	Horizontal	Pass
3**	4819.000	40.82	-3.40	54.0	13.18	AV	153.00	100	Horizontal	Pass
4	7721.500	54.41	0.90	74.0	19.59	Peak	209.00	300	Horizontal	Pass
4**	7721.500	44.16	0.90	54.0	9.84	AV	209.00	300	Horizontal	Pass
5	11965.300	53.06	-0.29	74.0	20.94	Peak	282.00	200	Horizontal	Pass
5**	11965.300	42.05	-0.29	54.0	11.95	AV	282.00	200	Horizontal	Pass
6	17460.562	56.75	5.37	74.0	17.25	Peak	200.00	100	Horizontal	Pass
6**	17460.562	48.06	5.37	54.0	5.94	AV	200.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.100	43.57	-16.93	74.0	30.43	Peak	360.00	200	Vertical	Pass
1**	1331.100	32.98	-16.93	54.0	21.02	AV	360.00	200	Vertical	Pass
2	2410.800	103.68	-10.35	74.0	-29.68	Peak	328.00	150	Vertical	N/A
2**	2410.800	96.19	-10.35	54.0	-42.19	AV	328.00	150	Vertical	N/A
3	4982.500	49.44	-3.34	74.0	24.56	Peak	153.00	200	Vertical	Pass
3**	4982.500	40.20	-3.34	54.0	13.80	AV	153.00	200	Vertical	Pass
4	7811.000	54.52	0.95	74.0	19.48	Peak	77.00	100	Vertical	Pass
4**	7811.000	44.56	0.95	54.0	9.44	AV	77.00	100	Vertical	Pass
5	12970.237	52.68	1.77	74.0	21.32	Peak	126.00	200	Vertical	Pass
5**	12970.237	43.40	1.77	54.0	10.60	AV	126.00	200	Vertical	Pass
6	17441.925	56.44	5.55	74.0	17.56	Peak	170.00	300	Vertical	Pass
6**	17441.925	47.84	5.55	54.0	6.16	AV	170.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1337.600	42.19	-17.21	74.0	31.81	Peak	255.00	200	Horizontal	Pass
1**	1337.600	32.12	-17.21	54.0	21.88	AV	255.00	200	Horizontal	Pass
2	2437.900	110.85	-10.28	74.0	-36.85	Peak	209.00	100	Horizontal	N/A
2**	2437.900	104.38	-10.28	54.0	-50.38	AV	209.00	100	Horizontal	N/A
3	4985.000	50.82	-3.28	74.0	23.18	Peak	233.00	200	Horizontal	Pass
3**	4985.000	40.66	-3.28	54.0	13.34	AV	233.00	200	Horizontal	Pass
4	7754.750	53.86	1.19	74.0	20.14	Peak	170.00	100	Horizontal	Pass
4**	7754.750	44.40	1.19	54.0	9.60	AV	170.00	100	Horizontal	Pass
5	11792.400	53.27	-0.15	74.0	20.73	Peak	160.00	300	Horizontal	Pass
5**	11792.400	44.37	-0.15	54.0	9.63	AV	160.00	300	Horizontal	Pass
6	16379.850	56.01	2.40	74.0	17.99	Peak	187.00	400	Horizontal	Pass
6**	16379.850	46.55	2.40	54.0	7.45	AV	187.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.300	43.56	-17.11	74.0	30.44	Peak	0.00	200	Vertical	Pass
1**	1333.300	35.41	-17.11	54.0	18.59	AV	0.00	200	Vertical	Pass
2	2438.400	105.69	-9.92	74.0	-31.69	Peak	325.00	100	Vertical	N/A
2**	2438.400	98.44	-9.92	54.0	-44.44	AV	325.00	100	Vertical	N/A
3	4874.250	49.50	-3.45	74.0	24.50	Peak	219.00	150	Vertical	Pass
3**	4874.250	40.05	-3.45	54.0	13.95	AV	219.00	150	Vertical	Pass
4	7422.500	53.72	1.35	74.0	20.28	Peak	219.00	300	Vertical	Pass
4**	7422.500	44.94	1.35	54.0	9.06	AV	219.00	300	Vertical	Pass
5	11769.362	53.27	-0.18	74.0	20.73	Peak	143.00	400	Vertical	Pass
5**	11769.362	43.77	-0.18	54.0	10.23	AV	143.00	400	Vertical	Pass
6	17240.062	56.14	2.77	74.0	17.86	Peak	244.00	300	Vertical	Pass
6**	17240.062	45.39	2.77	54.0	8.61	AV	244.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	42.34	-16.70	74.0	31.66	Peak	332.00	300	Horizontal	Pass
1**	1599.900	33.51	-16.70	54.0	20.49	AV	332.00	300	Horizontal	Pass
2	2463.800	111.18	-11.22	74.0	-37.18	Peak	179.00	150	Horizontal	N/A
2**	2463.800	103.04	-11.22	54.0	-49.04	AV	179.00	150	Horizontal	N/A
3	4924.750	51.22	-3.57	74.0	22.78	Peak	154.00	200	Horizontal	Pass
3**	4924.750	42.62	-3.57	54.0	11.38	AV	154.00	200	Horizontal	Pass
4	7761.000	53.83	1.60	74.0	20.17	Peak	0.00	300	Horizontal	Pass
4**	7761.000	44.45	1.60	54.0	9.55	AV	0.00	300	Horizontal	Pass
5	11761.526	52.90	-0.18	74.0	21.10	Peak	277.00	100	Horizontal	Pass
5**	11761.526	44.54	-0.18	54.0	9.46	AV	277.00	100	Horizontal	Pass
6	16390.613	56.37	2.81	74.0	17.63	Peak	341.00	300	Horizontal	Pass
6**	16390.613	47.49	2.81	54.0	6.51	AV	341.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1313.900	42.21	-16.82	74.0	31.79	Peak	41.00	200	Vertical	Pass
1**	1313.900	32.94	-16.82	54.0	21.06	AV	41.00	200	Vertical	Pass
2	2463.500	102.91	-11.26	74.0	-28.91	Peak	279.00	100	Vertical	N/A
2**	2463.500	95.29	-11.26	54.0	-41.29	AV	279.00	100	Vertical	N/A
3	4931.000	49.06	-3.37	74.0	24.94	Peak	105.00	150	Vertical	Pass
3**	4931.000	40.97	-3.37	54.0	13.03	AV	105.00	150	Vertical	Pass
4	7712.000	53.63	1.91	74.0	20.37	Peak	359.00	100	Vertical	Pass
4**	7712.000	44.86	1.91	54.0	9.14	AV	359.00	100	Vertical	Pass
5	11796.200	52.88	-0.15	74.0	21.12	Peak	208.00	300	Vertical	Pass
5**	11796.200	43.77	-0.15	54.0	10.23	AV	208.00	300	Vertical	Pass
6	17427.225	57.57	5.50	74.0	16.43	Peak	243.00	300	Vertical	Pass
6**	17427.225	46.61	5.50	54.0	7.39	AV	243.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax20(SU) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1295.900	42.07	-17.02	74.0	31.93	Peak	0.00	300	Horizontal	Pass
1**	1295.900	33.01	-17.02	54.0	20.99	AV	0.00	300	Horizontal	Pass
2	2411.100	110.75	-10.33	74.0	-36.75	Peak	184.00	100	Horizontal	N/A
2**	2411.100	104.20	-10.33	54.0	-50.20	AV	184.00	100	Horizontal	N/A
3	4824.500	50.31	-3.55	74.0	23.69	Peak	135.00	100	Horizontal	Pass
3**	4824.500	41.17	-3.55	54.0	12.83	AV	135.00	100	Horizontal	Pass
4	7704.500	54.19	1.93	74.0	19.81	Peak	322.00	300	Horizontal	Pass
4**	7704.500	44.92	1.93	54.0	9.08	AV	322.00	300	Horizontal	Pass
5	12519.862	53.69	1.32	74.0	20.31	Peak	309.00	100	Horizontal	Pass
5**	12519.862	43.71	1.32	54.0	10.29	AV	309.00	100	Horizontal	Pass
6	17444.813	56.69	5.55	74.0	17.31	Peak	317.00	300	Horizontal	Pass
6**	17444.813	47.47	5.55	54.0	6.53	AV	317.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V802.11ax20(SU) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.600	43.19	-17.01	74.0	30.81	Peak	221.00	400	Vertical	Pass
1**	1328.600	32.18	-17.01	54.0	21.82	AV	221.00	400	Vertical	Pass
2	2410.800	103.76	-10.35	74.0	-29.76	Peak	326.00	200	Vertical	N/A
2**	2410.800	96.78	-10.35	54.0	-42.78	AV	326.00	200	Vertical	N/A
3	4980.250	49.87	-3.29	74.0	24.13	Peak	253.00	150	Vertical	Pass
3**	4980.250	40.71	-3.29	54.0	13.29	AV	253.00	150	Vertical	Pass
4	7756.750	54.21	1.48	74.0	19.79	Peak	273.00	200	Vertical	Pass
4**	7756.750	45.73	1.48	54.0	8.27	AV	273.00	200	Vertical	Pass
5	11504.312	53.23	-0.65	74.0	20.77	Peak	228.00	200	Vertical	Pass
5**	11504.312	42.84	-0.65	54.0	11.16	AV	228.00	200	Vertical	Pass
6	17404.387	57.10	5.44	74.0	16.90	Peak	199.00	400	Vertical	Pass
6**	17404.387	46.48	5.44	54.0	7.52	AV	199.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax20(SU) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1570.200	42.47	-17.14	74.0	31.53	Peak	113.00	200	Horizontal	Pass
1**	1570.200	32.76	-17.14	54.0	21.24	AV	113.00	200	Horizontal	Pass
2	2435.700	111.27	-10.15	74.0	-37.27	Peak	203.00	100	Horizontal	N/A
2**	2435.700	104.04	-10.15	54.0	-50.04	AV	203.00	100	Horizontal	N/A
3	4880.000	50.23	-3.67	74.0	23.77	Peak	197.00	150	Horizontal	Pass
3**	4880.000	40.57	-3.67	54.0	13.43	AV	197.00	150	Horizontal	Pass
4	7715.500	54.11	1.50	74.0	19.89	Peak	336.00	100	Horizontal	Pass
4**	7715.500	44.36	1.50	54.0	9.64	AV	336.00	100	Horizontal	Pass
5	11758.913	53.36	-0.19	74.0	20.64	Peak	57.00	100	Horizontal	Pass
5**	11758.913	43.50	-0.19	54.0	10.50	AV	57.00	100	Horizontal	Pass
6	16405.313	56.86	3.10	74.0	17.14	Peak	141.00	400	Horizontal	Pass
6**	16405.313	47.67	3.10	54.0	6.33	AV	141.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax20(SU) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.500	42.65	-16.83	74.0	31.35	Peak	0.00	400	Vertical	Pass
1**	1329.500	34.08	-16.83	54.0	19.92	AV	0.00	400	Vertical	Pass
2	2435.700	105.56	-10.15	74.0	-31.56	Peak	316.00	100	Vertical	N/A
2**	2435.700	98.61	-10.15	54.0	-44.61	AV	316.00	100	Vertical	N/A
3	4838.750	49.21	-3.44	74.0	24.79	Peak	88.00	100	Vertical	Pass
3**	4838.750	40.46	-3.44	54.0	13.54	AV	88.00	100	Vertical	Pass
4	7880.750	54.84	2.13	74.0	19.16	Peak	21.00	400	Vertical	Pass
4**	7880.750	45.22	2.13	54.0	8.78	AV	21.00	400	Vertical	Pass
5	11762.000	53.21	-0.18	74.0	20.79	Peak	206.00	200	Vertical	Pass
5**	11762.000	43.62	-0.18	54.0	10.38	AV	206.00	200	Vertical	Pass
6	17384.962	56.80	4.73	74.0	17.20	Peak	22.00	300	Vertical	Pass
6**	17384.962	45.95	4.73	54.0	8.05	AV	22.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H802.11ax20(SU) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1395.800	43.10	-17.13	74.0	30.90	Peak	254.00	400	Horizontal	Pass
1**	1395.800	32.63	-17.13	54.0	21.37	AV	254.00	400	Horizontal	Pass
2	2463.100	110.71	-11.42	74.0	-36.71	Peak	193.00	150	Horizontal	N/A
2**	2463.100	102.96	-11.42	54.0	-48.96	AV	193.00	150	Horizontal	N/A
3	4926.000	50.21	-3.61	74.0	23.79	Peak	167.00	200	Horizontal	Pass
3**	4926.000	41.72	-3.61	54.0	12.28	AV	167.00	200	Horizontal	Pass
4	7953.250	53.49	1.59	74.0	20.51	Peak	0.00	100	Horizontal	Pass
4**	7953.250	43.71	1.59	54.0	10.29	AV	0.00	100	Horizontal	Pass
5	12965.775	53.01	1.73	74.0	20.99	Peak	46.00	400	Horizontal	Pass
5**	12965.775	43.50	1.73	54.0	10.50	AV	46.00	400	Horizontal	Pass
6	17397.823	56.98	5.33	74.0	17.02	Peak	182.00	100	Horizontal	Pass
6**	17397.823	47.66	5.33	54.0	6.34	AV	182.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax20(SU) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.200	43.46	-16.94	74.0	30.54	Peak	0.00	200	Vertical	Pass
1**	1329.200	33.00	-16.94	54.0	21.00	AV	0.00	200	Vertical	Pass
2	2460.700	102.82	-11.30	74.0	-28.82	Peak	267.00	100	Vertical	N/A
2**	2460.700	95.72	-11.30	54.0	-41.72	AV	267.00	100	Vertical	N/A
3	4985.500	49.74	-3.25	74.0	24.26	Peak	241.00	100	Vertical	Pass
3**	4985.500	40.48	-3.25	54.0	13.52	AV	241.00	100	Vertical	Pass
4	7874.000	53.96	1.71	74.0	20.04	Peak	220.00	200	Vertical	Pass
4**	7874.000	44.55	1.71	54.0	9.45	AV	220.00	200	Vertical	Pass
5	11805.463	53.11	-0.21	74.0	20.89	Peak	209.00	100	Vertical	Pass
5**	11805.463	43.69	-0.21	54.0	10.31	AV	209.00	100	Vertical	Pass
6	17463.450	56.94	5.32	74.0	17.06	Peak	138.00	200	Vertical	Pass
6**	17463.450	46.88	5.32	54.0	7.12	AV	138.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax20(RU26) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1572.500	42.00	-16.99	74.0	32.00	Peak	145.00	100	Horizontal	Pass
1**	1572.500	33.51	-16.99	54.0	20.49	AV	145.00	100	Horizontal	Pass
2	2403.700	115.23	-10.40	74.0	-41.23	Peak	84.00	100	Horizontal	N/A
2**	2403.700	111.14	-10.40	54.0	-57.14	AV	84.00	100	Horizontal	N/A
3	4806.750	53.73	-3.03	74.0	20.27	Peak	61.00	100	Horizontal	Pass
3**	4806.750	47.11	-3.03	54.0	6.89	AV	61.00	100	Horizontal	Pass
4	4807.250	54.79	-3.09	74.0	19.21	Peak	81.00	150	Horizontal	Pass
4**	4807.250	46.26	-3.09	54.0	7.74	AV	81.00	150	Horizontal	Pass
5	7210.750	59.70	-0.81	74.0	14.30	Peak	100.00	300	Horizontal	Pass
5**	7210.750	49.25	-0.81	54.0	4.75	AV	100.00	300	Horizontal	Pass
6	16399.275	56.30	3.14	74.0	17.70	Peak	360.00	100	Horizontal	Pass
6**	16399.275	47.93	3.14	54.0	6.07	AV	360.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax20(RU26) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.300	42.70	-17.03	74.0	31.30	Peak	311.00	400	Vertical	Pass
1**	1327.300	32.22	-17.03	54.0	21.78	AV	311.00	400	Vertical	Pass
2	2403.300	109.10	-10.55	74.0	-35.10	Peak	204.00	200	Vertical	N/A
2**	2403.300	101.23	-10.55	54.0	-47.23	AV	204.00	200	Vertical	N/A
3	4806.000	51.68	-3.02	74.0	22.32	Peak	41.00	150	Vertical	Pass
3**	4806.000	41.76	-3.02	54.0	12.24	AV	41.00	150	Vertical	Pass
4	4806.750	50.15	-3.03	74.0	23.85	Peak	19.00	100	Vertical	Pass
4**	4806.750	44.36	-3.03	54.0	9.64	AV	19.00	100	Vertical	Pass
5	11802.849	53.36	-0.18	74.0	20.64	Peak	16.00	300	Vertical	Pass
5**	11802.849	44.26	-0.18	54.0	9.74	AV	16.00	300	Vertical	Pass
6	17431.163	56.05	5.51	74.0	17.95	Peak	163.00	200	Vertical	Pass
6**	17431.163	47.27	5.51	54.0	6.73	AV	163.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax20(RU26) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1318.600	42.27	-16.89	74.0	31.73	Peak	288.00	200	Horizontal	Pass
1**	1318.600	32.43	-16.89	54.0	21.57	AV	288.00	200	Horizontal	Pass
2	2428.200	115.05	-10.36	74.0	-41.05	Peak	105.00	100	Horizontal	N/A
2**	2428.200	110.97	-10.36	54.0	-56.97	AV	105.00	100	Horizontal	N/A
3	4857.250	55.27	-3.53	74.0	18.73	Peak	77.00	100	Horizontal	Pass
3**	4857.250	48.38	-3.53	54.0	5.62	AV	77.00	100	Horizontal	Pass
4	4858.250	56.27	-3.63	74.0	17.73	Peak	292.00	200	Horizontal	Pass
4**	4858.250	46.94	-3.63	54.0	7.06	AV	292.00	200	Horizontal	Pass
5	7285.000	59.20	-0.76	74.0	14.80	Peak	141.00	100	Horizontal	Pass
5**	7285.000	45.16	-0.76	54.0	8.84	AV	141.00	100	Horizontal	Pass
6	7285.500	56.09	-0.61	74.0	17.91	Peak	118.00	100	Horizontal	Pass
6**	7285.500	48.33	-0.61	54.0	5.67	AV	118.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax20(RU26) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1435.700	41.95	-17.11	74.0	32.05	Peak	138.00	300	Vertical	Pass
1**	1435.700	32.09	-17.11	54.0	21.91	AV	138.00	300	Vertical	Pass
2	2428.300	109.63	-10.40	74.0	-35.63	Peak	201.00	150	Vertical	N/A
2**	2428.300	101.63	-10.40	54.0	-47.63	AV	201.00	150	Vertical	N/A
3	4856.250	50.83	-3.66	74.0	23.17	Peak	360.00	200	Vertical	Pass
3**	4856.250	42.60	-3.66	54.0	11.40	AV	360.00	200	Vertical	Pass
4	4856.750	48.96	-3.58	74.0	25.04	Peak	360.00	100	Vertical	Pass
4**	4856.750	43.37	-3.58	54.0	10.63	AV	360.00	100	Vertical	Pass
5	11799.525	52.99	-0.15	74.0	21.01	Peak	260.00	400	Vertical	Pass
5**	11799.525	43.94	-0.15	54.0	10.06	AV	260.00	400	Vertical	Pass
6	16397.963	56.26	3.09	74.0	17.74	Peak	356.00	400	Vertical	Pass
6**	16397.963	47.33	3.09	54.0	6.67	AV	356.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax20(RU26) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1568.400	42.08	-17.06	74.0	31.92	Peak	342.00	300	Horizontal	Pass
1**	1568.400	32.94	-17.06	54.0	21.06	AV	342.00	300	Horizontal	Pass
2	2453.100	115.22	-10.75	74.0	-41.22	Peak	71.00	150	Horizontal	N/A
2**	2453.100	110.14	-10.75	54.0	-56.14	AV	71.00	150	Horizontal	N/A
3	4906.000	55.90	-3.27	74.0	18.10	Peak	316.00	150	Horizontal	Pass
3**	4906.000	46.15	-3.27	54.0	7.85	AV	316.00	150	Horizontal	Pass
4	4907.000	55.29	-3.34	74.0	18.71	Peak	97.00	150	Horizontal	Pass
4**	4907.000	48.68	-3.34	54.0	5.32	AV	97.00	150	Horizontal	Pass
5	7359.500	56.56	0.87	74.0	17.44	Peak	117.00	400	Horizontal	Pass
5**	7359.500	46.15	0.87	54.0	7.85	AV	117.00	400	Horizontal	Pass
6	7360.750	53.85	0.78	74.0	20.15	Peak	97.00	150	Horizontal	Pass
6**	7360.750	47.79	0.78	54.0	6.21	AV	97.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax20(RU26) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.600	42.98	-16.91	74.0	31.02	Peak	101.00	300	Vertical	Pass
1**	1484.600	32.37	-16.91	54.0	21.63	AV	101.00	300	Vertical	Pass
2	2452.600	108.41	-10.75	74.0	-34.41	Peak	201.00	150	Vertical	N/A
2**	2452.600	99.55	-10.75	54.0	-45.55	AV	201.00	150	Vertical	N/A
3	4906.500	52.53	-3.34	74.0	21.47	Peak	57.00	150	Vertical	Pass
3**	4906.500	43.52	-3.34	54.0	10.48	AV	57.00	150	Vertical	Pass
4	4906.750	51.69	-3.34	74.0	22.31	Peak	36.00	150	Vertical	Pass
4**	4906.750	45.15	-3.34	54.0	8.85	AV	36.00	150	Vertical	Pass
5	12504.188	53.07	1.41	74.0	20.93	Peak	266.00	300	Vertical	Pass
5**	12504.188	44.01	1.41	54.0	9.99	AV	266.00	300	Vertical	Pass
6	17452.950	56.49	5.51	74.0	17.51	Peak	148.00	300	Vertical	Pass
6**	17452.950	47.65	5.51	54.0	6.35	AV	148.00	300	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ⁴: All antenna were tested, but only the worst case has been reported in this report.

Note ⁵: All the configurations were pre tested, only the worst configuration has been reported in this report.

SISO-Antenna 1


Test Data and Plots

802.11b LOW CHANNEL

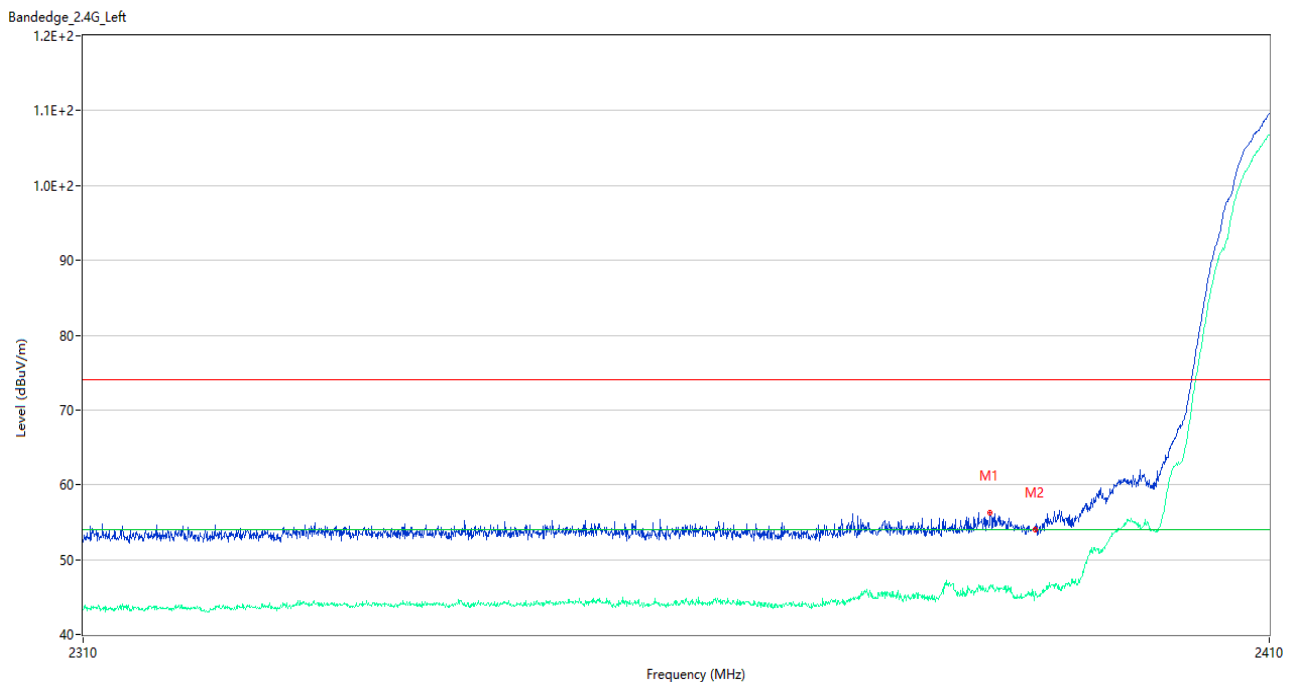


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2386.100	56.21	-1.37	74.0	17.79	Peak	184.00	200	Horizontal	Pass
1**	2386.100	46.39	-1.37	54.0	7.61	AV	184.00	200	Horizontal	Pass
2	2389.950	53.96	-1.82	74.0	20.04	Peak	1.00	100	Horizontal	Pass
2**	2389.950	45.38	-1.82	54.0	8.62	AV	1.00	100	Horizontal	Pass

802.11b HIGH CHANNEL

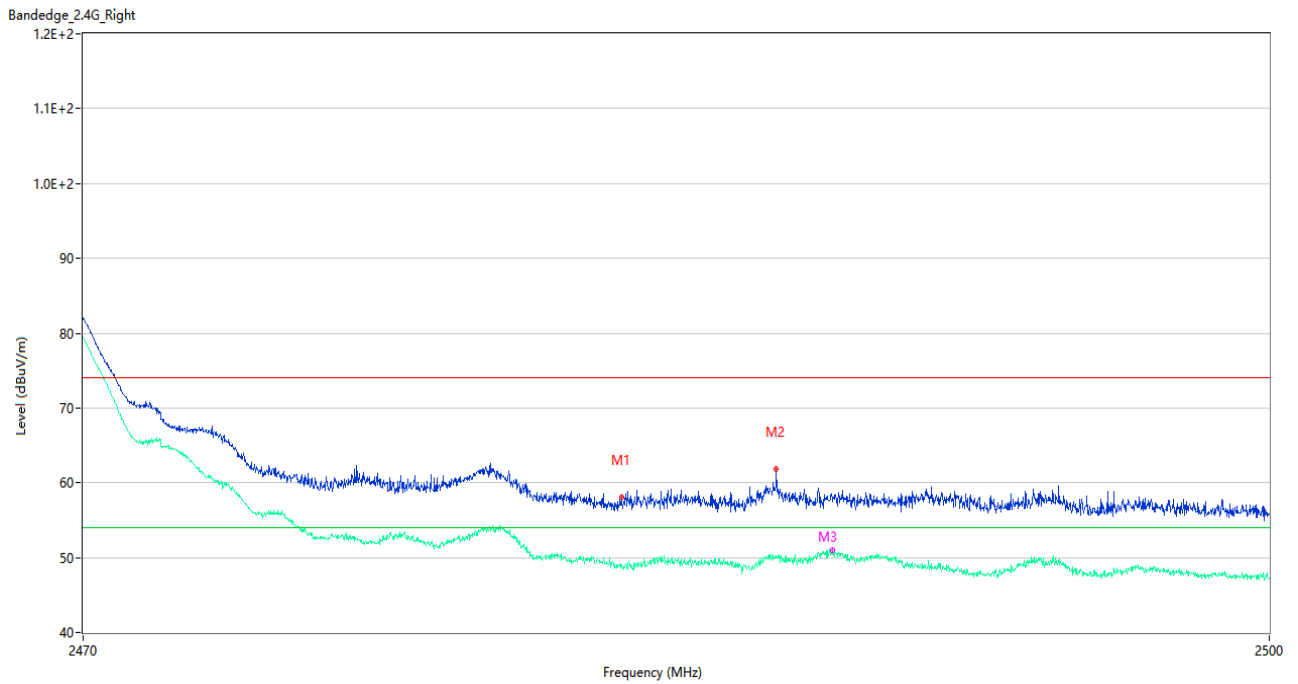


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.575	58.10	-1.09	74.0	15.90	Peak	177.00	200	Horizontal	Pass
1**	2483.575	48.89	-1.09	54.0	5.11	AV	177.00	200	Horizontal	Pass
2	2487.490	61.80	-0.91	74.0	12.20	Peak	200.00	200	Horizontal	Pass
2**	2487.490	49.95	-0.91	54.0	4.05	AV	200.00	200	Horizontal	Pass
3	2488.915	57.53	-0.86	74.0	16.47	Peak	199.00	200	Horizontal	Pass
3**	2488.915	50.92	-0.86	54.0	3.08	AV	199.00	200	Horizontal	Pass

802.11g LOW CHANNEL

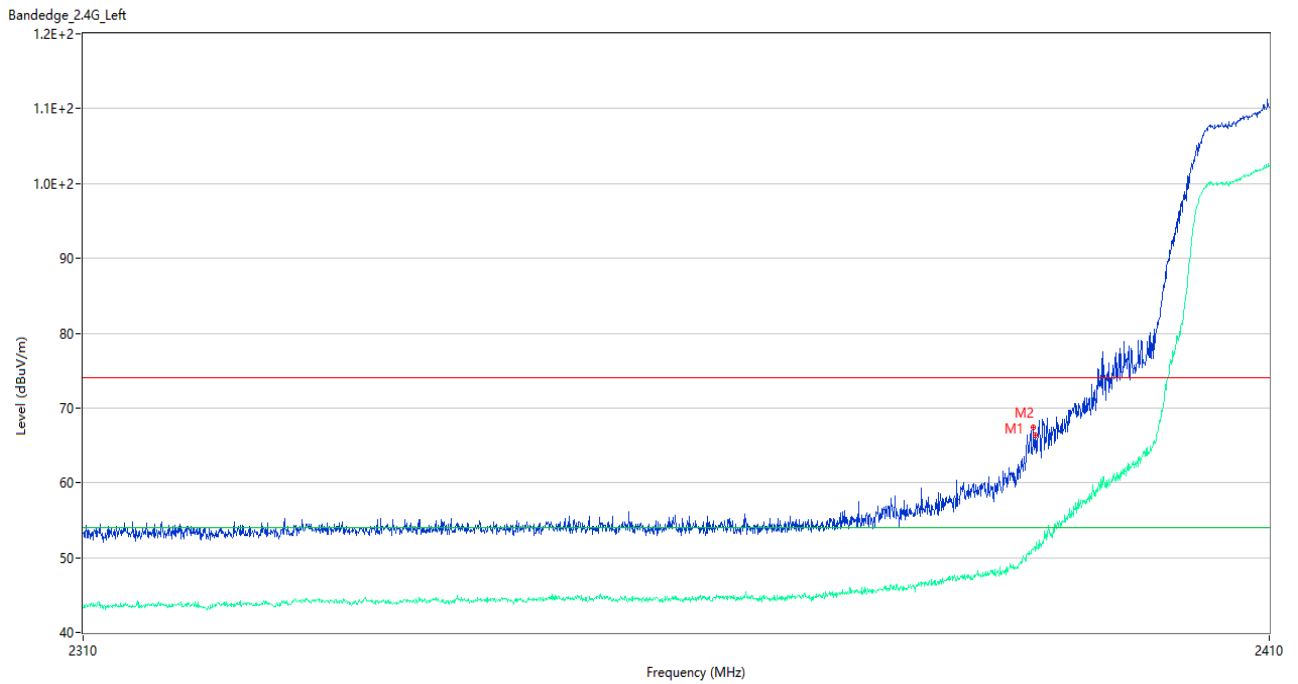


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.800	67.48	-1.78	74.0	6.52	Peak	179.00	100	Horizontal	Pass
1**	2389.800	50.96	-1.78	54.0	3.04	AV	179.00	100	Horizontal	Pass
2	2389.950	66.41	-1.82	74.0	7.59	Peak	188.00	100	Horizontal	Pass
2**	2389.950	50.78	-1.82	54.0	3.22	AV	188.00	100	Horizontal	Pass

802.11g HIGH CHANNEL

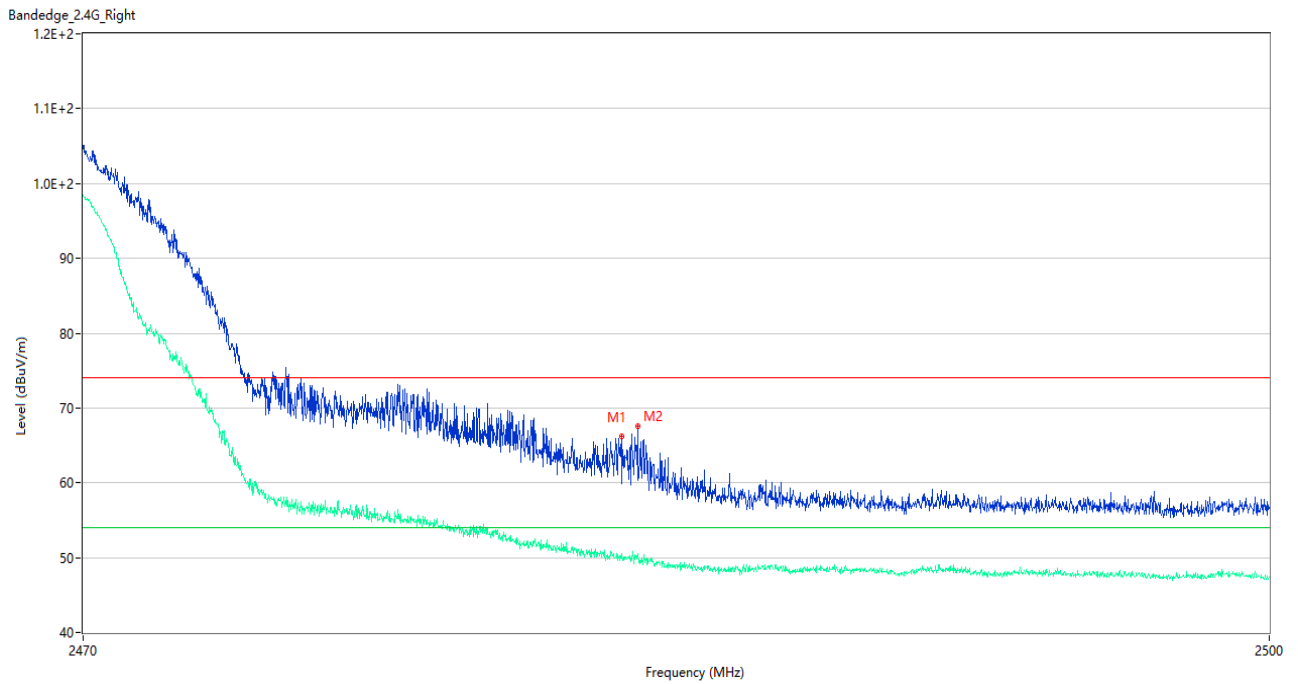


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.575	66.17	-1.09	74.0	7.83	Peak	189.00	200	Horizontal	Pass
1**	2483.575	49.92	-1.09	54.0	4.08	AV	189.00	200	Horizontal	Pass
2	2483.980	67.55	-1.05	74.0	6.45	Peak	193.00	200	Horizontal	Pass
2**	2483.980	50.52	-1.05	54.0	3.48	AV	193.00	200	Horizontal	Pass

802.11n20 LOW CHANNEL

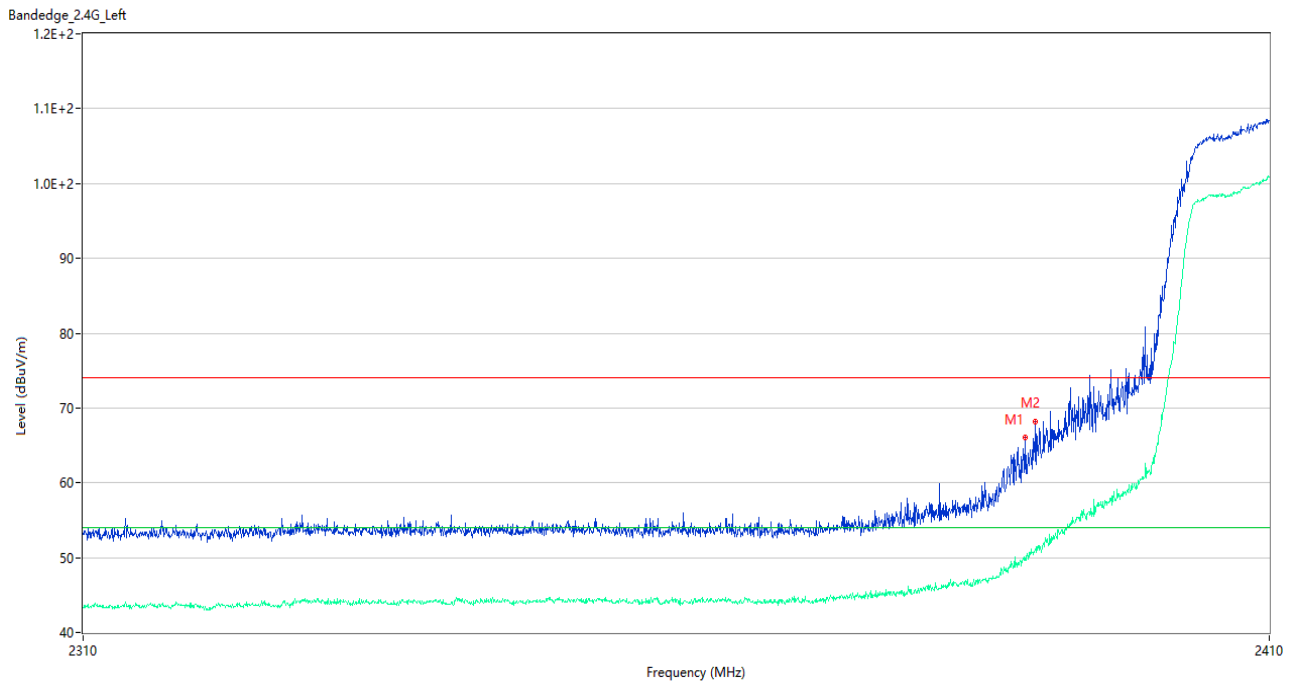


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.050	66.10	-1.88	74.0	7.90	Peak	166.00	200	Horizontal	Pass
1**	2389.050	49.86	-1.88	54.0	4.14	AV	166.00	200	Horizontal	Pass
2	2389.950	68.22	-1.82	74.0	5.78	Peak	192.00	150	Horizontal	Pass
2**	2389.950	50.93	-1.82	54.0	3.07	AV	192.00	150	Horizontal	Pass

802.11n20 HIGH CHANNEL

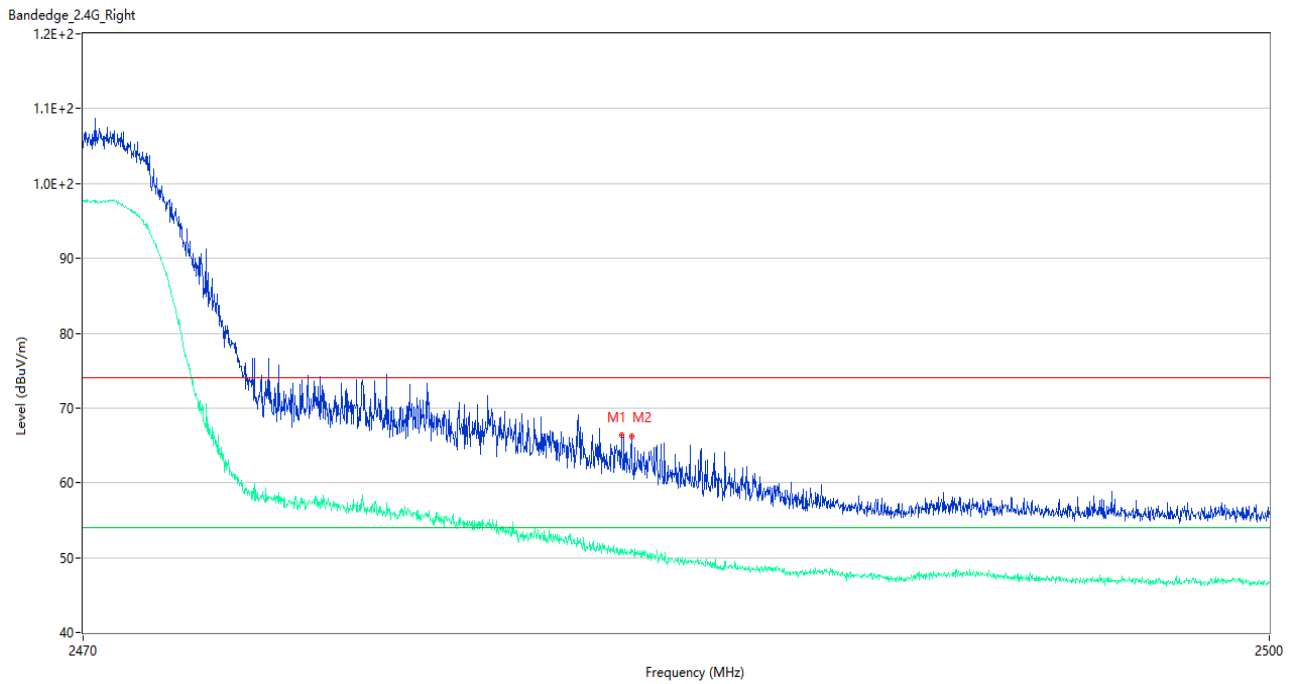


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.575	66.42	-1.09	74.0	7.58	Peak	198.00	150	Horizontal	Pass
1**	2483.575	50.55	-1.09	54.0	3.45	AV	198.00	150	Horizontal	Pass
2	2483.830	66.21	-1.04	74.0	7.79	Peak	190.00	200	Horizontal	Pass
2**	2483.830	50.63	-1.04	54.0	3.37	AV	190.00	200	Horizontal	Pass

802.11ax20(SU) LOW CHANNEL

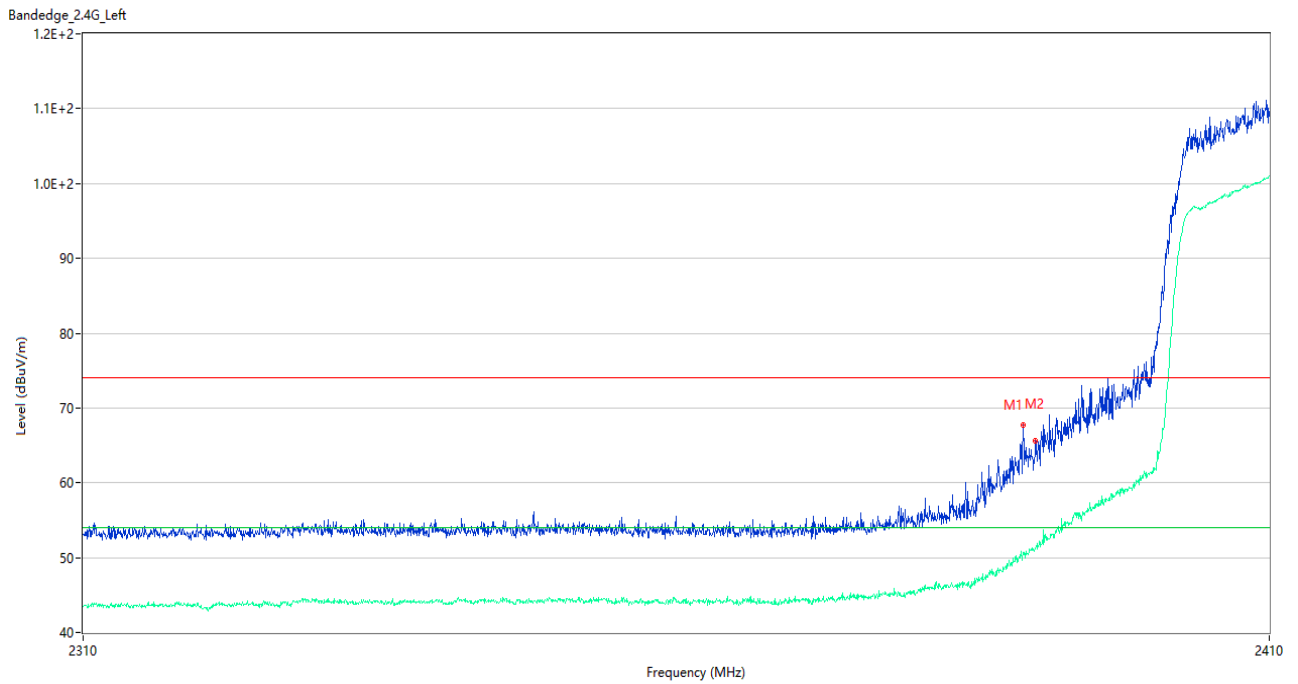


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2388.900	67.65	-1.86	74.0	6.35	Peak	192.00	100	Horizontal	Pass
1**	2388.900	50.70	-1.86	54.0	3.30	AV	192.00	100	Horizontal	Pass
2	2389.950	65.64	-1.82	74.0	8.36	Peak	189.00	150	Horizontal	Pass
2**	2389.950	50.93	-1.82	54.0	3.07	AV	189.00	150	Horizontal	Pass

802.11ax20(SU) HIGH CHANNEL

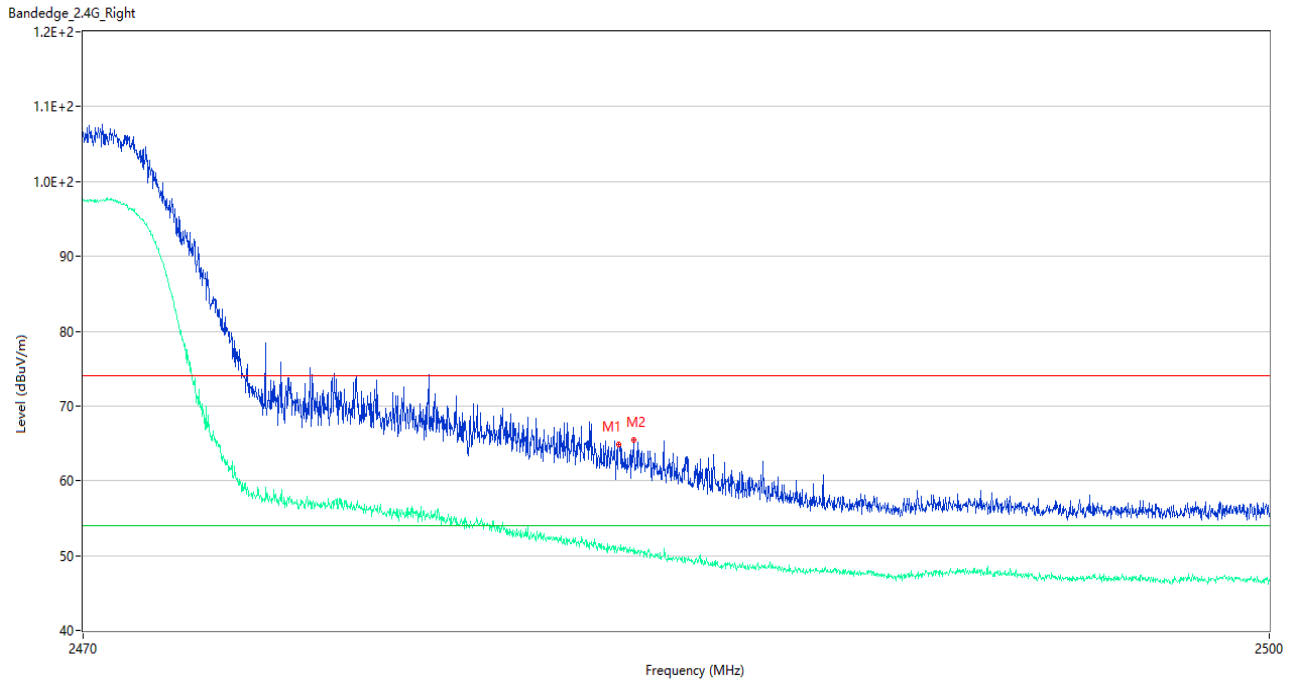


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.83	-1.10	74.0	9.17	Peak	186.00	150	Horizontal	Pass
1**	2483.500	50.94	-1.10	54.0	3.06	AV	186.00	150	Horizontal	Pass
2	2483.875	65.50	-1.03	74.0	8.50	Peak	190.00	200	Horizontal	Pass
2**	2483.875	50.26	-1.03	54.0	3.74	AV	190.00	200	Horizontal	Pass

802.11ax20(RU26) LOW CHANNEL

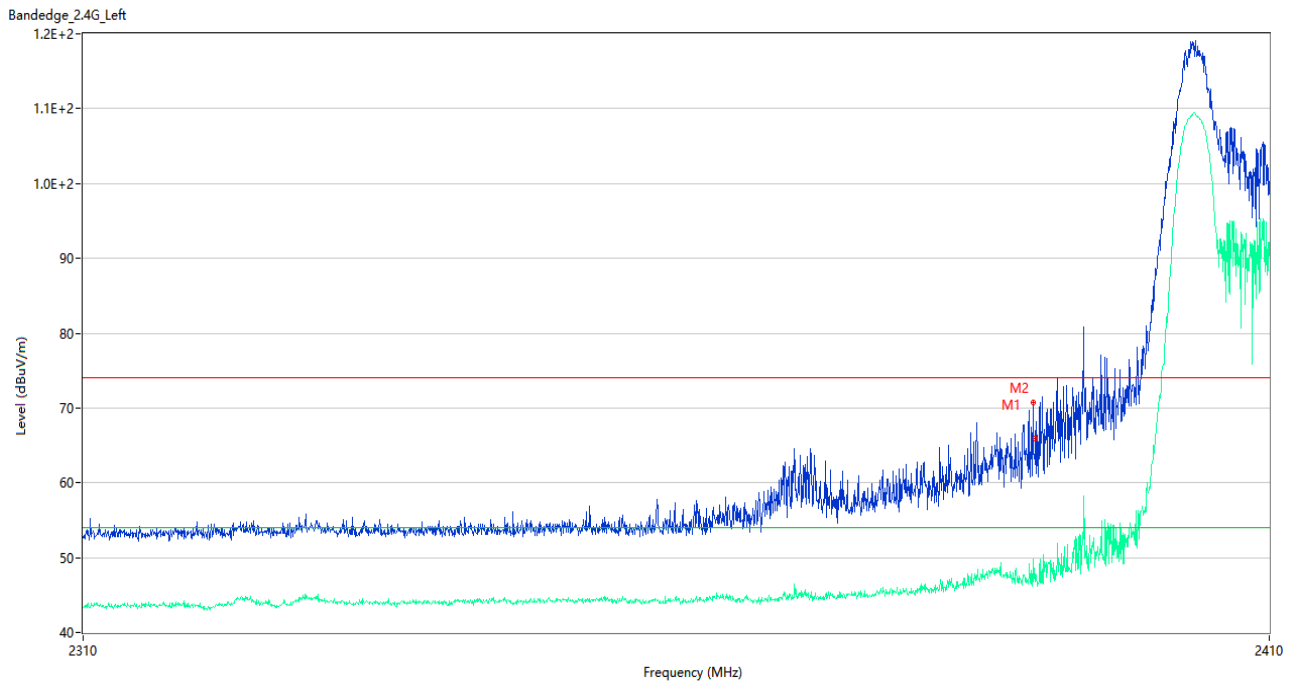

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.750	70.68	-1.77	74.0	3.32	Peak	182.00	100	Horizontal	Pass
1**	2389.750	47.25	-1.77	54.0	6.75	AV	182.00	100	Horizontal	Pass
2	2389.950	65.93	-1.82	74.0	8.07	Peak	160.00	150	Horizontal	Pass
2**	2389.950	47.89	-1.82	54.0	6.11	AV	160.00	150	Horizontal	Pass

802.11ax20(RU26) HIGH CHANNEL

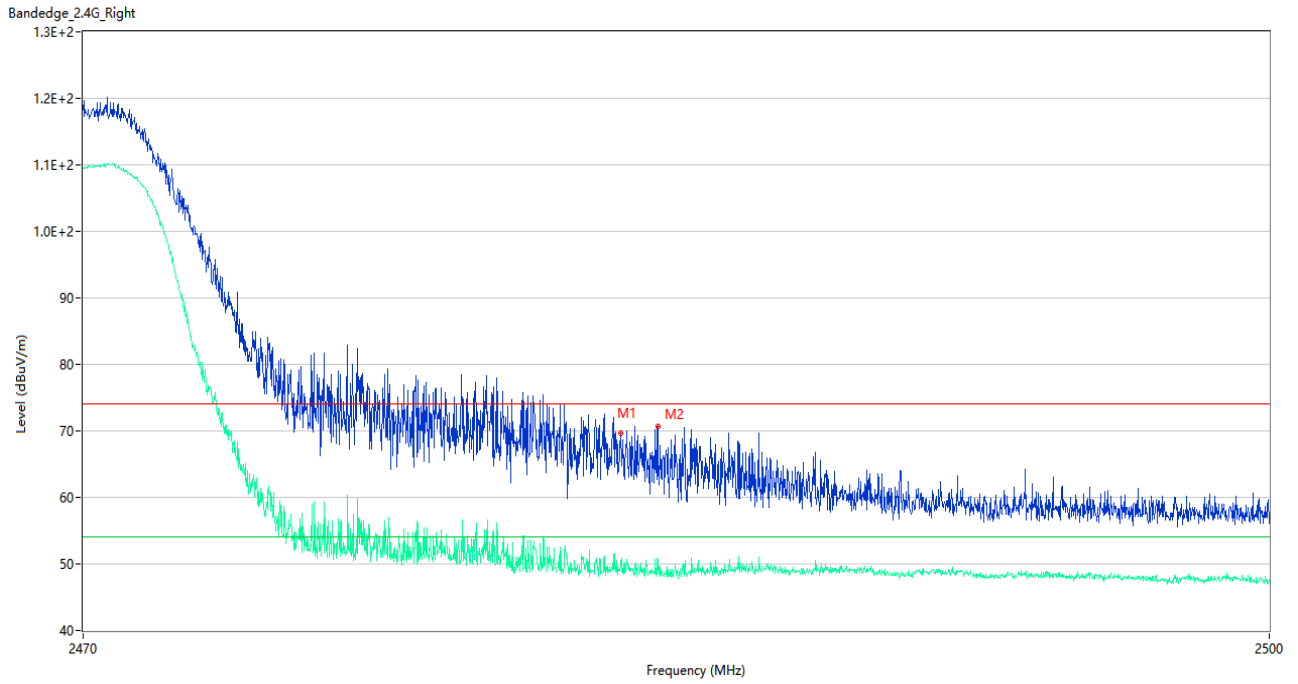

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.560	69.61	-1.09	74.0	4.39	Peak	194.00	150	Horizontal	Pass
1**	2483.560	50.09	-1.09	54.0	3.91	AV	194.00	150	Horizontal	Pass
2	2484.490	70.70	-1.21	74.0	3.30	Peak	198.00	100	Horizontal	Pass
2**	2484.490	49.09	-1.21	54.0	4.91	AV	198.00	100	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Note ¹: All antenna were tested, but only the worst case has been reported in this report.

Note ²: All the configurations were pre tested, only the worst configuration has been reported in this report.

SISO-Antenna 1

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-3.11	8
Middle	-3.89	8
High	-4.44	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-7.19	8
Middle	-6.22	8
High	-10.41	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-9.69	8
Middle	-6.24	8
High	-10.21	8

802.11ax-20 MHz(SU) Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.23	8
Middle	-8.07	8
High	-11.75	8

802.11ax-20 MHz(RU26) Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-2.87	8
Middle	-2.58	8
High	-4.12	8

Test Plots

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL




802.11g MIDDLE CHANNEL

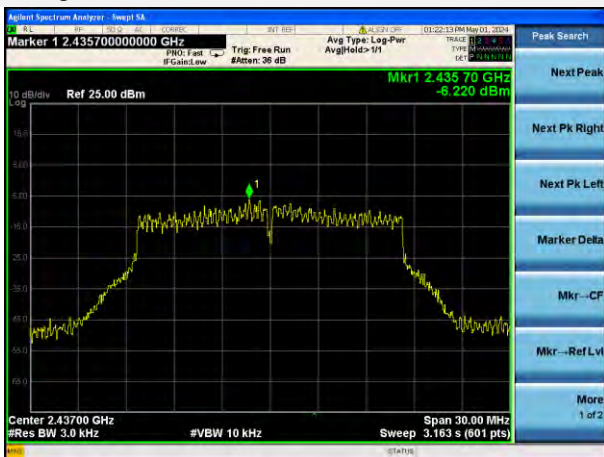

802.11g HIGH CHANNEL

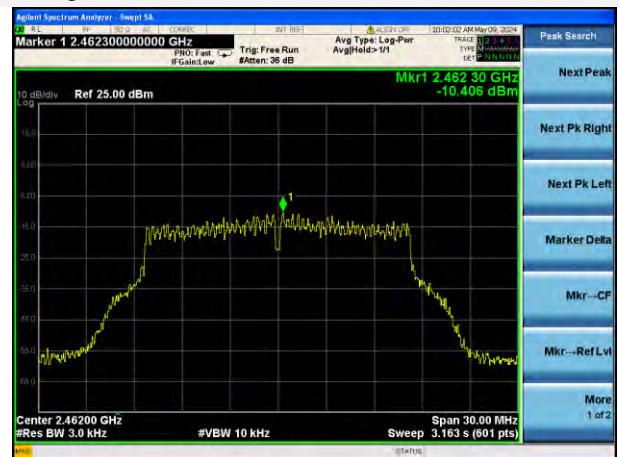


802.11n-20 MHz LOW CHANNEL

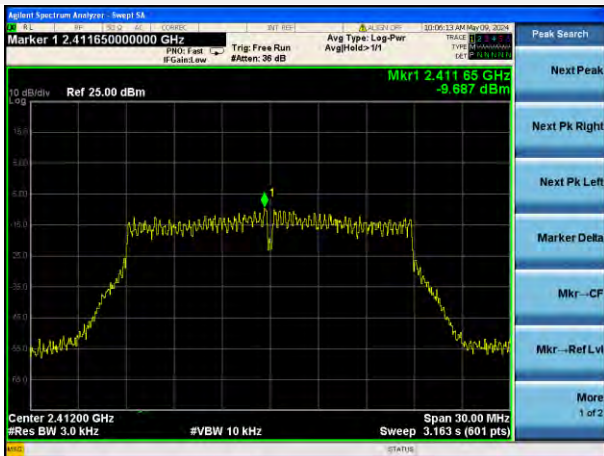

802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL

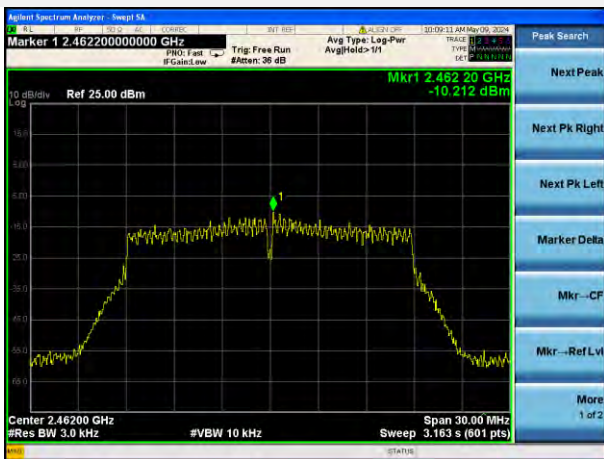

802.11ax-20 MHz(SU) LOW CHANNEL



802.11ax-20 MHz(SU) MIDDLE CHANNEL




802.11ax-20 MHz(SU) HIGH CHANNEL




802.11ax-20 MHz(RU26) LOW CHANNEL



802.11ax-20 MHz(RU26) MIDDLE CHANNEL

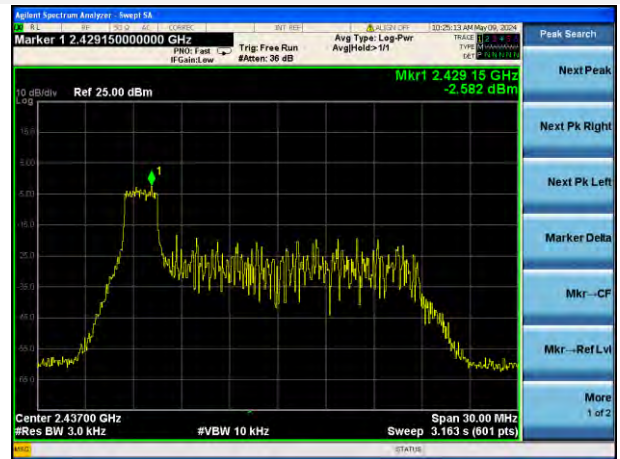

802.11ax-20 MHz(RU26) HIGH CHANNEL

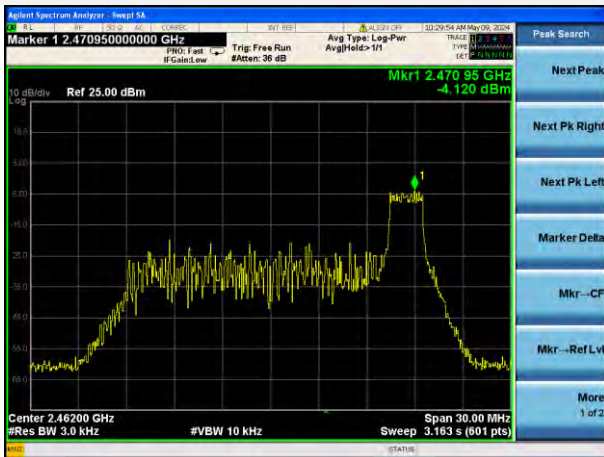

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2440954-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2440954-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2440954-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--