



OTA TEST REPORT

Applicant Shenzhen Guanqun Electronics Co. , Ltd.
Project name GQ3105
Date of report September 8,2022
Engineer Wang Zhifeng



目录
contents

01

Test Laboratory

02

General Description of Equipment under Test

03

Test Conditions

04

Test Results

05

Equipment List



01

Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Shenzhen Maya Communication Equipment Co. , Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CERTIFICATE OF COMPLIANCE N° CC.126.2.16.MVI.A

Shenzhen Maya Communication Equipment Co. , Ltd. has been included in the Italian Institute of Laboratory Accreditation Executive Measurement

1.3 Testing Location

Company: Shenzhen Maya Communication Equipment Co. , Ltd.

Address: 2/F, Unit 2, Building 1, Guanghui Science and Technology Park, Minqing Road, Longhua District, Shenzhen City, Guangdong Province

Post code: 518000

Contact: Yan Rong Fen

Telephone: 15815509272

E-mail: yyf@mayaant.com

Laboratory Environment

Temperature	22°C-25°C	
Relative humidity	≤80%	
Shield effect	0.7-6GHz	> 100dB
Ground resistance	<0.5Ω	



02

General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant Name	Shenzhen Guanqun Electronics Co. , Ltd.
Applicant address	Block A, Block 7B01, Tianyao Plaza, Anhongji, Tai Leng community, Minzhi Street, Longhua District, Shenzhen City
Manufacturer Name	Shenzhen Maya Communication Equipment Co. , Ltd.
Manufacturer address	2/F, Unit 2, Building 1, Guanghui Science and Technology Park, Minqing Road, Longhua District, Shenzhen City, Guangdong Province

2.2 General Information

EUT Description	
Project name	GQ3105
Antenna Type	FPC Antenna
Antenna Manufacturer	Shenzhen Maya Communication Equipment Co. , Ltd.
Test Frequency	1710MHz~2700MHz,2400MHz~2500MHz,5200MHz~5800MHz, 1570MHz~1580MHz,700MHz~960MHz,
Note:The EUT is sent from the applicant to MAYA and the information of the EUT is declared by the applicant. All indications of Pass/Fail in this report are opinions expressed by MAYA based on interpretations and/or observations of test results.Measurement Uncertainties were not taken into account and are published for informational purposes only.	

2.3

Test Date

The test is performed from August 8,2022 to August 18,2022

2.4

Receiving Date

The sample was received on August 8,2022

2.5

Applied Standards

According to the specifications of the manufacturer,it must comply with the requirements of the following standards.

Test Method:Have been manufactured and tested following the MV Italy procedure and according to ISO 9001 requirements.

Test lab.of the antenna gain and radiation pattern measurement :
Shenzhen Maya Communication Equipment Co. , Ltd.



03

Test Conditions


Test method description and data

Device name	Purpose
Vector Network Analyzer	S11/Impedance/ Passive Test
Agilent 8960 SP6010 R&S CMU200	Mobile Communication Device Test including GSM, GPRS, EDGE, CDMA2000, 1XEV-DO, TD-SCDMA, WCDMA, HSDPA
R&S CMW500 MT8820C	Mobile phone test including TD-SCDMA, WCDMA, HSDPA, LTE, WIFI, GPS
SP9500E	Contains 5G, SA, NSA
Agilent E4438C	Test active GPS
MVG Chamber	Passive Test / OTA active Test / Efficiency/Gain

Passive Test Report

Test Equipment: Network analyzer

Test method: A 50 ohm CABLE is used to export from the instrument test port. After calibration, the SMA Joint of the handset is connected with the calibrated parts, and the data of the relevant frequency points such as echo loss or standing wave ratio is recorded.

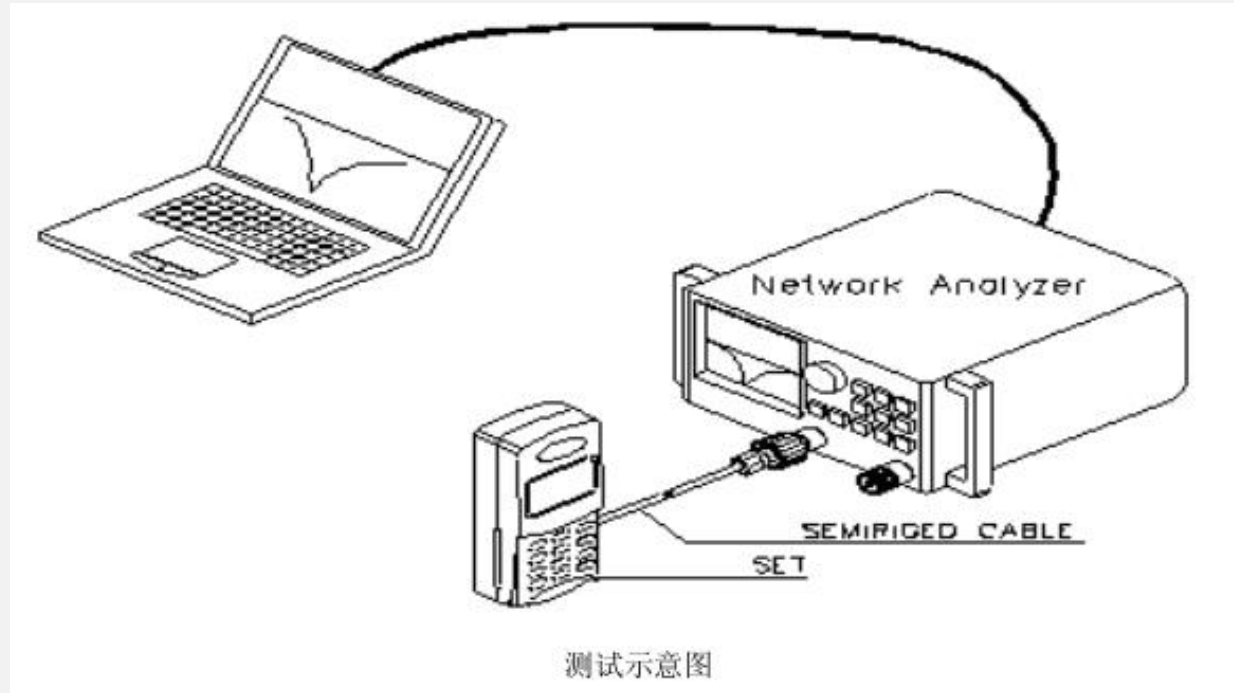

Active Test Report

TRP/TIS




Testing Tools: General Surveyor, Network Analyzer, full-wave Far-field ETS, French MVG SG24LT (Satmio) near-field 3D anechoic chamber, High Precision positioning system and its controller and computer test environment with automatic test program: Temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $60\% \pm 15\%$: Using the Test Method and calculation of TRP in EST or Satimo 24LT system software, DUT (Device Under Test) is in the state of maximum transmitting power when TRP is tested, the position of the DUT is controlled by the positioning system. The 15-degree step is used to measure the 3D effective radiated power (EIRP) at each point. The mean value on the sphere is calculated by integrating, The formula is as follows:

$$TRP \cong \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} [EiRP_{\theta}(\theta_i, \phi_j) + EiRP(\theta_i, \phi_j)] \sin(\theta_i)$$

Active Test Report

In the TIS test, the DUT is in the state of maximum transmitting power. Three channels are selected to test. By controlling the position of the DUT, the receiving sensitivity of each point of the 3D is measured at a step length of 30 degrees, the mean value on the sphere is calculated by integration, The formula is as follows:

$$TIS \cong \frac{2NM}{\pi \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} \left[\frac{1}{EIS_{\theta}(\theta_i, \phi_j)} + \frac{1}{EIS_{\phi}(\theta_i, \phi_j)} \right] \sin(\theta_i)}$$

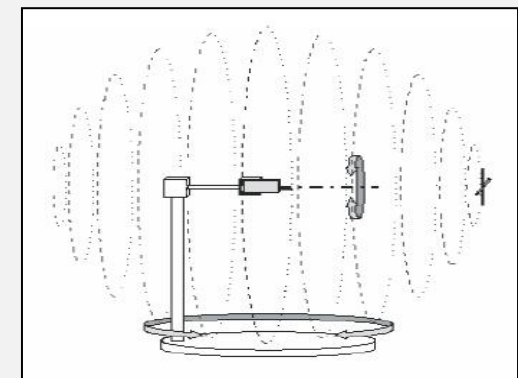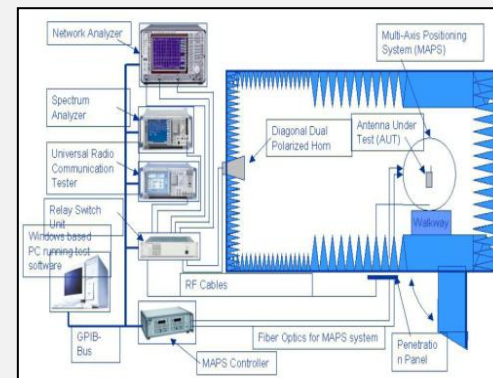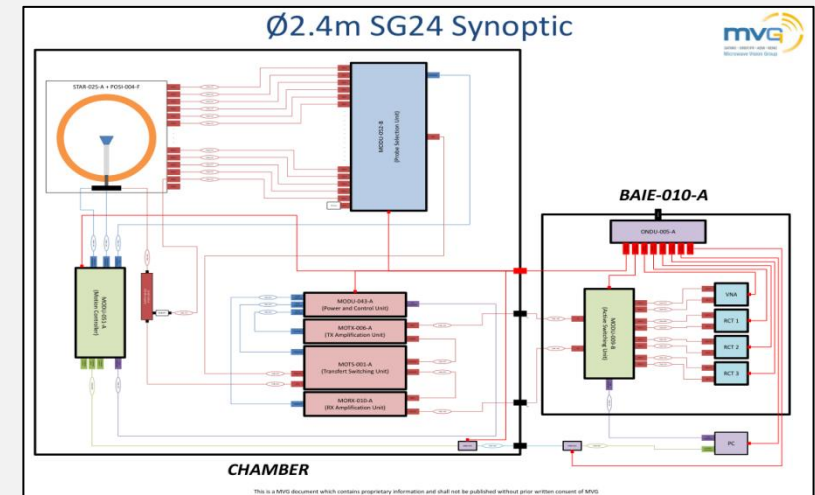



04

Test Results

射频增益规格书		
产品名(中英文)		
产品型号		
商标		Antenna Gain(dBi):
2G 频段选择 GSM Band	<input checked="" type="checkbox"/> 850	0.2
	<input checked="" type="checkbox"/> 900	0.1
	<input checked="" type="checkbox"/> 1800	0.8
	<input checked="" type="checkbox"/> 1900	0.9
	<input checked="" type="checkbox"/> GPRS	
	<input checked="" type="checkbox"/> EDGE (若仅支持RX, 请不要勾选)	xx
3G 频段选择 WCDMA UITS Band	<input checked="" type="checkbox"/> FDD band I 2100	1.0
	<input checked="" type="checkbox"/> FDD band II 1900	1.0
	<input checked="" type="checkbox"/> FDD band V 850	0.2
	<input checked="" type="checkbox"/> FDD band VIII 900	0.1
	<input checked="" type="checkbox"/> FDD band IV 1700	0.8
CDMA	<input checked="" type="checkbox"/> 2000	
4G 频段选择 LTE Band	<input checked="" type="checkbox"/> LTE band 1	1.1
	<input checked="" type="checkbox"/> LTE band 2	1.0
	<input checked="" type="checkbox"/> LTE band 3	0.8
	<input checked="" type="checkbox"/> LTE band 4	0.8
	<input checked="" type="checkbox"/> LTE band 5	0.2
	<input checked="" type="checkbox"/> LTE band 7	1.5
	<input checked="" type="checkbox"/> LTE band 8	0.1
	<input checked="" type="checkbox"/> LTE band 12	0.1
	<input checked="" type="checkbox"/> LTE band 17	0.1
	<input checked="" type="checkbox"/> LTE band 19	0.1
	<input checked="" type="checkbox"/> LTE band 20	0.2
	<input checked="" type="checkbox"/> LTE band28	0.1
WIFI 2.4GHz	<input checked="" type="checkbox"/> 802.11b 2.4GHz	1.6
	<input checked="" type="checkbox"/> 802.11g 2.4GHz	
	<input checked="" type="checkbox"/> 802.11n(20M) 2.4GHz	
	<input checked="" type="checkbox"/> 802.11n(40M) 2.4GHz	
WIFI 5GHz(CE)	<input checked="" type="checkbox"/> 802.11a/n 5150-5250	1.8
	<input type="checkbox"/> 802.11a/n 5250-5350 (DFS)	
	<input type="checkbox"/> 802.11a/n 5470-5725 (DFS)	
	<input checked="" type="checkbox"/> 802.11ac <input type="checkbox"/> 80M <input type="checkbox"/> 160M	
WIFI 5GHz(FCC)	<input checked="" type="checkbox"/> 802.11a/n 5150-5250	





05



Equipment List

Type of Equipment	Manufacture	Model Number	S/N	Calibration Date
Network Analyzer	KEYSIGHT	E5071C	MY46528346	2021-12-11
Network Analyzer	Agilent Technologies	E5071B	MY42200809	2021-12-11

ANNEX A 3-D Pattern Plots

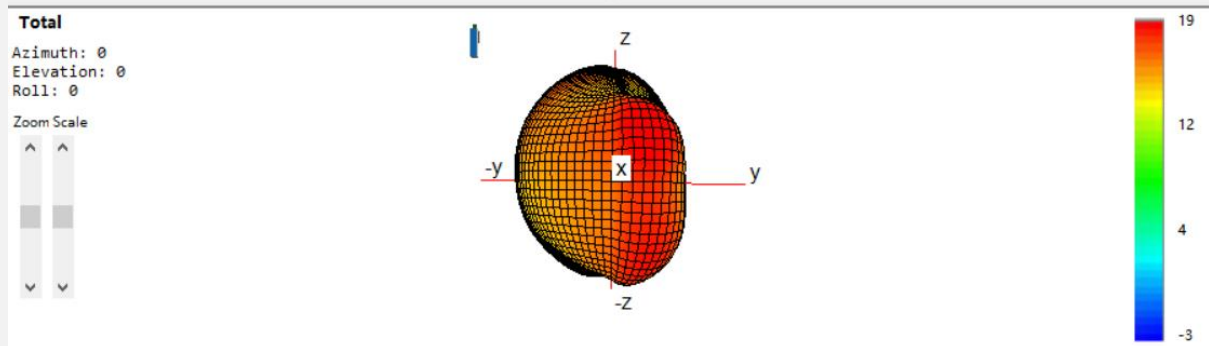
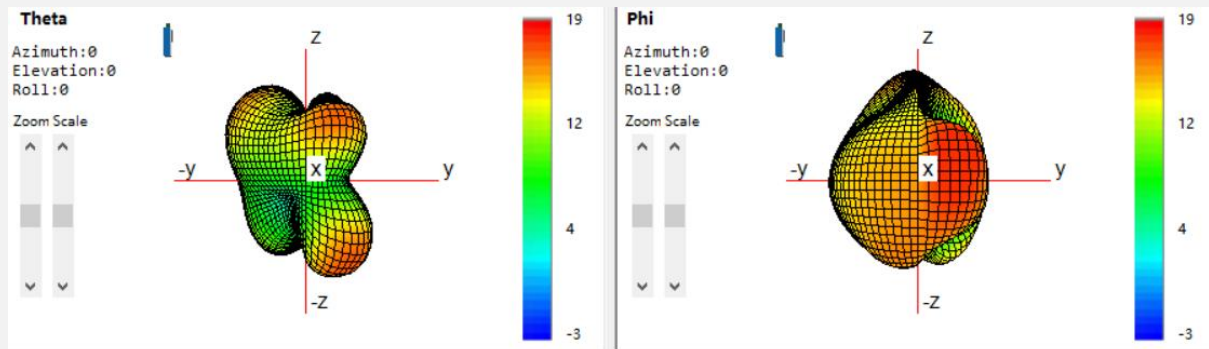


1710-2700MHz

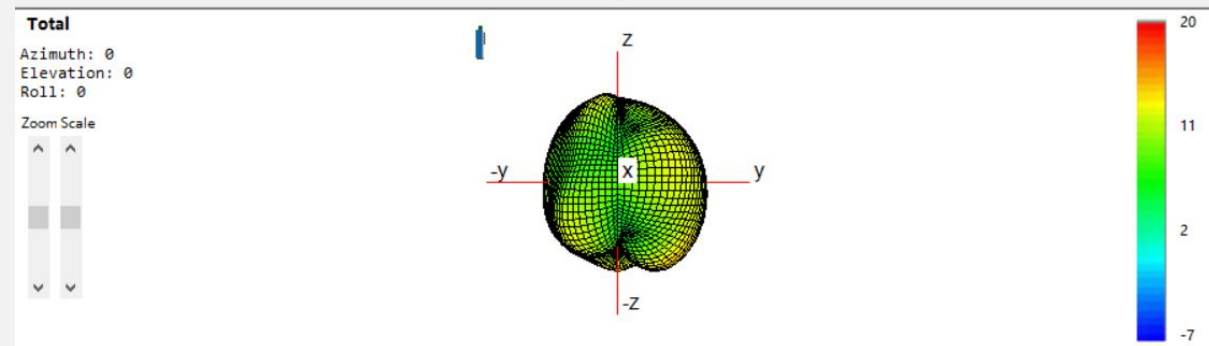
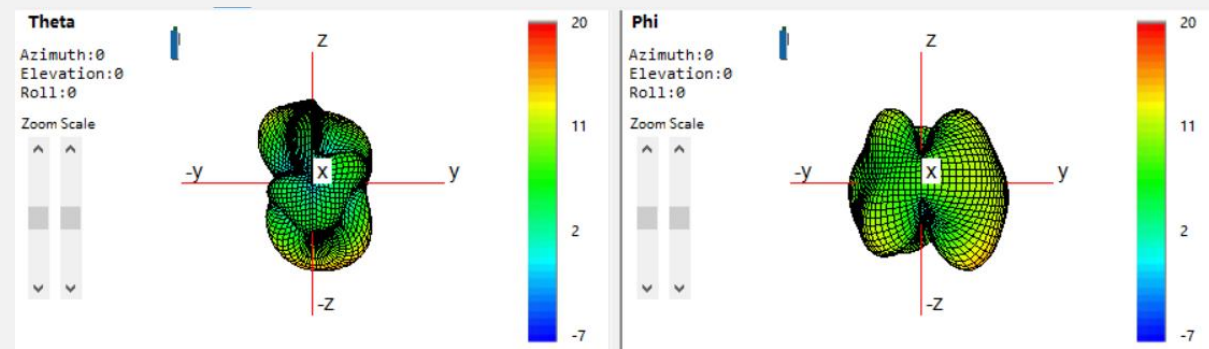


2400-2500MHz

ANNEX A 3-D Pattern Plots

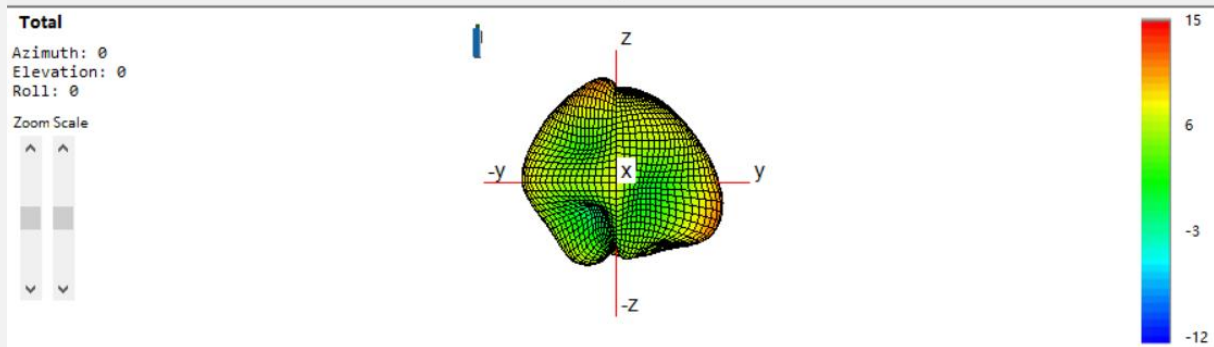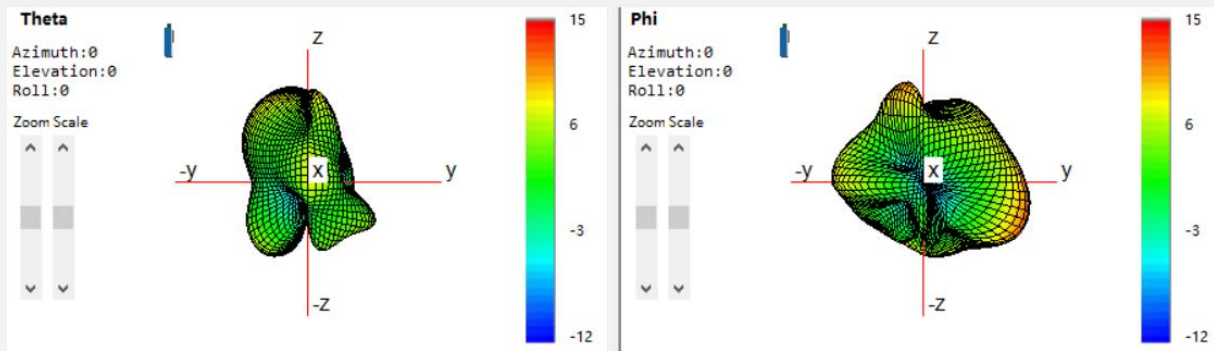


5200-5800MHz

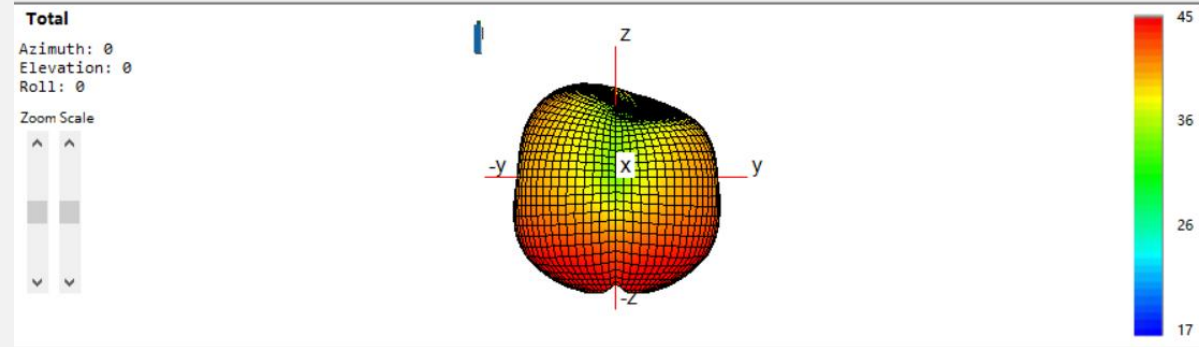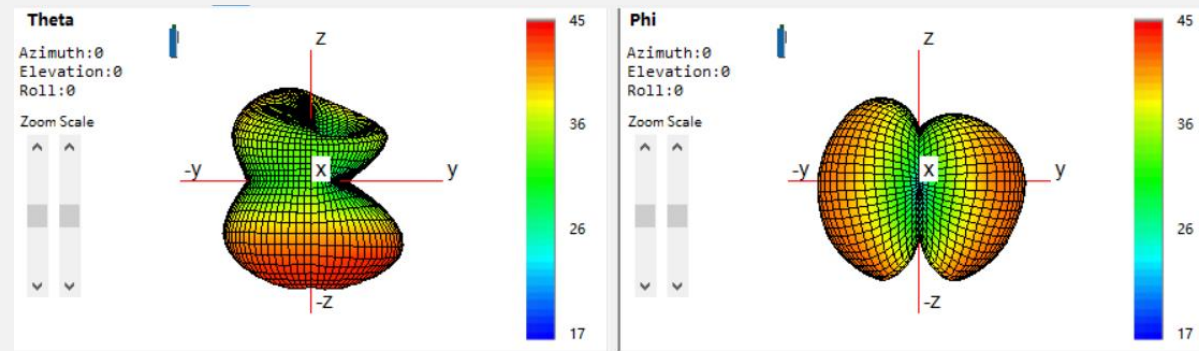

1570-1580MHz




ANNEX A 3-D Pattern Plots

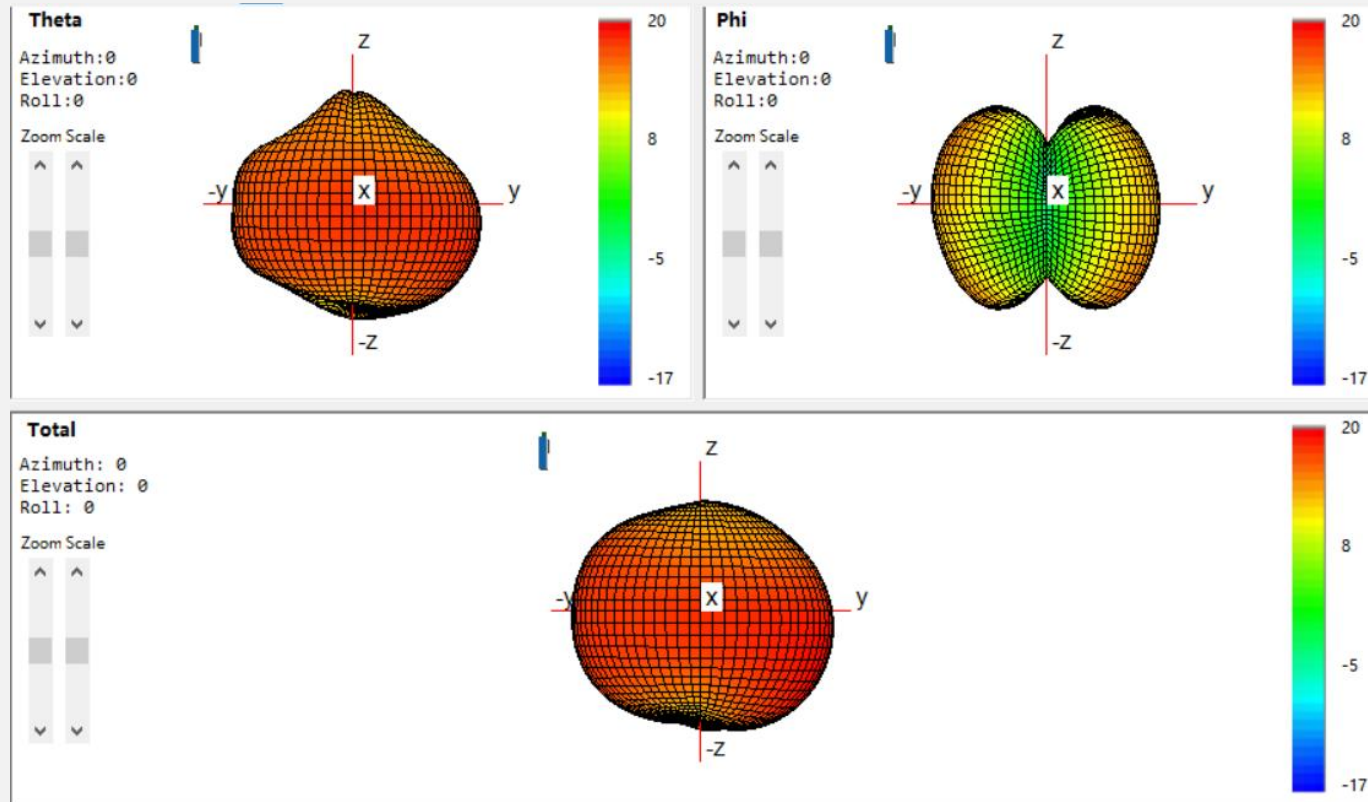

700-960MHz




5.2

ANNEX A 3-D Pattern Plots

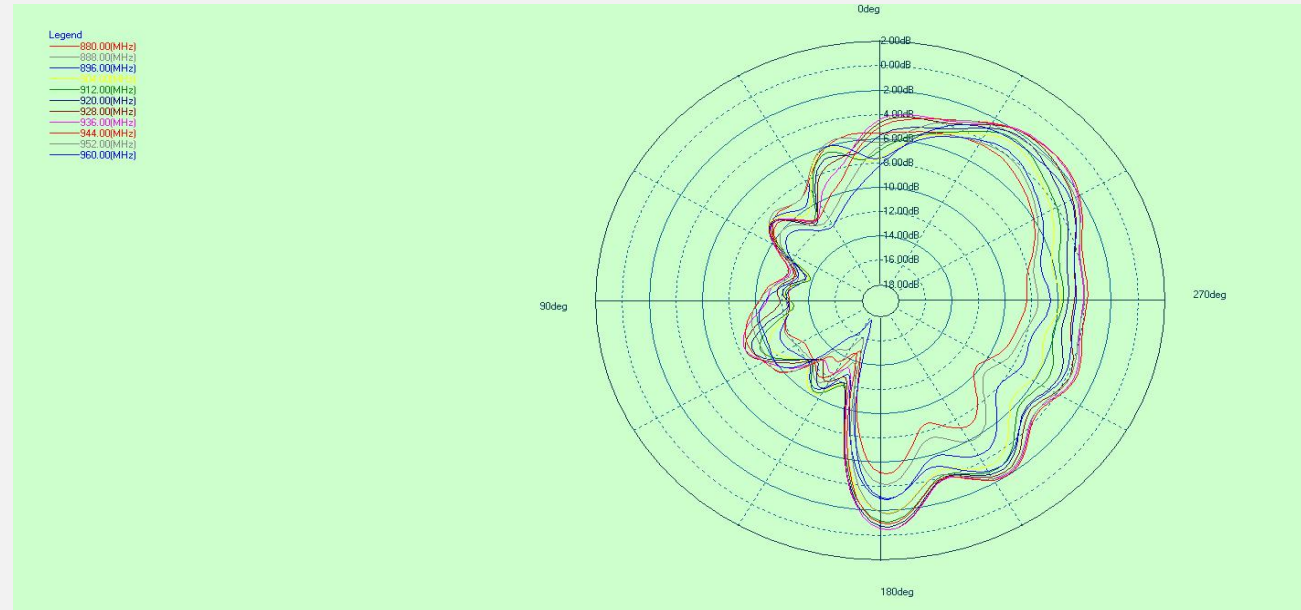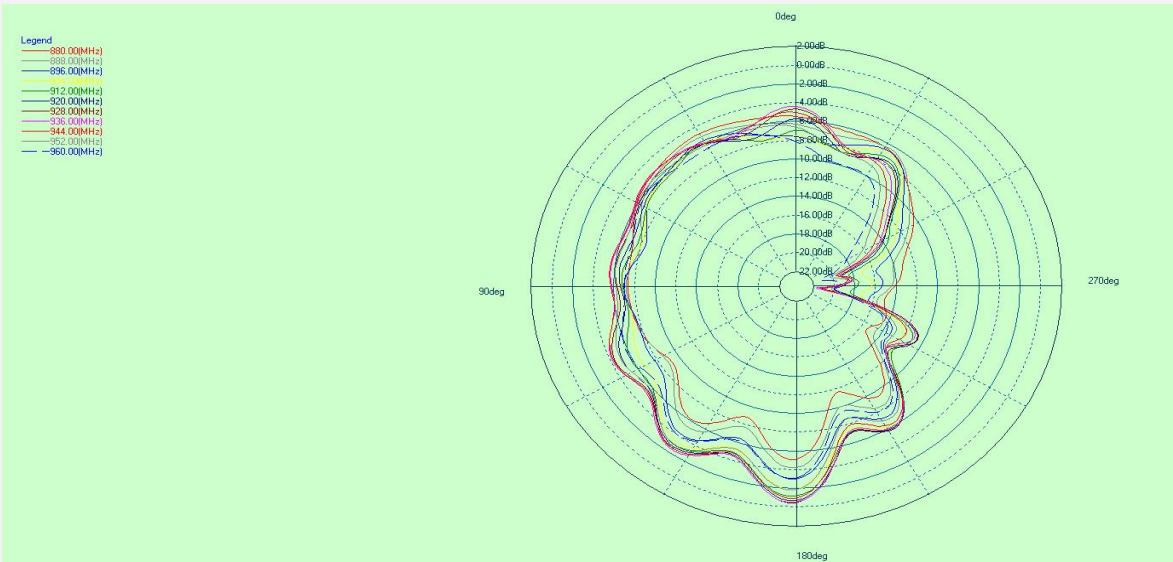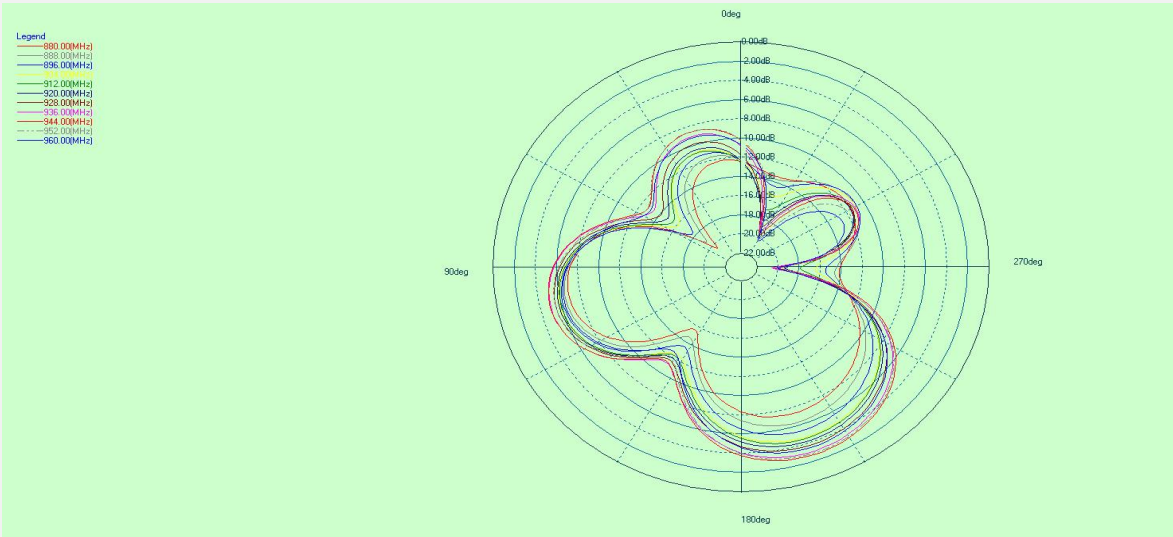




700-960MHz

ANNEX A 3-D Pattern Plots

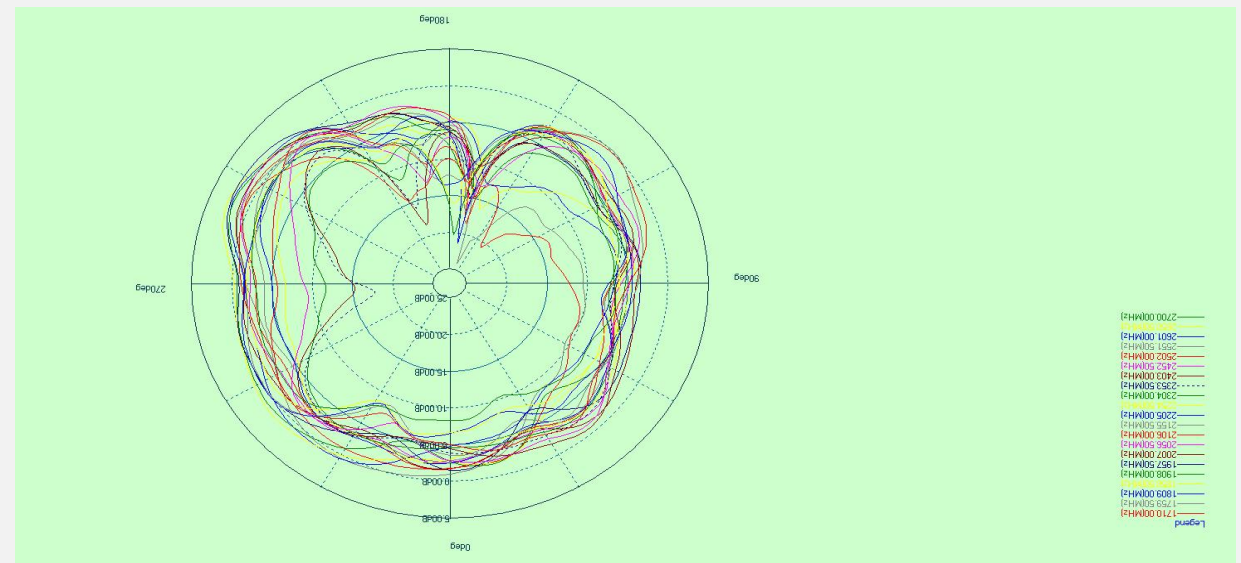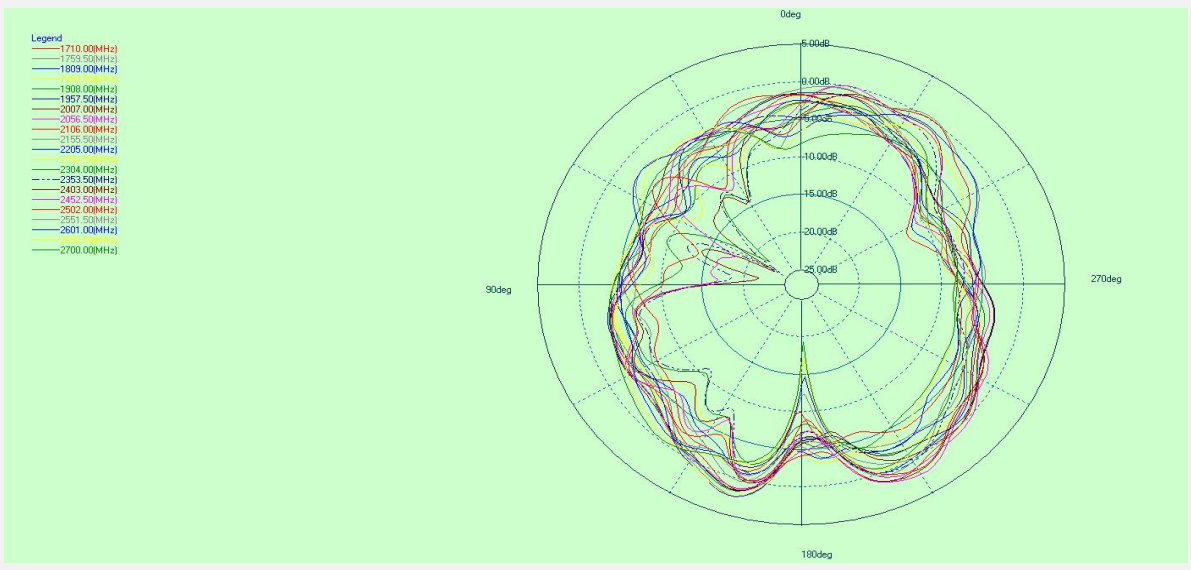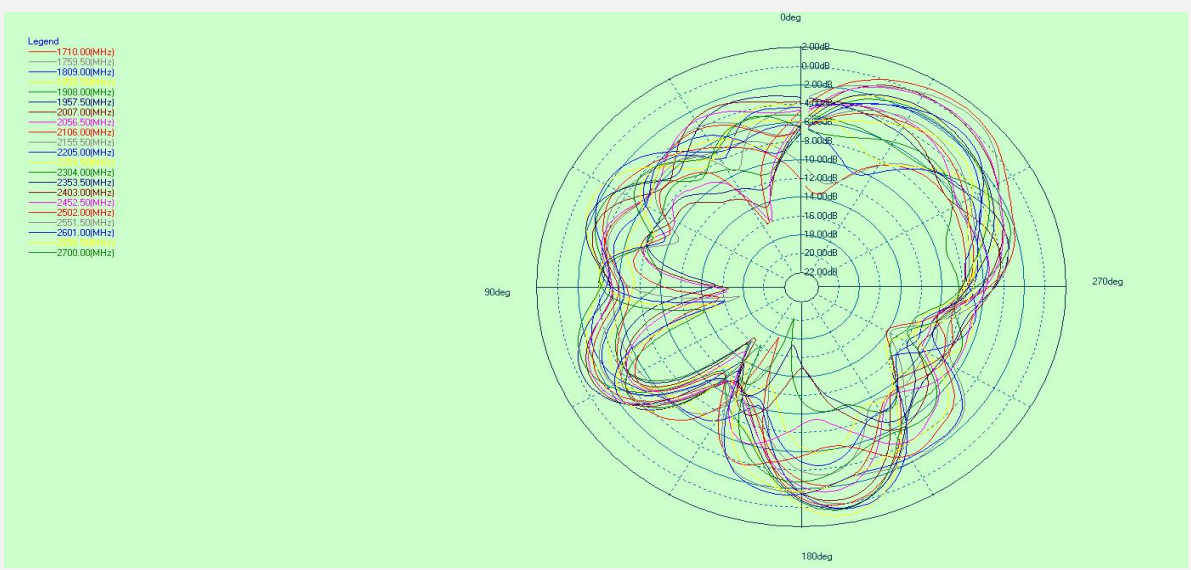




1710-2700MHz

ANNEX A 3-D Pattern Plots

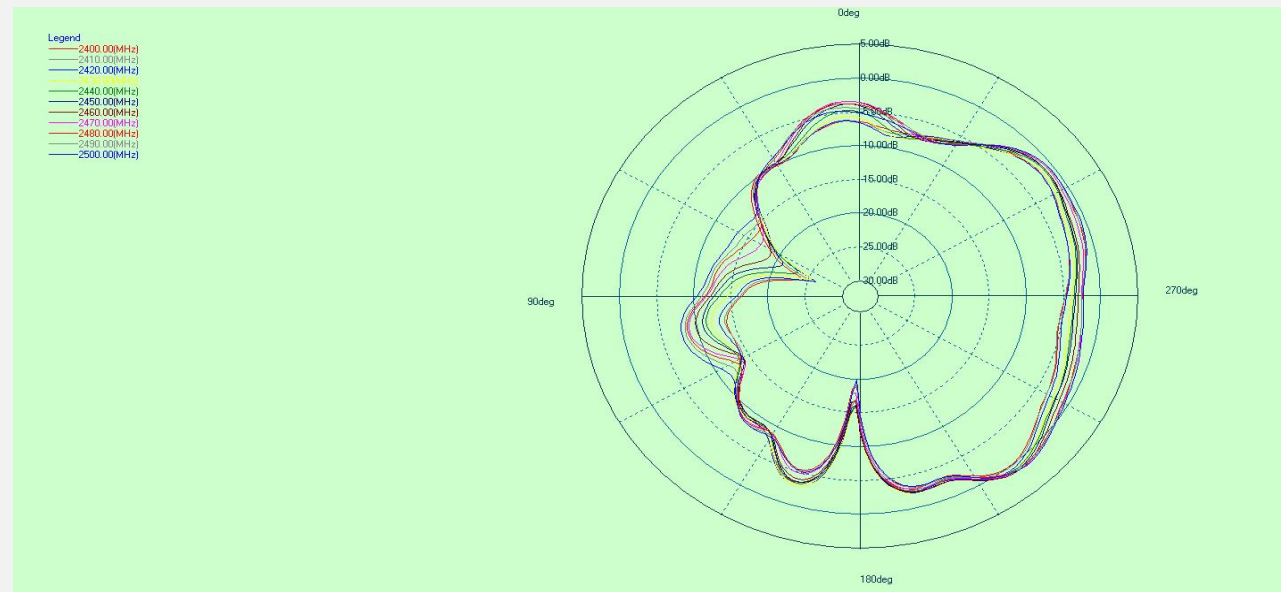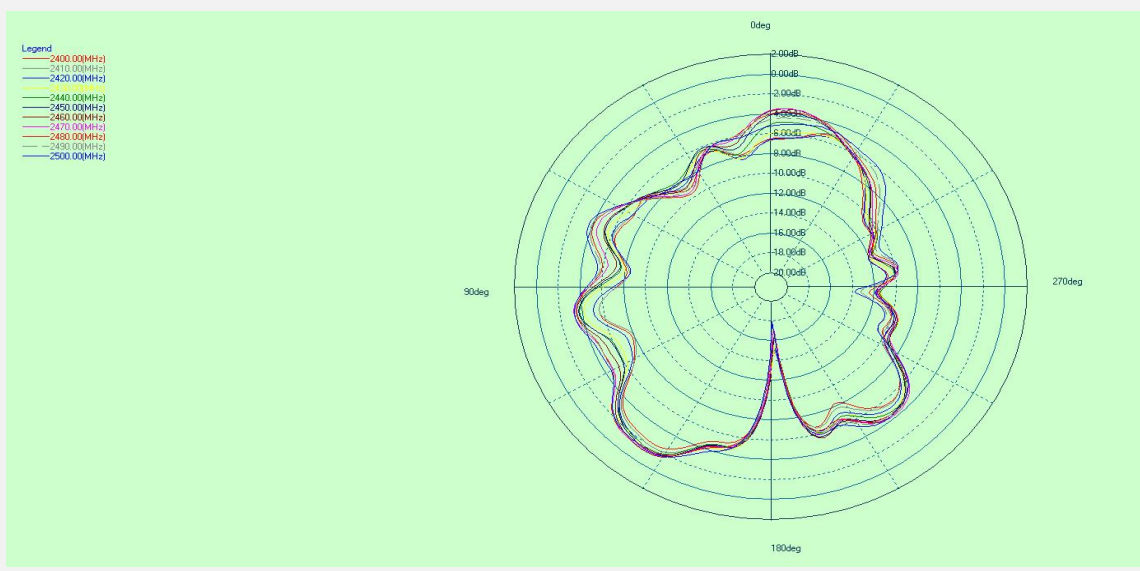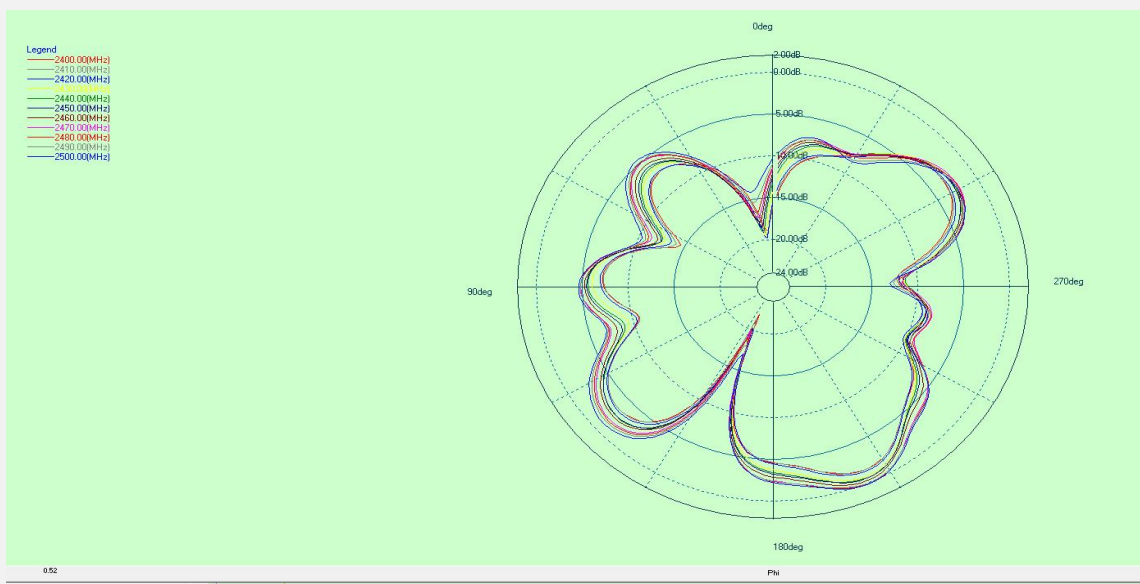




2400-2500MHz

ANNEX A 3-D Pattern Plots

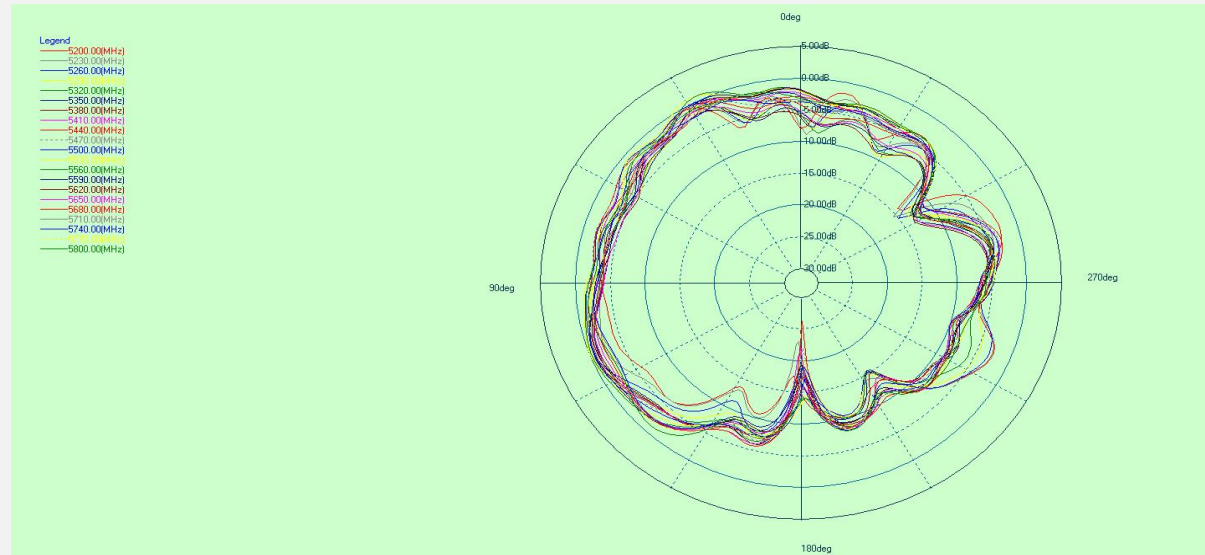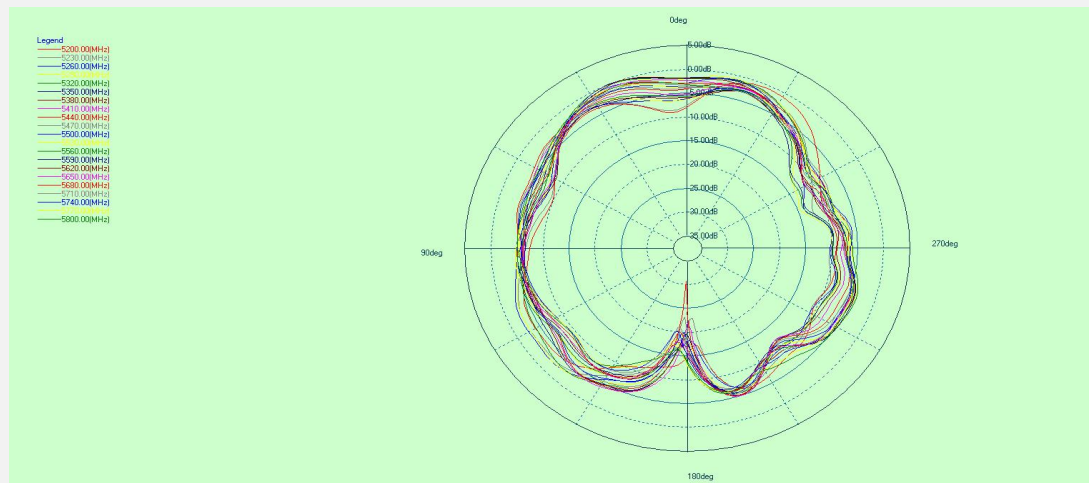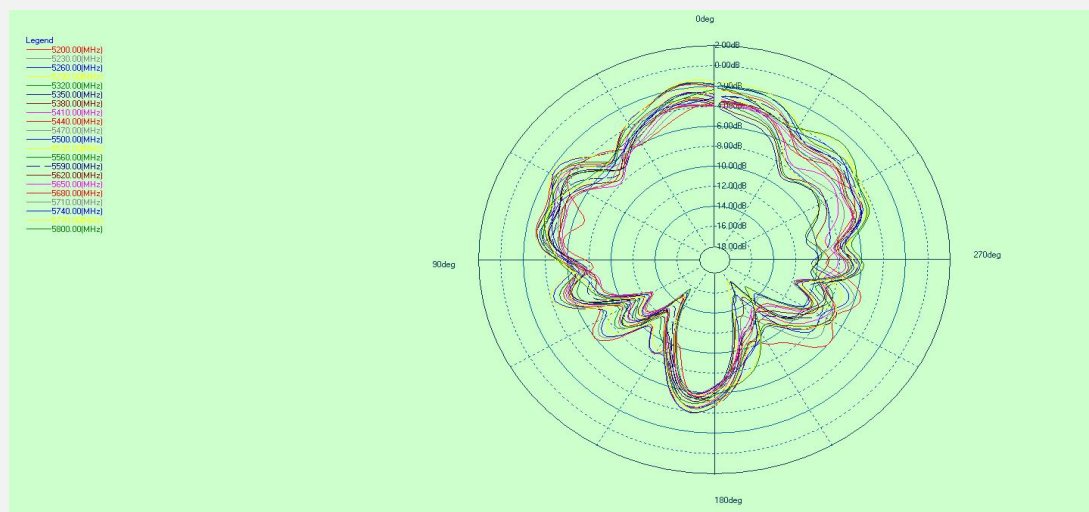

5200-5800MHz



ANNEX A 3-D Pattern Plots

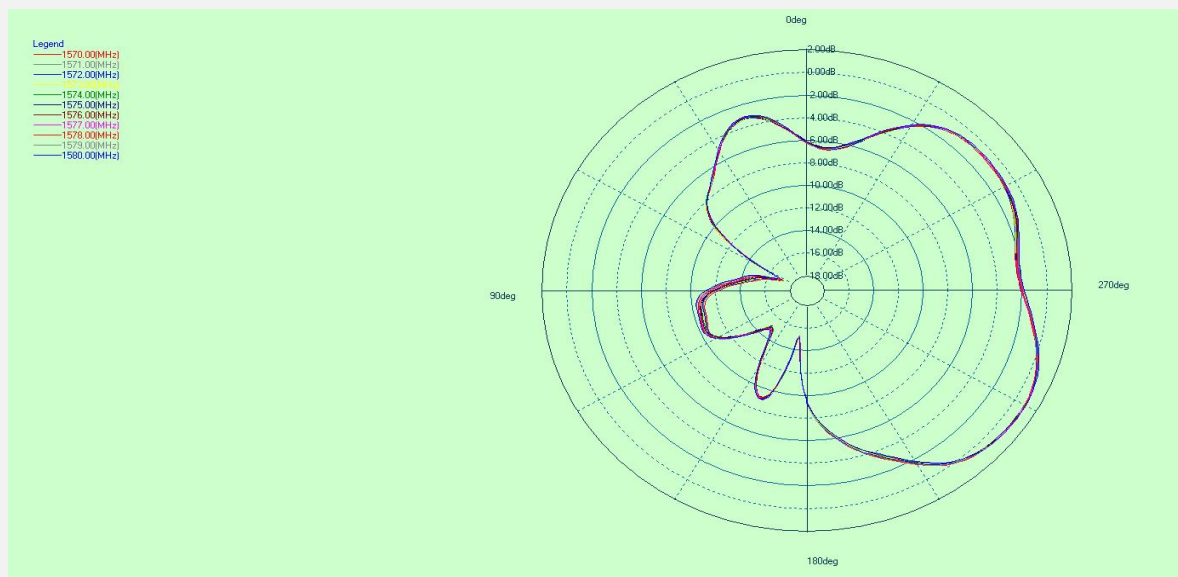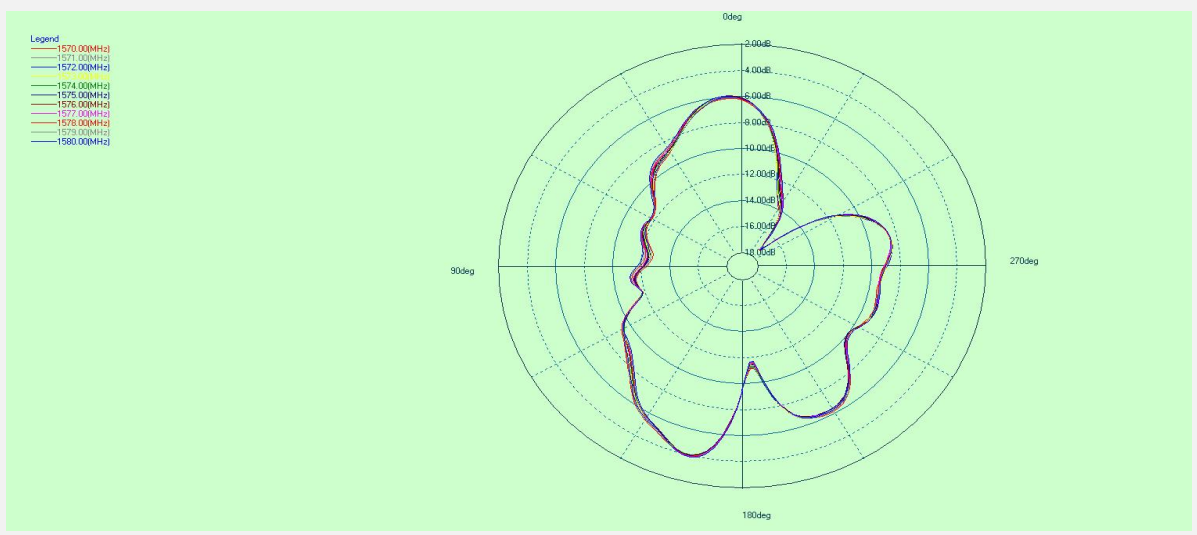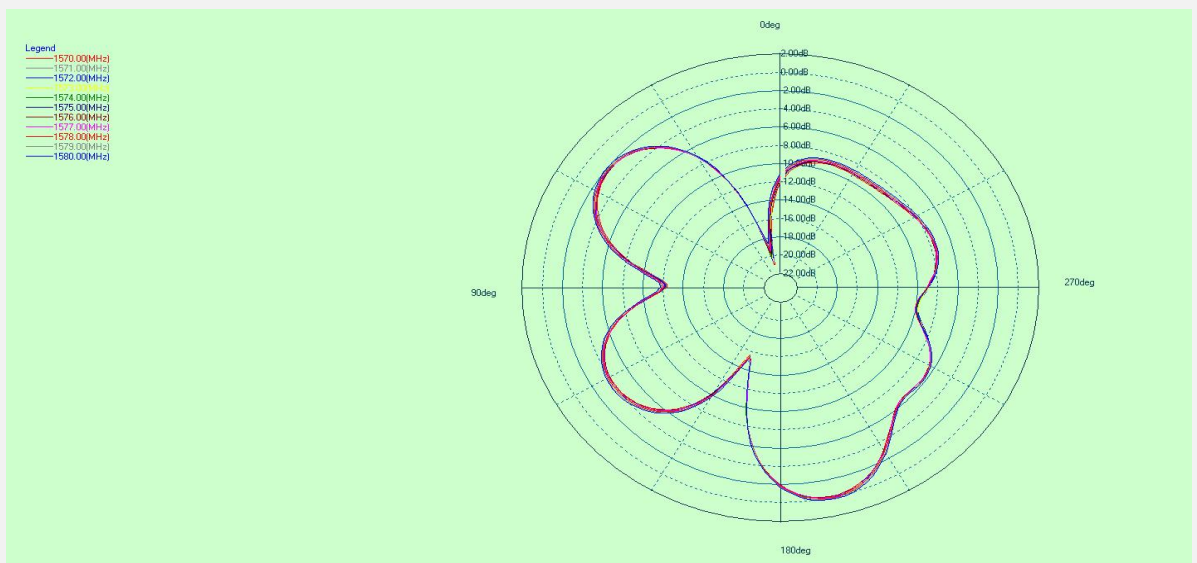

1570-1580MHz

ANNEX B: The EUT Appearance and Test Configuration

B.1 EUT Appearance

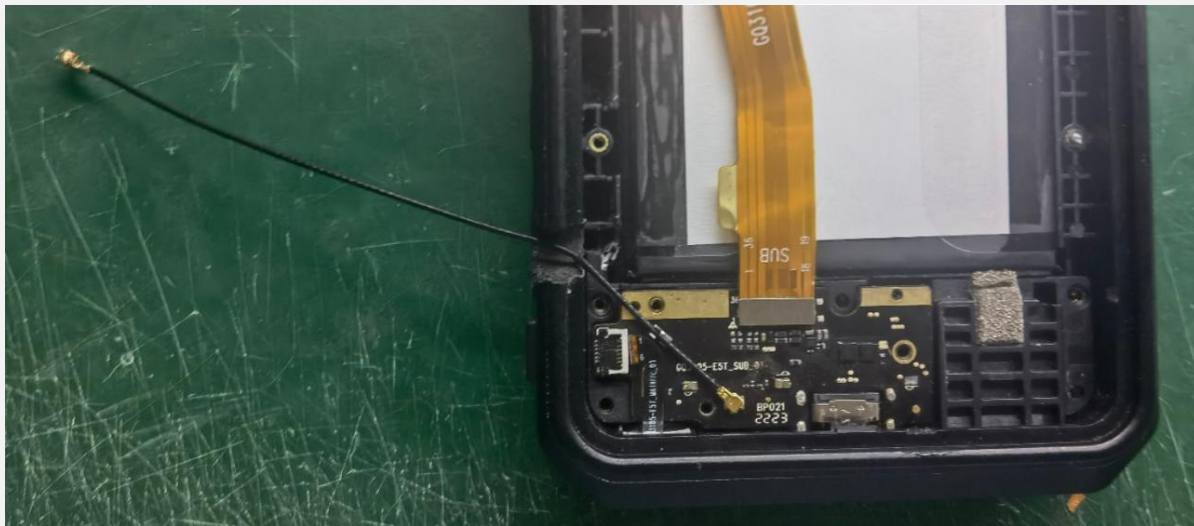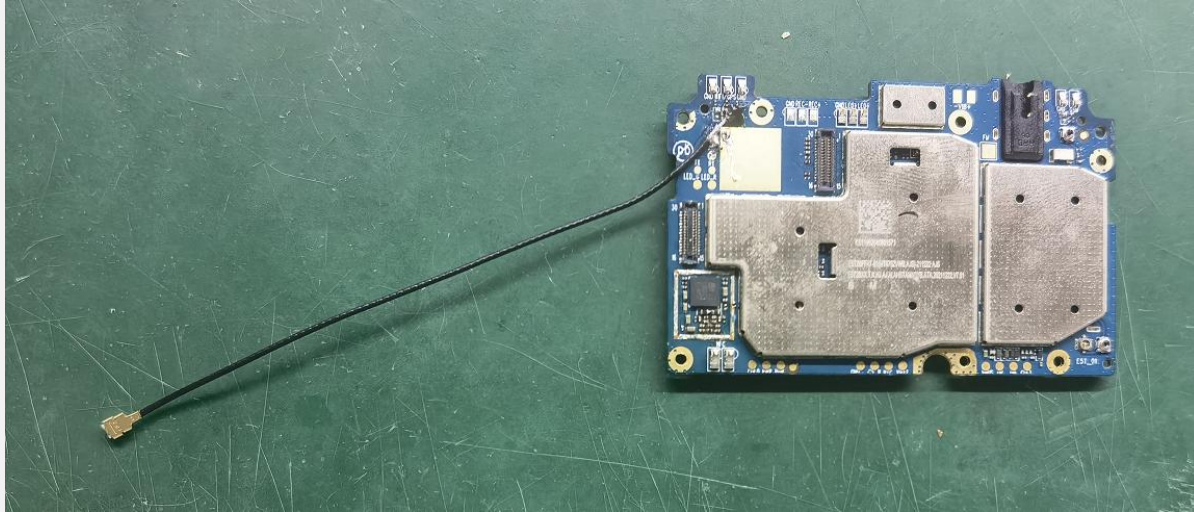

ANNEX B: The EUT Appearance and Test Configuration

B.2 Test Configuration

