

FCC CFR47 PART 27 CERTIFICATION TEST REPORT FCC ID: 2AOWK-5011

Product: Mobile Phone
Trade Mark: ulefone
Model Number: GQ5011
Family Model: Armor 28 Ultra, Armor 28, Armor 28 Pro,
Armor 28T Ultra, Armor 28T Pro,
Armor 28 Lite, Armor 28s, Armor 28s Pro
Report No.: S24111904707007
Issue Date: Jan. 14, 2025

Prepared for

Shenzhen Gotron Electronic CO.,LTD.
7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen
City, Guangdong Province China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District,
Shenzhen, Guangdong, People's Republic of China
Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name: Shenzhen Gotron Electronic CO.,LTD.
Address: 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City, Guangdong Province China
Manufacturer's Name: Shenzhen Gotron Electronic CO.,LTD.
Address: 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City, Guangdong Province China
Product name: Mobile Phone
Trade Mark: ulefone
Model and/or type reference : GQ5011
Family Model: Armor 28 Ultra, Armor 28, Armor 28 Pro, Armor 28T Ultra, Armor 28T Pro, Armor 28 Lite, Armor 28s, Armor 28s Pro
Test Sample number.....: S241119047007
Date of Test.....: Nov. 19, 2024 ~ Jan. 14, 2025
Standards: FCC CFR 47 Part 27
Test procedure..... ANSI C63.26:2015
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Prepared By : Allen Liu
Allen Liu
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
1.5 MEASUREMENT UNCERTAINTY	6
1.6 SPECIAL ACCESSORIES.....	6
1.7 WORST-CASE CONFIGURATION AND MODE.....	6
1.8 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE	8
2.3 CONFIGURATION OF EUT SYSTEM.....	8
2.4 TEST SETUP	9
3.TEST AND MEASUREMENT EQUIPMENT	10
4. OUTPUT POWER.....	12
4.1 OUTPUT POWER MEASUREMENT	12
5. OCCUPIED BANDWIDTH	13
6. BANEDGE AND EMISSION MASK.....	14
7. OUT OF BAND EMISSIONS	15
8. RADIATED MEASUREMENT	17
8.1. RADIATED POWER (ERP & EIRP).....	17
8.2 NR BAND 66	18
8.2 NR BAND 71	22
9. SPURIOUS RADIATION EMISSION	24

9.1 NR N66	26
9.2 NR N71	30
10. FREQUENCY STABILITY	34
10.1 NR BAND 66	35
10.2 NR BAND 71	37
11. PEAK-TO-AVERAGE RATIO	39
11.1 Description of the PAR Measurement	39
11.2 Measuring Instruments	39
11.3 Test Procedures	39
11.4 Test Setup	39
11.5 MODES TESTED	39

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Equipment	Mobile Phone
Trade Mark	ulefone
Model Name	GQ5011
Family Model	Armor 28 Ultra, Armor 28, Armor 28 Pro, Armor 28T Ultra, Armor 28T Pro, Armor 28 Lite, Armor 28s, Armor 28s Pro
Model Difference	All models are the same circuit and RF module, except for model names.
FCC ID:	2AOWK-5011
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> NR FDD Band 66 Uplink: 1710MHz-1780MHz, Downlink: 2110MHz-2200MHz; <input checked="" type="checkbox"/> NR FDD Band 71 Uplink: 663MHz-698MHz, Downlink: 617MHz-652MHz;
Frequency Range:	NR FDD: n66, n71
Type of Modulation:	DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM
Subcarrier spacing	<input checked="" type="checkbox"/> 15KHz, <input checked="" type="checkbox"/> 30KHz, <input type="checkbox"/> 60KHz
NR architecture	<input checked="" type="checkbox"/> SA , <input type="checkbox"/> NSA
Antenna:	LDS Antenna
Antenna gain:	N66: -0.38 dBi; N71: -1.96 dBi;
Adapter	Model: HJ-PD120W-US Input: 100-240V~50/60Hz, 1.8A Output: 5.0V---3.0A 15.0W OR 9.0V---3.0A 27.0W OR 12.0V---3.0A 36.0W OR 15.0V---3.0A 45.0W OR 20.0V---5.0A 100.0W MAX PPS: 3.6V-20.0V---6.0A 120.0W MAX
Battery	DC 7.74V, 5300mAh, 41.022Wh
Power supply	DC 7.74V from battery or DC 5V/9V/12V/15V/20V from adapter
Extreme Vol. Limits:	DC 6.58V to DC 8.90V (Nominal DC 7.74V) (Note 1)
HW Version	M190-MUB-V
SW Version	N/A
** Note1: The High Voltage 8.90V and Low Voltage 6.58V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AOWK-5011** filing to comply with the FCC Part 27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A,

CNAS Registration No.:L5516

1.5 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has NR Bands of: Band 66/71.

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.8 SUMMARY OF TEST RESULTS

FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
<p>Remark:</p> <ol style="list-style-type: none"> 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test. 3. No modifications are made to the EUT during all test items. 			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	GQ5011	FCC ID: 2AOWK-5011	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

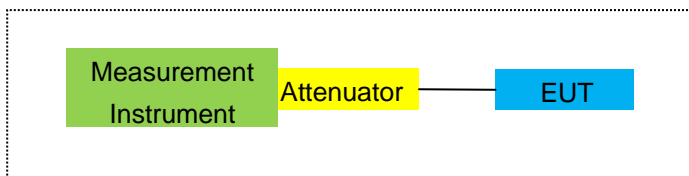

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

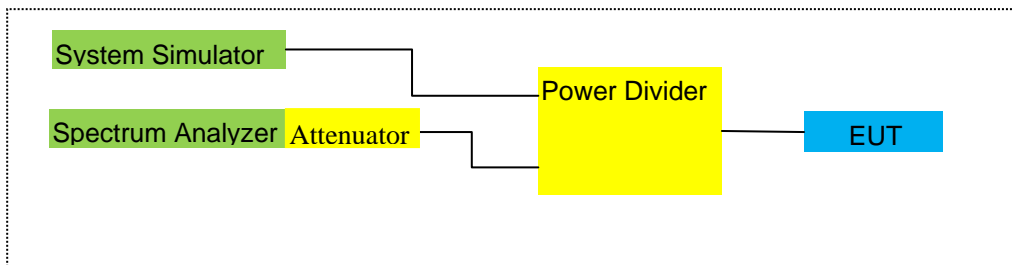

For Frequency Stability

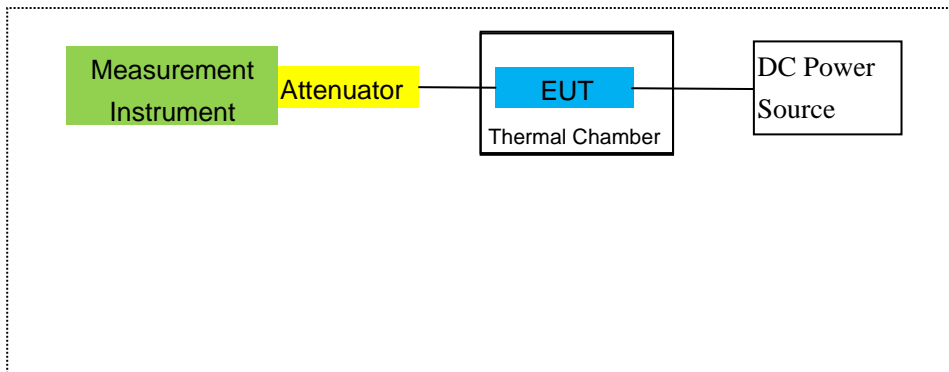

Note: EUT built-in battery-powered, the battery is fully-charged.

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2024.04.25	2025.04.24	1 year
2	Test Receiver	R&S	ESPI	101318	2024.04.26	2025.04.25	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12	2025.05.11	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2024.05.12	2027.05.11	3 year
7	Amplifier	EM	EM-30180	060538	2024.04.26	2025.04.25	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2024.03.12	2025.03.11	1 year
9	Power Meter	R&S	NRVS	100696	2024.04.26	2025.04.25	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2024.04.26	2025.04.25	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2024.04.26	2025.04.25	1 year
15	LISN	R&S	ENV216	101313	2024.04.25	2025.04.24	1 year
16	LISN	EMCO	3816/2	00042990	2024.04.25	2025.04.24	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2024.03.12	2025.03.11	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2024.03.12	2025.03.11	1 year
19	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
20	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
21	Test Cable	N/A	C03	N/A	2023.05.06	2026.05.05	3 year
22	Attenuator	MCE	24-10-34	BN9258	2024.03.12	2025.03.11	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2024.03.12	2025.03.11	1 year
24	test receiver	R&S	ESCI	a0304218	2024.03.12	2025.03.11	1 year
25	Communication Tester	R&S	CMU200	A0304247	2024.04.26	2025.04.25	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2024.03.12	2025.03.11	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2024.04.25	2027.04.24	3 year
28	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2024.04.25	2025.04.24	1 year
29	Communication Tester	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year
30	Radio Communication Analyzer	Anritsu	MT8821C	SN 6262186364	2024.04.25	2025.04.24	1 year
31	Radio Communication Test Station	Anritsu	MT8000A	SN 6262192315	2024.04.25	2025.04.24	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTest	MTS 8200 NR	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	raditeq	RadiMation	2023.1.3	RadiatedTest
4	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

NR Measurement Procedure:

All NR bands conducted power peak and average are obtained from the MT8821C telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 38.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table Table 6.2.2.3-1: of the 3GPP TS 38.521-1 (V15.3.0) (07-2019).

Table 6.2.2.3-1: UE Power Class

EUTRA band	Class 1 (dBm)	Tolerance (dB)	Class 2 (dBm)	Tolerance (dB)	Class 3 (dBm)	Tolerance (dB)	Class 4 (dBm)	Tolerance (dB)
1					23	±2		
2					23	±2 ²		
3					23	±2 ²		
4					23	±2		
5					23	±2		
~					~	~		
40					23	±2		
41					23	±2 ²		
42					23	+2/-3		
43					23	+2/-3		
44					23	+2/[-3]		
45					23	±2		
47			26	±2	23	±2		

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS 38.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

NR Band 66/71

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

FCC: §2.1046,

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

NR Band 66/71

RESULTS

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set display line

Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

NR Band 66/71

MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, “Measurement Guidance for Certification of Licensed Digital Transmitters”

MODES TESTED

NR Band 66/71

RESULTS

Pass

8.2 NR BAND 66

Radiated Power (EIRP) for N66 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	1715	-7.07	5.12	29.16	16.97	49.774	Horizontal	Pass
		1745	-6.38	5.18	28.92	17.36	54.450	Horizontal	Pass
		1775	-6.51	5.23	28.91	17.17	52.119	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	1717.5	-6.70	5.12	28.97	17.15	51.880	Horizontal	Pass
		1745	-6.51	5.18	28.92	17.23	52.845	Horizontal	Pass
		1772.5	-6.78	5.22	28.91	16.91	49.091	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	1720	-6.77	5.13	28.97	17.07	50.933	Horizontal	Pass
		1745	-6.46	5.18	28.92	17.28	53.456	Horizontal	Pass
		1770	-6.76	5.21	28.89	16.92	49.204	Horizontal	Pass
25.0MHz DFT_QPSK	1@1	1722.5	-6.96	5.13	28.98	16.89	48.865	Horizontal	Pass
		1745	-6.71	5.18	28.92	17.03	50.466	Horizontal	Pass
		1767.5	-7.04	5.21	28.9	16.65	46.238	Horizontal	Pass
30.0MHz DFT_QPSK	1@1	1725	-6.55	5.14	28.98	17.29	53.580	Horizontal	Pass
		1745	-6.40	5.18	28.93	17.35	54.325	Horizontal	Pass
		1765	-6.38	5.2	28.9	17.32	53.951	Horizontal	Pass
40.0MHz DFT_QPSK	1@1	1730	-7.38	5.14	28.99	16.47	44.361	Horizontal	Pass
		1745	-6.67	5.18	28.92	17.07	50.933	Horizontal	Pass
		1760	-6.28	5.19	28.88	17.41	55.081	Horizontal	Pass

Radiated Power (EIRP) for N66 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	1715	-7.40	5.12	29.16	16.64	46.132	Vertical	Pass
		1745	-6.71	5.18	28.92	17.03	50.466	Vertical	Pass
		1775	-6.84	5.23	28.91	16.84	48.306	Vertical	Pass
15.0MHz DFT_QPSK	1@1	1717.5	-7.03	5.12	28.97	16.82	48.084	Vertical	Pass
		1745	-6.84	5.18	28.92	16.9	48.978	Vertical	Pass
		1772.5	-7.11	5.22	28.91	16.58	45.499	Vertical	Pass
20.0MHz DFT_QPSK	1@1	1720	-7.10	5.13	28.97	16.74	47.206	Vertical	Pass
		1745	-6.79	5.18	28.92	16.95	49.545	Vertical	Pass
		1770	-7.09	5.21	28.89	16.59	45.604	Vertical	Pass
25.0MHz DFT_QPSK	1@1	1722.5	-7.29	5.13	28.98	16.56	45.290	Vertical	Pass
		1745	-7.04	5.18	28.92	16.7	46.774	Vertical	Pass
		1767.5	-7.37	5.21	28.9	16.32	42.855	Vertical	Pass
30.0MHz DFT_QPSK	1@1	1725	-6.88	5.14	28.98	16.96	49.659	Vertical	Pass
		1745	-6.73	5.18	28.93	17.02	50.350	Vertical	Pass
		1765	-6.71	5.2	28.9	16.99	50.003	Vertical	Pass
40.0MHz DFT_QPSK	1@1	1730	-7.71	5.14	28.99	16.14	41.115	Vertical	Pass
		1745	-7.00	5.18	28.92	16.74	47.206	Vertical	Pass
		1760	-6.61	5.19	28.88	17.08	51.050	Vertical	Pass

Radiated Power (EIRP) for N66 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_16QAM	1@1	1715	-6.87	5.12	29.16	15.94	39.264	Horizontal	Pass
		1745	-6.67	5.18	28.92	15.63	36.559	Horizontal	Pass
		1775	-6.38	5.23	28.91	15.47	35.237	Horizontal	Pass
15.0MHz DFT_16QAM	1@1	1717.5	-6.75	5.12	28.97	15.84	38.371	Horizontal	Pass
		1745	-6.72	5.18	28.92	15.82	38.194	Horizontal	Pass
		1772.5	-6.90	5.22	28.91	15.58	36.141	Horizontal	Pass
20.0MHz DFT_16QAM	1@1	1720	-7.05	5.13	28.97	15.55	35.892	Horizontal	Pass
		1745	-6.49	5.18	28.92	16.07	40.458	Horizontal	Pass
		1770	-6.44	5.21	28.89	15.99	39.719	Horizontal	Pass
25.0MHz DFT_16QAM	1@1	1722.5	-6.95	5.13	28.98	15.70	37.154	Horizontal	Pass
		1745	-6.48	5.18	28.92	16.04	40.179	Horizontal	Pass
		1767.5	-6.42	5.21	28.9	16.02	39.994	Horizontal	Pass
30.0MHz DFT_16QAM	1@1	1725	-6.65	5.14	28.98	15.98	39.628	Horizontal	Pass
		1745	-6.59	5.18	28.93	15.95	39.355	Horizontal	Pass
		1765	-6.97	5.2	28.9	15.52	35.645	Horizontal	Pass
40.0MHz DFT_16QAM	1@1	1730	-6.74	5.14	28.99	15.90	38.905	Horizontal	Pass
		1745	-6.58	5.18	28.92	15.95	39.355	Horizontal	Pass
		1760	-6.49	5.19	28.88	16.08	40.551	Horizontal	Pass

Radiated Power (EIRP) for N66 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_16QAM	1@1	1715	-6.87	5.12	29.16	15.67	36.898	Vertical	Pass
		1745	-6.67	5.18	28.92	15.36	34.356	Vertical	Pass
		1775	-6.38	5.23	28.91	15.2	33.113	Vertical	Pass
15.0MHz DFT_16QAM	1@1	1717.5	-6.75	5.12	28.97	15.57	36.058	Vertical	Pass
		1745	-6.72	5.18	28.92	15.55	35.892	Vertical	Pass
		1772.5	-6.9	5.22	28.91	15.31	33.963	Vertical	Pass
20.0MHz DFT_16QAM	1@1	1720	-7.05	5.13	28.97	15.28	33.729	Vertical	Pass
		1745	-6.49	5.18	28.92	15.8	38.019	Vertical	Pass
		1770	-6.44	5.21	28.89	15.81	38.107	Vertical	Pass
25.0MHz DFT_16QAM	1@1	1722.5	-6.95	5.13	28.98	15.43	34.914	Vertical	Pass
		1745	-6.48	5.18	28.92	15.77	37.757	Vertical	Pass
		1767.5	-6.42	5.21	28.9	15.75	37.584	Vertical	Pass
30.0MHz DFT_16QAM	1@1	1725	-6.65	5.14	28.98	15.71	37.239	Vertical	Pass
		1745	-6.59	5.18	28.93	15.68	36.983	Vertical	Pass
		1765	-6.97	5.2	28.9	15.25	33.497	Vertical	Pass
40.0MHz DFT_16QAM	1@1	1730	-6.74	5.14	28.99	15.63	36.559	Vertical	Pass
		1745	-6.58	5.18	28.92	15.68	36.983	Vertical	Pass
		1760	-6.49	5.19	28.88	15.72	37.325	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.2 NR BAND 71

Radiated Power (EIRP) for N71 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	668	-7.07	5.12	29.16	16.97	49.774	Horizontal	Pass
		680.5	-6.38	5.18	28.92	17.36	54.450	Horizontal	Pass
		693	-6.51	5.23	28.91	17.17	52.119	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	670.5	-6.70	5.12	28.97	17.15	51.880	Horizontal	Pass
		680.5	-6.51	5.18	28.92	17.23	52.845	Horizontal	Pass
		690.5	-6.78	5.22	28.91	16.91	49.091	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	673	-6.77	5.13	28.97	17.07	50.933	Horizontal	Pass
		680.5	-6.46	5.18	28.92	17.28	53.456	Horizontal	Pass
		688	-6.31	5.21	28.89	17.37	54.576	Horizontal	Pass

Radiated Power (EIRP) for N71 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	668	-7.36	5.12	29.16	16.68	46.559	Vertical	Pass
		680.5	-6.67	5.18	28.92	17.07	50.933	Vertical	Pass
		693	-6.8	5.23	28.91	16.88	48.753	Vertical	Pass
15.0MHz DFT_QPSK	1@1	670.5	-6.99	5.12	28.97	16.86	48.529	Vertical	Pass
		680.5	-6.8	5.18	28.92	16.94	49.431	Vertical	Pass
		690.5	-7.07	5.22	28.91	16.62	45.920	Vertical	Pass
20.0MHz DFT_QPSK	1@1	673	-7.06	5.13	28.97	16.78	47.643	Vertical	Pass
		680.5	-6.75	5.18	28.92	16.99	50.003	Vertical	Pass
		688	-6.6	5.21	28.89	17.08	51.050	Vertical	Pass

Radiated Power (EIRP) for N71 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_16QAM	1@1	668	-6.87	5.12	29.16	17.72	59.156	Vertical	Pass
		680.5	-6.67	5.18	28.92	17.41	55.081	Vertical	Pass
		693	-6.38	5.23	28.91	17.25	53.088	Vertical	Pass
15.0MHz DFT_16QAM	1@1	670.5	-6.75	5.12	28.97	17.62	57.810	Vertical	Pass
		680.5	-6.72	5.18	28.92	17.60	57.544	Vertical	Pass
		690.5	-6.90	5.22	28.91	17.36	54.450	Vertical	Pass
20.0MHz DFT_16QAM	1@1	673	-7.05	5.13	28.97	17.33	54.075	Vertical	Pass
		680.5	-6.49	5.18	28.92	17.85	60.954	Vertical	Pass
		688	-6.44	5.21	28.89	17.86	61.094	Vertical	Pass

Radiated Power (EIRP) for N71 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_16QAM	1@1	668	-6.87	5.12	29.16	17.54	56.754	Vertical	Pass
		680.5	-6.67	5.18	28.92	17.23	52.845	Vertical	Pass
		693	-6.38	5.23	28.91	17.07	50.933	Vertical	Pass
15.0MHz DFT_16QAM	1@1	670.5	-6.75	5.12	28.97	17.44	55.463	Vertical	Pass
		680.5	-6.72	5.18	28.92	17.42	55.208	Vertical	Pass
		690.5	-6.9	5.22	28.91	17.18	52.240	Vertical	Pass
20.0MHz DFT_16QAM	1@1	673	-7.05	5.13	28.97	17.15	51.880	Vertical	Pass
		680.5	-6.49	5.18	28.92	17.67	58.479	Vertical	Pass
		688	-6.44	5.21	28.89	17.68	58.614	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB at the channel edges and $55 + 10 \text{ Log}_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

NR Band 66/71

RESULTS

PASS

9.1 NR N66

QPSK NR N66 10MHZ SCS 30kHz

Test Results for Low Channel 1715MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3430	-37.37	6.14	27.3	-16.21	-13	-3.21	Horizontal
3430	-42.37	6.14	27.3	-21.21	-13	-8.21	Vertical
5145	-40.51	6.58	28.51	-18.58	-13	-5.58	Vertical
5145	-42.28	6.58	28.51	-20.35	-13	-7.35	Horizontal
291.4	-34.98	0.67	15.17	-20.48	-13	-7.48	Vertical
536.7	-39.03	0.93	15.06	-24.89	-13	-11.89	Horizontal
Test Results for Mid Channel 1745MHz							
3490	-39.56	6.15	27.32	-18.39	-13	-5.39	Horizontal
3490	-38.22	6.15	27.32	-17.05	-13	-4.05	Vertical
5235	-37.19	6.61	28.51	-15.29	-13	-2.29	Vertical
5235	-42.78	6.61	28.51	-20.88	-13	-7.88	Horizontal
352.1	-41.86	0.65	16.34	-26.17	-13	-13.17	Vertical
601.8	-38.18	1.46	15.28	-24.36	-13	-11.36	Horizontal
Test Results for High Channel 1775MHz							
3550	-36.99	6.18	27.32	-15.85	-13	-2.85	Horizontal
3550	-39.16	6.18	27.32	-18.02	-13	-5.02	Vertical
5325	-36.58	6.68	28.89	-14.37	-13	-1.37	Vertical
5325	-39.86	6.68	28.89	-17.65	-13	-4.65	Horizontal
187.9	-39.57	0.62	16.26	-23.93	-13	-10.93	Vertical
548.8	-42.68	1.39	15.28	-28.80	-13	-15.80	Horizontal

QPSK NR N66 45MHZ SCS 30kHz

Test Results for Low Channel 1715MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3430	-43.25	6.14	27.3	-22.09	-13	-9.09	Horizontal
3430	-43.13	6.14	27.3	-21.97	-13	-8.97	Vertical
5145	-38.87	6.59	28.51	-16.95	-13	-3.95	Vertical
5145	-42.70	6.59	28.51	-20.78	-13	-7.78	Horizontal
395.4	-44.49	0.58	15.08	-29.99	-13	-16.99	Vertical
529.1	-43.92	0.79	15.20	-29.51	-13	-16.51	Horizontal
Test Results for Mid Channel 1745MHz							
3490	-41.17	6.16	27.32	-20.01	-13	-7.01	Horizontal
3490	-38.26	6.16	27.32	-17.10	-13	-4.10	Vertical
5235	-39.25	6.68	28.51	-17.42	-13	-4.42	Vertical
5235	-39.69	6.68	28.51	-17.86	-13	-4.86	Horizontal
334.5	-43.76	0.60	15.10	-29.26	-13	-16.26	Vertical
463.6	-38.54	1.43	15.29	-24.67	-13	-11.67	Horizontal
Test Results for High Channel 1775MHz							
3550	-37.69	6.21	27.32	-16.58	-13	-3.58	Horizontal
3550	-39.71	6.21	27.32	-18.60	-13	-5.60	Vertical
5325	-37.44	6.71	28.89	-15.26	-13	-2.26	Vertical
5325	-41.47	6.71	28.89	-19.29	-13	-6.29	Horizontal
344.5	-34.95	0.61	16.20	-19.36	-13	-6.36	Vertical
496.0	-38.49	1.55	15.76	-24.28	-13	-11.28	Horizontal

16QAM NR N66 10MHZ SCS 30kHz

Test Results for Low Channel 1715MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3430	-43.50	6.14	27.3	-22.34	-13	-9.34	Horizontal
3430	-39.85	6.14	27.3	-18.69	-13	-5.69	Vertical
5145	-39.10	6.58	28.51	-17.17	-13	-4.17	Vertical
5145	-38.26	6.58	28.51	-16.33	-13	-3.33	Horizontal
173.3	-37.15	0.65	16.15	-21.66	-13	-8.66	Vertical
560.6	-37.69	1.46	15.84	-23.31	-13	-10.31	Horizontal
Test Results for Mid Channel 1745MHz							
3490	-38.62	6.15	27.32	-17.45	-13	-4.45	Horizontal
3490	-35.20	6.15	27.32	-14.03	-13	-1.03	Vertical
5235	-43.24	6.61	28.51	-21.34	-13	-8.34	Vertical
5235	-44.06	6.61	28.51	-22.16	-13	-9.16	Horizontal
195.0	-36.69	0.61	16.25	-21.04	-13	-8.04	Vertical
442.0	-35.08	1.14	16.02	-20.20	-13	-7.20	Horizontal
Test Results for High Channel 1775MHz							
3550	-36.37	6.18	27.32	-15.23	-13	-2.23	Horizontal
3550	-38.90	6.18	27.32	-17.76	-13	-4.76	Vertical
5325	-40.93	6.68	28.89	-18.72	-13	-5.72	Vertical
5325	-38.35	6.68	28.89	-16.14	-13	-3.14	Horizontal
370.5	-35.96	0.61	16.35	-20.22	-13	-7.22	Vertical
449.7	-41.90	1.42	16.04	-27.27	-13	-14.27	Horizontal

16QAM NR N66 45MHZ SCS 30kHz

Test Results for Low Channel 1715MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3430	-38.96	6.14	27.3	-17.80	-13	-4.80	Horizontal
3430	-43.08	6.14	27.3	-21.92	-13	-8.92	Vertical
5145	-41.39	6.59	28.51	-19.47	-13	-6.47	Vertical
5145	-42.31	6.59	28.51	-20.39	-13	-7.39	Horizontal
225.3	-41.91	0.70	16.13	-26.48	-13	-13.48	Vertical
634.7	-38.06	1.01	15.43	-23.64	-13	-10.64	Horizontal
Test Results for Mid Channel 1745MHz							
3490	-43.64	6.16	27.32	-22.48	-13	-9.48	Horizontal
3490	-38.33	6.16	27.32	-17.17	-13	-4.17	Vertical
5235	-39.61	6.68	28.51	-17.78	-13	-4.78	Vertical
5235	-39.51	6.68	28.51	-17.68	-13	-4.68	Horizontal
358.0	-38.54	0.65	15.27	-23.92	-13	-10.92	Vertical
613.6	-40.33	1.45	15.41	-26.37	-13	-13.37	Horizontal
Test Results for High Channel 1775MHz							
3550	-38.62	6.21	27.32	-17.51	-13	-4.51	Horizontal
3550	-35.37	6.21	27.32	-14.26	-13	-1.26	Vertical
5325	-40.04	6.71	28.89	-17.86	-13	-4.86	Vertical
5325	-37.87	6.71	28.89	-15.69	-13	-2.69	Horizontal
385.8	-37.97	0.63	15.30	-23.31	-13	-10.31	Vertical
513.5	-41.44	1.39	16.57	-26.26	-13	-13.26	Horizontal

9.2 NR N71

QPSK NR N71 10MHZ SCS 30kHz

Test Results for Low Channel 688MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1376	-37.31	6.14	27.3	-16.15	-13	-3.15	Horizontal
1376	-43.07	6.14	27.3	-21.91	-13	-8.91	Vertical
2064	-40.29	6.58	28.51	-18.36	-13	-5.36	Vertical
2064	-42.12	6.58	28.51	-20.19	-13	-7.19	Horizontal
236.9	-34.85	0.67	15.17	-20.35	-13	-7.35	Vertical
439.0	-38.91	0.93	15.06	-24.78	-13	-11.78	Horizontal
Test Results for Mid Channel 680.5MHz							
1361	-39.65	6.15	27.32	-18.48	-13	-5.48	Horizontal
1361	-37.25	6.15	27.32	-16.08	-13	-3.08	Vertical
2041.5	-37.36	6.61	28.51	-15.46	-13	-2.46	Vertical
2041.5	-42.59	6.61	28.51	-20.69	-13	-7.69	Horizontal
186.5	-41.70	0.65	16.34	-26.01	-13	-13.01	Vertical
380.4	-38.69	1.46	15.28	-24.87	-13	-11.87	Horizontal
Test Results for High Channel 693MHz							
1386	-36.68	6.18	27.32	-15.54	-13	-2.54	Horizontal
1386	-38.68	6.18	27.32	-17.54	-13	-4.54	Vertical
2079	-36.77	6.68	28.89	-14.56	-13	-1.56	Vertical
2079	-40.08	6.68	28.89	-17.87	-13	-4.87	Horizontal
184.0	-39.50	0.62	16.26	-23.87	-13	-10.87	Vertical
408.3	-42.38	1.39	15.28	-28.50	-13	-15.50	Horizontal

QPSK NR N71 20MHZ SCS 30kHz

Test Results for Low Channel 688MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1376	-42.68	6.14	27.3	-21.52	-13	-8.52	Horizontal
1376	-43.81	6.14	27.3	-22.65	-13	-9.65	Vertical
2064	-38.66	6.59	28.51	-16.74	-13	-3.74	Vertical
2064	-42.06	6.59	28.51	-20.14	-13	-7.14	Horizontal
235.7	-44.29	0.58	15.08	-29.80	-13	-16.80	Vertical
479.7	-43.73	0.79	15.20	-29.32	-13	-16.32	Horizontal
Test Results for Mid Channel 680.5MHz							
1361	-41.05	6.16	27.32	-19.89	-13	-6.89	Horizontal
1361	-38.46	6.16	27.32	-17.30	-13	-4.30	Vertical
2041.5	-38.98	6.68	28.51	-17.15	-13	-4.15	Vertical
2041.5	-39.58	6.68	28.51	-17.75	-13	-4.75	Horizontal
168.6	-43.33	0.60	15.10	-28.83	-13	-15.83	Vertical
452.1	-38.42	1.43	15.29	-24.56	-13	-11.56	Horizontal
Test Results for High Channel 693MHz							
1386	-36.33	6.21	27.32	-15.22	-13	-2.22	Horizontal
1386	-40.00	6.21	27.32	-18.89	-13	-5.89	Vertical
2079	-37.44	6.71	28.89	-15.26	-13	-2.26	Vertical
2079	-40.71	6.71	28.89	-18.53	-13	-5.53	Horizontal
187.7	-34.03	0.61	16.20	-18.45	-13	-5.45	Vertical
468.1	-38.98	1.55	15.76	-24.77	-13	-11.77	Horizontal

16QAM NR N71 10MHZ SCS 30kHz

Test Results for Low Channel 688MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1376	-42.71	6.14	27.3	-21.55	-13	-8.55	Horizontal
1376	-40.30	6.14	27.3	-19.14	-13	-6.14	Vertical
2064	-39.75	6.58	28.51	-17.82	-13	-4.82	Vertical
2064	-37.41	6.58	28.51	-15.48	-13	-2.48	Horizontal
176.1	-36.40	0.65	16.15	-20.90	-13	-7.90	Vertical
435.7	-37.93	1.46	15.84	-23.55	-13	-10.55	Horizontal
Test Results for Mid Channel 680.5MHz							
1361	-37.81	6.15	27.32	-16.64	-13	-3.64	Horizontal
1361	-35.21	6.15	27.32	-14.04	-13	-1.04	Vertical
2041.5	-43.75	6.61	28.51	-21.85	-13	-8.85	Vertical
2041.5	-43.90	6.61	28.51	-22.00	-13	-9.00	Horizontal
197.4	-37.14	0.61	16.25	-21.50	-13	-8.50	Vertical
422.2	-35.28	1.14	16.02	-20.40	-13	-7.40	Horizontal
Test Results for High Channel 693MHz							
1386	-35.43	6.18	27.32	-14.29	-13	-1.29	Horizontal
1386	-39.44	6.18	27.32	-18.30	-13	-5.30	Vertical
2079	-40.40	6.68	28.89	-18.19	-13	-5.19	Vertical
2079	-38.58	6.68	28.89	-16.37	-13	-3.37	Horizontal
197.1	-36.16	0.61	16.35	-20.41	-13	-7.41	Vertical
466.0	-41.63	1.42	16.04	-27.01	-13	-14.01	Horizontal

16QAM NR N71 20MHZ SCS 30kHz

Test Results for Low Channel 688MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1376	-39.33	6.14	27.3	-18.17	-13	-5.17	Horizontal
1376	-42.40	6.14	27.3	-21.24	-13	-8.24	Vertical
2064	-41.59	6.59	28.51	-19.67	-13	-6.67	Vertical
2064	-41.74	6.59	28.51	-19.82	-13	-6.82	Horizontal
283.5	-41.22	0.70	16.13	-25.78	-13	-12.78	Vertical
274.6	-38.74	1.01	15.43	-24.33	-13	-11.33	Horizontal
Test Results for Mid Channel 680.5MHz							
1361	-43.07	6.16	27.32	-21.91	-13	-8.91	Horizontal
1361	-38.02	6.16	27.32	-16.86	-13	-3.86	Vertical
2041.5	-38.89	6.68	28.51	-17.06	-13	-4.06	Vertical
2041.5	-40.14	6.68	28.51	-18.31	-13	-5.31	Horizontal
199.8	-37.91	0.65	15.27	-23.30	-13	-10.30	Vertical
418.3	-39.79	1.45	15.41	-25.83	-13	-12.83	Horizontal
Test Results for High Channel 693MHz							
1386	-37.84	6.21	27.32	-16.73	-13	-3.73	Horizontal
1386	-38.22	6.21	27.32	-17.11	-13	-4.11	Vertical
2079	-39.03	6.71	28.89	-16.85	-13	-3.85	Vertical
2079	-38.14	6.71	28.89	-15.96	-13	-2.96	Horizontal
241.7	-38.49	0.63	15.30	-23.82	-13	-10.82	Vertical
377.4	-41.87	1.39	16.57	-26.68	-13	-13.68	Horizontal

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to $+50^{\circ}\text{C}$

Voltage = low voltage, DC 6.58V, Normal, DC 7.74V and High voltage, DC 8.90V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

NR Band 66/71

RESULTS

See the following pages.

10.1 NR BAND 66

N66 QPSK, (45MHz CH 549000 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
6.58	2592	9.00	0.00347	2.5
7.74	2592	5.00	0.00193	2.5
8.90	2592	1.00	0.00039	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2592	4.50	0.00174	2.5
Extreme (50C)	2592	3.50	0.00135	2.5
Extreme (40C)	2592	4.00	0.00154	2.5
Extreme (30C)	2592	3.60	0.00139	2.5
Extreme (10C)	2592	4.50	0.00174	2.5
Extreme (0C)	2592	5.50	0.00212	2.5
Extreme (-10C)	2592	8.50	0.00328	2.5
Extreme (-20C)	2592	9.50	0.00367	2.5
Extreme (-30C)	2592	10.50	0.00405	2.5

N66 16QAM, (45MHz CH 549000 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
6.58	2592	7.50	0.00289	2.5
7.74	2592	4.50	0.00174	2.5
8.90	2592	3.50	0.00135	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2592	6.27	0.00242	2.5
Extreme (50C)	2592	7.10	0.00274	2.5
Extreme (40C)	2592	3.50	0.00135	2.5
Extreme (30C)	2592	4.50	0.00174	2.5
Extreme (10C)	2592	8.50	0.00328	2.5
Extreme (0C)	2592	11.50	0.00444	2.5
Extreme (-10C)	2592	9.50	0.00367	2.5
Extreme (-20C)	2592	14.50	0.00559	2.5
Extreme (-30C)	2592	2.50	0.00096	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 NR BAND 71

N71 QPSK, (20MHz CH 134264 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
6.58	3500	2.50	0.00071	2.5
7.74	3500	4.50	0.00129	2.5
8.90	3500	1.50	0.00043	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	3500	7.50	0.00214	2.5
Extreme (50C)	3500	6.50	0.00186	2.5
Extreme (40C)	3500	7.00	0.00200	2.5
Extreme (30C)	3500	2.50	0.00071	2.5
Extreme (10C)	3500	7.50	0.00214	2.5
Extreme (0C)	3500	8.50	0.00243	2.5
Extreme (-10C)	3500	11.50	0.00329	2.5
Extreme (-20C)	3500	12.50	0.00357	2.5
Extreme (-30C)	3500	13.50	0.00386	2.5

N71 16QAM, (20MHz CH 134264 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
6.58	3500	7.50	0.00214	2.5
7.74	3500	4.50	0.00129	2.5
8.90	3500	3.50	0.00100	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	3500	6.27	0.00179	2.5
Extreme (50C)	3500	7.10	0.00203	2.5
Extreme (40C)	3500	3.50	0.00100	2.5
Extreme (30C)	3500	4.50	0.00129	2.5
Extreme (10C)	3500	8.50	0.00243	2.5
Extreme (0C)	3500	11.50	0.00329	2.5
Extreme (-10C)	3500	9.50	0.00271	2.5
Extreme (-20C)	3500	14.50	0.00414	2.5
Extreme (-30C)	3500	2.50	0.00071	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

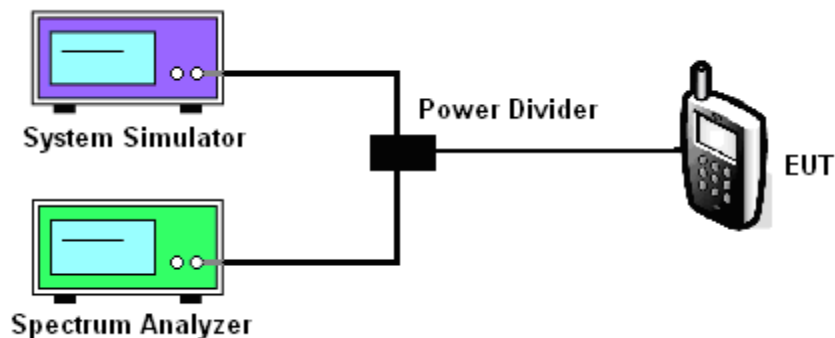

11.5 MODES TESTED

NR Band 66/71

Test data reference attachment.

----END OF REPORT----