

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (DTS)

FOR:

Lifebuoy Ltd.

Control unit of pool alarm system

Model: LBPACNTL1

FCC ID:2AOXNLBPACNTL

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Changes made in EUT	5
6.3	Test configuration	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Minimum 6 dB bandwidth	7
7.2	Peak output power	11
7.3	Field strength of spurious emissions	17
7.4	Band edge radiated emissions	45
7.5	Maximum power spectral density (PSD)	49
7.6	Antenna requirements	55
8	APPENDIX A Test equipment and ancillaries used for tests	56
9	APPENDIX B Measurement uncertainties	57
10	APPENDIX C Test laboratory description	58
11	APPENDIX D Specification references	58
12	APPENDIX E Test equipment correction factors	59
13	APPENDIX F Abbreviations and acronyms	68



1 Applicant information

Client name: Lifebuoy Ltd.
Address: 12 Lohamey Hagetaot St., Ness-Ziona 7409612, Israel
Telephone: +972-52-942-8008
E-mail: yaelt@lifebuoyalarm.com
Contact name: Mrs. Yael Tepper

2 Equipment under test attributes

Product name: Control unit of pool alarm system
Product type: Transceiver
Model(s): LBPACNTL1
Serial number: C5000
Hardware version: Rev-2
Software release: 1.74
Receipt date 20-Nov-17

3 Manufacturer information

Manufacturer name: Lifebuoy Ltd.
Address: 12 Lohamey Hagetaot St., Ness-Ziona 7409612, Israel
Telephone: +972-52-942-8008
E-Mail: yaelt@lifebuoyalarm.com
Contact name: Mrs. Yael Tepper

4 Test details

Project ID: 29408
Location: Hermon Laboratories Ltd., P.O. Box 23, Binyamina 3055001, Israel
Test started: 20-Nov-17
Test completed: 30-Nov-17
Test specification(s): FCC 47CFR part 15 subpart C § 15.247 (DTS)



5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)2, 6 dB bandwidth	Pass
Section 15.247(b)3, Peak output power	Pass
Section 15.247(d), Radiated spurious emissions	Pass
Section 15.247(d), Band edge emissions	Pass
Section 15.247(d), Peak power density	Pass
Section 15.247(b)5, RF exposure	Pass, the exhibit to the application of certification is provided
Section 15.207(a), Conducted emission	Not required

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. I. Zilberstein, test engineer	November 30, 2017	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	January 28, 2018	
Approved by:	Mr. K. Zushchuk, Projects & Customer Manager, EMC & Radio	February 4, 2018	



6 EUT description

6.1 General information

The EUT is a control unit of pool alarm system. The control unit communicates with a floating unit of the system at 433.92 MHz and with a cellular device (smartphone) in 2402 - 2480 MHz band.


The radios could not operate simultaneously; in any given moment the radio will use either 433.92 MHz or 2402-2480 MHz frequency.

The present test report involves the test results for certification of 2402-2480 MHz transmitter as a part of a composite application for certification.

6.2 Changes made in EUT

No changes were implemented in the EUT during the testing.

6.3 Test configuration

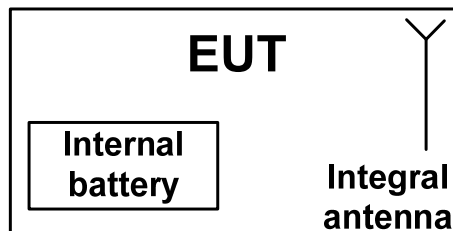



6.4 Transmitter characteristics

Type of equipment					
X	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
	fixed	Always at a distance more than 2 m from all people			
X	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		2400 - 2483.5 MHz			
Operating frequency		2402 - 2480 MHz			
Maximum rated output power		Peak output power		-11.99 dBm	
Is transmitter output power variable?		X	No		
			Yes	continuous variable	
		stepped variable with stepsize		dB	
		minimum RF power		dBm	
		maximum RF power		dBm	
Antenna connection					
unique coupling		standard connector		X	integral
				X	with temporary RF connector without temporary RF connector
Antenna/s technical characteristics					
Type		Manufacturer		Model number	
Integral (PCB reversed-F antenna)		Texas Instruments		AN043	
				Gain	
				4.5 dBi	
Modulation		GFSK			
Transmitter aggregate data rate/s		1 Mbps			
Modulating test signal (baseband)		PRBS			
Transmitter power source					
X	Battery	Nominal rated voltage	9 VDC	Battery type	ER9V
	DC	Nominal rated voltage	VDC		
	AC mains	Nominal rated voltage	VAC	Frequency	
Spread spectrum technique used		Frequency hopping (FHSS)			
		X	Digital transmission system (DTS)		
		Hybrid			

Test specification: Section 15.247(a)2, 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.4 °C	Relative Humidity: 41 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 The 6 dB bandwidth test setup





HERMON LABORATORIES

Test specification: Section 15.247(a)2, 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.4 °C	Relative Humidity: 41 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400 – 2483.5 MHz
 DETECTOR USED: Peak
 SWEEP MODE: Single
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
 MODULATION: GFSK
 BIT RATE: 1 Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
2402	670.0	500	170	Pass
Mid frequency				
2426	524.0	500	24	Pass
High frequency				
2480	752.0	500	252	Pass


Reference numbers of test equipment used

HL 4274	HL 4575							
---------	---------	--	--	--	--	--	--	--

Full description is given in Appendix A.

Test specification:		Section 15.247(a)2, 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.4 °C	Relative Humidity: 41 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Plot 7.1.1 The 6 dB bandwidth test result at low frequency

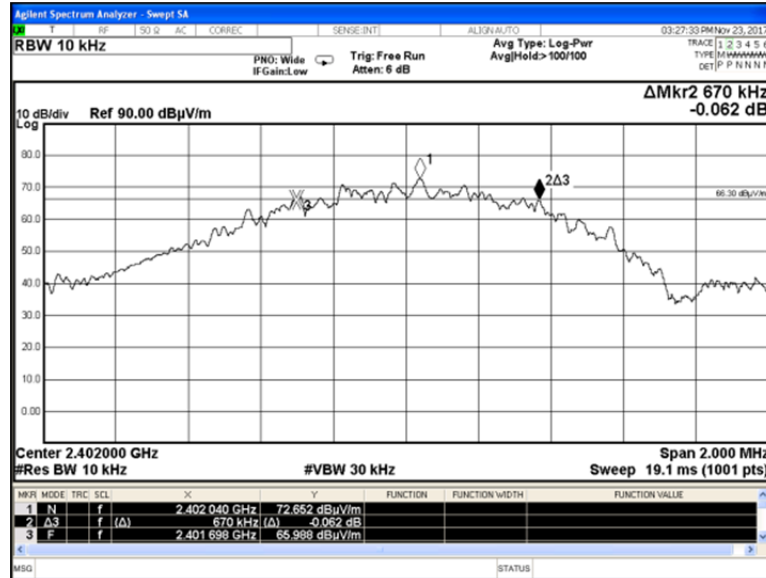

Plot 7.1.2 The 6 dB bandwidth test result at mid frequency





HERMON LABORATORIES

Test specification:		Section 15.247(a)2, 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.4 °C	Relative Humidity: 41 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Plot 7.1.3 The 6 dB bandwidth test result at high frequency



Test specification: Section 15.247(b)3, Peak output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-Nov-17			
Temperature: 25.1 °C	Relative Humidity: 49 %	Air Pressure: 1014 hPa	Power: Battery
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1 **Error! Reference source not found.**

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

**- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.

Test specification:		Section 15.247(b)3, Peak output power	
Test procedure:		ANSI C63.10 sections 11.9.2.2.4	
Test mode:		Verdict: PASS	
Date(s):			
20-Nov-17			
Temperature: 25.1 °C	Relative Humidity: 49 %	Air Pressure: 1014 hPa	Power: Battery
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

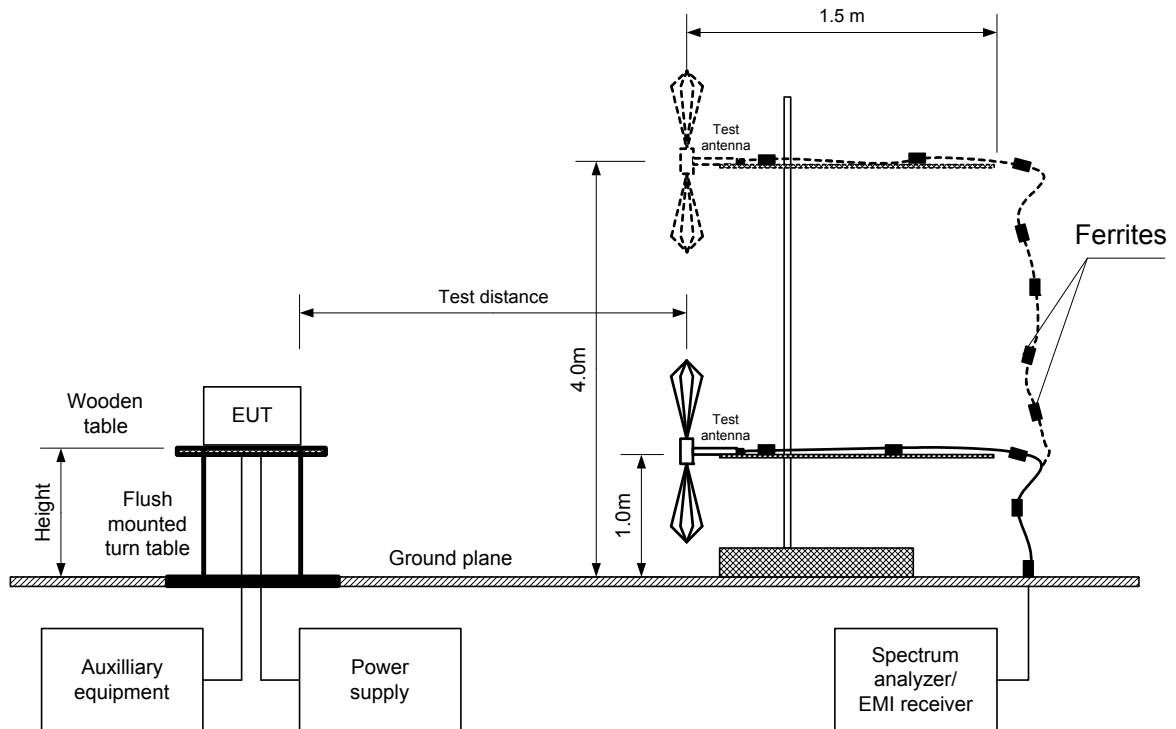



HERMON LABORATORIES

Test specification:		Section 15.247(b)3, Peak output power	
Test procedure:		ANSI C63.10 sections 11.9.2.2.4	
Test mode:		Verdict: PASS	
Date(s):			
20-Nov-17			
Temperature: 25.1 °C	Relative Humidity: 49 %	Air Pressure: 1014 hPa	Power: Battery
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 6 dB BANDWIDTH: 0.752 MHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2401.522	87.71	Vertical	1.0	0	4.5	-11.99	30.0	-41.99	Pass
2425.677	87.44	Vertical	1.06	0	4.5	-12.26	30.0	-42.26	Pass
2479.197	87.12	Vertical	1.0	0	4.5	-12.58	30.0	-42.58	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power – specification limit.


Reference numbers of test equipment used

HL 4543	HL 4603	HL 5102					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification:		Section 15.247(b)3, Peak output power	
Test procedure:		ANSI C63.10 sections 11.9.2.2.4	
Test mode:		Verdict: PASS	
Date(s):			
20-Nov-17			
Temperature: 25.1 °C	Relative Humidity: 49 %	Air Pressure: 1014 hPa	Power: Battery
Remarks:			

Plot 7.2.1 Field strength of carrier at low frequency in vertical antenna polarization

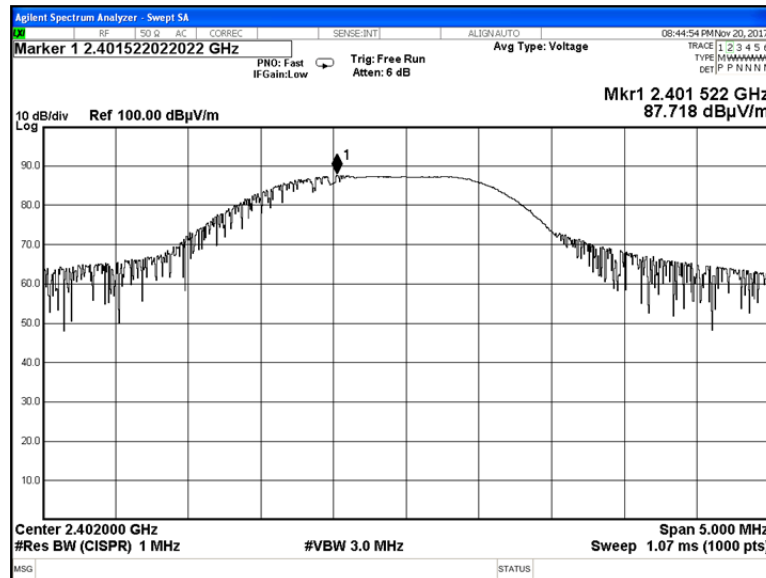


Plot 7.2.2 Field strength of carrier at low frequency in horizontal antenna polarization

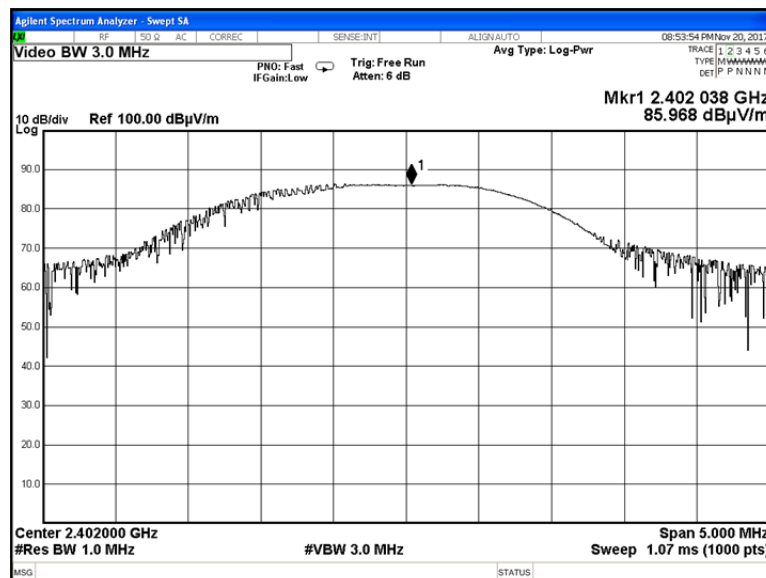


Test specification:		Section 15.247(b)3, Peak output power	
Test procedure:		ANSI C63.10 sections 11.9.2.2.4	
Test mode:		Verdict: PASS	
Date(s):			
20-Nov-17			
Temperature: 25.1 °C	Relative Humidity: 49 %	Air Pressure: 1014 hPa	Power: Battery
Remarks:			

Plot 7.2.3 Field strength of carrier at mid frequency in vertical antenna polarization

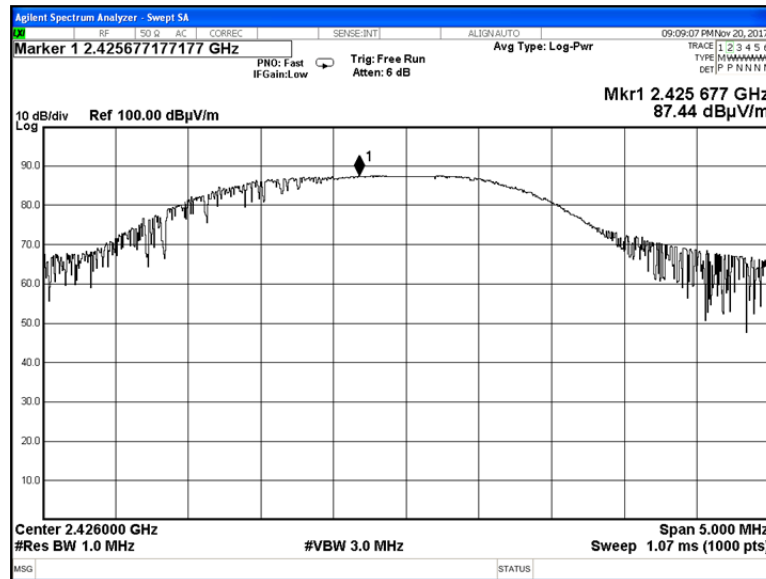


Plot 7.2.4 Field strength of carrier at mid frequency in horizontal antenna polarization

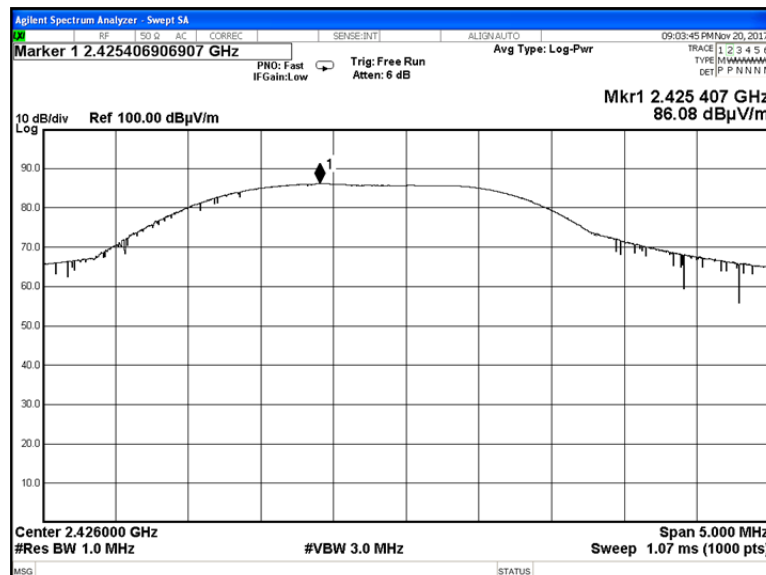

Test specification:		Section 15.247(b)3, Peak output power	
Test procedure:		ANSI C63.10 sections 11.9.2.2.4	
Test mode:		Verdict: PASS	
Date(s):			
20-Nov-17			
Temperature: 25.1 °C	Relative Humidity: 49 %	Air Pressure: 1014 hPa	Power: Battery
Remarks:			

Plot 7.2.5 Field strength of carrier at high frequency in vertical antenna polarization

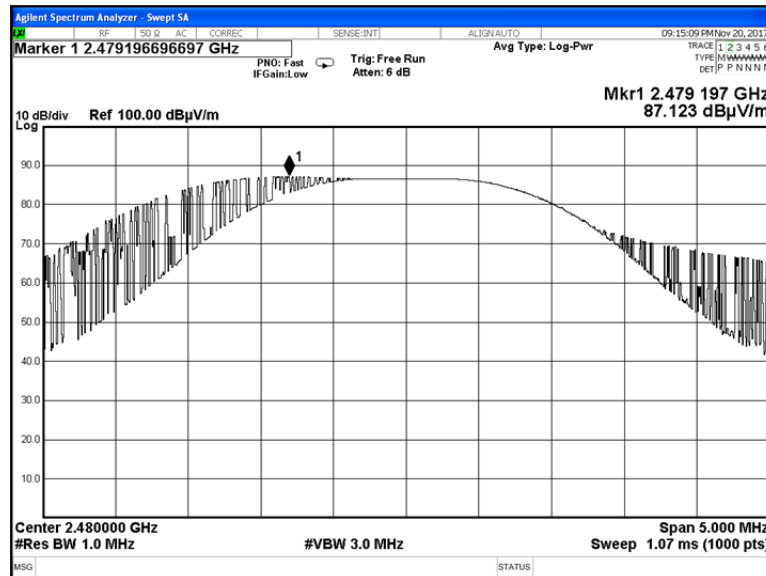

Plot 7.2.6 Field strength of carrier at high frequency in horizontal antenna polarization





Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz


7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 7.3.3, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz

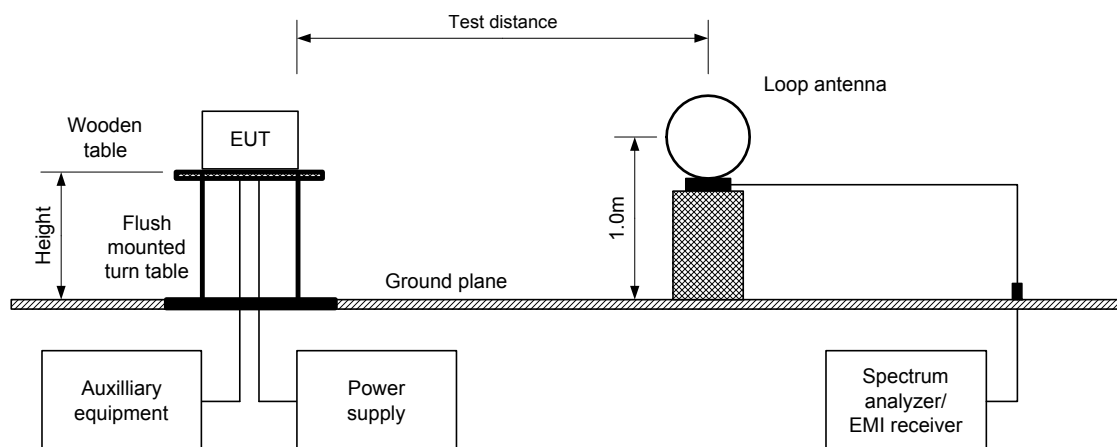

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Figure 7.3.2 Setup for spurious emission field strength measurements in 30 – 1000 MHz


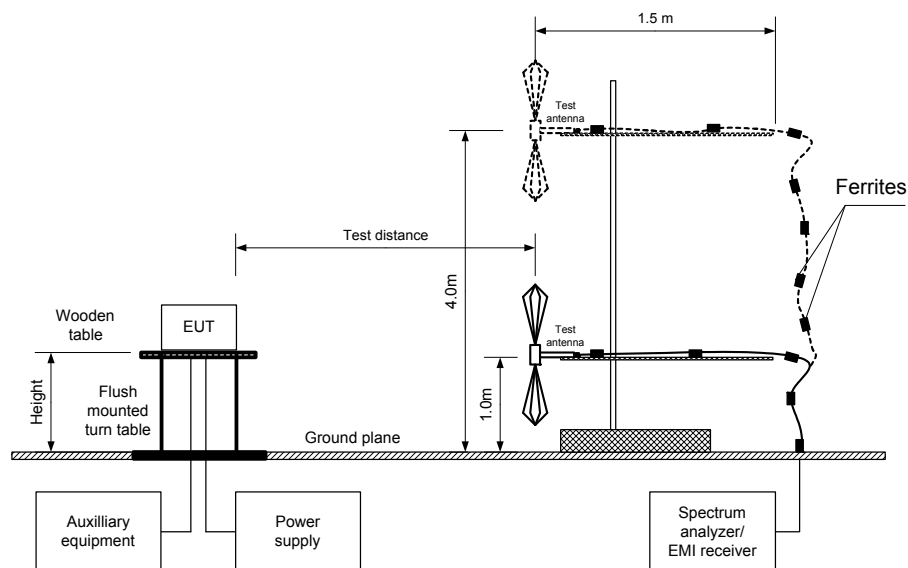


Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz

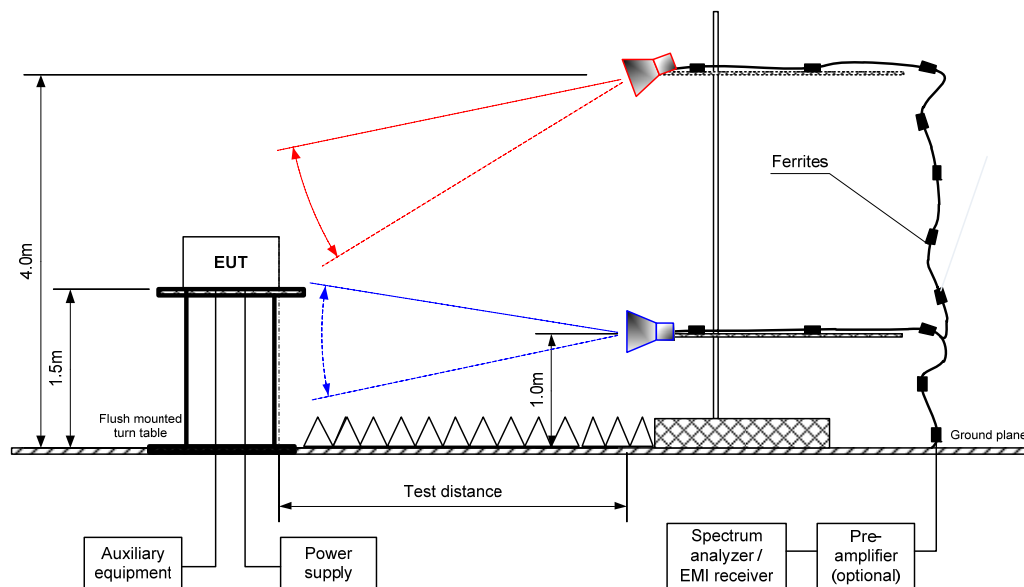

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbit/s
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Double sided guide (above 1000 MHz)									
Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
7205.364	58.84	H	1.5	0	86.71	27.87	20.0	7.87	Pass
9609.065	46.90	V	1.64	0		39.81		19.81	
Mid carrier frequency									
9704.215	45.86	H	1.6	360	86.52	40.66	20.0	20.66	Pass
High carrier frequency									
9920.315	44.51	V	1.5	359	86.22	41.71	20.0	21.71	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1Mbit/s
 DUTY CYCLE: 100 %
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 ASSIGNED FREQUENCY: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz
 TEST DISTANCE: 3 m

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
4804.526	Horizontal	1.65	360	46.34	74.0	-27.66	43.19	13.05	54.0	-40.95	Pass
Mid carrier frequency											
4852.365	Horizontal	1.5	0	46.10	74	-27.90	43.97	13.83	54.0	-40.17	Pass
7276.684	Horizontal	1.6	343	58.62	74	-15.38	55.43	25.29	54.0	-28.71	
High carrier frequency											
4960.566	Horizontal	1.65	0	46.55	74	-27.45	43.49	13.35	54.0	-40.17	Pass
7440.596	Horizontal	1.55	324	57.05	74	-16.95	54.17	24.03	54.0	-28.71	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,
where Calculated field strength = Measured field strength + average factor.

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
0.416	13.37	N/A	N/A	N/A	-30.14

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY:	2400-2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1000 kHz
TEST ANTENNA TYPE:	Double ridged guide
ASSIGNED FREQUENCY:	2400-2483.5 MHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emission were found								Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 1915	HL 2909	HL 4541	HL 4542	HL 4543	HL 4575	HL 4603	HL 4604
HL 4956	HL 5102	HL 5105	HL 5112				

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Table 7.3.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

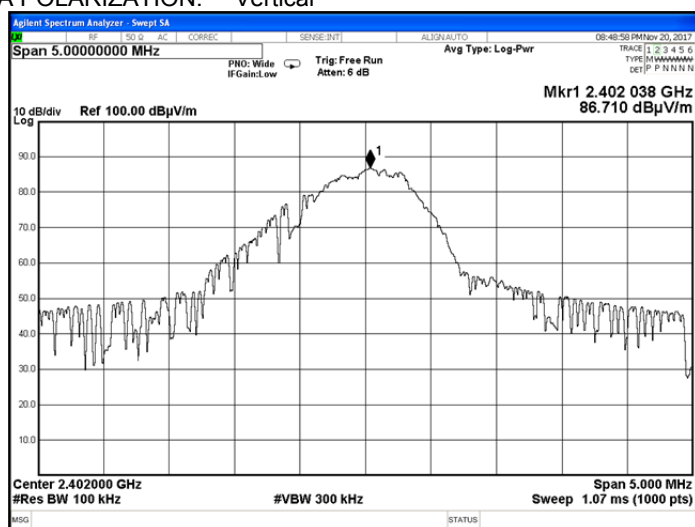

Plot 7.3.2 Radiated emission measurements at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

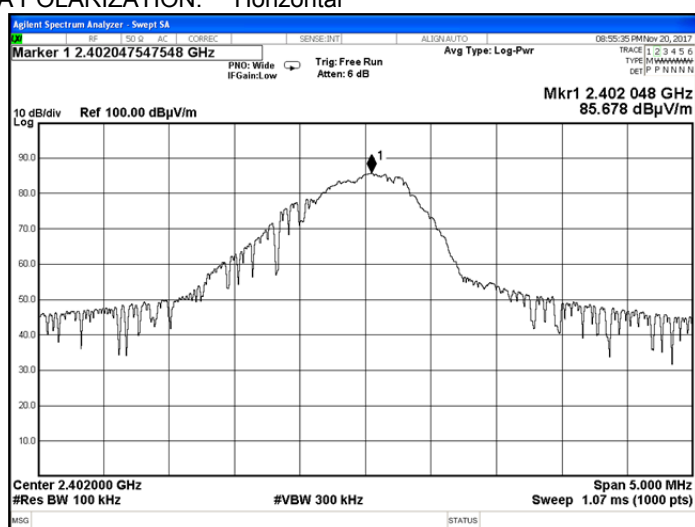

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.3 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

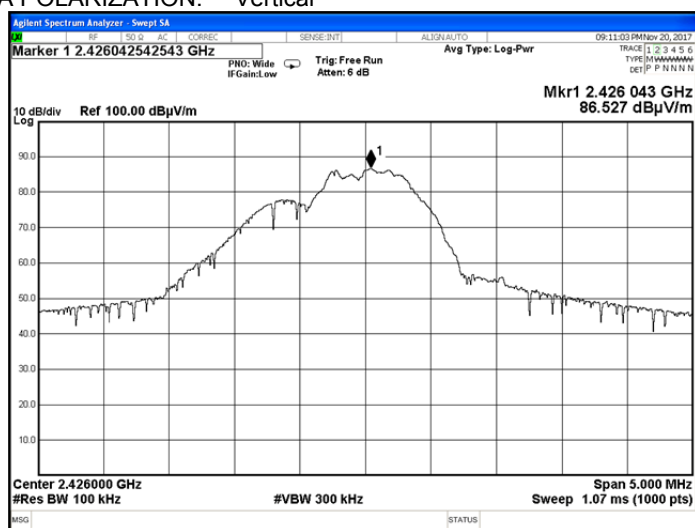

Plot 7.3.4 Radiated emission measurements at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

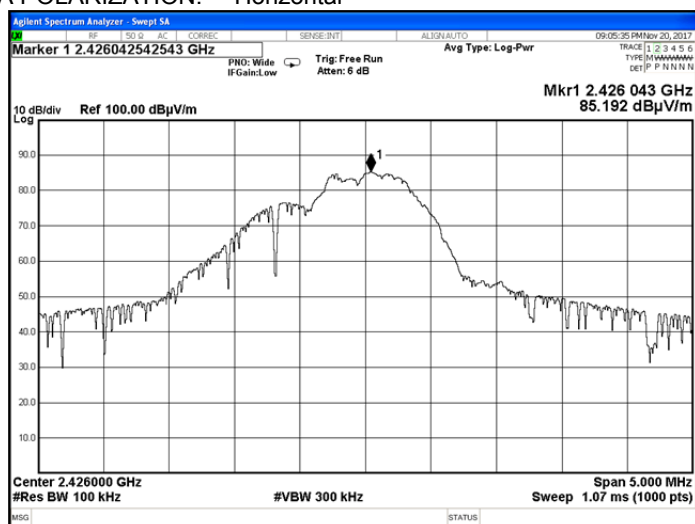

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.5 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

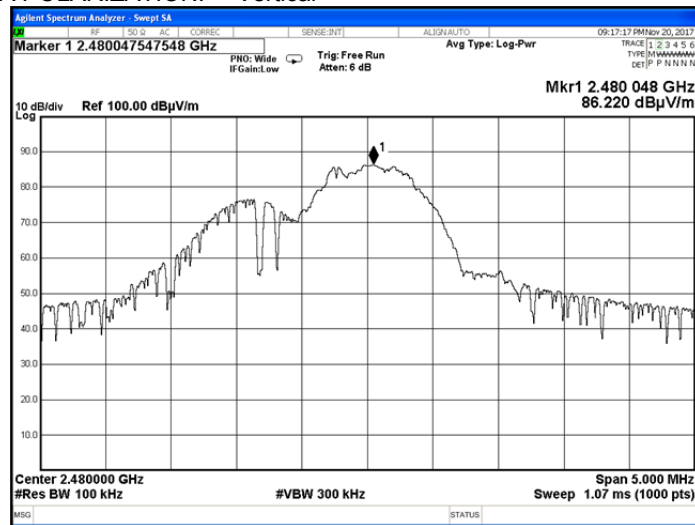

Plot 7.3.6 Radiated emission measurements at the high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

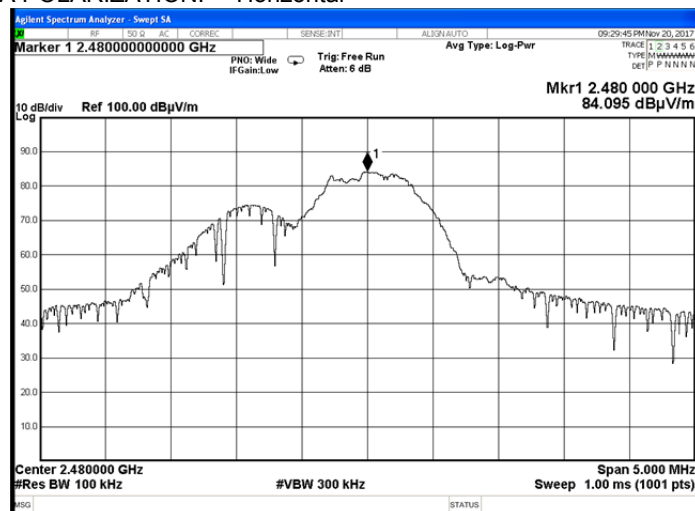

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.7 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

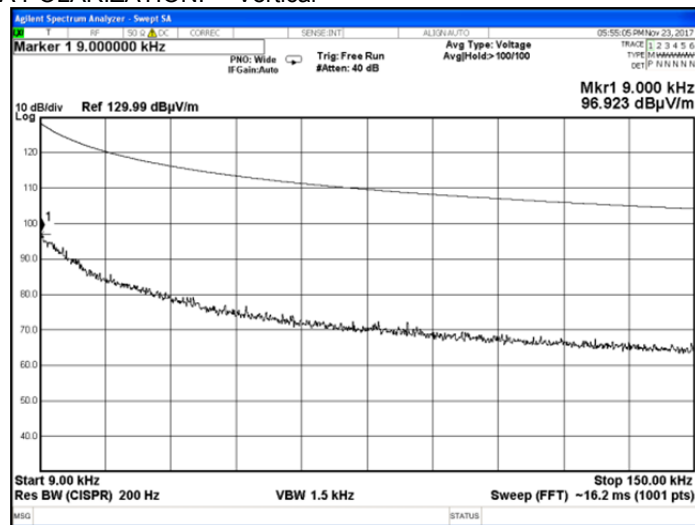

Plot 7.3.8 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

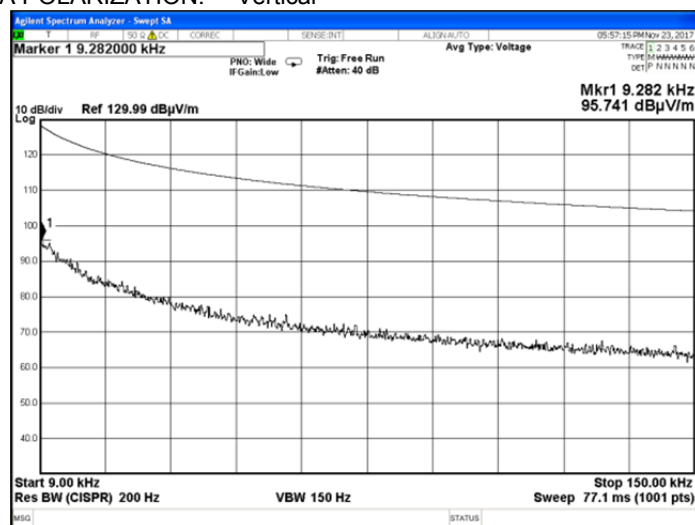

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			



Plot 7.3.9 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

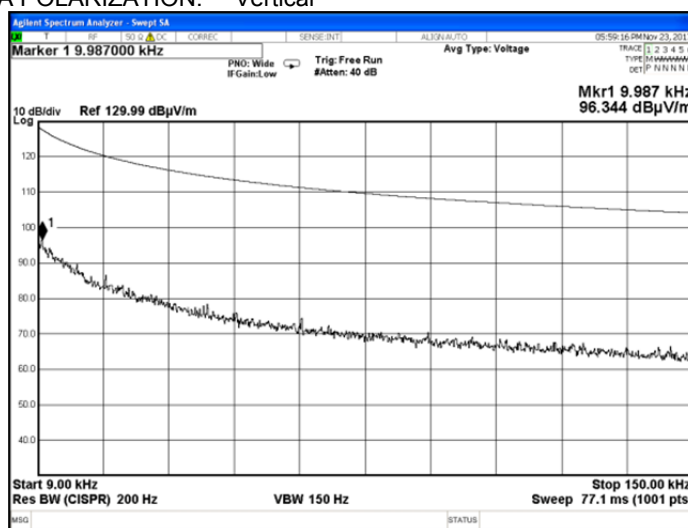

Plot 7.3.10 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

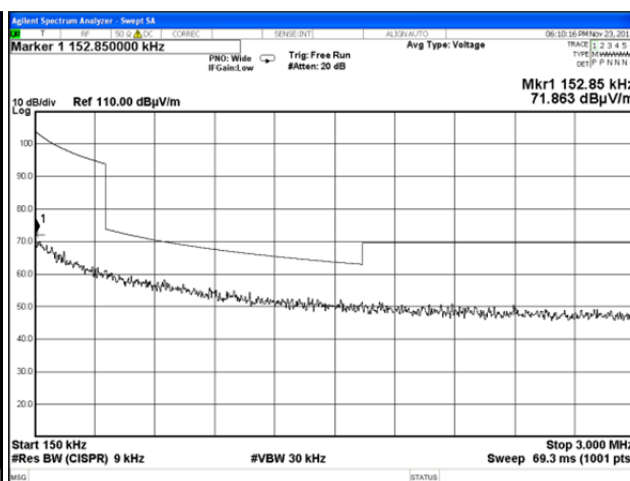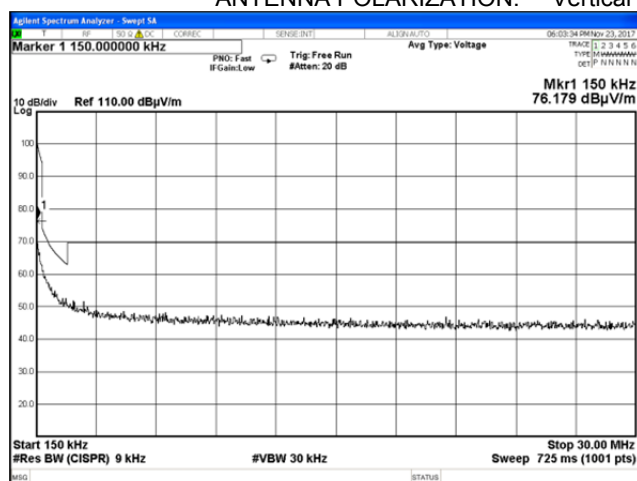

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.11 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

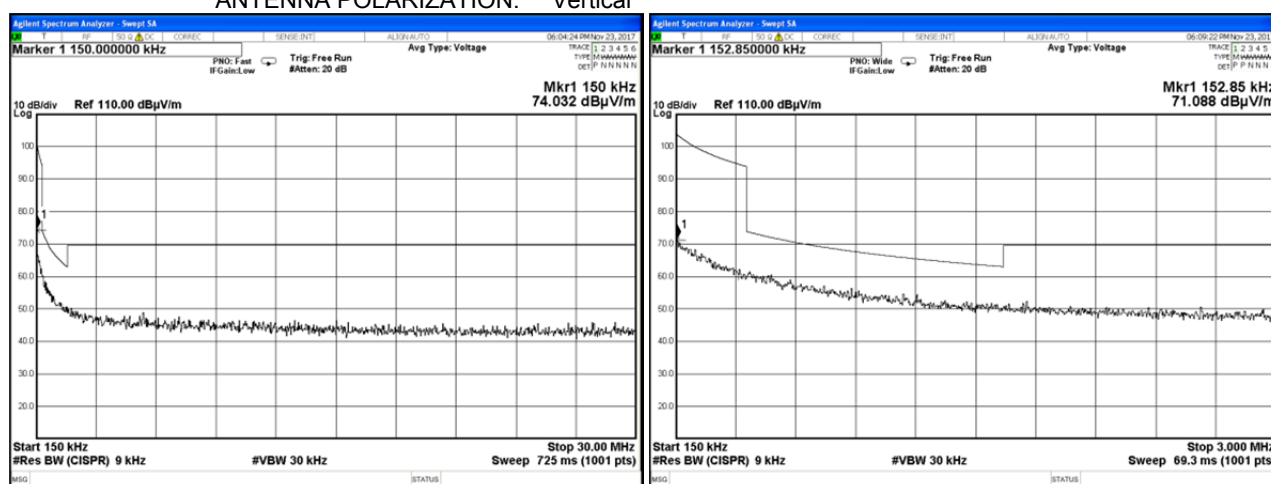

Plot 7.3.12 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

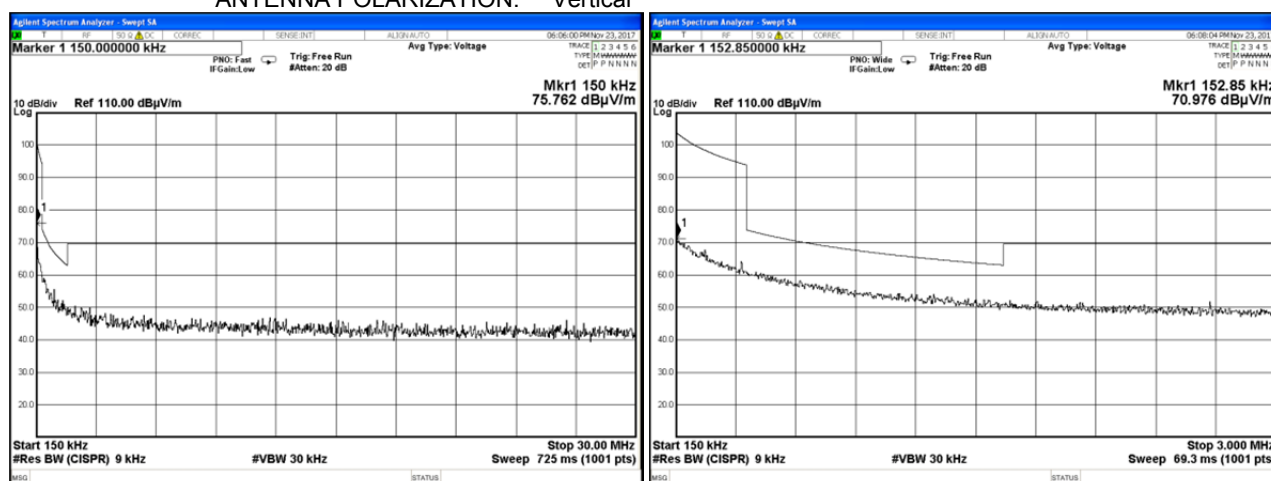

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.13 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

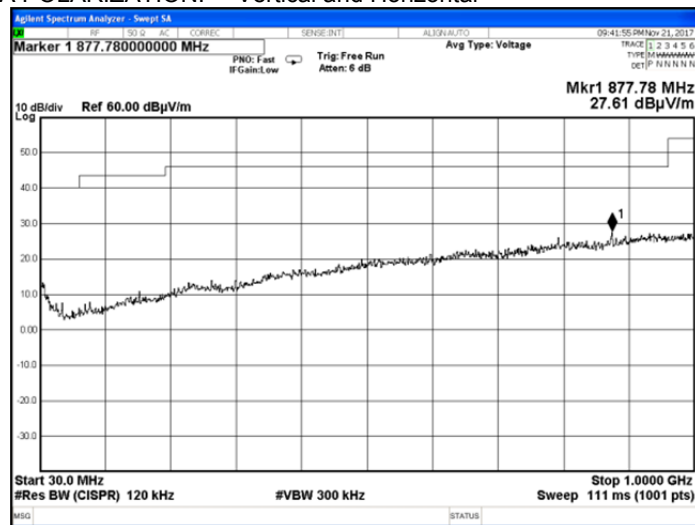

Plot 7.3.14 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

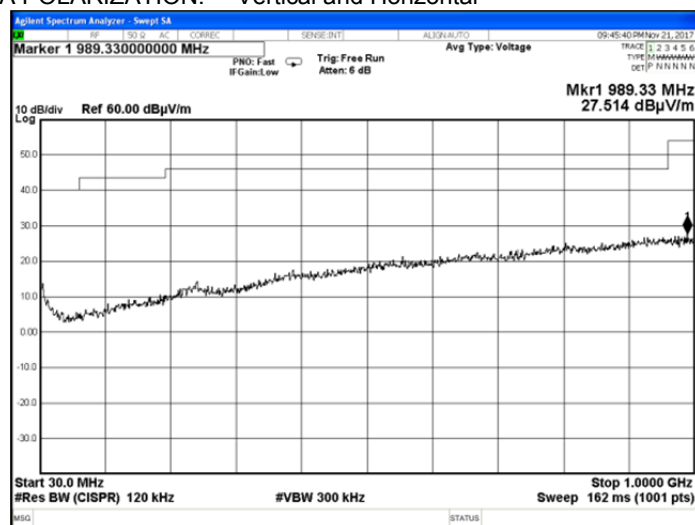

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.15 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

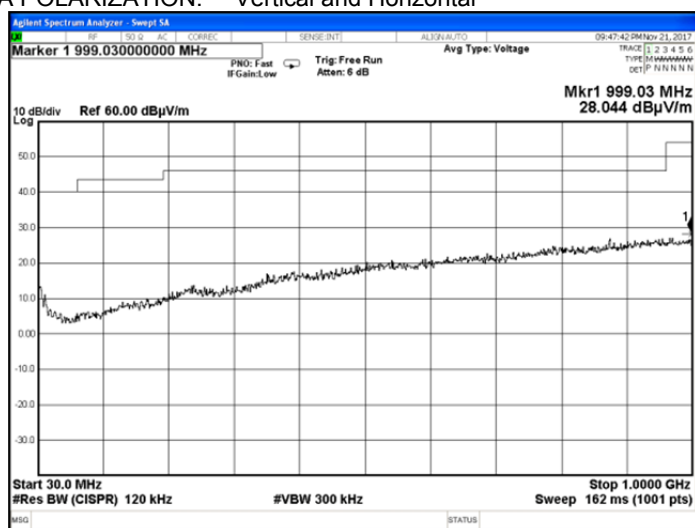

Plot 7.3.16 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

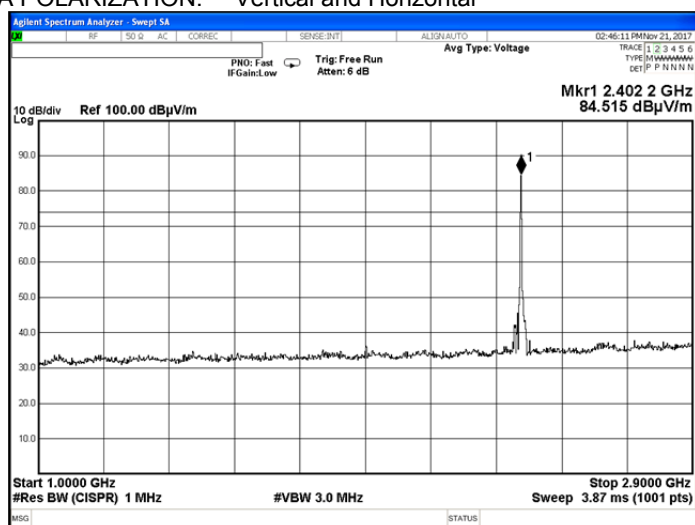

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.17 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

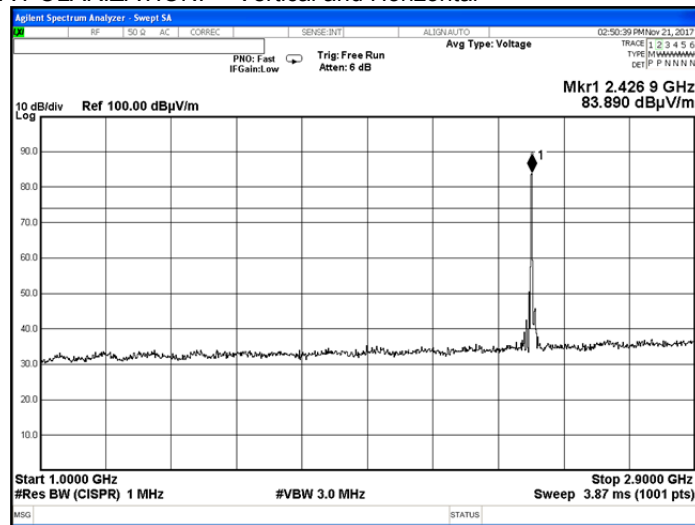

Plot 7.3.18 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

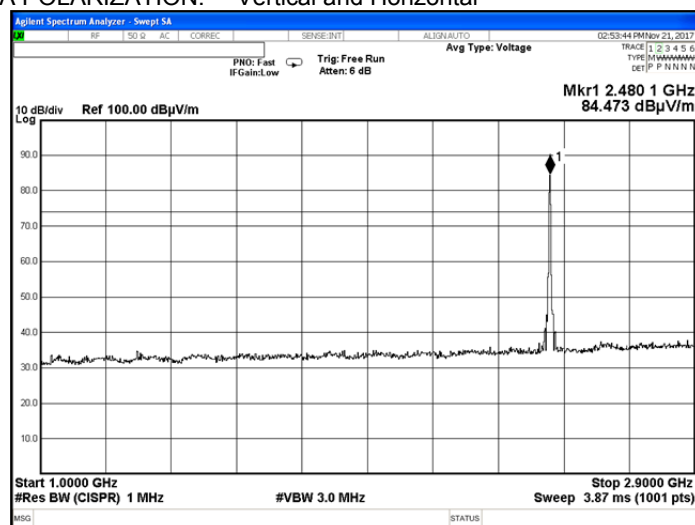

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.19 Radiated emission measurements from 2900 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

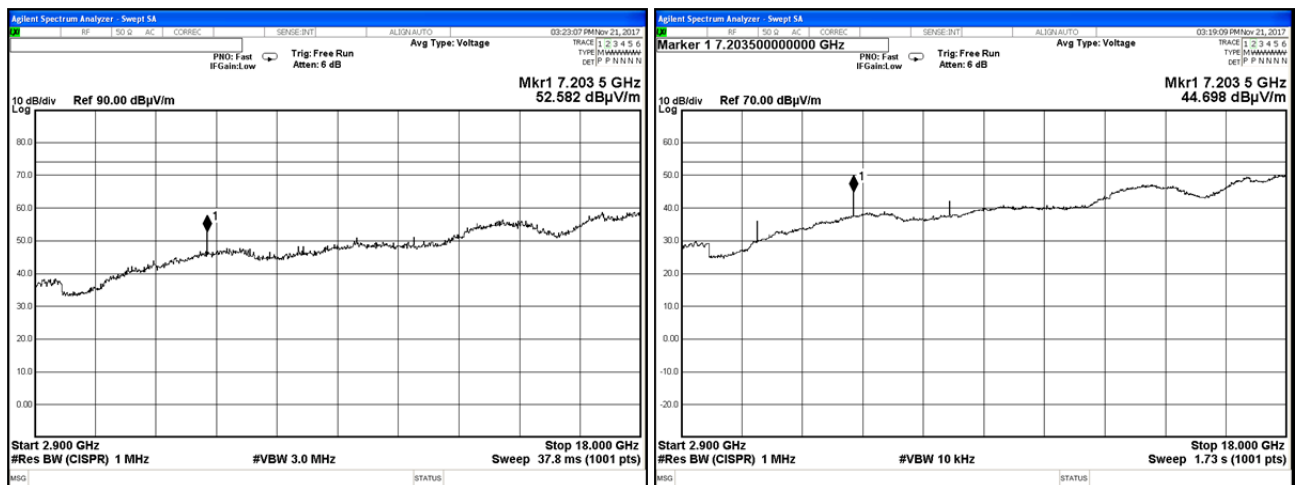

Plot 7.3.20 Radiated emission measurements from 2900 to 18000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

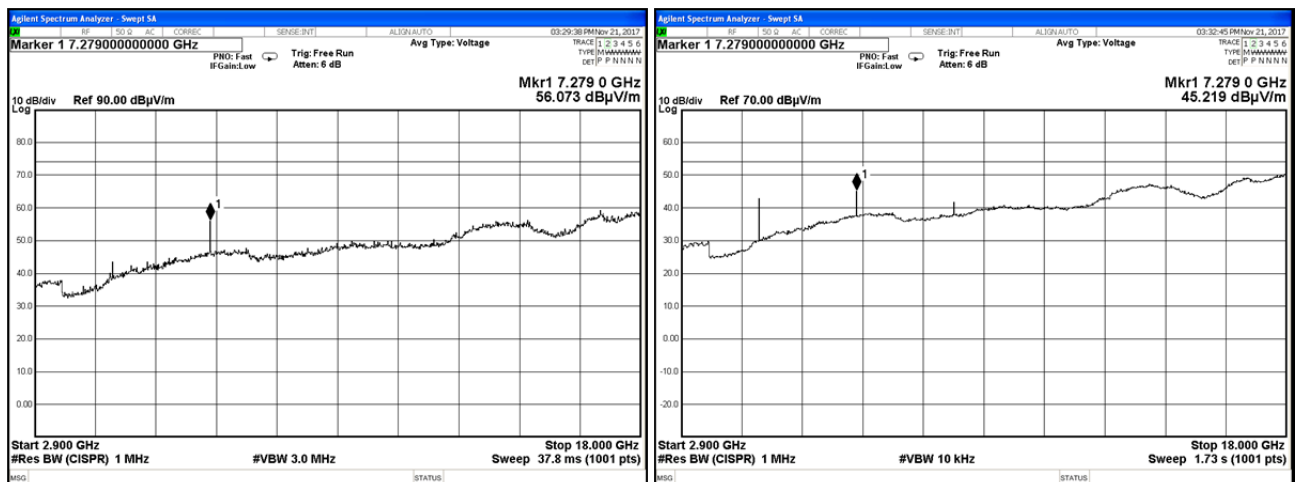

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.21 Radiated emission measurements from 2900 to 18000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

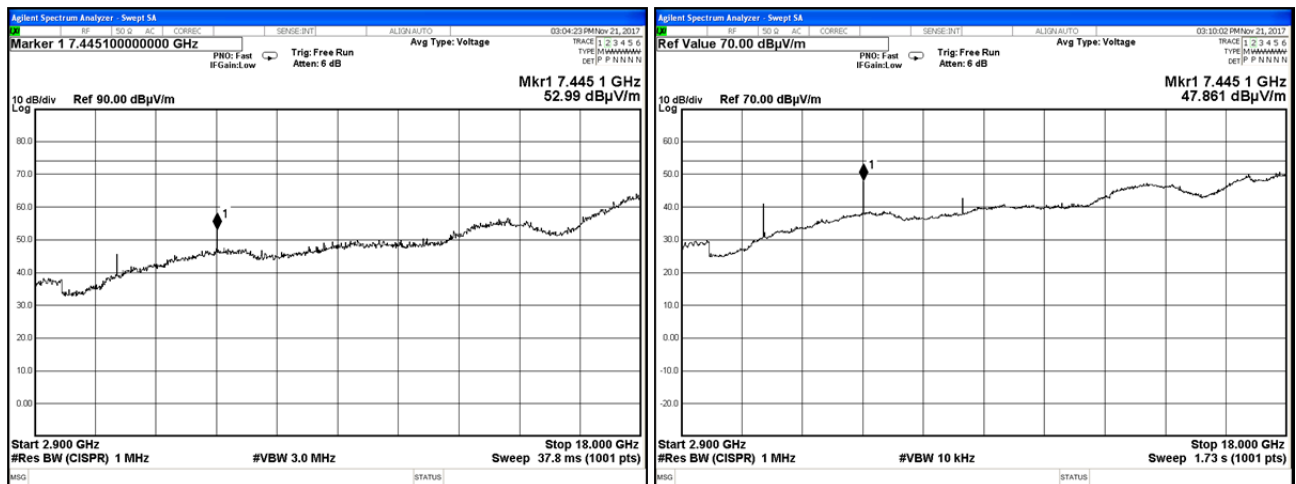

Plot 7.3.22 Radiated emission measurements from 1800 to 25000 MHz at the low, mid, high carrier frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

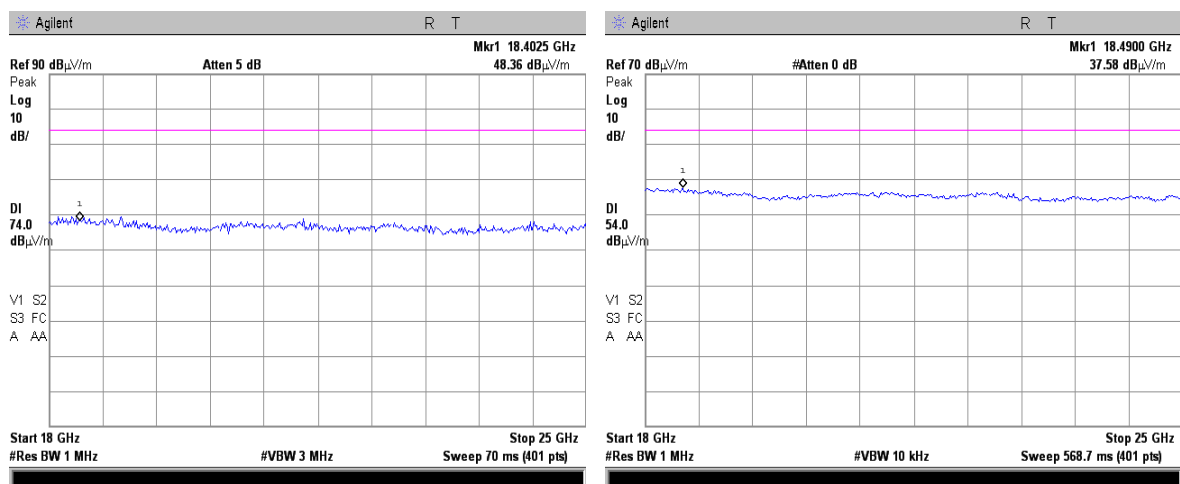

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.23 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

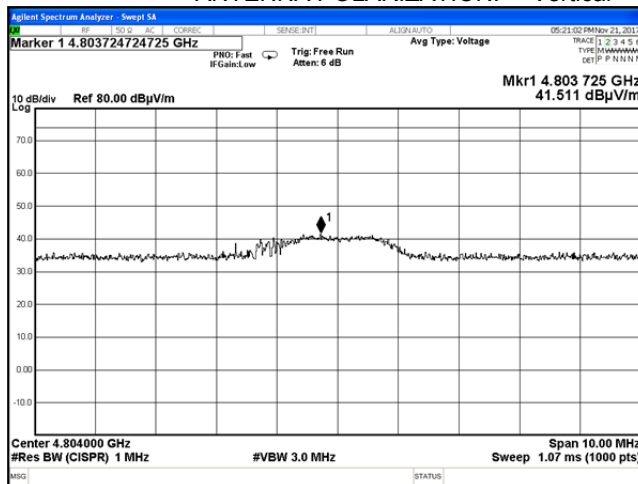

Plot 7.3.24 Radiated emission measurements at the second harmonic of low carrier frequency



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

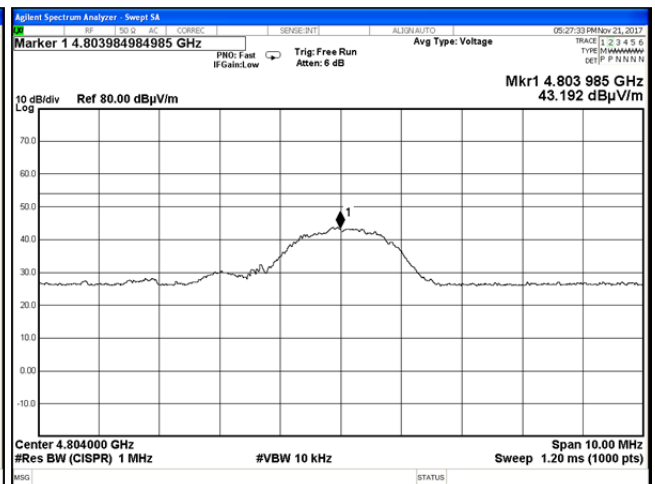

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.25 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

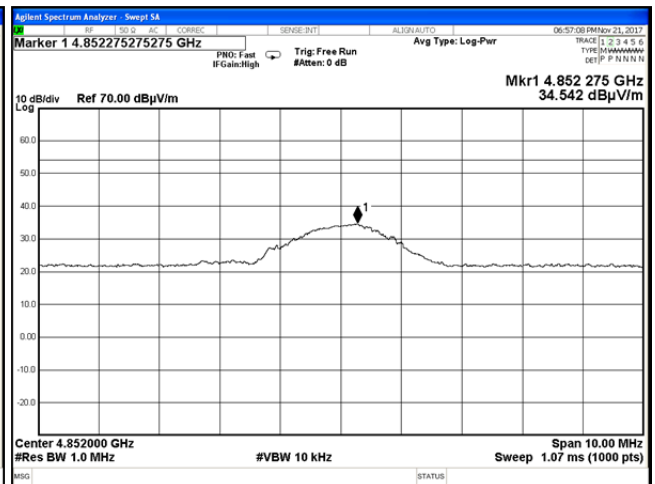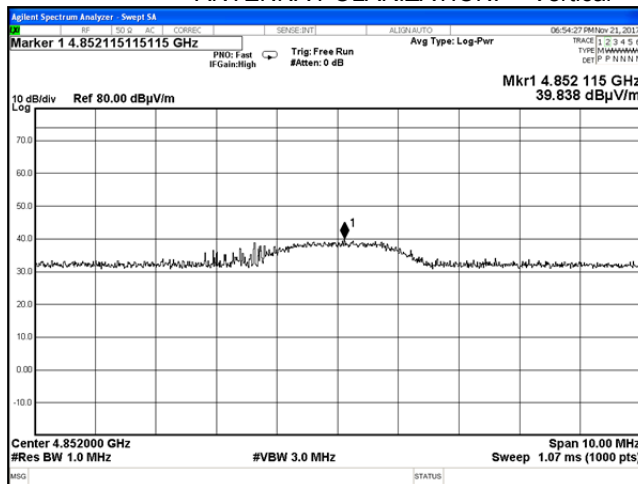

Plot 7.3.26 Radiated emission measurements at the second harmonic of mid carrier frequency



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

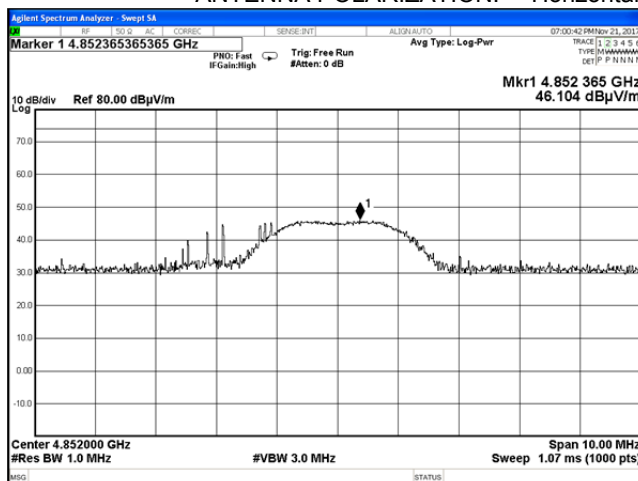

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			



Plot 7.3.27 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

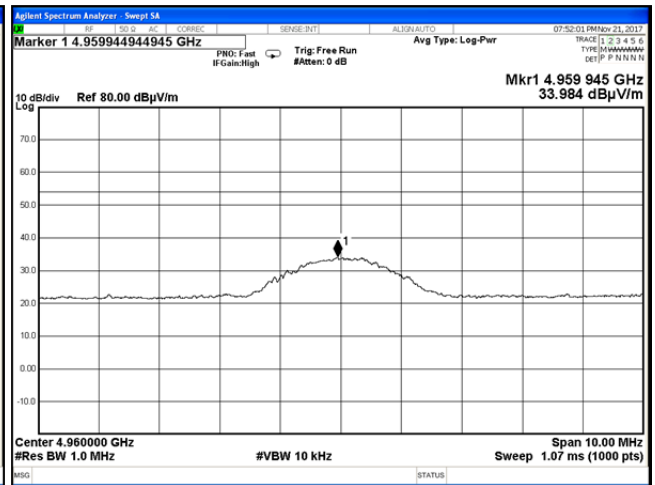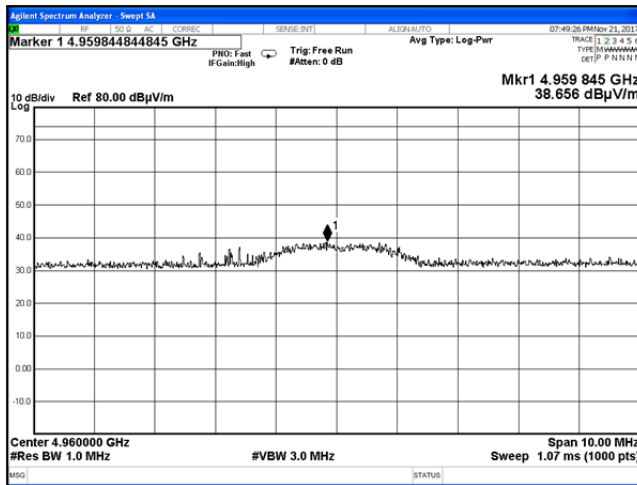

lot 7.3.28 Radiated emission measurements at the second harmonic of high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

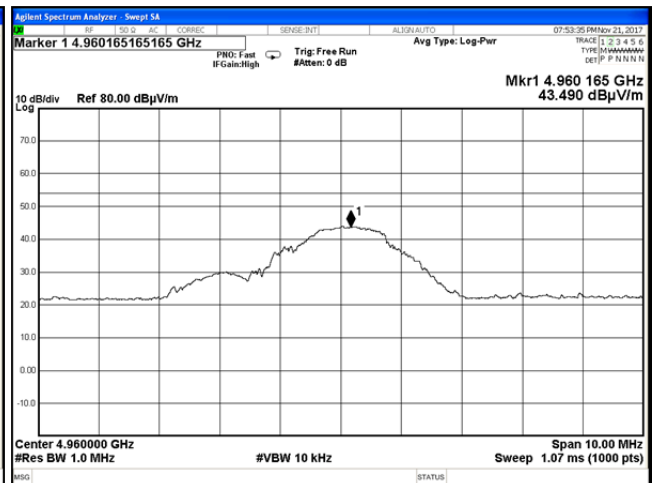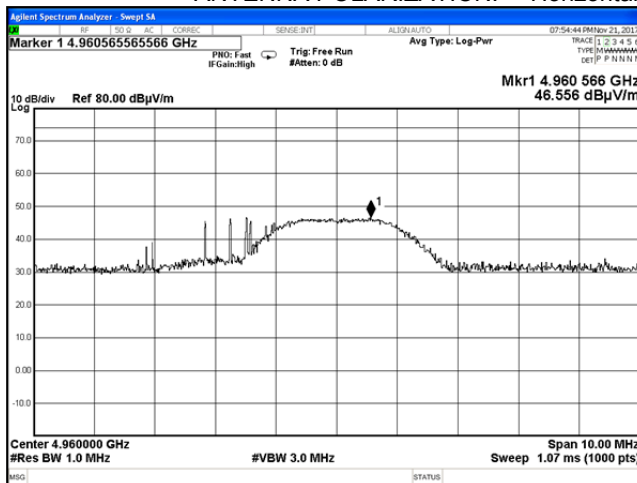

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.29 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

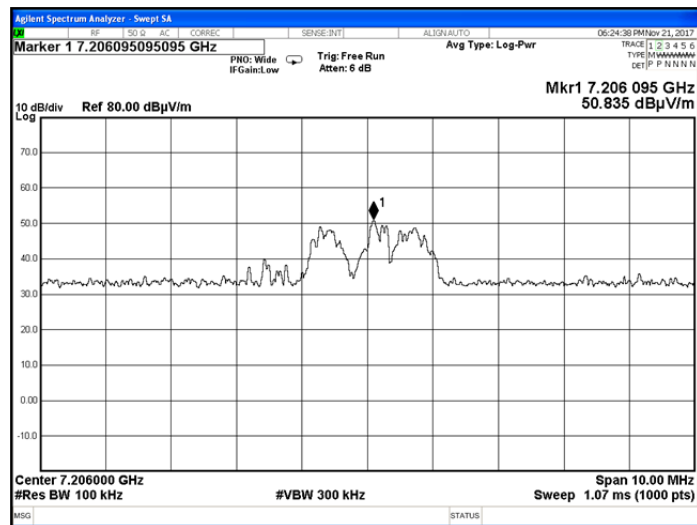

Plot 7.3.30 Radiated emission measurements at the third harmonic of low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

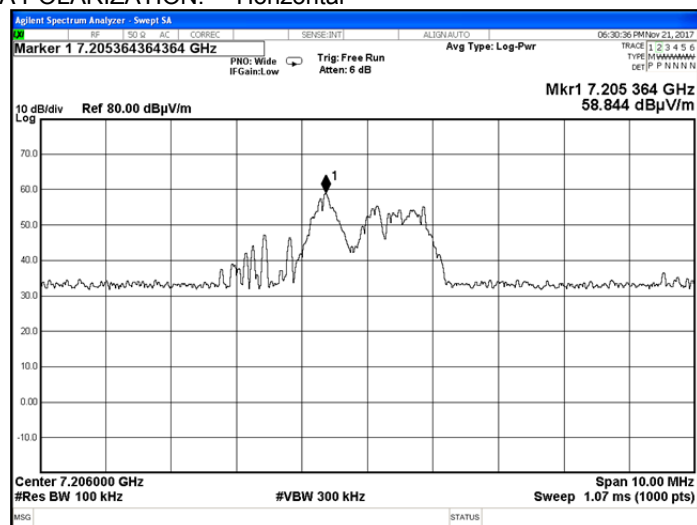

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.31 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

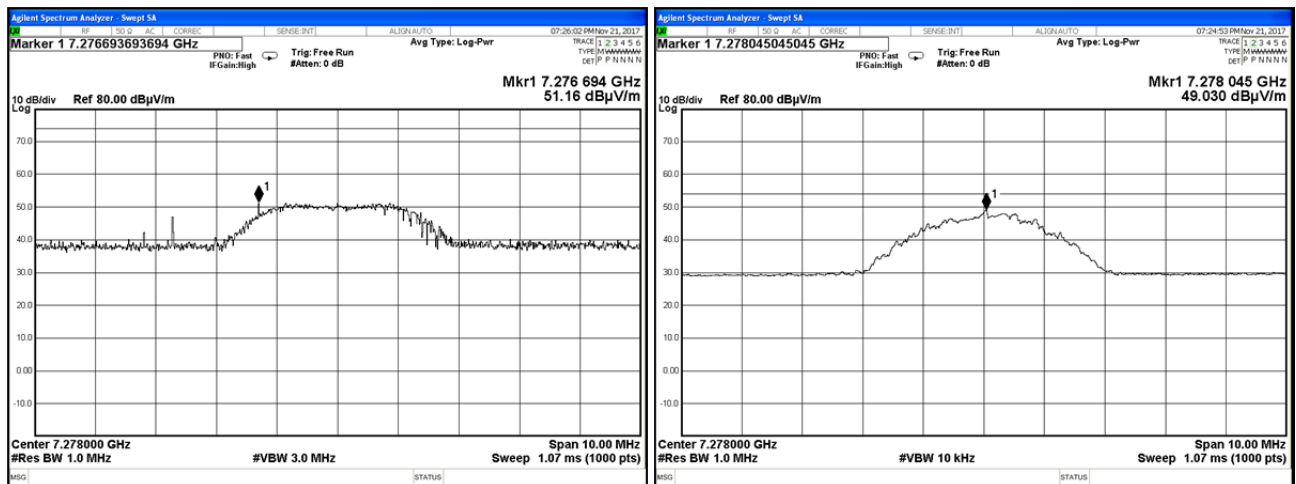

Plot 7.3.32 Radiated emission measurements at the third harmonic of mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

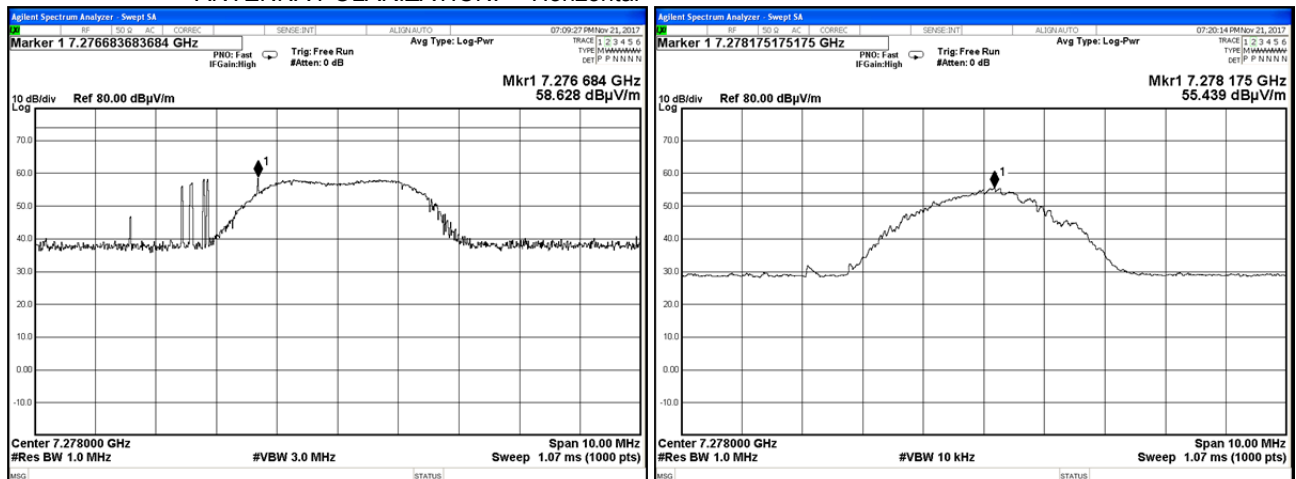

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.33 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

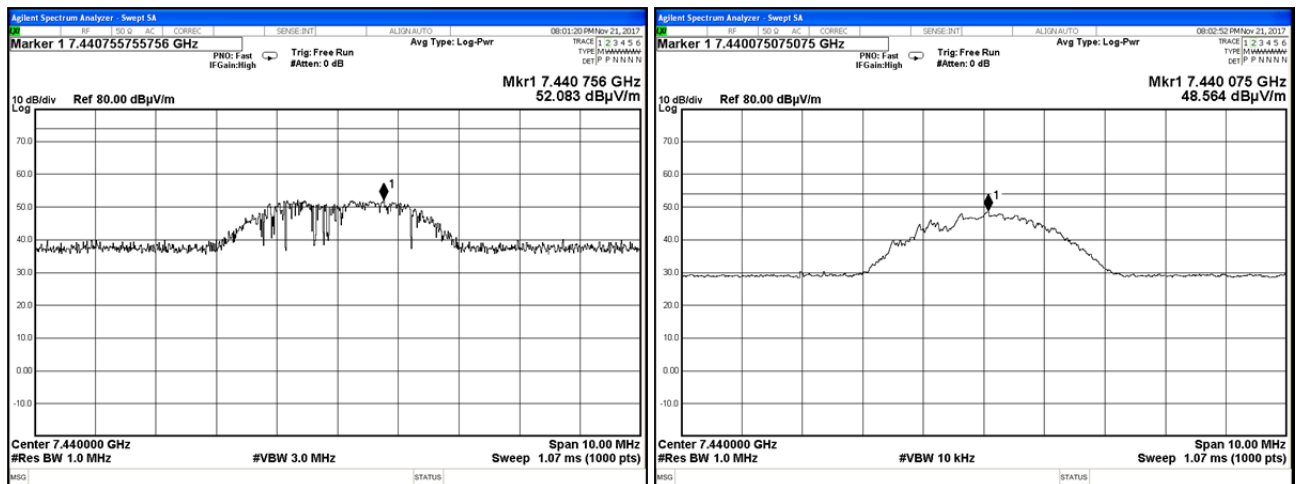

Plot 7.3.34 Radiated emission measurements at the third harmonic of high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

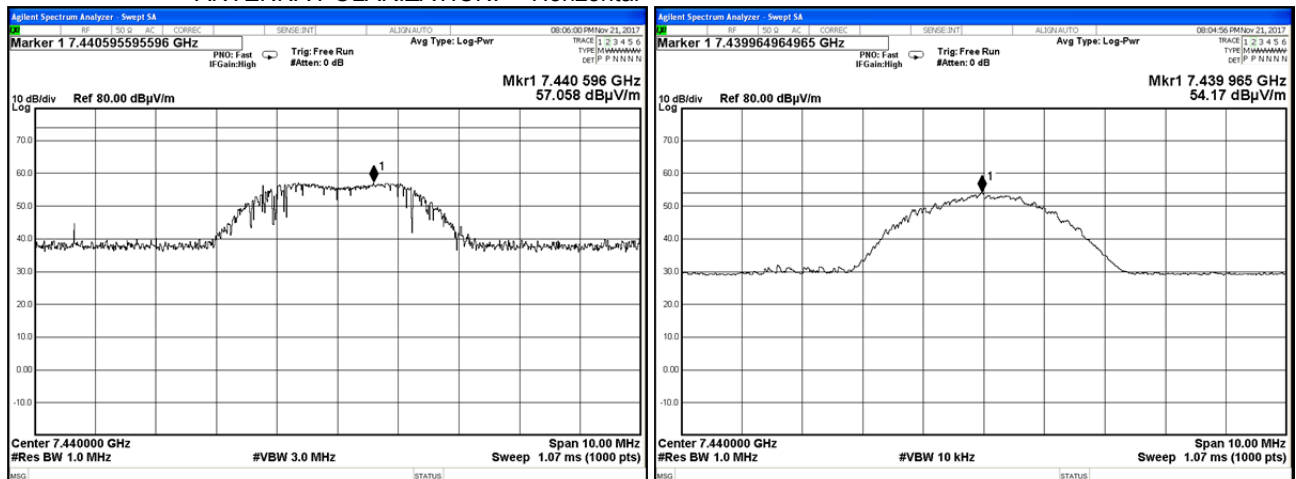

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.35 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

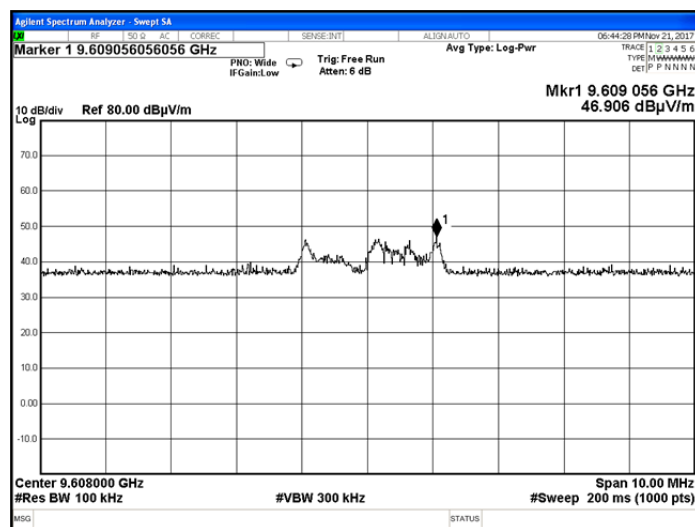

Plot 7.3.36 Radiated emission measurements at the fourth harmonic of low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

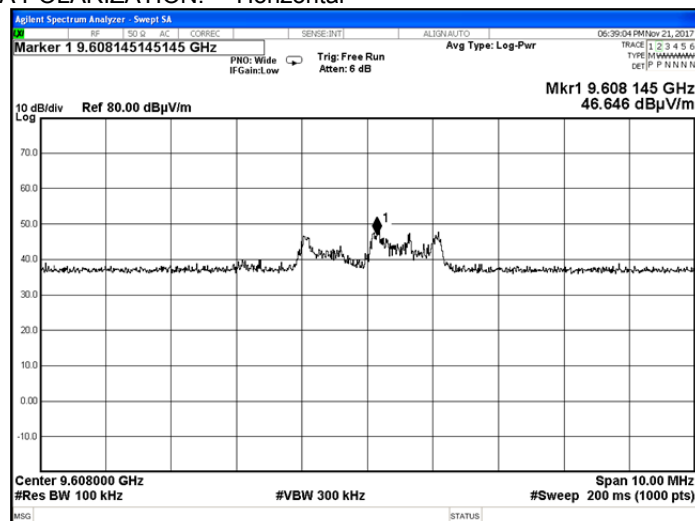

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.37 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

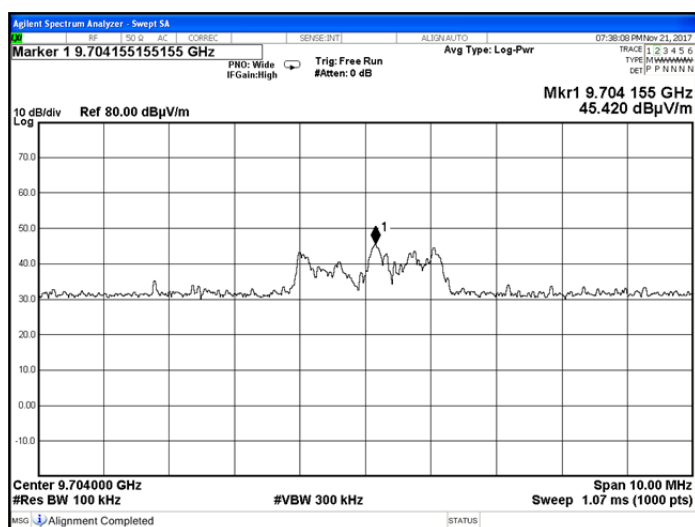

Plot 7.3.38 Radiated emission measurements at the fourth harmonic of mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

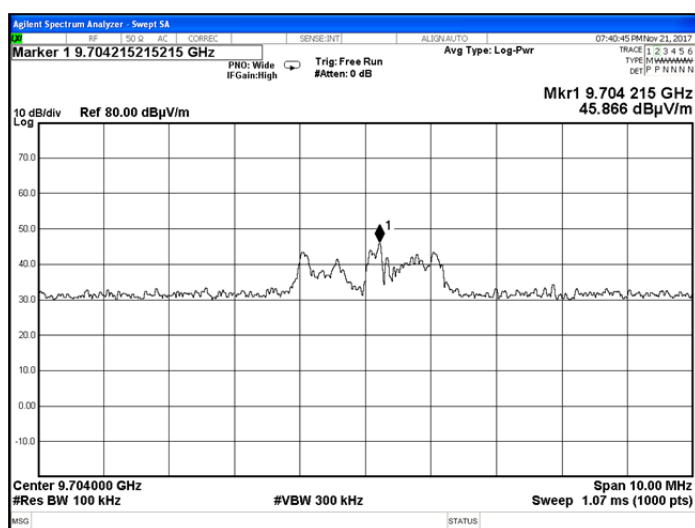

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			


Plot 7.3.39 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

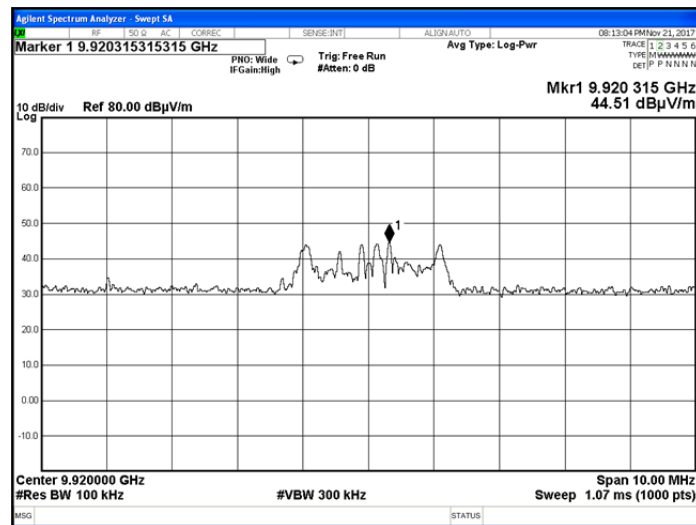


Plot 7.3.40 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

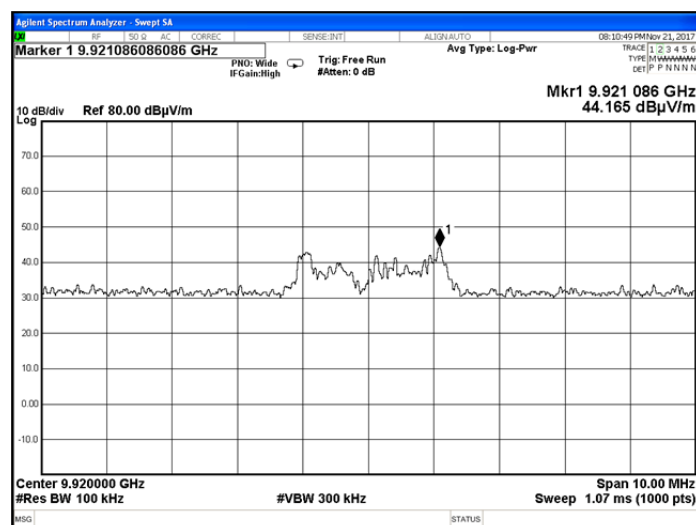


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 23-Nov-17			
Temperature: 24.6 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: Battery
Remarks:			

Plot 7.3.41 Transmission pulse duration

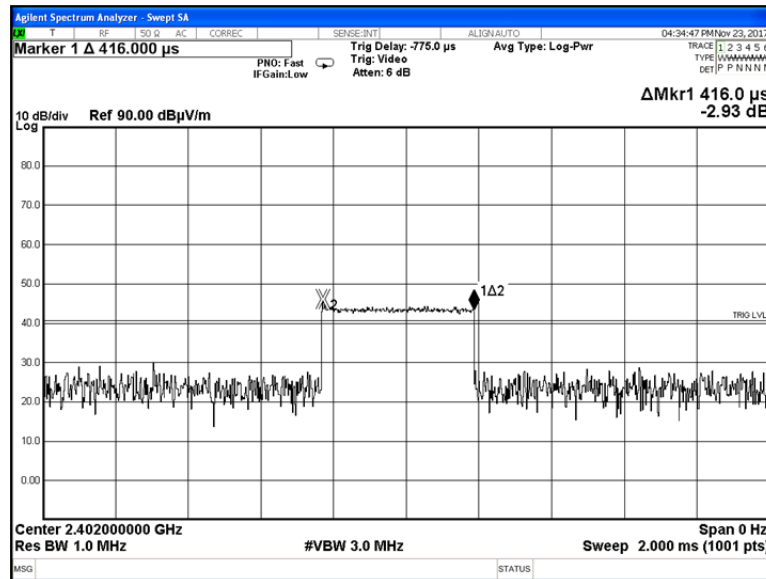

Plot 7.3.42 Transmission pulse period

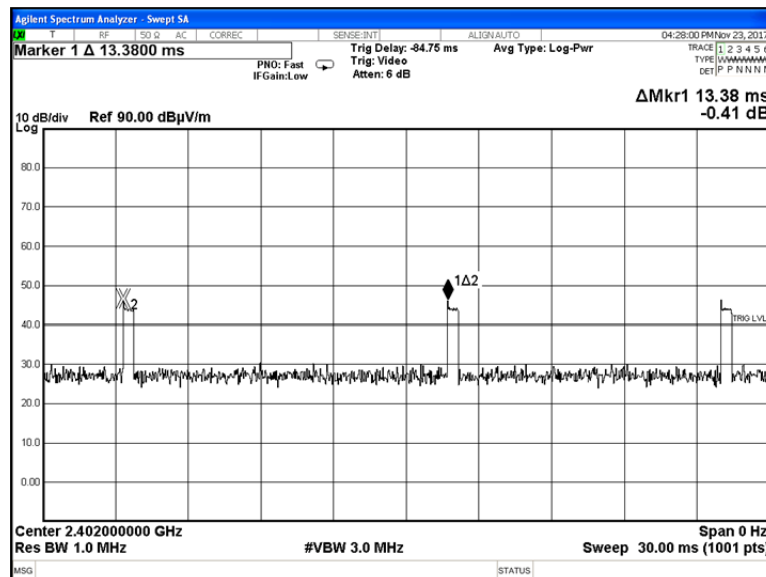

Test specification: Section 15.247(d), Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Nov-17			
Temperature: 23.7 °C	Relative Humidity: 40 %	Air Pressure: 1017 hPa	Power: Battery
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.4.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.4.1 Band edge emission test setup





Test specification: Section 15.247(d), Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Nov-17			
Temperature: 23.7 °C	Relative Humidity: 40 %	Air Pressure: 1017 hPa	Power: Battery
Remarks:			

Table 7.4.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 VIDEO BANDWIDTH: $\geq$ RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2399.984	48.24	85.44	37.2	30.0	7.2	Pass

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μ V/m)	Limit, dB(μ V/m)	Margin, dB**	Measured, dB(μ V/m)	Calculated, dB(μ V/m)	Limit, dB(μ V/m)	Margin, dB***	
2483.500	Vertical	1.6	0	61.12	74	-12.88	61.12	30.98	54	-23.02	Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 4543	HL 4603	HL 5102					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification:		Section 15.247(d), Band edge emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
26-Nov-17			
Temperature: 23.7 °C	Relative Humidity: 40 %	Air Pressure: 1017 hPa	Power: Battery
Remarks:			

Plot 7.4.1 The highest emission level within the assigned band at low carrier frequency




Plot 7.4.2 The highest emission level within the assigned band at high carrier frequency

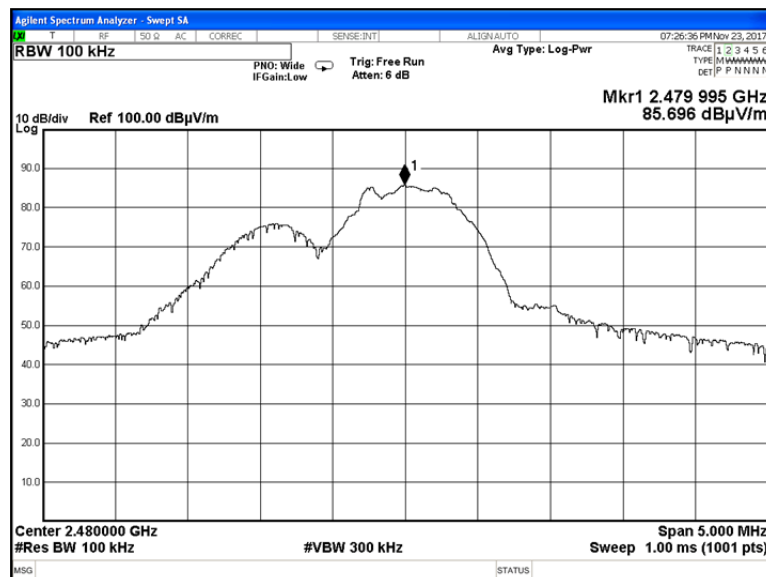


Test specification: Section 15.247(d), Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Nov-17			
Temperature: 23.7 °C	Relative Humidity: 40 %	Air Pressure: 1017 hPa	Power: Battery
Remarks:			

Plot 7.4.3 The highest band edge emission at low carrier frequency

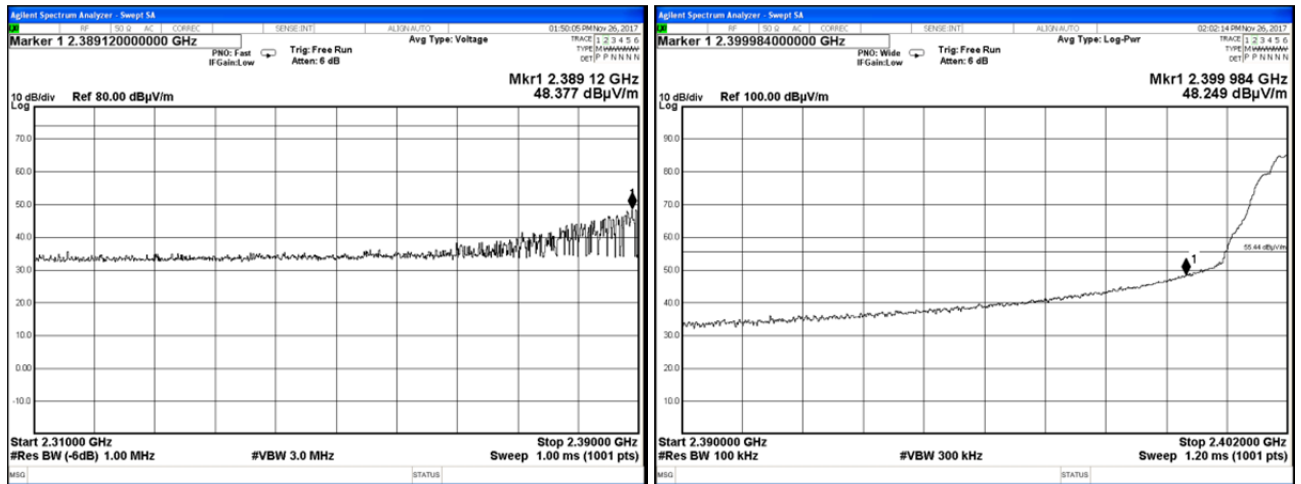

Plot 7.4.4 The highest band edge emission at high carrier frequency

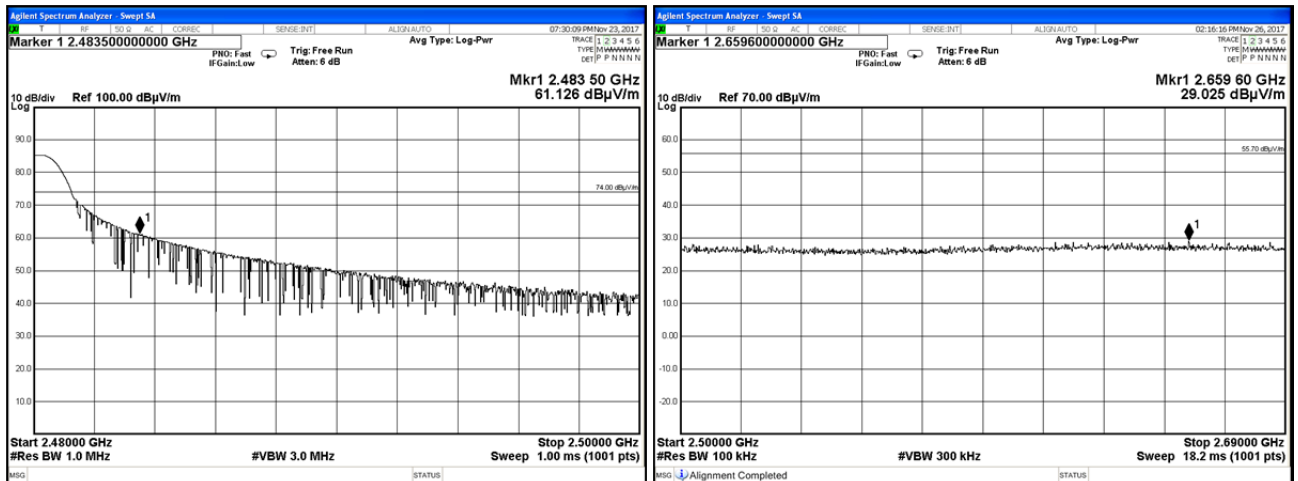



Test specification:		Section 15.247(e), Peak power density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:		Verdict: PASS	
Date(s):			
20-Nov-17			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1012 hPa	Power: Battery
Remarks:			

7.5 Maximum power spectral density (PSD)

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum power spectral density was measured using a peak detector with resolution bandwidth set to 100 kHz, VBW ≥ 300 kHz, sweep time = auto couple, trace mode = max hold.

7.5.2.5 The maximum power level was determined in any 100 kHz band within the fundamental EBW. The measured value did not exceed the limit


7.5.2.6 The test results provided in Table 7.5.2 and the associated plots.



HERMON LABORATORIES

Test specification: Section 15.247(e), Peak power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-Nov-17			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1012 hPa	Power: Battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

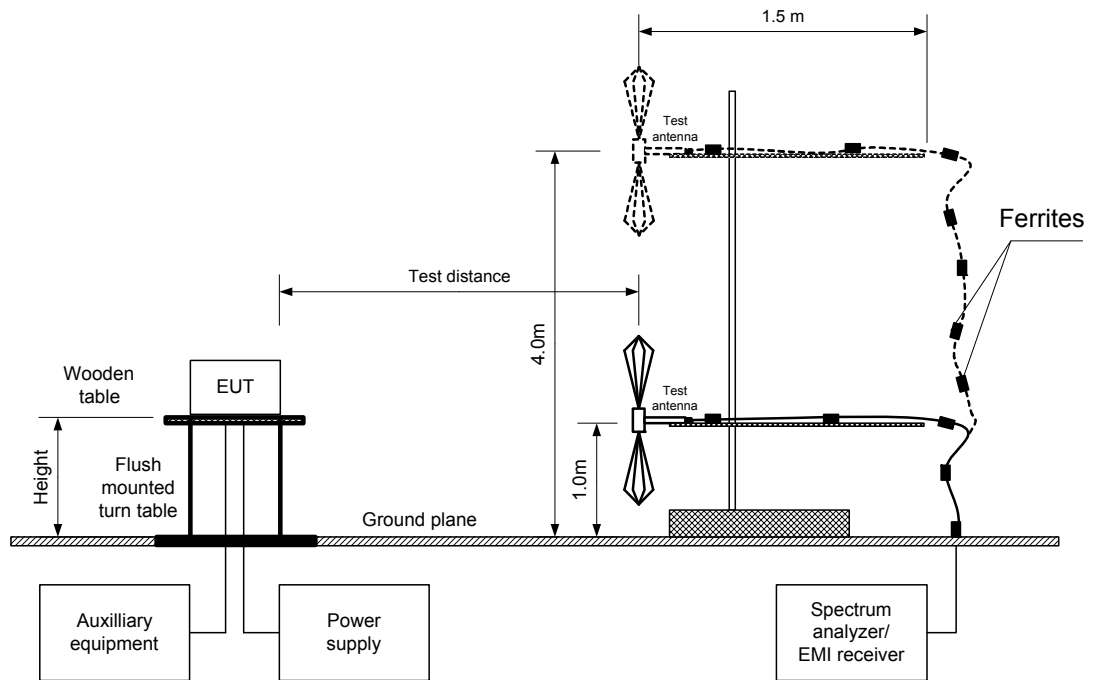



HERMON LABORATORIES

Test specification: Section 15.247(e), Peak power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-Nov-17			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1012 hPa	Power: Battery
Remarks:			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Double ridged guide
 MODULATION: GFSK
 BIT RATE: 1 Mbps

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
2402	86.710	4.5	103.2	-16.49	Vertical	1.1	0
2426	86.527	4.5	103.2	-16.67	Vertical	1.0	0
2480	86.220	4.5	103.2	-16.98	Vertical	1.0	0

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 4543	HL 4603	HL 5102					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(e), Peak power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-Nov-17			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1012 hPa	Power: Battery
Remarks:			

Plot 7.5.1 Peak spectral power density at low frequency in vertical antenna polarization

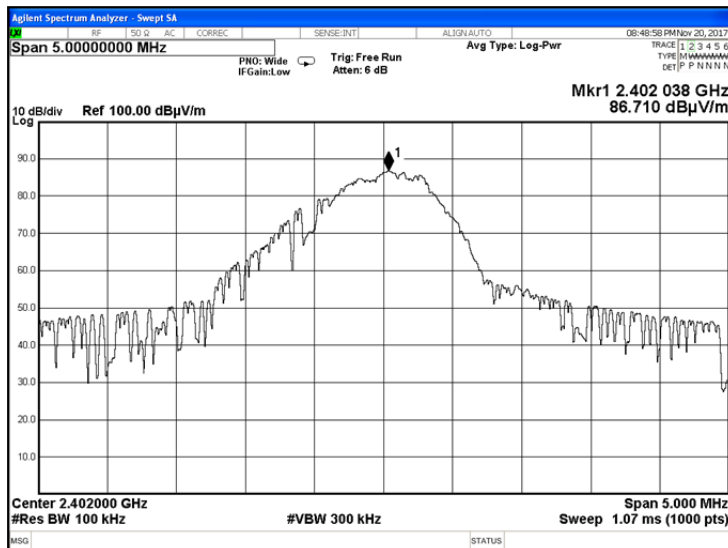

Plot 7.5.2 Peak spectral power density at low frequency in horizontal antenna polarization

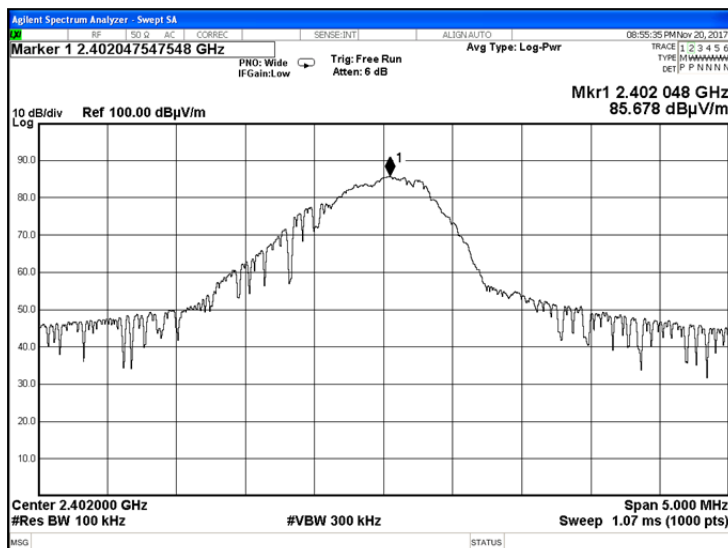





HERMON LABORATORIES

Test specification:		Section 15.247(e), Peak power density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:	Compliance	Verdict: PASS	
Date(s):	20-Nov-17		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1012 hPa	Power: Battery
Remarks:			

Plot 7.5.3 Peak spectral power density at midfrequency in vertical antenna polarization

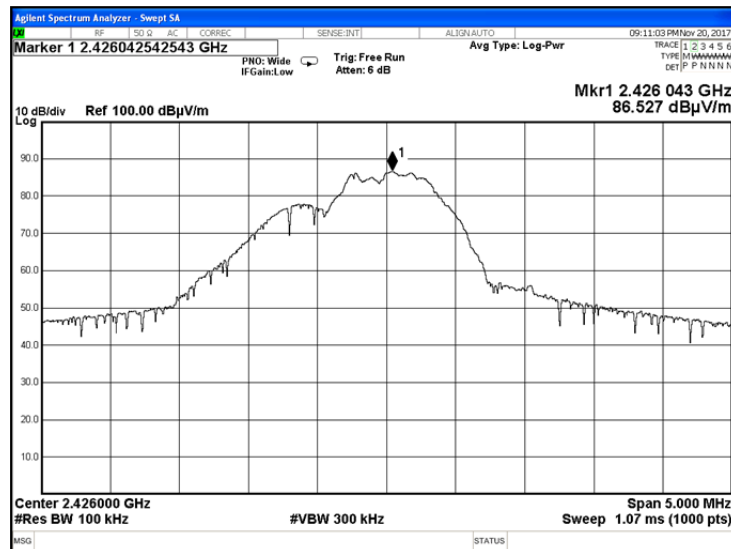

Plot 7.5.4 Peak spectral power density at midfrequency in horizontal antenna polarization

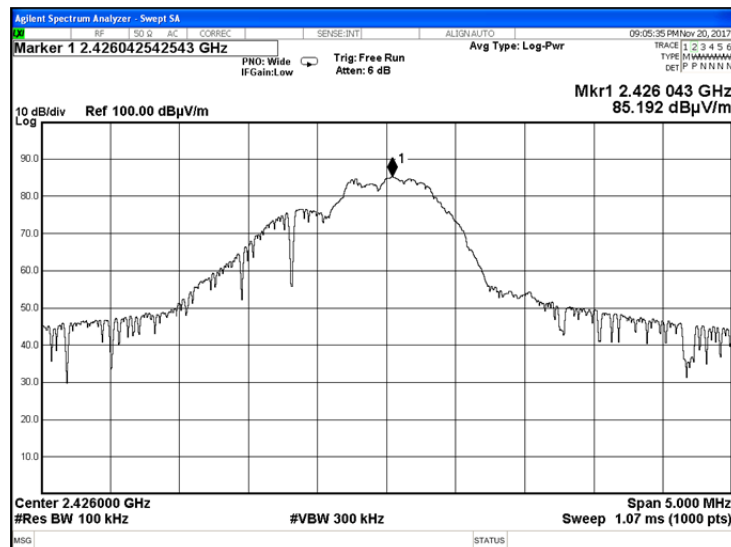




HERMON LABORATORIES

Test specification:		Section 15.247(e), Peak power density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:	Compliance	Verdict: PASS	
Date(s):	20-Nov-17		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1012 hPa	Power: Battery
Remarks:			

Plot 7.5.5 Peak spectral power density at high frequency in vertical antenna polarization

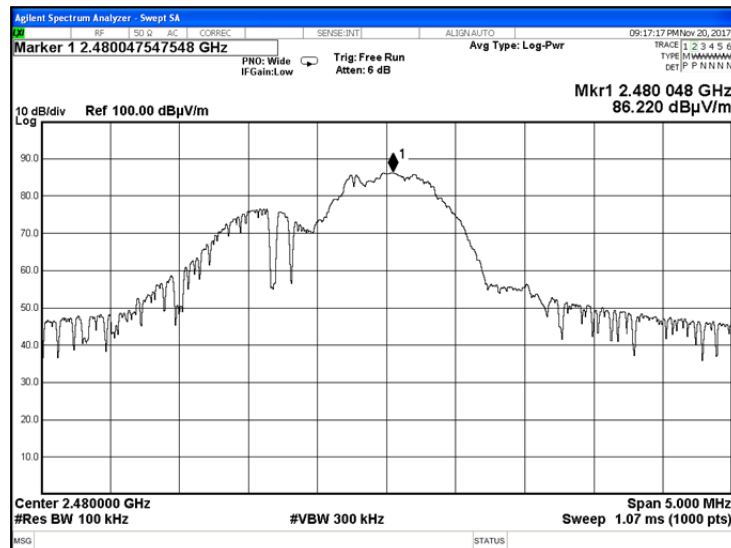

Plot 7.5.6 Peak spectral power density at high frequency in horizontal antenna polarization



Test specification: Section 15.203, Antenna requirement			
Test procedure: Visual inspection			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Nov-17			
Temperature: 24.7 °C	Relative Humidity: 43 %	Air Pressure: 1018 hPa	Power: 9 VDC
Remarks:			

7.6 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.6.1 Antenna assembly

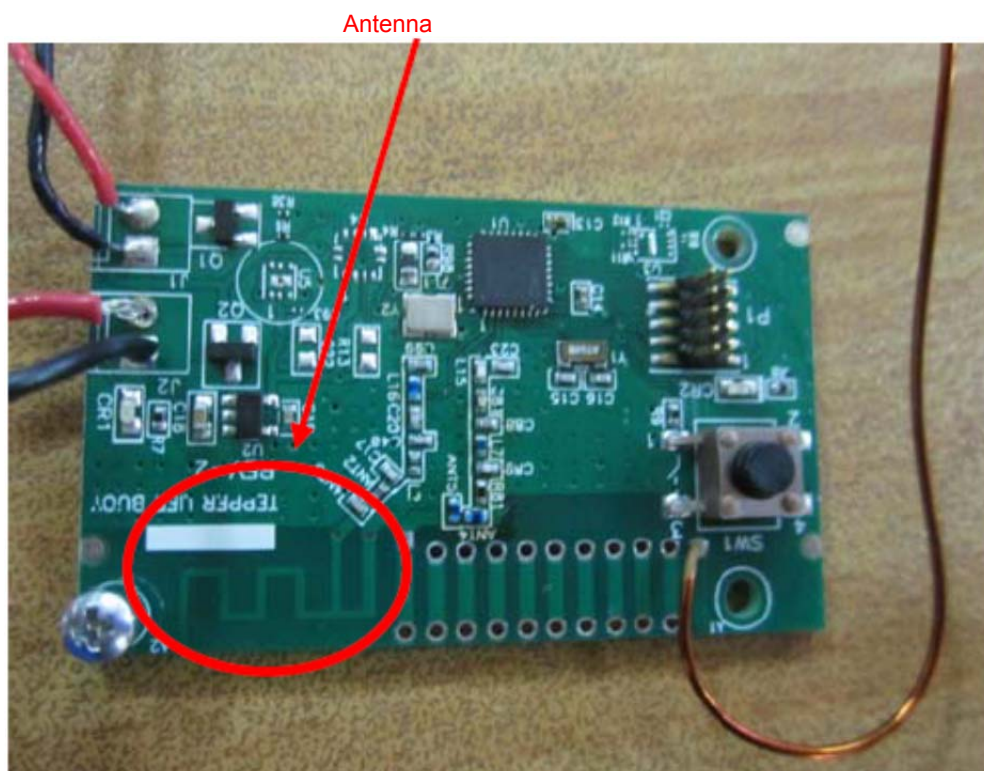

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
1915	Antenna, Loop, Active Receiving, 1 kHz - 30 MHz	EMC Test Systems	6507	1457	19-Jan-17	19-Feb-18
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	09-Mar-17	09-Mar-18
4274	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70047	04-Jun-17	04-Jun-18
4541	Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	10-Sep-17	10-Sep-18
4542	Amplifier, 9 kHz to 1 GHz, 32 dB gain	Sonoma Instrument	310	0002A056 39	15-Mar-17	15-Mar-18
4543	Broadband preamplifier, 0.5 to 18 GHz, 35 dB gain	Schwarzbeck mess-elektronik	BBV 9718	9718-134	15-Mar-17	15-Mar-18
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	28-Dec-17	28-Dec-18
4603	Horn Antenna, 1 - 18 GHz	Schwarzbeck mess-elektronik	BBHA 9120 D	9120D-611	04-Jan-18	04-Jan-19
4604	Biconilog Antenna, 26 - 2000 MHz	EMCO	3142B	9909-1421	12-May-17	12-May-18
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	11-Jan-18	11-Jan-19
5102	RF cable, 18 GHz, 6 m, N-type	Huber-Suhner	SF106A/1 1N/11N/6 000MM	500848/6A	27-Jul-17	27-Jul-18
5105	RF cable, 18 GHz, 6 m, N-type	Huber-Suhner	SF106A/1 1N/11N/6 000MM	500851/6A	27-Jul-17	27-Jul-18
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/ 11SK/11S K/5500M M	502494/2E A	27-Jul-17	27-Jul-18

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-1606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

11 APPENDIX D Specification references

FCC 47CFR part 15: 2016	Radio Frequency Devices.
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

12 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
EMC Test Systems
Model 6507, S/N 1457, HL 1915

Frequency, kHz	Measured antenna factor, dBS/m
10	-22.7
20	-27.6
50	-31.3
75	-31.8
100	-32.2
150	-32.3
250	-32.6
500	-32.8
750	-33.0
1000	-33.1
2000	-33.4
3000	-33.7
4000	-34.0
5000	-34.3
10000	-34.9
15000	-35.6
20000	-35.9
25000	-36.1
30000	-36.7

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.

Antenna factor
Horn antenna
Schwarzbeck mess-elektronik, Model BBHA 9120 D, serial number: 9120D-611, HL 4603

Frequency, MHz	Measured antenna factor, dB/m
1000	25.2
1500	25.7
2000	26.1
2500	27.5
3000	28.3
3500	29.0
4000	30.0
4500	30.8
5000	31.9
5500	32.2
6000	33.1
6500	34.6
7000	35.9
7500	36.6
8000	37.2
8500	36.6
9000	36.9
9500	37.5
10000	38.4
10500	39.5
11000	40.3
11500	40.0
12000	39.2
12500	38.7
13000	39.6
13500	40.8
14000	41.6
14500	42.1
15000	41.2
15500	39.1
16000	38.5
16500	39.9
17000	41.0
17500	44.1
18000	55.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Antenna factor
Biconilog Antenna, 26 - 2000 MHz
EMCO, Model 3142B, serial number: 9909-1421, HL 4604

Frequency, MHz	Measured, dB/m
30	17.9
35	14.8
40	12.1
45	10.0
50	8.7
60	8.1
70	7.3
80	6.6
90	7.6
100	7.9
120	7.0
140	7.7
160	9.6
180	10.0
200	10.2
250	12.7
300	13.4
400	16.7
500	18.2
600	20.2
700	22.0
800	22.7
900	24.1
1000	25.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m



HERMON LABORATORIES

Antenna factor, HL 4956

**Active Horn Antenna Factor Calibration**

18 GHz to 40 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-840		
Serial Number:			105004		
Calibration Distance:			3 meter		
Polarization:			Horizontal		
Calibration Date:			1/26/2015		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
Calibration per ANSI C63.5: 2006 Standard Site Method, Equations 1-6 (3-antenna) Corrected Reading (dBμV/m) = Meter Reading (dBμV) + AFE(dB/m)					

Cable loss
Test cable, Mini-Circuits, S/N 70047, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4274

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.07	4800	1.69	9800	2.62	14800	3.42
30	0.11	4900	1.70	9900	2.63	14900	3.39
50	0.14	5000	1.72	10000	2.64	15000	3.38
100	0.21	5100	1.75	10100	2.64	15100	3.40
200	0.26	5200	1.76	10200	2.66	15200	3.41
300	0.30	5300	1.77	10300	2.67	15300	3.40
400	0.37	5400	1.79	10400	2.68	15400	3.39
500	0.44	5500	1.82	10500	2.68	15500	3.41
600	0.49	5600	1.85	10600	2.70	15600	3.44
700	0.54	5700	1.86	10700	2.71	15700	3.46
800	0.58	5800	1.87	10800	2.73	15800	3.45
900	0.63	5900	1.91	10900	2.74	15900	3.47
1000	0.67	6000	1.94	11000	2.76	16000	3.51
1100	0.71	6100	1.97	11100	2.77	16100	3.56
1200	0.75	6200	1.98	11200	2.78	16200	3.55
1300	0.78	6300	1.99	11300	2.79	16300	3.54
1400	0.81	6400	2.02	11400	2.80	16400	3.57
1500	0.85	6500	2.05	11500	2.82	16500	3.62
1600	0.88	6600	2.06	11600	2.83	16600	3.61
1700	0.91	6700	2.06	11700	2.84	16700	3.60
1800	0.94	6800	2.08	11800	2.85	16800	3.62
1900	0.97	6900	2.10	11900	2.87	16900	3.68
2000	1.00	7000	2.12	12000	2.88	17000	3.70
2100	1.03	7100	2.12	12100	2.89	17100	3.68
2200	1.06	7200	2.13	12200	2.90	17200	3.70
2300	1.08	7300	2.16	12300	2.92	17300	3.80
2400	1.11	7400	2.19	12400	2.94	17400	3.84
2500	1.14	7500	2.22	12500	2.95	17500	3.83
2600	1.16	7600	2.23	12600	2.96	17600	3.83
2700	1.19	7700	2.26	12700	2.98	17700	3.86
2800	1.21	7800	2.30	12800	3.00	17800	3.86
2900	1.27	7900	2.33	12900	3.02	17900	3.80
3000	1.29	8000	2.35	13000	3.03	18000	3.79
3100	1.32	8100	2.37	13100	3.06		
3200	1.35	8200	2.41	13200	3.08		
3300	1.37	8300	2.44	13300	3.09		
3400	1.38	8400	2.47	13400	3.10		
3500	1.41	8500	2.48	13500	3.13		
3600	1.43	8600	2.51	13600	3.17		
3700	1.46	8700	2.53	13700	3.17		
3800	1.47	8800	2.55	13800	3.18		
3900	1.49	8900	2.56	13900	3.22		
4000	1.52	9000	2.57	14000	3.26		
4100	1.55	9100	2.58	14100	3.28		
4200	1.56	9200	2.59	14200	3.30		
4300	1.58	9300	2.59	14300	3.35		
4400	1.60	9400	2.60	14400	3.39		
4500	1.63	9500	2.60	14500	3.39		
4600	1.65	9600	2.61	14600	3.39		
4700	1.67	9700	2.61	14700	3.41		

Cable loss
Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type
Suhner Switzerland, HL 4541

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	1700	0.45
15	0.03	1800	0.46
20	0.03	1900	0.48
30	0.04	2000	0.49
40	0.04	2100	0.52
50	0.05	2200	0.54
60	0.06	2300	0.55
70	0.06	2400	0.56
80	0.07	2500	0.58
90	0.07	2600	0.59
100	0.08	2700	0.61
150	0.10	2800	0.63
200	0.12	2900	0.64
300	0.15	3000	0.67
400	0.18	3100	0.70
500	0.20	3200	0.74
600	0.23	3300	0.77
700	0.25	3400	0.80
800	0.28	3500	0.82
900	0.30	3600	0.86
1000	0.31	3700	0.88
1100	0.33	3800	0.94
1200	0.35	3900	0.95
1300	0.37	4000	0.99
1400	0.39		
1500	0.41		
1600	0.43		

Cable loss
RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,
SF106A/11N/11N/6000MM, S/N 500848/6A
HL 5102

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.00	5500	2.43
50	0.23	6000	2.54
100	0.31	6500	2.65
200	0.44	7000	2.76
300	0.54	7500	2.87
400	0.62	8000	2.98
500	0.69	8500	3.06
600	0.76	9000	3.16
700	0.82	9500	3.27
800	0.87	10000	3.36
900	0.94	10500	3.45
1000	0.98	11000	3.55
1100	1.03	11500	3.63
1200	1.08	12000	3.72
1300	1.13	12500	3.82
1400	1.17	13000	3.90
1500	1.21	13500	3.99
1600	1.25	14000	4.06
1700	1.30	14500	4.15
1800	1.33	15000	4.24
1900	1.37	15500	4.30
2000	1.41	16000	4.37
2500	1.59	16500	4.45
3000	1.75	17000	4.53
3500	1.90	17500	4.62
4000	2.04	18000	4.67
4500	2.17		
5000	2.30		

Cable loss
RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,
SF106A/11N/11N/6000MM, S/N 500851/6A
HL 5105

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	2.41
50	0.22	6000	2.53
100	0.31	6500	2.64
200	0.43	7000	2.75
300	0.53	7500	2.85
400	0.61	8000	2.96
500	0.68	8500	3.05
600	0.75	9000	3.15
700	0.81	9500	3.26
800	0.87	10000	3.34
900	0.93	10500	3.44
1000	0.98	11000	3.53
1100	1.03	11500	3.61
1200	1.07	12000	3.71
1300	1.12	12500	3.81
1400	1.16	13000	3.89
1500	1.21	13500	3.97
1600	1.25	14000	4.05
1700	1.28	14500	4.13
1800	1.32	15000	4.21
1900	1.37	15500	4.29
2000	1.40	16000	4.36
2500	1.58	16500	4.43
3000	1.74	17000	4.49
3500	1.89	17500	4.58
4000	2.03	18000	4.67
4500	2.17		
5000	2.29		

Cable loss
RF Cable, Huber-Suhner, 40 GHz, 5.5 m, K type,
SF102EA/11SK/11SK/5500MM, S/N 502494/2EA
HL 5112

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
100	0.69	20500	10.18
200	0.97	21000	10.32
300	1.18	21500	10.47
500	1.52	22000	10.60
1000	2.14	22500	10.75
1500	2.62	23000	10.87
2000	3.03	23500	11.00
2500	3.40	24000	11.12
3000	3.73	24500	11.23
3500	4.04	25000	11.35
4000	4.33	25500	11.52
4500	4.60	26000	11.64
5000	4.86	26500	11.73
5500	5.10	27000	11.84
6000	5.34	27500	11.93
6500	5.57	28000	12.05
7000	5.79	28500	12.19
7500	6.00	29000	12.33
8000	6.21	29500	12.44
8500	6.43	30000	12.53
9000	6.62	30500	12.58
9500	6.82	31000	12.71
10000	7.01	31500	12.86
10500	7.17	32000	13.00
11000	7.34	32500	13.11
11500	7.51	33000	13.24
12000	7.68	33500	13.33
12500	7.84	34000	13.44
13000	8.00	34500	13.58
13500	8.16	35000	13.69
14000	8.32	35500	13.81
14500	8.48	36000	13.93
15000	8.63	36500	14.05
15500	8.77	37000	14.24
16000	8.92	37500	14.28
16500	9.08	38000	14.38
17000	9.23	38500	14.50
17500	9.37	39000	14.61
18000	9.51	39500	14.70
18500	9.66	40000	14.83
19000	9.78		
19500	9.92		
20000	10.07		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT