







Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

# TEST REPORT

## FCC PART 15.247

Report Reference No. .... : **CTL1810196061-WF02**

Compiled by: ( position+printed name+signature)	Happy Guo (File administrators)	 
Tested by: ( position+printed name+signature)	Nice Nong (Test Engineer)	 
Approved by: ( position+printed name+signature)	Ivan Xie (Manager)	 

**Product Name** ..... : Langie Speaking Translator

**Model/Type reference** ..... : S2

**List Model(s)**..... : S2-i, S2-a, S2-x, S2-n, S2-b

**Trade Mark**..... : Langie

**FCC ID**..... : **2AOZK-S2**

**Applicant's name** ..... : **Comet Innovation Limited**

**Address of applicant** ..... : Unit 1204, Winful Centre, 30 Shing Yip Street, Kwun Tong, Kowloon, Hong Kong

**Test Firm**..... : **Shenzhen CTL Testing Technology Co., Ltd.**

**Address of Test Firm** ..... : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

**Test specification**..... :

Standard ..... : **FCC Part 15.247**: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator ..... : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

**Date of Receipt**..... : Oct. 23, 2018

**Date of Test Date**..... : Oct. 23, 2018 – Dec. 09, 2018

**Data of Issue**..... : Dec. 10, 2018

**Result**..... : Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No.:</b>	<b>CTL1810196061-WF02</b>	Dec. 10, 2018 Date of issue
-------------------------	---------------------------	--------------------------------

Equipment under Test : Langie Speaking Translator

Model /Type : S2

Listed Models : S2-i, S2-a, S2-x, S2-n, S2-b

**Applicant** : **Comet Innovation Limited**

Address : Unit 1204, Winful Centre, 30 Shing Yip Street, Kwun Tong, Kowloon, Hong Kong

**Manufacturer** : **Comet Innovation Limited**

Address : Unit 1204, Winful Centre, 30 Shing Yip Street, Kwun Tong, Kowloon, Hong Kong

<b>Test result</b>	<b>Pass*</b>
--------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified page 5.


The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## **\*\* Modified History \*\***



	Table of Contents	Page
<b>1. SUMMARY .....</b>		<b>5</b>
1.1. TEST STANDARDS.....		5
1.2. TEST DESCRIPTION.....		5
1.3. TEST FACILITY .....		6
<b>FCC-REGISTRATION NO.: 399832.....</b>		<b>6</b>
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....		6
<b>2. GENERAL INFORMATION .....</b>		<b>7</b>
2.1. ENVIRONMENTAL CONDITIONS .....		7
2.2. GENERAL DESCRIPTION OF EUT .....		7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....		7
2.4. EQUIPMENTS USED DURING THE TEST .....		8
2.5. RELATED SUBMITTAL(S) / GRANT (S).....		8
2.6. MODIFICATIONS.....		8
<b>3. TEST CONDITIONS AND RESULTS .....</b>		<b>9</b>
3.1. CONDUCTED EMISSIONS TEST .....		9
3.2. RADIATED EMISSIONS AND BAND EDGE .....		12
3.3. MAXIMUM CONDUCTED OUTPUT POWER.....		19
3.4. POWER SPECTRAL DENSITY .....		20
3.5. 6dB BANDWIDTH.....		22
3.6. OUT-OF-BAND EMISSIONS .....		24
3.7. ANTENNA REQUIREMENT.....		28
<b>4. TEST SETUP PHOTOS OF THE EUT .....</b>		<b>29</b>
<b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>		<b>30</b>

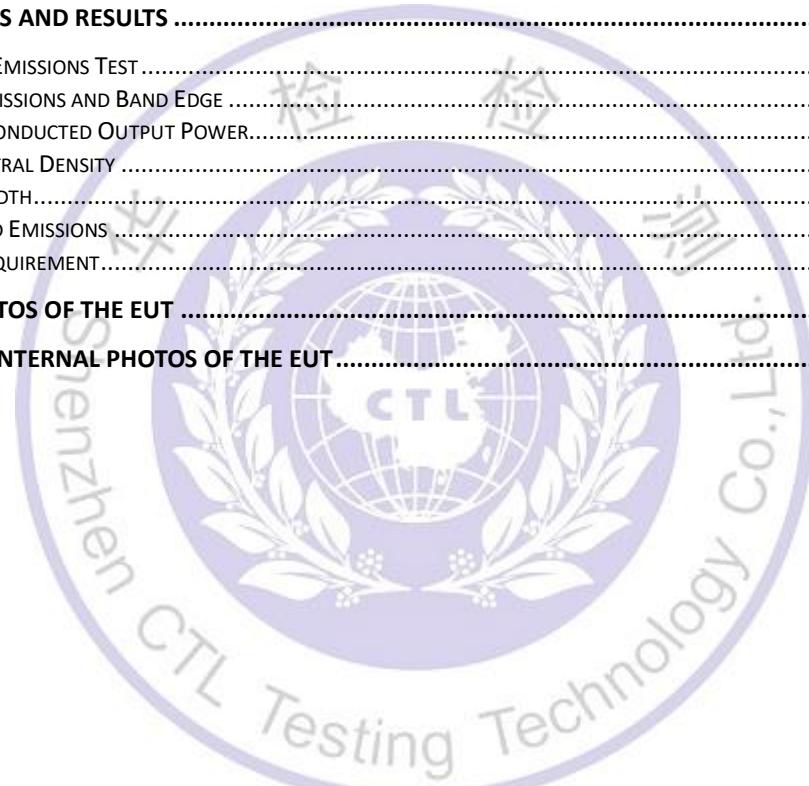

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz Range of 9 kHz to 40GHz

[KDB558074 D01 V05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

## 1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

#### FCC-Registration No.: 399832

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

## 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Langie Speaking Translator
Model/Type reference:	S2
Power supply:	DC 3.7V from battery
Adapter information:	Input: 100-240V~, 50/60Hz, 0.3A Max Output: 5V==1500mA
<b>Bluetooth LE</b>	
Supported type:	Bluetooth low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	PIFA antenna
Antenna gain:	1.0 dBi

Note: For more details, please refer to the user's manual of the EUT.

### 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 39 channels provided to the EUT and Channel 00/19/39 were selected for BT4.0 test.

#### Operation Frequency List :

Channel	Frequency (MHz)
00	2402
01	2404
02	2406
:	:
19	2440
:	:
37	2476
38	2478
39	2480

Note: The line display in grey were the channel selected for testing

## 2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date recent	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2018/06/01	2019/05/31
LISN	R&S	ESH2-Z5	860014/010	2018/06/01	2019/05/31
Power Meter	Agilent	U2531A	TW53323507	2018/06/01	2019/05/31
Power Sensor	Agilent	U2021XA	MY5365004	2018/05/20	2019/05/19
EMI Test Receiver	R&S	ESCI	103710	2018/06/01	2019/05/31
Spectrum Analyzer	Agilent	E4407B	MY41440676	2018/05/20	2019/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2018/01/16	2019/01/15
Controller	EM Electronics	Controller EM 1000	N/A	2018/05/20	2019/05/19
Active Loop Antenna	Daze	ZN30900A	N/A	2018/05/18	2019/05/17
Bilog Antenna	Schwarzbeck	VULB 9168	00824	2018/10/25	2019/10/24
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2018/05/18	2019/05/17
Horn Antenna	SCHWARZBACK	BBHA 9170	BBHA9170184	2018/05/18	2019/05/17
Amplifier	Agilent	8349B	3008A02306	2018/05/18	2019/05/17
Amplifier	Agilent	8447D	2944A10176	2018/05/18	2019/05/17
Temperature/Humidity Meter	Gangxing	CTH-608	02	2018/05/19	2019/05/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2018/05/19	2019/05/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2018/05/19	2019/05/18
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2018/06/01	2019/05/31
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/06/01	2019/05/31
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/06/01	2019/05/31
RF Cable	Megalon	RF-A303	N/A	2018/06/01	2019/05/31
EMI Test Software	R&S	ES-K1	V1.7.1	2018/06/01	2019/05/31
EMI Test Software	AUDIX	E3	V6.0	2018/06/01	2019/05/31

The calibration interval was one year

## 2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
/	/	/	/	/
/	/	/	/	/

## 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.7. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

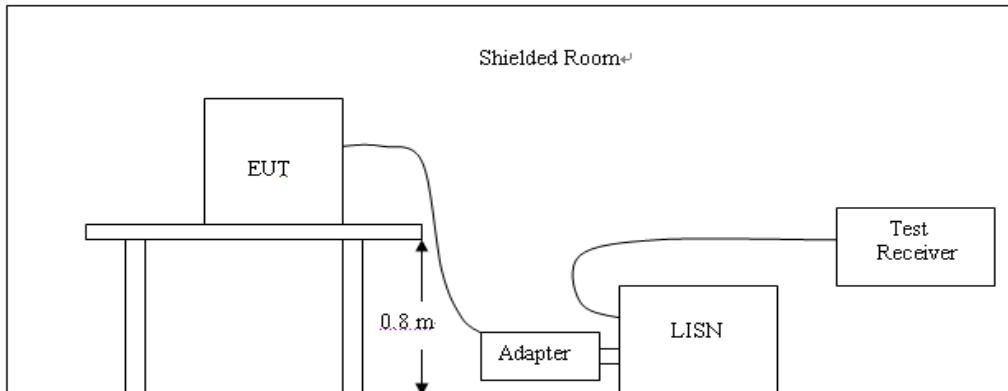

##### TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

## TEST RESULTS

Remark:

- Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz with BLE middle channel was reported as below:

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
Short Description: 150K-30M Voltage

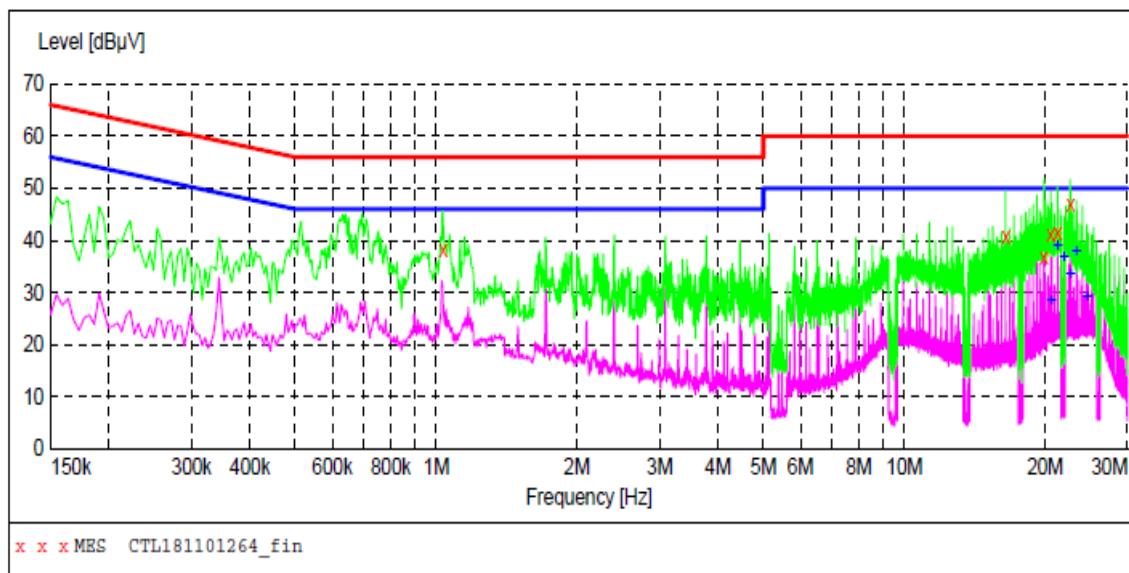

### **MEASUREMENT RESULT: "CTL181101264\_fin"**

2018-10-28 02:17??


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
1.034000	38.20	10.3	56	17.8	QP	L1	GND
16.472000	40.60	10.8	60	19.4	QP	L1	GND
19.880000	36.90	10.9	60	23.1	QP	L1	GND
20.588000	41.20	11.0	60	18.8	QP	L1	GND
21.272000	41.60	11.0	60	18.4	QP	L1	GND
22.646000	46.80	11.0	60	13.2	QP	L1	GND

### **MEASUREMENT RESULT: "CTL181101264\_fin2"**

2018-10-28 02:17??

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
20.594000	28.50	11.0	50	21.5	AV	L1	GND
21.278000	38.90	11.0	50	11.1	AV	L1	GND
21.956000	36.60	11.0	50	13.4	AV	L1	GND
22.640000	33.60	11.0	50	16.4	AV	L1	GND
23.336000	37.90	11.1	50	12.1	AV	L1	GND
24.554000	29.00	11.1	50	21.0	AV	L1	GND

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
 Short Description: 150K-30M Voltage

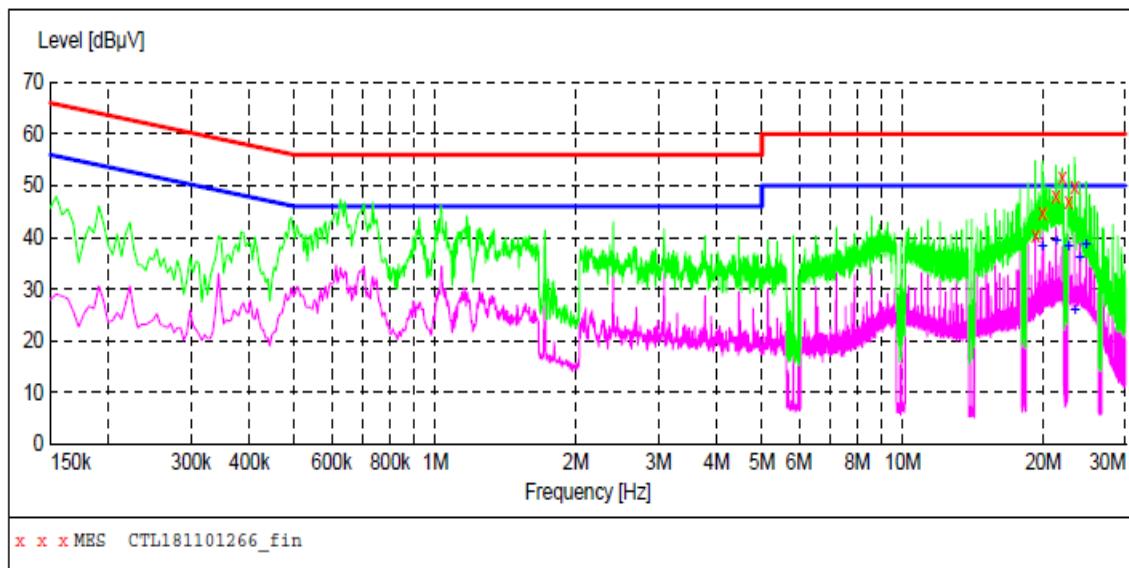

**MEASUREMENT RESULT: "CTL181101266\_fin"**

2018-10-28 02:21??

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
19.226000	40.40	10.9	60	19.6	QP	N	GND
19.922000	44.60	10.9	60	15.4	QP	N	GND
21.296000	48.00	11.0	60	12.0	QP	N	GND
21.986000	51.70	11.0	60	8.3	QP	N	GND
22.670000	46.80	11.0	60	13.2	QP	N	GND
23.360000	49.70	11.1	60	10.3	QP	N	GND

**MEASUREMENT RESULT: "CTL181101266\_fin2"**

2018-10-28 02:21??

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
19.928000	38.00	10.9	50	12.0	AV	N	GND
21.296000	39.10	11.0	50	10.9	AV	N	GND
22.670000	38.30	11.0	50	11.7	AV	N	GND
23.360000	26.00	11.1	50	24.0	AV	N	GND
23.954000	36.00	11.1	50	14.0	AV	N	GND
24.734000	38.70	11.1	50	11.3	AV	N	GND

### 3.2. Radiated Emissions and Band Edge

#### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

#### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

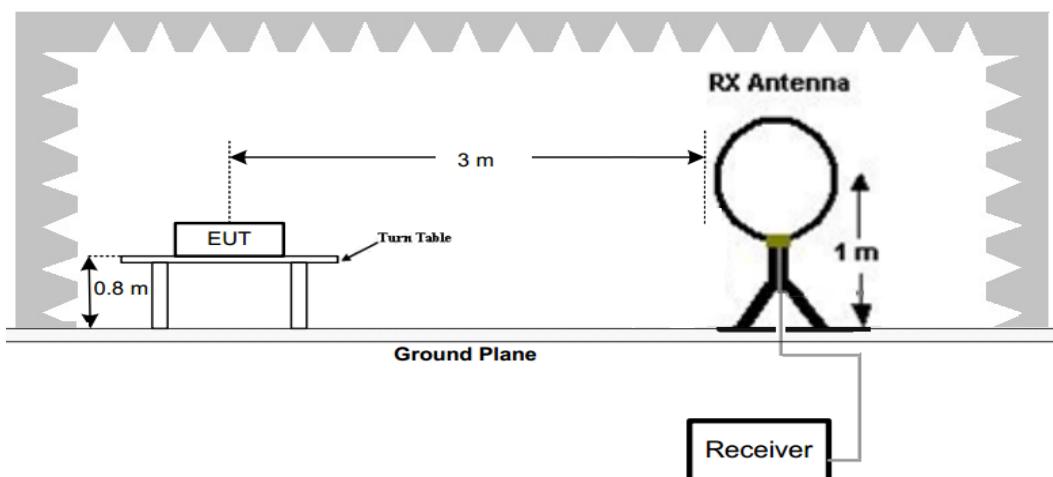

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

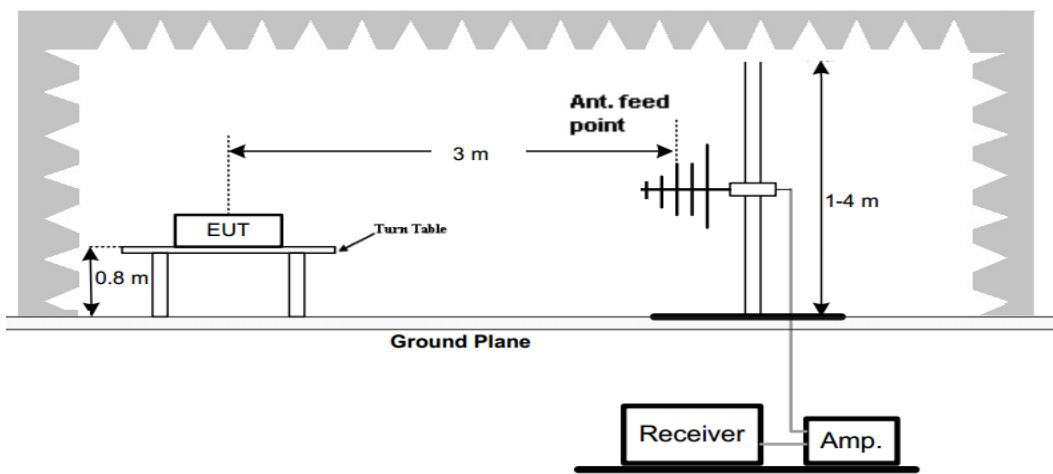

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

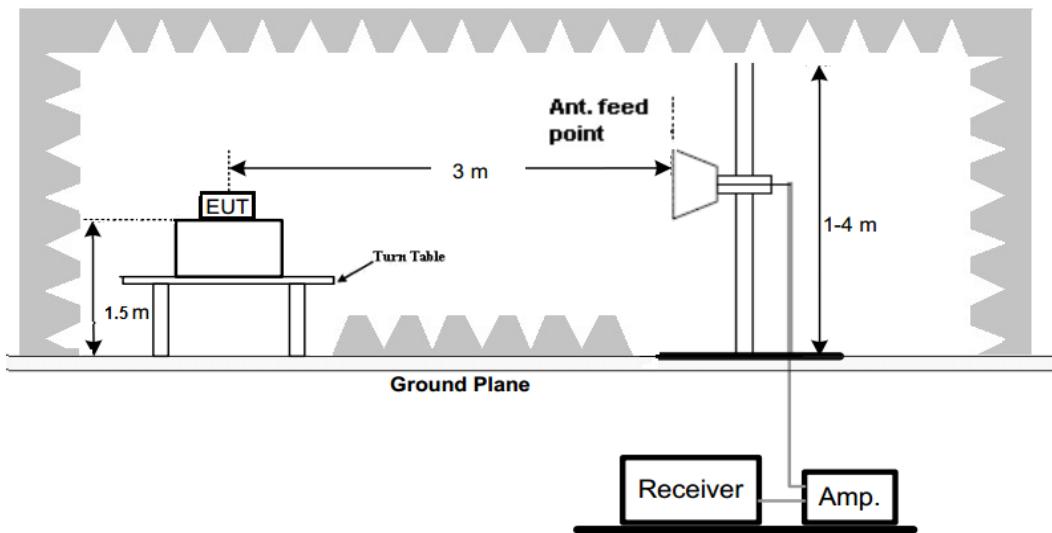

### Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

### TEST RESULTS

Remark:


1. For below 1GHz testing recorded worst at BLE low channel.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
3. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in Z position.

## For 30MHz-1GHz

## Horizontal

***SWEET TABLE: "test (30M-1G)"***

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	200.0 ms	120 kHz
				Transducer
				VULB 9168

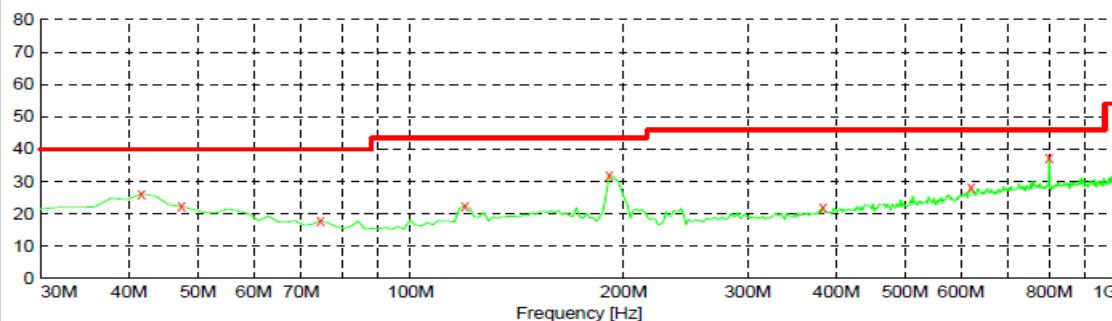Level [dB<sub>μ</sub>/m]***MEASUREMENT RESULT: "CTL18103130\_red"***


2018-10-31 9:42

Frequency MHz	Level dB <sub>μ</sub> /m	Transd dB	Limit dB <sub>μ</sub> /m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	26.20	14.7	40.0	13.8	---	0.0	0.00	HORIZONTAL
47.460000	22.30	14.3	40.0	17.7	---	0.0	0.00	HORIZONTAL
74.620000	17.90	10.9	40.0	22.1	---	0.0	0.00	HORIZONTAL
119.240000	22.40	13.1	43.5	21.1	---	0.0	0.00	HORIZONTAL
191.020000	31.90	11.5	43.5	11.6	---	0.0	0.00	HORIZONTAL
383.080000	21.90	15.9	46.0	24.1	---	0.0	0.00	HORIZONTAL
619.760000	28.00	20.5	46.0	18.0	---	0.0	0.00	HORIZONTAL
800.180000	37.40	22.7	46.0	8.6	---	0.0	0.00	HORIZONTAL

## Vertical

***SWEET TABLE: "test (30M-1G)"***

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	200.0 ms	120 kHz
				Transducer
				VULB 9168

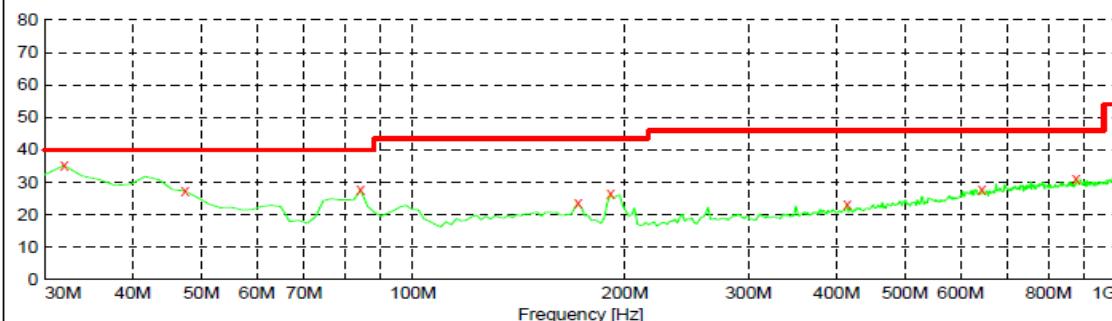Level [dB<sub>μ</sub>/m]***MEASUREMENT RESULT: "CTL18103128\_red"***

2018-10-31 9:38

Frequency MHz	Level dB <sub>μ</sub> /m	Transd dB	Limit dB <sub>μ</sub> /m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	35.20	13.9	40.0	4.8	---	0.0	0.00	VERTICAL
47.460000	27.40	14.3	40.0	12.6	---	0.0	0.00	VERTICAL
84.320000	27.60	10.2	40.0	12.4	---	0.0	0.00	VERTICAL
171.620000	23.40	14.0	43.5	20.1	---	0.0	0.00	VERTICAL
191.020000	26.30	11.5	43.5	17.2	---	0.0	0.00	VERTICAL
414.120000	23.00	16.6	46.0	23.0	---	0.0	0.00	VERTICAL
643.040000	27.90	20.8	46.0	18.1	---	0.0	0.00	VERTICAL
875.840000	31.20	23.4	46.0	14.8	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz

**BLE GFSK Mode (above 1GHz)**

Frequency(MHz):		2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	48.83	PK	74	25.17	44.32	33.49	6.91	35.89
4804.00	--	AV	54	--	--	--	--	--
5380.00	45.66	PK	74	28.34	38.06	34.72	7.25	34.37
5380.00	--	AV	54	--	--	--	--	--
7206.00	44.24	PK	74	29.76	33.13	36.95	9.18	35.03
7206.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	48.52	PK	74	25.48	44.01	33.49	6.91	35.89
4804.00	--	AV	54	--	--	--	--	--
5191.00	43.10	PK	74	30.90	35.74	34.52	7.14	34.30
5191.00	--	AV	54	--	--	--	--	--
7206.00	43.81	PK	74	30.19	32.70	36.95	9.18	35.03
7206.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2440		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	49.68	PK	74	24.32	45.03	33.60	6.95	35.90
4880.00	--	AV	54	--	--	--	--	--
6950.00	44.89	PK	74	29.11	34.74	36.18	9.03	35.06
6950.00	--	AV	54	--	--	--	--	--
7320.00	45.15	PK	74	28.85	33.46	37.46	9.23	35.00
7320.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2440		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	48.70	PK	74	25.30	44.05	33.60	6.95	35.90
4880.00	--	AV	54	--	--	--	--	--
5831.00	42.38	PK	74	31.62	34.61	34.81	7.50	34.53
5831.00	--	AV	54	--	--	--	--	--
7320.00	43.16	PK	74	30.84	31.47	37.46	9.23	35.00
7320.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	49.02	PK	74	24.98	44.10	33.84	7.00	35.92
4960.00	--	AV	54	--	--	--	--	--
6020.00	44.12	PK	74	29.88	35.96	35.14	7.62	34.60
6020.00	--	AV	54	--	--	--	--	--
7440.00	44.97	PK	74	29.03	33.02	37.64	9.28	34.97
7440.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	48.51	PK	74	25.49	43.59	33.84	7.00	35.92
4960.00	--	AV	54	--	--	--	--	--
5298.00	46.07	PK	74	27.93	38.57	34.64	7.20	34.34
5298.00	--	AV	54	--	--	--	--	--
7440.00	44.59	PK	74	29.41	32.64	37.64	9.28	34.97
7440.00	--	AV	54	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

**Results of Band Edges Test (Radiated)**

Frequency(MHz):		2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	92.25	PK	--	--	58.85	28.78	4.61	0.00
2402.00	85.37	AV	--	--	51.97	28.78	4.61	0.00
2368.00	44.12	PK	74	29.88	10.96	28.58	4.57	0.00
2368.00	--	AV	54	--	--	--	--	--
2390.00	43.01	PK	74	30.99	9.69	28.72	4.60	0.00
2390.00	--	AV	54	--	--	--	--	--
2400.00	47.49	PK	74	26.51	14.10	28.78	4.61	0.00
2400.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	91.60	PK	--	--	58.20	28.78	4.61	0.00
2402.00	83.08	AV	--	--	49.68	28.78	4.61	0.00
2368.00	44.72	PK	74	29.28	11.56	28.58	4.57	0.00
2368.00	--	AV	54	--	--	--	--	--
2390.00	43.70	PK	74	30.30	10.38	28.72	4.60	0.00
2390.00	--	AV	54	--	--	--	--	--
2400.00	46.37	PK	74	27.63	12.98	28.78	4.61	0.00
2400.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	91.18	PK	--	--	57.56	28.92	4.70	0.00
2480.00	83.68	AV	--	--	50.06	28.92	4.70	0.00
2483.50	46.73	PK	74	27.27	13.10	28.93	4.70	0.00
2483.50	--	AV	54	--	--	--	--	--
2492.00	43.12	PK	74	30.88	9.46	28.95	4.71	0.00
2492.00	--	AV	54	--	--	--	--	--
2500.00	41.82	PK	74	32.18	8.14	28.96	4.72	0.00
2500.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	91.72	PK	--	--	58.10	28.92	4.70	0.00
2480.00	84.71	AV	--	--	51.09	28.92	4.70	0.00
2483.50	46.95	PK	74	27.05	13.32	28.93	4.70	0.00
2483.50	--	AV	54	--	--	--	--	--
2492.00	44.93	PK	74	29.07	11.27	28.95	4.71	0.00
2492.00	--	AV	54	--	--	--	--	--
2500.00	41.40	PK	74	32.60	7.72	28.96	4.72	0.00
2500.00	--	AV	54	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

### 3.3. Maximum Conducted Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	-3.14	30.00	Pass
	19	-3.56		
	39	-3.47		

Note: 1.The test results including the cable lose.

### 3.4. Power Spectral Density

#### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq$  3 kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.


#### Test Configuration



#### Test Results

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
GFSK	00	-18.146	8.00	Pass
	19	-18.501		
	39	-19.252		

Test plot as follows:

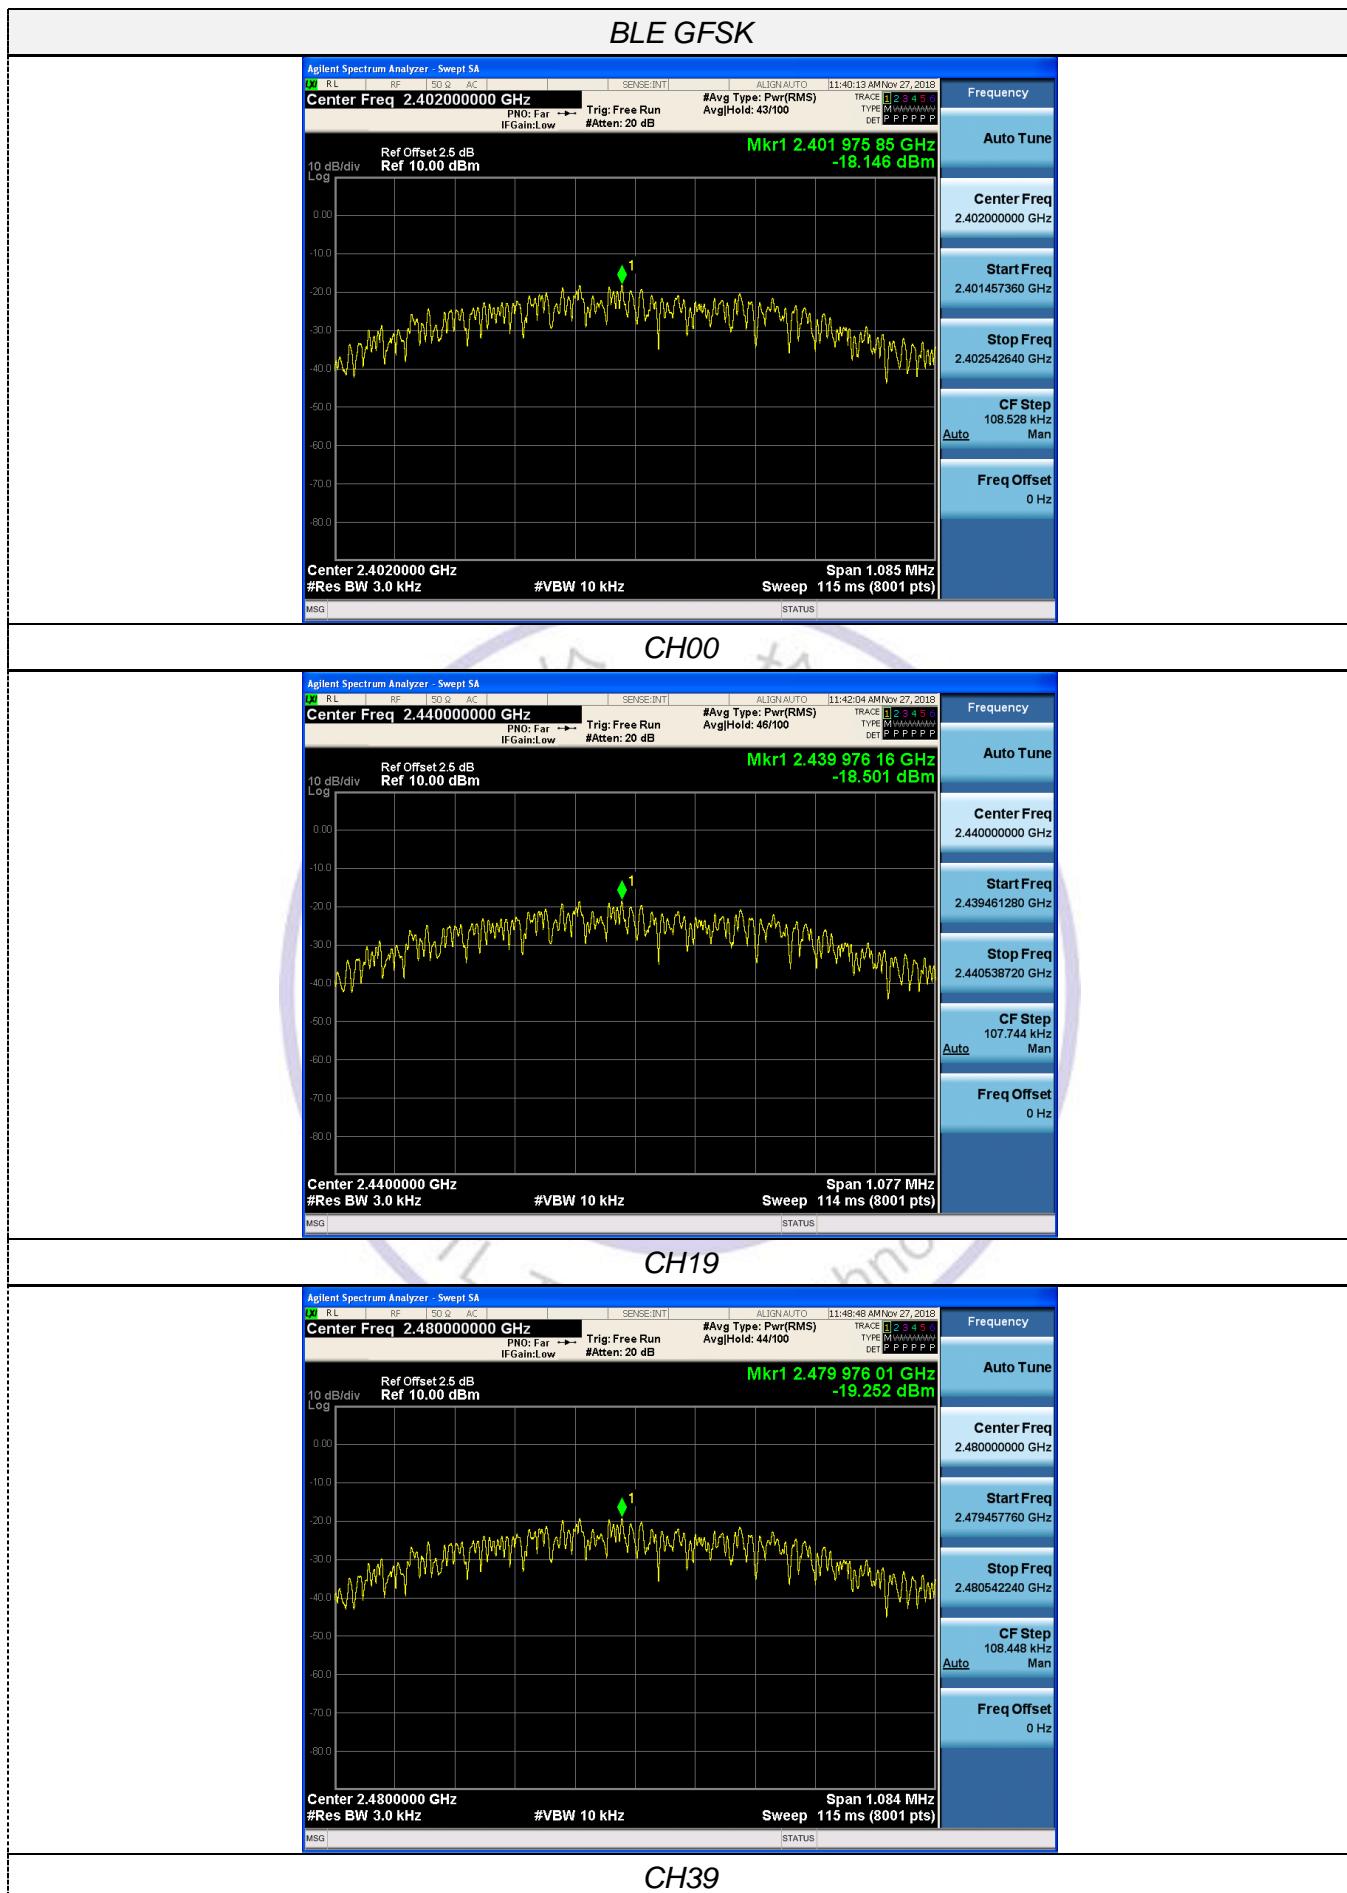

### 3.5. 6dB Bandwidth

#### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### Test Configuration



#### Test Results

Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
GFSK	00	0.6783	1.0226	≥500	Pass
	19	0.6734	1.0239		
	39	0.6778	1.0269		

Test plot as follows:

**BLE GFSK****CH00****CH19****CH39**

### 3.6. Out-of-band Emissions

#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.


#### Test Configuration




#### Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

Test plot as follows:

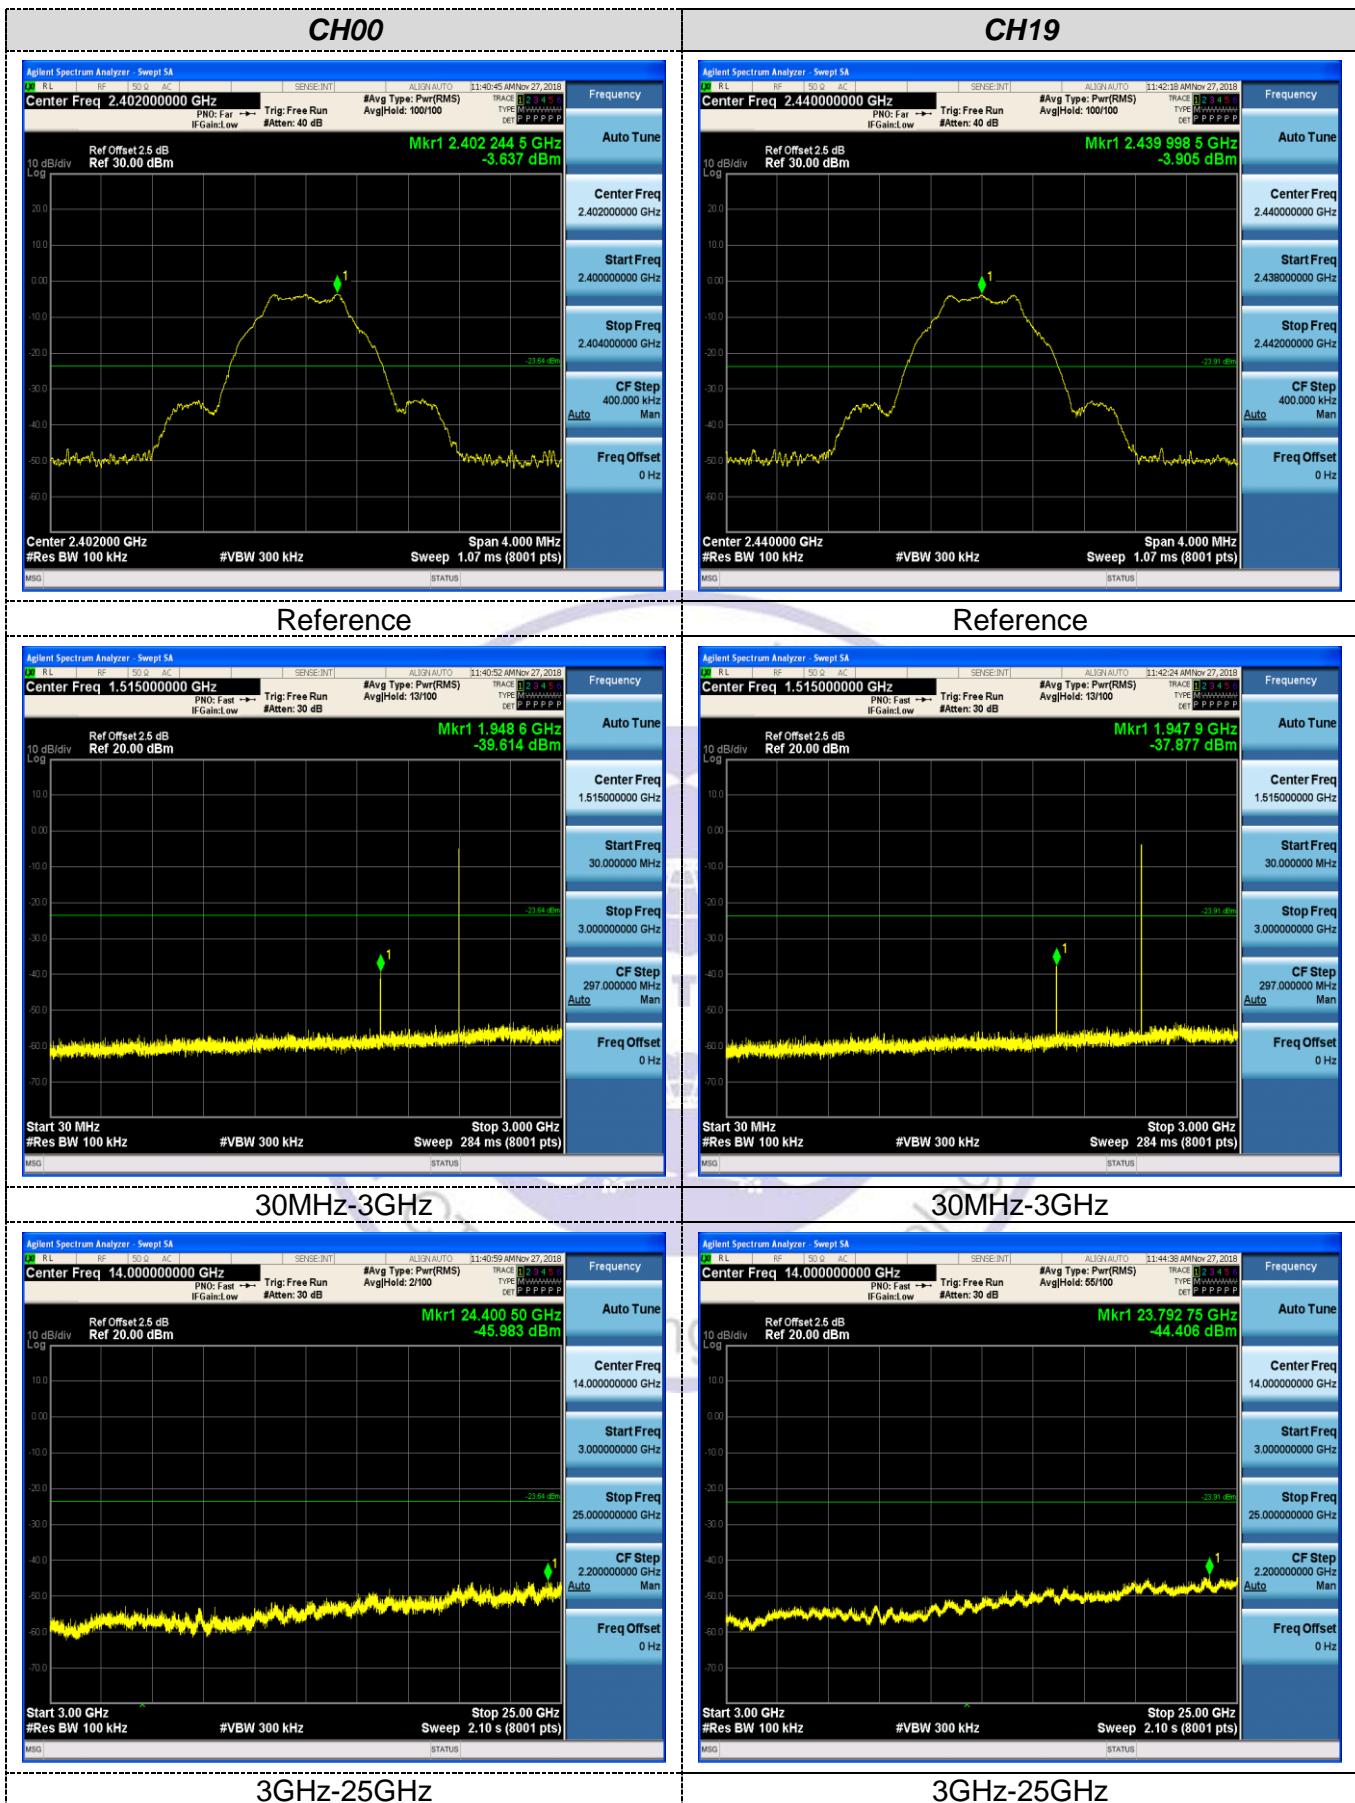

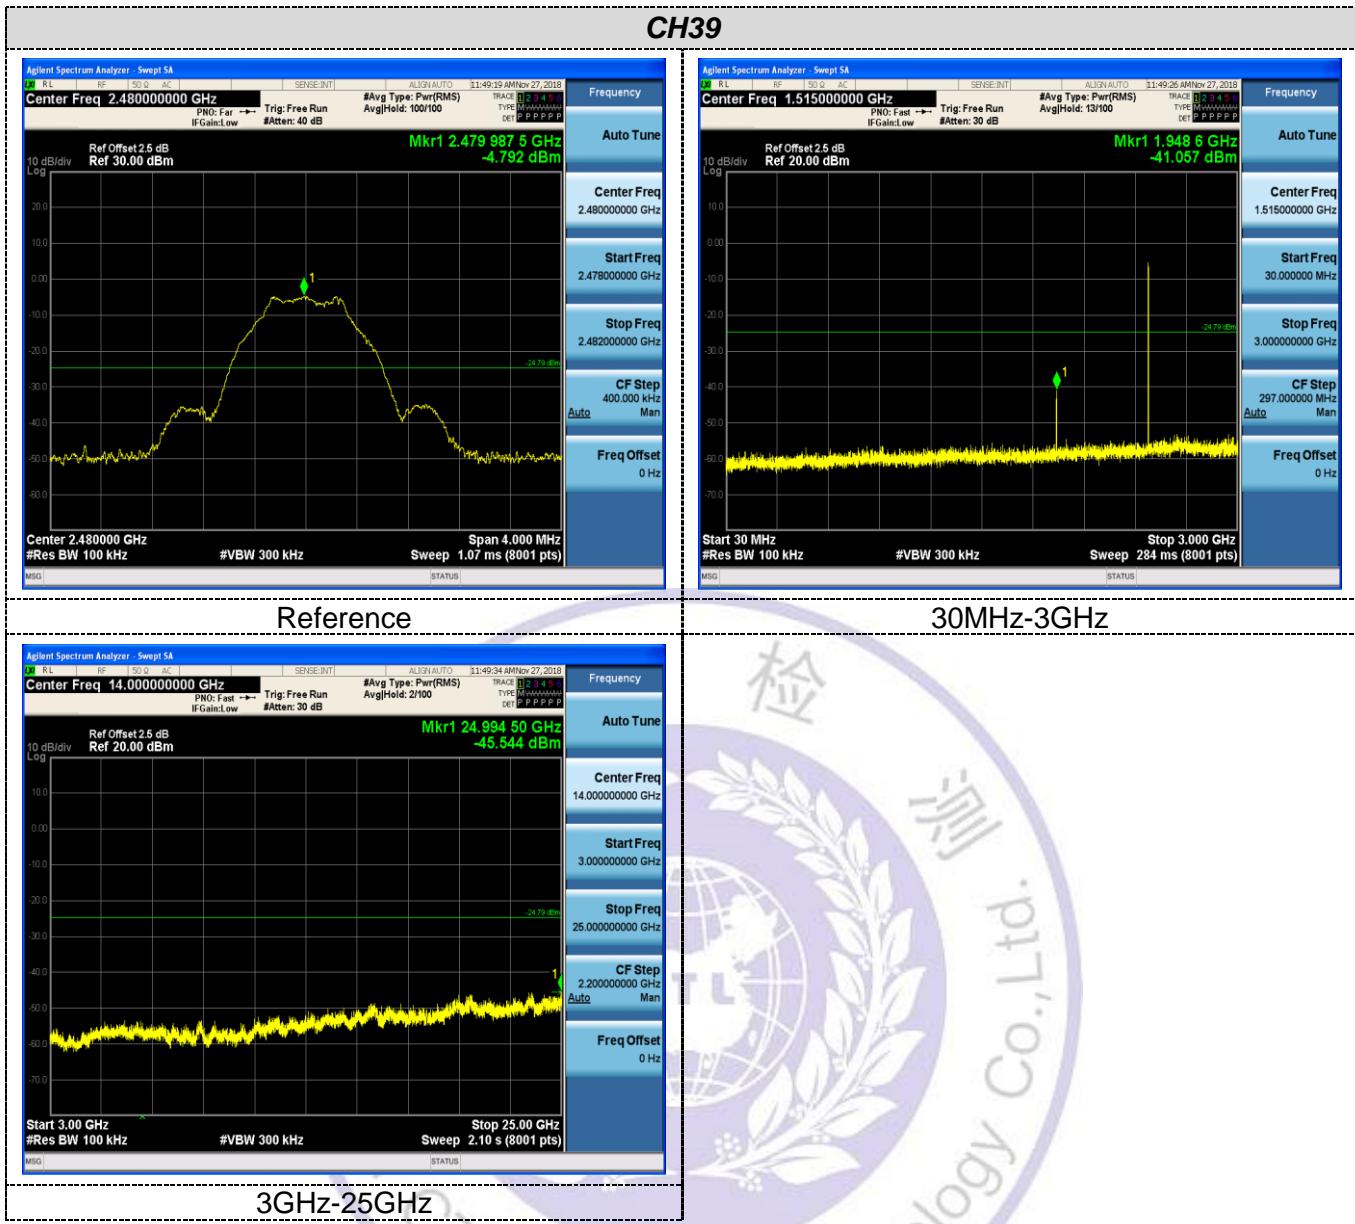

### Band-edge Measurements for RF Conducted Emissions:

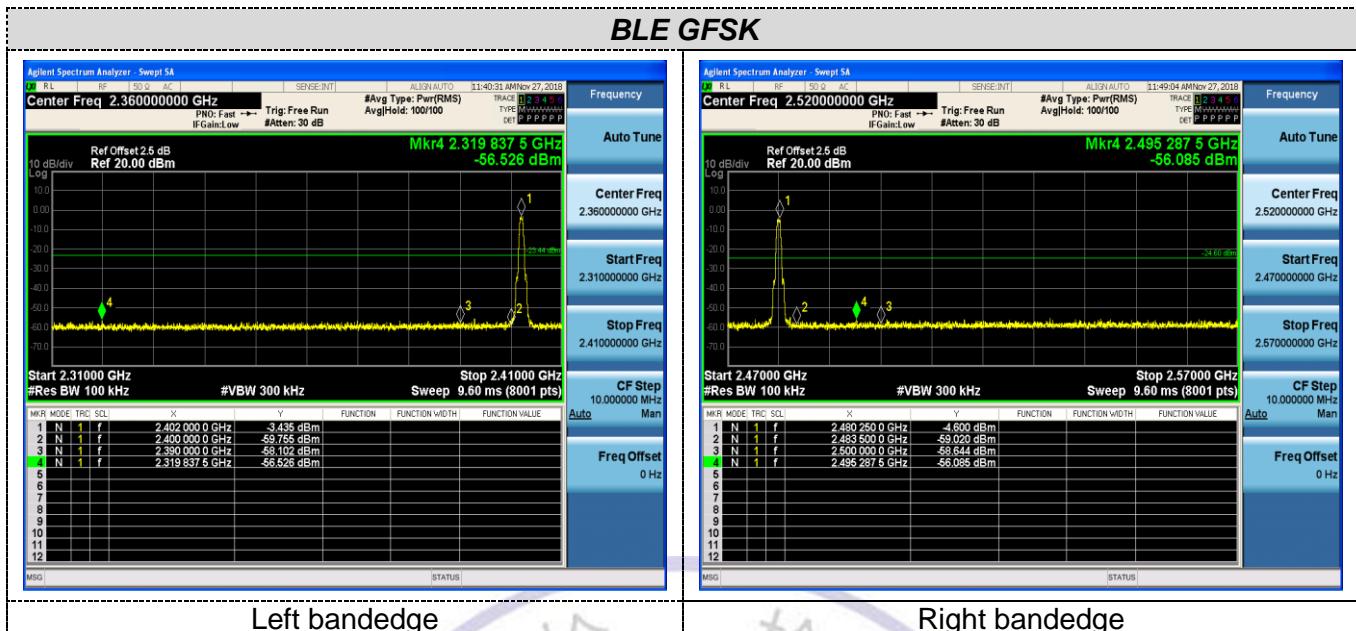

### 3.7. Antenna Requirement

#### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.



#### Test Result:

The maximum gain of antenna was 1.0dBi.

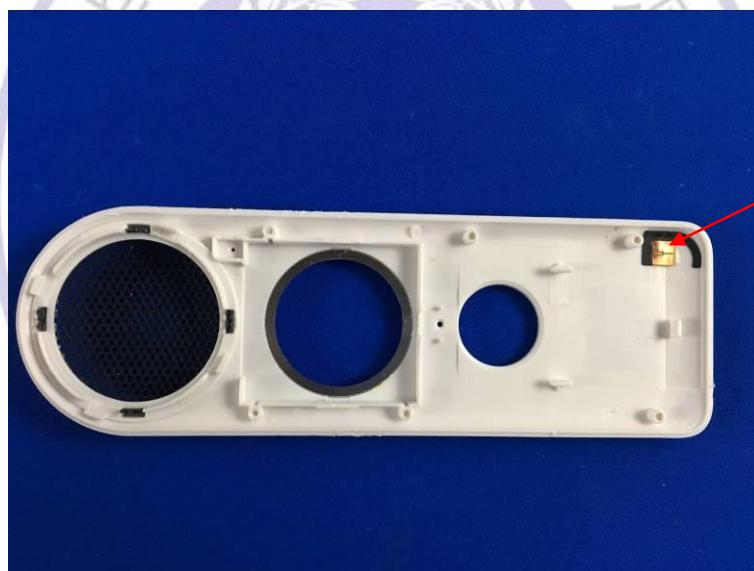

WIFI/BT  
Antenna

## 4. Test Setup Photos of the EUT

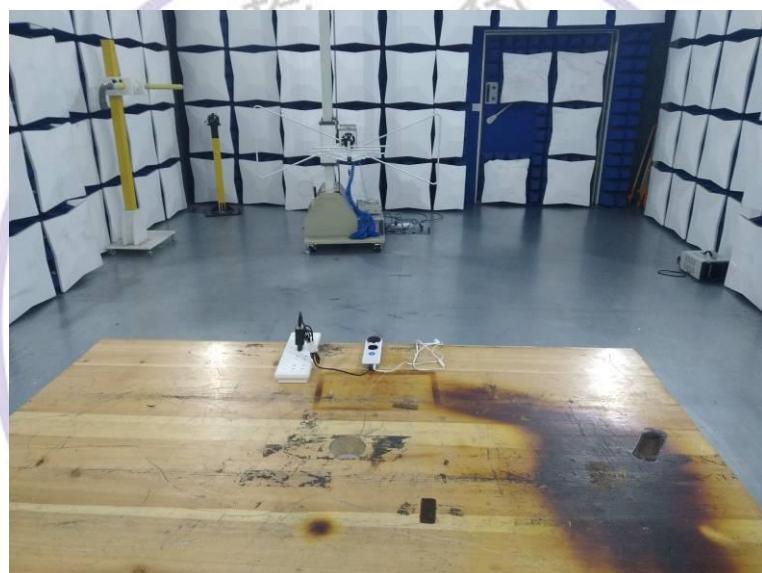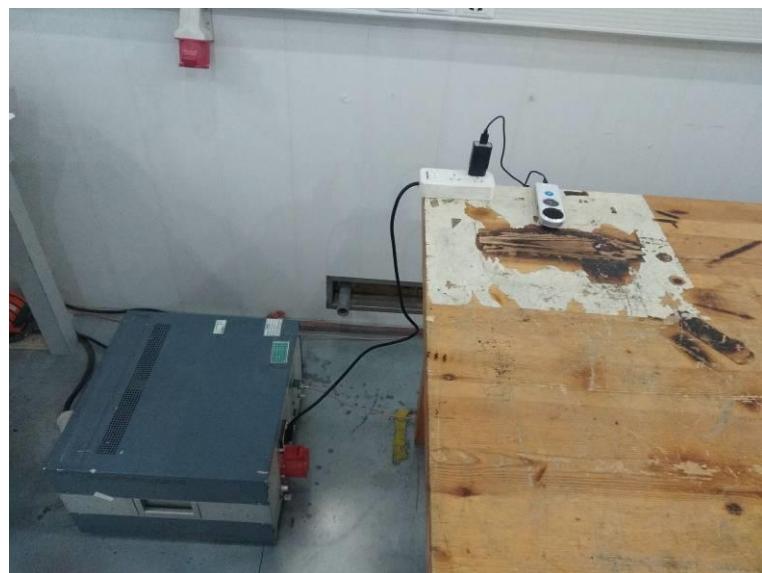

## 5. External and Internal Photos of the EUT

Reference to the test report No. CTL1810196061-WF01

\*\*\*\*\* End of Report \*\*\*\*\*

