

FCC REPORT

Applicant: SKY RICH STAR LIMITED

Address of Applicant: Unit E, 10/F, Worldwide Centre, 123 Tung Chau Street, Tai Kok Tsui Kowloon, Hong Kong, China

Manufacturer/Factory: Zhongshan Quaxin Lighting Electrical Co., Ltd.

Address of Manufacturer/Factory: Hong Ji Street, Shalang, Long Ping Cun, West District, ZHONGSHAN Guangdong 528411 CHINA

Equipment Under Test (EUT)

Product Name: LED Work Light

Model No.: A03SH061C-AL, A03SH061H-AL, A03SH06#*-* (Where "" is used to denote letters or blank for commercial purpose. Where "#" is used to denote numbers or blank for commercial purpose.)

Trade Mark: Honeywell

FCC ID: 2AP2LA03SH061C-AL

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: May 31, 2018

Date of Test: June 01-04, 2018

Date of report issued: June 04, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	June 04, 2018	Original

Prepared By:

Bill. Yuan

Date:

June 04, 2018

Project Engineer

Check By:

Andy. Wu

Date:

June 04, 2018

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION	7
5.6 ADDITIONAL INSTRUCTIONS.....	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 RADIATED EMISSION METHOD.....	14
7.3.1 <i>Field Strength of The Fundamental Signal</i>	16
7.3.2 <i>Spurious emissions</i>	17
7.3.3 <i>Bandedge emissions</i>	22
7.4 20dB OCCUPY BANDWIDTH.....	23
8 TEST SETUP PHOTO	25
9 EUT CONSTRUCTIONAL DETAILS	26

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	LED Work Light
Model No.:	A03SH061C-AL, A03SH061H-AL, A03SH06#*-** ((Where "*" is used to denote letters or blank for commercial purpose. Where "#" is used to denote numbers or blank for commercial purpose.))
Test Model No.:	A03SH061C-AL
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is model name for marketing requirement.</i>	
Serial No.:	P180400056
Test sample(s) ID:	GTS201805000233-1
Sample(s) Status	Engineered sample
Hardware Version:	HF2603_MAIN_R04
Software Version:	KSD2815_HF-2603_US281A_V1.21_20180530_FwV2.1
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	40
Channel separation:	2MHz
Modulation type:	GFSK
Antenna Type:	PCB antenna
Antenna gain:	0.5dBi(declare by applicant)
Power supply:	Adapter: Model:TK-AD-324 Input: AC 120V, 60Hz, 0.3A Output: DC 5V, 2000mA, 10W Battery: DC 3.7V, 2000mAh

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. Worse case Y axis is reported:

Axis	X	Y	Z
Field Strength(dBuV/m)	93.22	94.34	93.89

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102


Tel: 0755-27798480

Fax: 0755-27798960

5.6 Additional instructions

EUT Fixed Frequency Settings:

Power level setup			
Support Units	Description	Manufacturer	Model
	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500
Mode	Channel	Frequency (MHz)	Level Set
GFSK	CH01	2402	TX level : Maximum
	CH20	2440	
	CH40	2480	

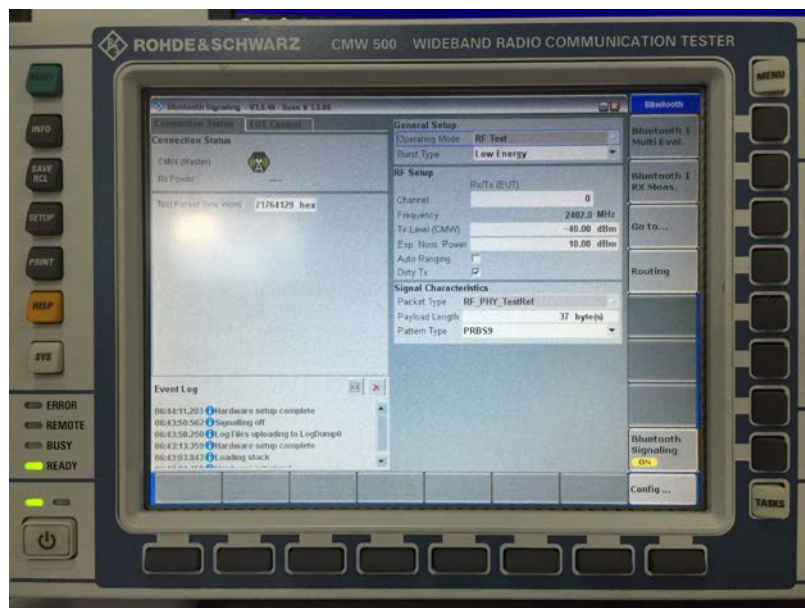

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	Zhinan	ZN30900A	GTS215	June. 28 2017	June. 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

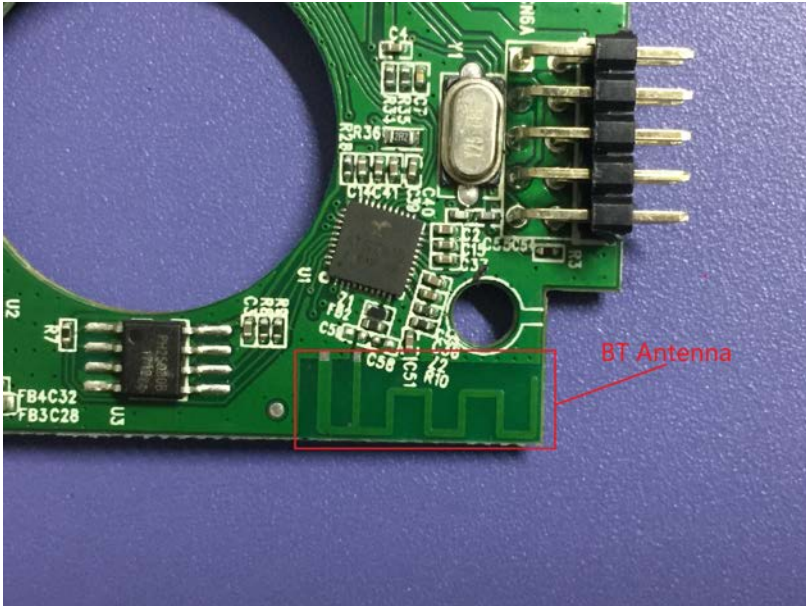
Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna: <p><i>The antenna is PCB antenna, the best case gain of the antenna is 0.5 dBi.</i></p>	
	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														


Measurement data

Line:

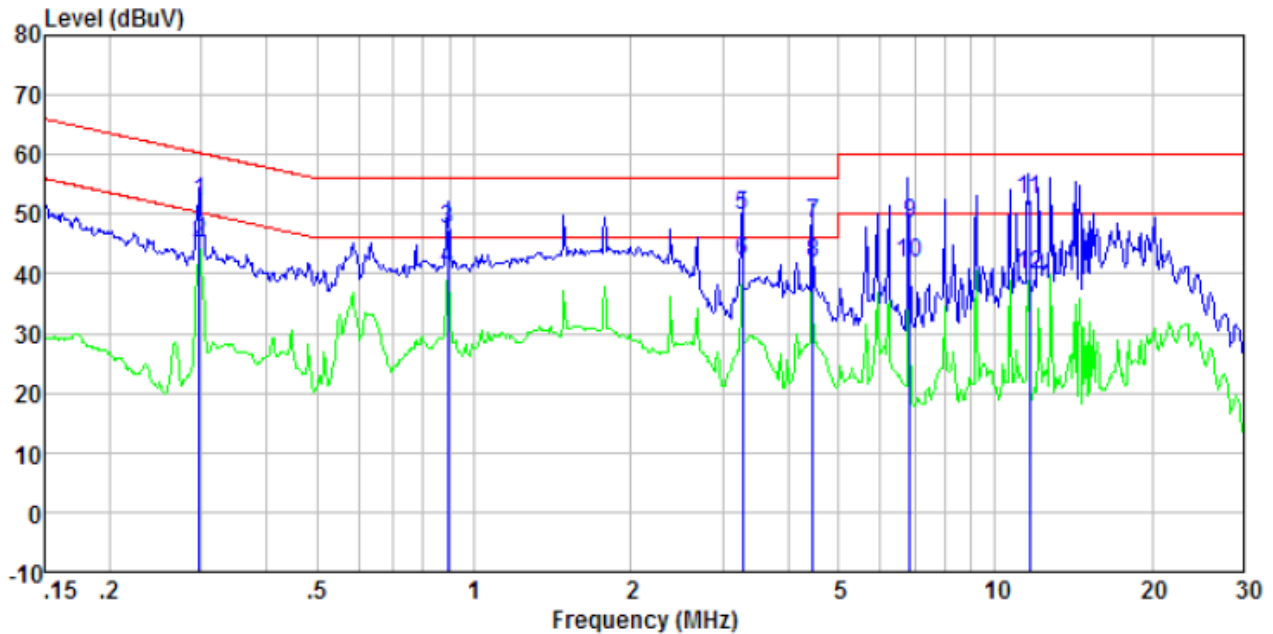

Freq MHz	Reading level dBUV	LISN/ISN factor dB/m	Cable loss dB	Level dBUV	Limit level dBUV	Over limit dB	Remark
0.30	51.46	0.40	0.10	51.96	60.32	-8.36	QP
0.30	44.71	0.40	0.10	45.21	50.32	-5.11	Average
0.89	47.26	0.22	0.14	47.62	56.00	-8.38	QP
0.89	40.49	0.22	0.14	40.85	46.00	-5.15	Average
3.28	49.44	0.20	0.19	49.83	56.00	-6.17	QP
3.28	41.87	0.20	0.19	42.26	46.00	-3.74	Average
4.47	47.95	0.20	0.17	48.32	56.00	-7.68	QP
4.47	41.50	0.20	0.17	41.87	46.00	-4.13	Average
6.86	47.92	0.20	0.18	48.30	60.00	-11.70	QP
6.86	41.28	0.20	0.18	41.66	50.00	-8.34	Average
11.62	51.92	0.20	0.20	52.32	60.00	-7.68	QP
11.62	39.49	0.20	0.20	39.89	50.00	-10.11	Average

Neutral:

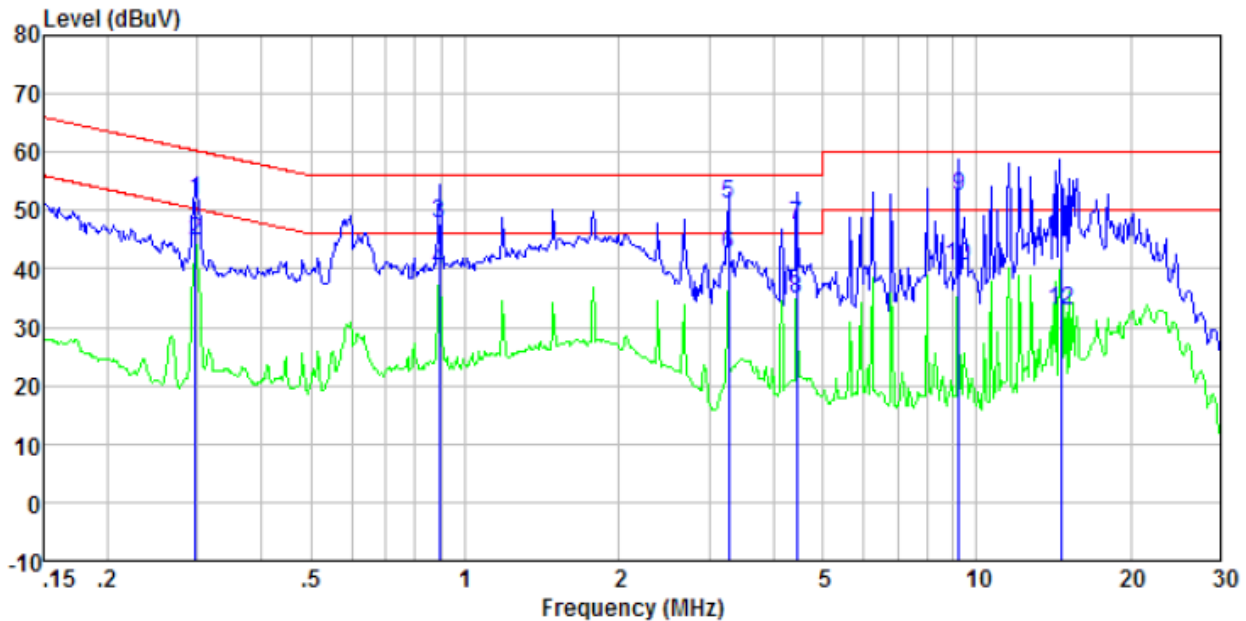



Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.30	51.18	0.40	0.10	51.68	60.32	-8.64	QP
0.30	44.42	0.40	0.10	44.92	50.32	-5.40	Average
0.89	47.28	0.22	0.14	47.64	56.00	-8.36	QP
0.89	39.34	0.22	0.14	39.70	46.00	-6.30	Average
3.28	50.69	0.20	0.19	51.08	56.00	-4.92	QP
3.28	42.19	0.20	0.19	42.58	46.00	-3.42	Average
4.45	47.10	0.20	0.17	47.47	56.00	-8.53	QP
4.45	34.59	0.20	0.17	34.96	46.00	-11.04	Average
9.23	52.11	0.20	0.20	52.51	60.00	-7.49	QP
9.23	40.20	0.20	0.20	40.60	50.00	-9.40	Average
14.60	43.84	0.20	0.21	44.25	60.00	-15.75	QP
14.60	32.35	0.20	0.21	32.76	50.00	-17.24	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

7.3 Radiated Emission Method

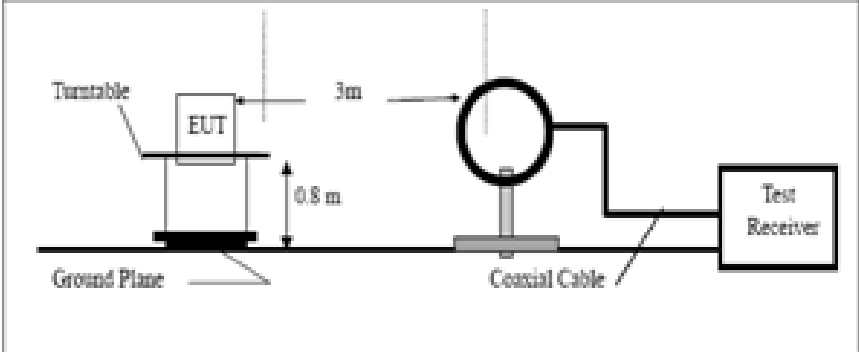Test Requirement:	FCC Part15 C Section 15.209																				
Test Method:	ANSI C63.10:2013																				
Test Frequency Range:	9kHz to 25GHz																				
Test site:	Measurement Distance: 3m																				
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																	
Above 1GHz	Peak	1MHz	3MHz	Peak Value																	
	Peak	1MHz	10Hz	Average Value																	
Limit: (Field strength of the fundamental signal)	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>2400MHz-2483.5MHz</td> <td>94.00</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Limit (dBuV/m @3m)	Remark	2400MHz-2483.5MHz	94.00	Average Value														
Frequency	Limit (dBuV/m @3m)	Remark																			
2400MHz-2483.5MHz	94.00	Average Value																			
Limit: (Spurious Emissions)	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (uV/m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>100 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>150 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>200 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>500 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>500 @3m</td> <td>Average Value</td> </tr> <tr> <td>5000 @3m</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (uV/m)	Remark	30MHz-88MHz	100 @3m	Quasi-peak Value	88MHz-216MHz	150 @3m	Quasi-peak Value	216MHz-960MHz	200 @3m	Quasi-peak Value	960MHz-1GHz	500 @3m	Quasi-peak Value	Above 1GHz	500 @3m	Average Value	5000 @3m	Peak Value
Frequency	Limit (uV/m)	Remark																			
30MHz-88MHz	100 @3m	Quasi-peak Value																			
88MHz-216MHz	150 @3m	Quasi-peak Value																			
216MHz-960MHz	200 @3m	Quasi-peak Value																			
960MHz-1GHz	500 @3m	Quasi-peak Value																			
Above 1GHz	500 @3m	Average Value																			
	5000 @3m	Peak Value																			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.																				
Test setup:	<p>Below 1GHz</p> 																				

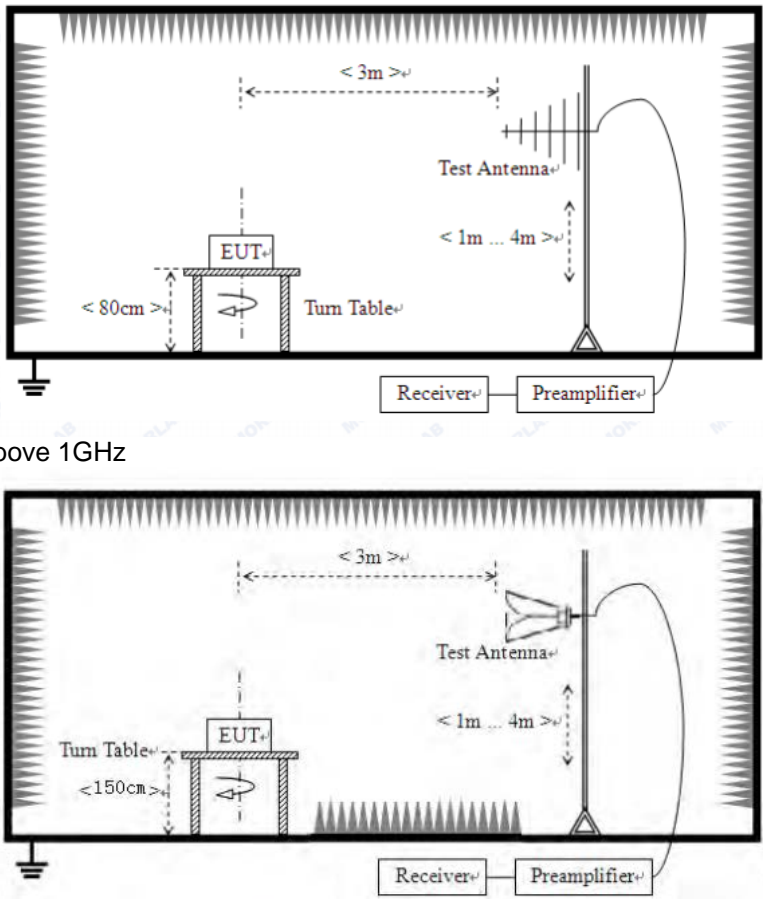	 <p>Above 1GHz</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	90.26	27.58	5.39	30.18	93.05	114.00	-20.95	Vertical
2402.00	87.98	27.58	5.39	30.18	90.77	114.00	-23.23	Horizontal
2440.00	88.74	27.55	5.43	30.06	91.66	114.00	-22.34	Vertical
2440.00	87.02	27.55	5.43	30.06	89.94	114.00	-24.06	Horizontal
2480.00	91.28	27.52	5.47	29.93	94.34	114.00	-19.66	Vertical
2480.00	88.36	27.52	5.47	29.93	91.42	114.00	-22.58	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	76.24	27.58	5.39	30.18	79.03	94.00	-14.97	Vertical
2402.00	74.53	27.58	5.39	30.18	77.32	94.00	-16.68	Horizontal
2440.00	74.82	27.55	5.43	30.06	77.74	94.00	-16.26	Vertical
2440.00	72.15	27.55	5.43	30.06	75.07	94.00	-18.93	Horizontal
2480.00	76.86	27.52	5.47	29.93	79.92	94.00	-14.08	Vertical
2480.00	74.57	27.52	5.47	29.93	77.63	94.00	-16.37	Horizontal

Note: For fundamental frequency RBW 3MHz VBW 3MHz peak detector is for PK value , RMS detector is for AV value


7.3.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

Horizontal:

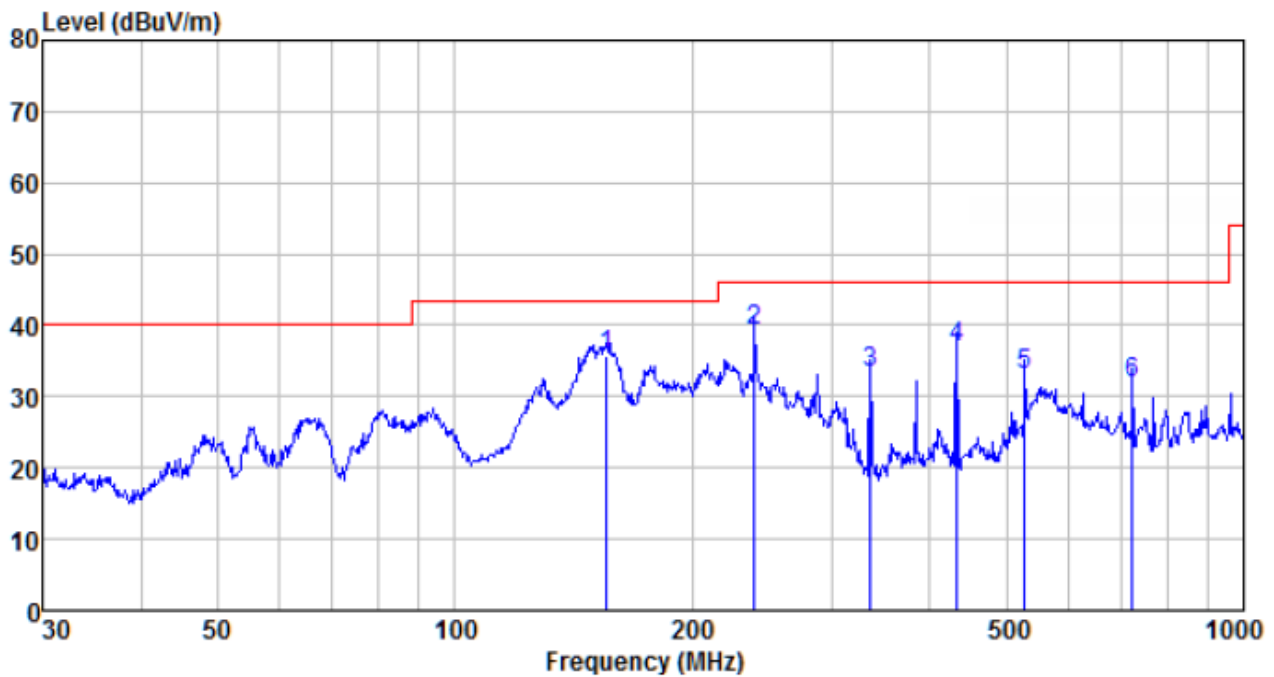

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
155.910	63.07	8.05	1.60	37.11	35.61	43.50	-7.89	QP
239.987	62.77	11.85	2.07	37.37	39.32	46.00	-6.68	QP
336.035	53.83	14.29	2.55	37.46	33.21	46.00	-12.79	QP
432.546	55.39	15.99	3.01	37.52	36.87	46.00	-9.13	QP
528.246	49.31	17.96	3.43	37.52	33.18	46.00	-12.82	QP
721.726	45.24	20.03	4.17	37.63	31.81	46.00	-14.19	QP

Vertical:

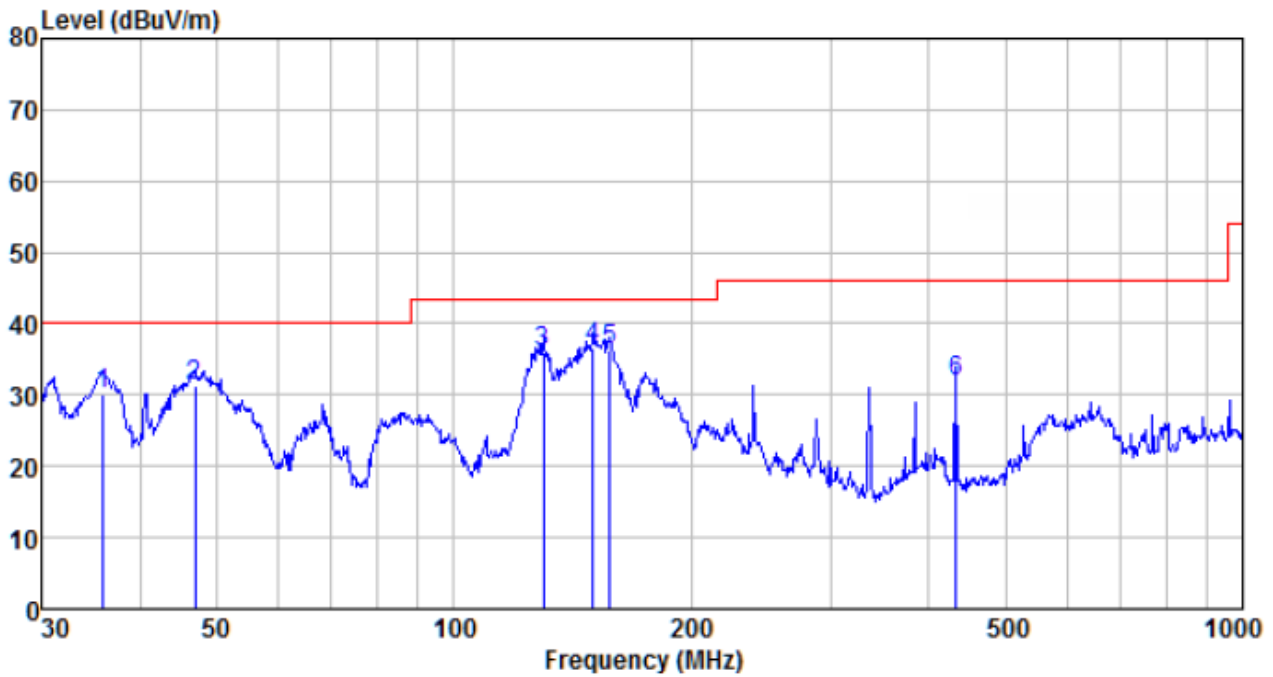

Freq MHz	Reading level dBUV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBUV	Limit level dBUV/m	Over limit dB	Remark
35.875	53.46	11.49	0.62	35.41	30.16	40.00	-9.84	QP
46.995	54.44	12.27	0.74	36.04	31.41	40.00	-8.59	QP
129.923	63.30	8.20	1.44	36.95	35.99	43.50	-7.51	QP
150.011	64.52	7.65	1.57	37.08	36.66	43.50	-6.84	QP
157.559	63.52	8.15	1.62	37.12	36.17	43.50	-7.33	QP
432.546	50.32	15.99	3.01	37.52	31.80	46.00	-14.20	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	37.42	31.78	8.60	32.09	45.71	74.00	-28.29	Vertical
7206.00	31.91	36.15	11.65	32.00	47.71	74.00	-26.29	Vertical
9608.00	31.54	37.95	14.14	31.62	52.01	74.00	-21.99	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	41.73	31.78	8.60	32.09	50.02	74.00	-23.98	Horizontal
7206.00	33.67	36.15	11.65	32.00	49.47	74.00	-24.53	Horizontal
9608.00	30.97	37.95	14.14	31.62	51.44	74.00	-22.56	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.22	31.78	8.60	32.09	34.51	54.00	-19.49	Vertical
7206.00	20.58	36.15	11.65	32.00	36.38	54.00	-17.62	Vertical
9608.00	19.65	37.95	14.14	31.62	40.12	54.00	-13.88	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.46	31.78	8.60	32.09	38.75	54.00	-15.25	Horizontal
7206.00	22.76	36.15	11.65	32.00	38.56	54.00	-15.44	Horizontal
9608.00	19.39	37.95	14.14	31.62	39.86	54.00	-14.14	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	37.29	31.85	8.67	32.12	45.69	74.00	-28.31	Vertical
7320.00	31.82	36.37	11.72	31.89	48.02	74.00	-25.98	Vertical
9760.00	31.46	38.35	14.25	31.62	52.44	74.00	-21.56	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	41.58	31.85	8.67	32.12	49.98	74.00	-24.02	Horizontal
7320.00	33.58	36.37	11.72	31.89	49.78	74.00	-24.22	Horizontal
9760.00	30.88	38.35	14.25	31.62	51.86	74.00	-22.14	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	26.12	31.85	8.67	32.12	34.52	54.00	-19.48	Vertical
7320.00	20.52	36.37	11.72	31.89	36.72	54.00	-17.28	Vertical
9760.00	19.60	38.35	14.25	31.62	40.58	54.00	-13.42	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	30.35	31.85	8.67	32.12	38.75	54.00	-15.25	Horizontal
7320.00	22.69	36.37	11.72	31.89	38.89	54.00	-15.11	Horizontal
9760.00	19.33	38.35	14.25	31.62	40.31	54.00	-13.69	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”*, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	36.98	31.93	8.73	32.16	45.48	74.00	-28.52	Vertical
7440.00	31.61	36.59	11.79	31.78	48.21	74.00	-25.79	Vertical
9920.00	31.27	38.81	14.38	31.88	52.58	74.00	-21.42	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	41.19	31.93	8.73	32.16	49.69	74.00	-24.31	Horizontal
7440.00	33.34	36.59	11.79	31.78	49.94	74.00	-24.06	Horizontal
9920.00	30.67	38.81	14.38	31.88	51.98	74.00	-22.02	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	25.93	31.93	8.73	32.16	34.43	54.00	-19.57	Vertical
7440.00	20.39	36.59	11.79	31.78	36.99	54.00	-17.01	Vertical
9920.00	19.48	38.81	14.38	31.88	40.79	54.00	-13.21	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	30.13	31.93	8.73	32.16	38.63	54.00	-15.37	Horizontal
7440.00	22.55	36.59	11.79	31.78	39.15	54.00	-14.85	Horizontal
9920.00	19.19	38.81	14.38	31.88	40.50	54.00	-13.50	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”, means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	39.50	27.59	5.38	30.18	42.29	74.00	-31.71	Horizontal
2400.00	55.81	27.58	5.39	30.18	58.60	74.00	-15.40	Horizontal
2390.00	39.73	27.59	5.38	30.18	42.52	74.00	-31.48	Vertical
2400.00	57.49	27.58	5.39	30.18	60.28	74.00	-13.72	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	30.82	27.59	5.38	30.18	33.61	54.00	-20.39	Horizontal
2400.00	41.85	27.58	5.39	30.18	44.64	54.00	-9.36	Horizontal
2390.00	30.52	27.59	5.38	30.18	33.31	54.00	-20.69	Vertical
2400.00	43.18	27.58	5.39	30.18	45.97	54.00	-8.03	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.21	27.53	5.47	29.93	44.28	74.00	-29.72	Horizontal
2500.00	41.02	27.55	5.49	29.93	44.13	74.00	-29.87	Horizontal
2483.50	41.49	27.53	5.47	29.93	44.56	74.00	-29.44	Vertical
2500.00	41.70	27.55	5.49	29.93	44.81	74.00	-29.19	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.61	27.53	5.47	29.93	36.68	54.00	-17.32	Horizontal
2500.00	32.09	27.55	5.49	29.93	35.20	54.00	-18.80	Horizontal
2483.50	34.54	27.53	5.47	29.93	37.61	54.00	-16.39	Vertical
2500.00	31.73	27.55	5.49	29.93	34.84	54.00	-19.16	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor


7.4 20dB Occupy Bandwidth

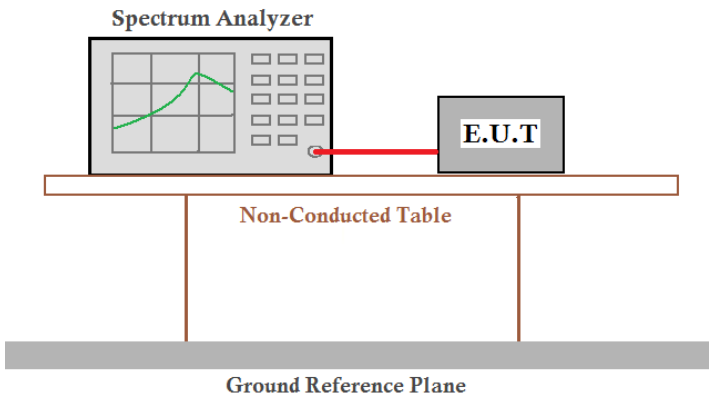Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	1.232	Pass
Middle	1.237	Pass
Highest	1.229	Pass


Test plot as follows:

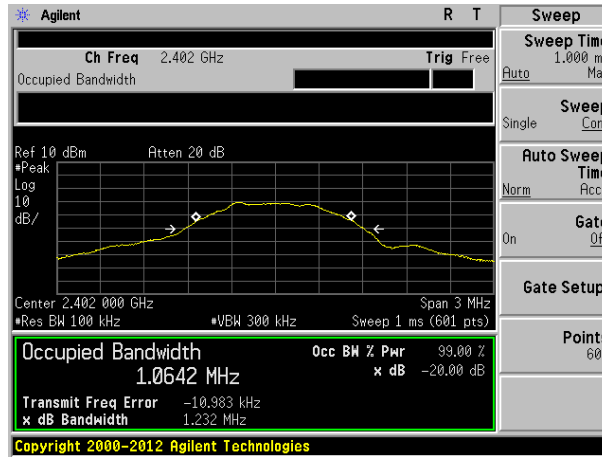

Lowest channel

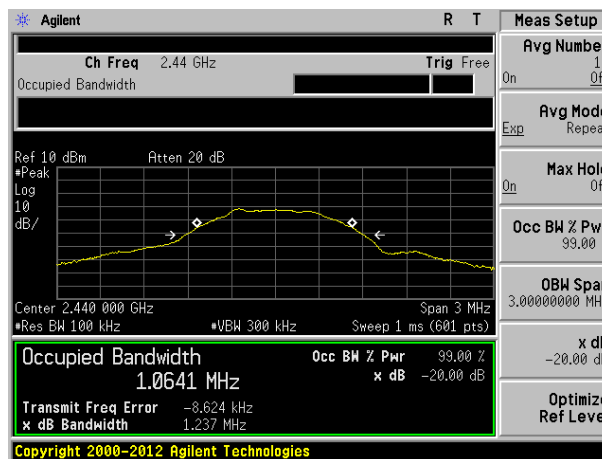



Middle channel

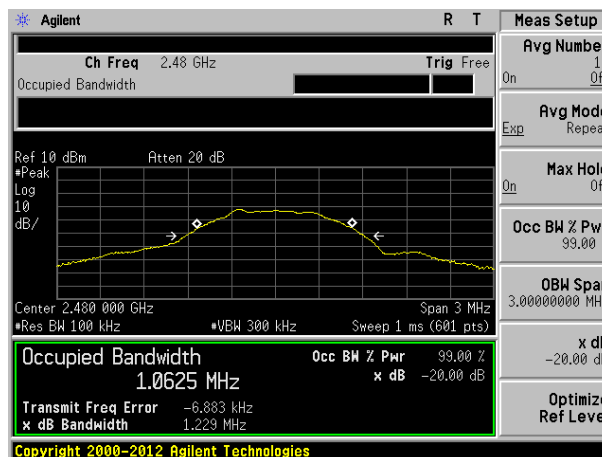


Highest channel

8 Test Setup Photo

Radiated Emission

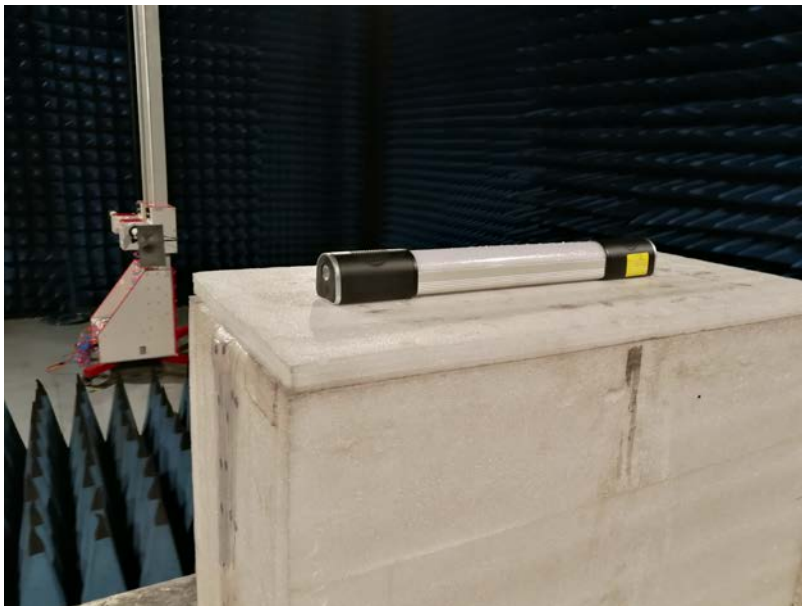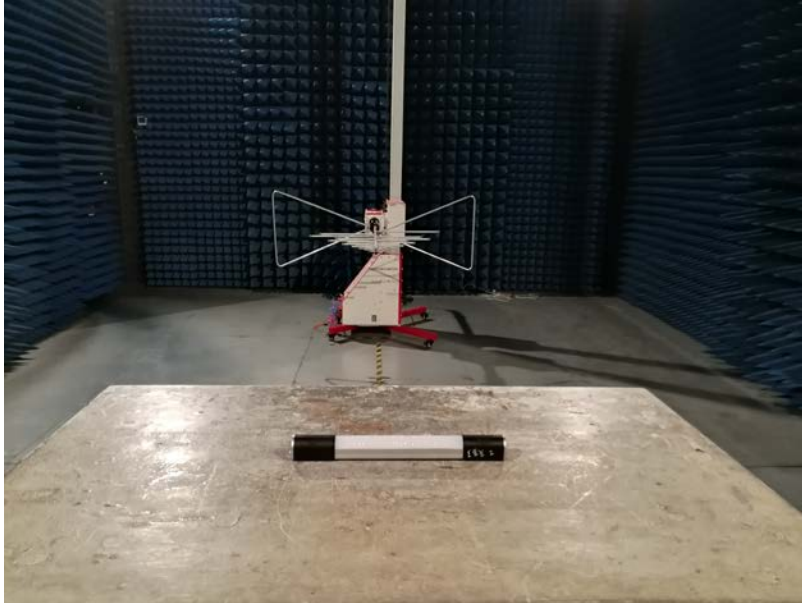

Conducted Emission

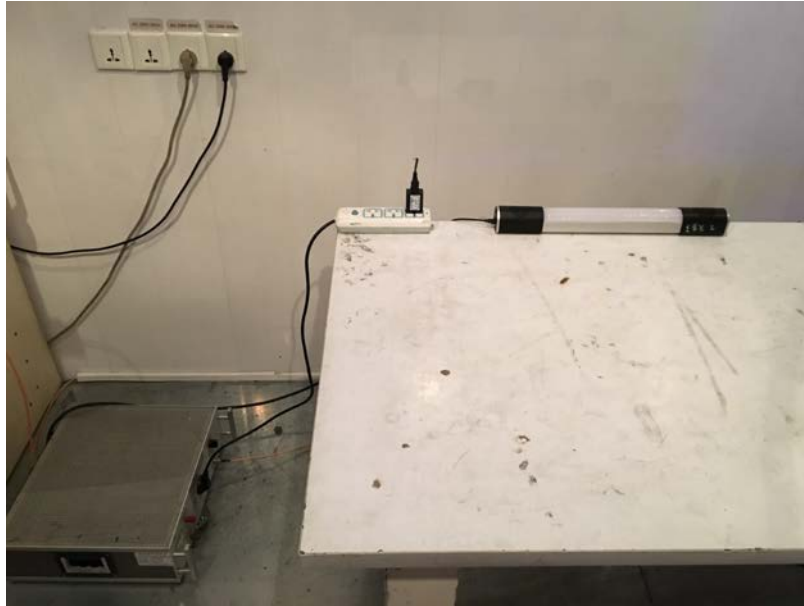

9 EUT Constructional Details

Reference to the test report No. : GTS201805000233F01

-----End-----