

各 尸: CUSTOMER:	Shenzhen Yostand Technology Co., Ltd.	
客戶料號: CUST P/N:	10.0110.1207	
松 岛 料 號: FINE P/N:	手表发射线圈 6.8UH 0.08*24P*11TS	
産 品 型 號: DESC:		
日 期: DATE:	2021/08/18	
版 本: Version:	A.0	

擬制	審核	批准	客戶承認
PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
黄燕铭	宁元安	黄锦华	

TEL: 0755-36820766

FAX: 0755-84526500

E-mail: aming198204@163.com



# 版本變更履歷

### **Version Change History**


版本	變 更 前	變 更 後	更改日期	批 准
Rev.	Before Change	After Change	Change Date	Approved By
A.0	New issue		2018/03/09	黄锦华



## **SPECIFICATION**

産品型號:	苹果发射线圈 15*21.5-6.8UH	版本	客戶 CUST:	XXX
DESC		Rev: A.0	客户料号 CUST P/N:	

#### 一、尺寸 DIMENSION:(mm)

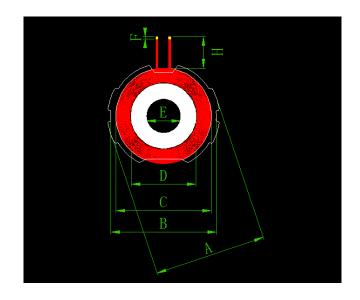

5 CUST P/IN.	
A	25±1
В	23.6±0.5
C	$21.5 \pm 0.5$
D	$14.5 \pm 0.3$
Е	$7.7 \pm 0.05$
F	3±2
Н	20±2

#### 二、原理图 SCHEMATIC DIAGRAM:



#### Remark:

- 1.Cross outgoing line;
- 2.Wrap mm (ref) wide high-temperature adhesive tape Ts around the outlet position;
- 3. The coil is attached to a circular hard magnetic sheet with notches at both ends. The magnetic sheet size is  $25 \pm 1$ mm, the inner hole is 7.7mm, and the thickness is  $2.8 \pm 0.2$ mm

#### 三、绕线参数 Winding Specification:

序号	端	子	线径	圈数	绕线方向
NO.	TERM	INAL	WIRE	Turns	Winding Direction
1	S	F	漆包线 0.08*24P	11Ts	CCW

#### 四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号	项目	端子	标准	测试条件	测试仪器
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	3.1uH ±20%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8 uH ±20%单独线圈	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤110mΩ	100KHz/1.0V	LCZ METER 502B
4	Q	S-F	€32	100KHz/1.0V	LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
黄燕铭 2021/08/18	黄锦华 2021/08/18