

Shaoxing Prolux Lighting Co.,Ltd

TEST REPORT

SCOPE OF WORK

SAR Assessment– PL-0182

REPORT NUMBER

190704047SZN-002

ISSUE DATE

8 August 2019

[REVISED DATE]

[-----]

PAGES

4

DOCUMENT CONTROL NUMBER

RF Exposure

© 2017 INTERTEK



Test Report

Applicant : Shaoxing Prolux Lighting Co.,Ltd
Ludong Industrial Zone, BaiGuan Street, ShangYu District,
Shaoxing City, Zhejiang Province, China

Sample Description

Product : Wireless Charging LED Makeup Mirror
Model No. : PL-0182
Brand Name : N/A
Electrical Rating : Input: DC 13V, 1.8A from adapter
Output: DC5V, 1A by wireless charger
Output: DC5V, 2.1A by USB port

Date Received : 4 July 2019
Date Test Conducted : 4 July 2019 to 5 August 2019

Test Requested : Test for compliance with CFR 47 part 1
Test Method : Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310

Test Result : Pass
Conclusion : When determining of test conclusion, measurement uncertainty of tests have been considered.

***** End of Page *****

Prepared and Checked By:

Approved By:

Jeff Liang
Engineer

Kidd Yang
Technical Supervisor
Date: 8 August 2019


This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

Test Report

Test Setup Configuration

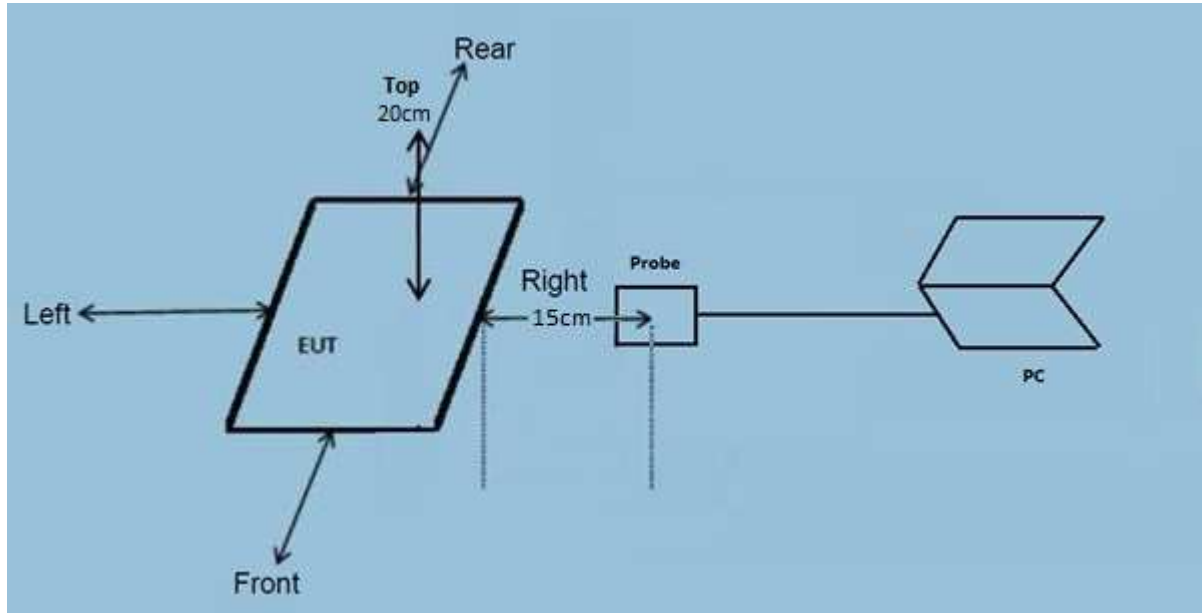

Note

- The RF exposure test is performed in the shield room.
- The test distance is between the edge of the charger and the geometric centre of probe.

Test Equipment List

Name of instrument	Model	Manufacturer	Cal. Date	Due Date
Exposure Level Tester	EHP-50F	Narda	01-Apr-2019	01-Apr-2020

Reference Limit:

Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation.

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3 – 1.34	614	1.63	(100) *	30

Note: * = Plane wave equivalent power density

Test Result:

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.110-0.205	1% Battery Level	0.0228	0.0785	0.0699	0.0614	0.0355	1.63
0.110-0.205	50% Battery Level	0.0223	0.0778	0.0687	0.0608	0.0349	1.63
0.110-0.205	99% Battery Level	0.0224	0.0780	0.0689	0.0611	0.0352	1.63
0.110-0.205	Stand-by	0.0023	0.0024	0.023	0.024	0.024	1.63

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.110-0.205	1% Battery Level	0.4918	0.3378	0.5331	0.3566	0.2048	614
0.110-0.205	50% Battery Level	0.4901	0.3369	0.5324	0.3551	0.2037	614
0.110-0.205	99% Battery Level	0.4911	0.3371	0.5328	0.3560	0.2042	614
0.110-0.205	Stand-by	0.0372	0.0328	0.0592	0.0343	0.0306	614

Configuration photo of the test:

For electronic filing, H-Field & E-Field Strength configuration photographs are saved with filename: H-Field & E-Field Strength test setup photos.pdf.

***** End of Report*****