

TEST REPORT

Reference No..... : WTN23X02025033W001
FCC ID : 2AP2V-DESKLAMP13
Applicant : Shaoxing Prolux Lighting Co.,Ltd
Address..... : Ludong Industrial Zone,BaiGuan Street,ShangYu District, Shaoxing
City,Zhejiang Province,China
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : LED DESK LAMP WITH WIRELESS CHARGING
Model No..... : PL-0360QU
Standards : FCC Part 15C
Date of Receipt sample : 2023-02-20
Date of Test..... : 2023-02-20 to 2023-03-30
Date of Issue : 2023-03-30
Test Report Form No. : WTX_Part 15CW
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION..... 4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
1.2 TEST STANDARDS 5
1.3 TEST METHODOLOGY 5
1.4 TEST FACILITY 5
1.5 EUT SETUP AND OPERATION MODE 6
1.6 MEASUREMENT UNCERTAINTY 7
1.7 TEST EQUIPMENT LIST AND DETAILS 8

2. SUMMARY OF TEST RESULTS 9

3. RF EXPOSURE 10
3.1 STANDARD APPLICABLE..... 10
3.2 TEST RESULT..... 10

4. ANTENNA REQUIREMENT 11
4.1 STANDARD APPLICABLE..... 11
4.2 EVALUATION INFORMATION 11

5. CONDUCTED EMISSIONS..... 12
5.1 TEST PROCEDURE 12
5.2 BASIC TEST SETUP BLOCK DIAGRAM 12
5.3 ENVIRONMENTAL CONDITIONS 12
5.4 TEST RECEIVER SETUP 13
5.5 SUMMARY OF TEST RESULTS/PLOTS..... 13

6. FIELD STRENGTH OF SPURIOUS EMISSIONS 16
6.1 STANDARD APPLICABLE..... 16
6.2 TEST PROCEDURE 16
6.3 CORRECTED AMPLITUDE & MARGIN CALCULATION..... 17
6.4 ENVIRONMENTAL CONDITIONS 18
6. REFERENCE MEASUREMENT AT OPEN FIELD SITE 18
6.5 SUMMARY OF TEST RESULTS/PLOTS..... 18

7. 20DB EMISSION BANDWIDTH..... 22
7.1 STANDARD APPLICABLE..... 22
7.2 TEST PROCEDURE 22
7.3 ENVIRONMENTAL CONDITIONS 22
7.4 SUMMARY OF TEST RESULTS/PLOTS..... 22

APPENDIX PHOTOGRAPHS 24

Report version

Version No.	Date of issue	Description
Rev.00	2023-03-30	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	LED DESK LAMP WITH WIRELESS CHARGING
Trade Name:	/
Model No.:	PL-0360QU
Adding Model:	PL-0372QU
Software Version:	Version 06 2021.06.16
Hardware Version:	WTM-H005
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model PL-0360QU, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Frequency Range:	112~205KHz
Modulation Type:	/
Antenna Type:	Coil Antenna
Rated Voltage:	12.0V
Rated Current:	2A
Power adapter:	MODEL: RSS1006-240120-W2-J-P INPUT: AC 100-240V~ 50/60Hz 1.4A OUTPUT: DC 12.0V 2.0A OUTPUT POWER: 24.0W MAX
Rated Power:	5W Max

1.2 Test Standards

FCC Part 15 Subpart C: Intentional Radiators.

FCC Rules Part 15.207: Conducted limits.

FCC Rules Part 15.209: Radiated emission limits; general requirements.

FCC Rules Part 15.215: Additional provisions to the general radiated emission limitations.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless charging	Transmit	DC 12.0V

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Cable	1.90	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Smart phone	Apple	IPhone 12 Pro Max	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	±2.88dB
Transmitter Spurious Emissions	Radiated	±5.1dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-21	2023-03-20
Amplifier	HP	8447F	2805A03475	2022-12-30	2023-12-29
Amplifier	C&D	PAP-1G18	2002	2022-03-21	2023-03-20
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-21	2023-03-20
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-02-25	2024-02-24
Amplifier	HP	8447F	2805A03475	2023-02-25	2024-02-24
Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-22	2024-03-21
Amplifier	Agilent	8447D	2944A10179	2023-02-25	2024-02-24
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.207(a) Conducted Emission	Compliant
§15.209(a) Radiated Emission	Compliant
§15.215 20dB Emission Bandwidth	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a Coil antenna, fulfill the requirement of this section.


5. Conducted Emissions

5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

5.2 Basic Test Setup Block Diagram

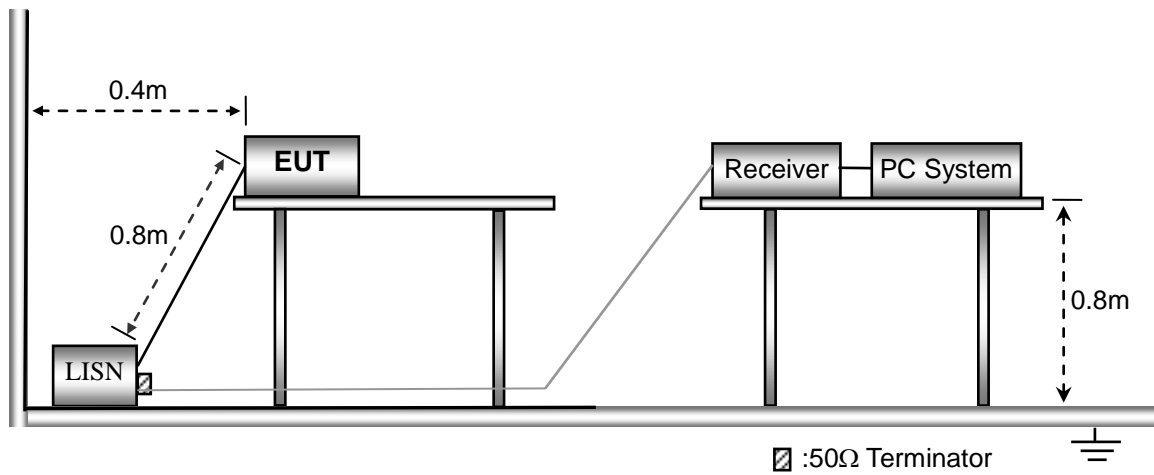

5.3 Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	54%
ATM Pressure:	1012 mbar


5.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth..... 9 kHz
Quasi-Peak Adapter Mode Normal


5.5 Summary of Test Results/Plots

Test Mode	TM1	AC120V 60Hz	Polarity:	Neutral
-----------	-----	-------------	-----------	---------

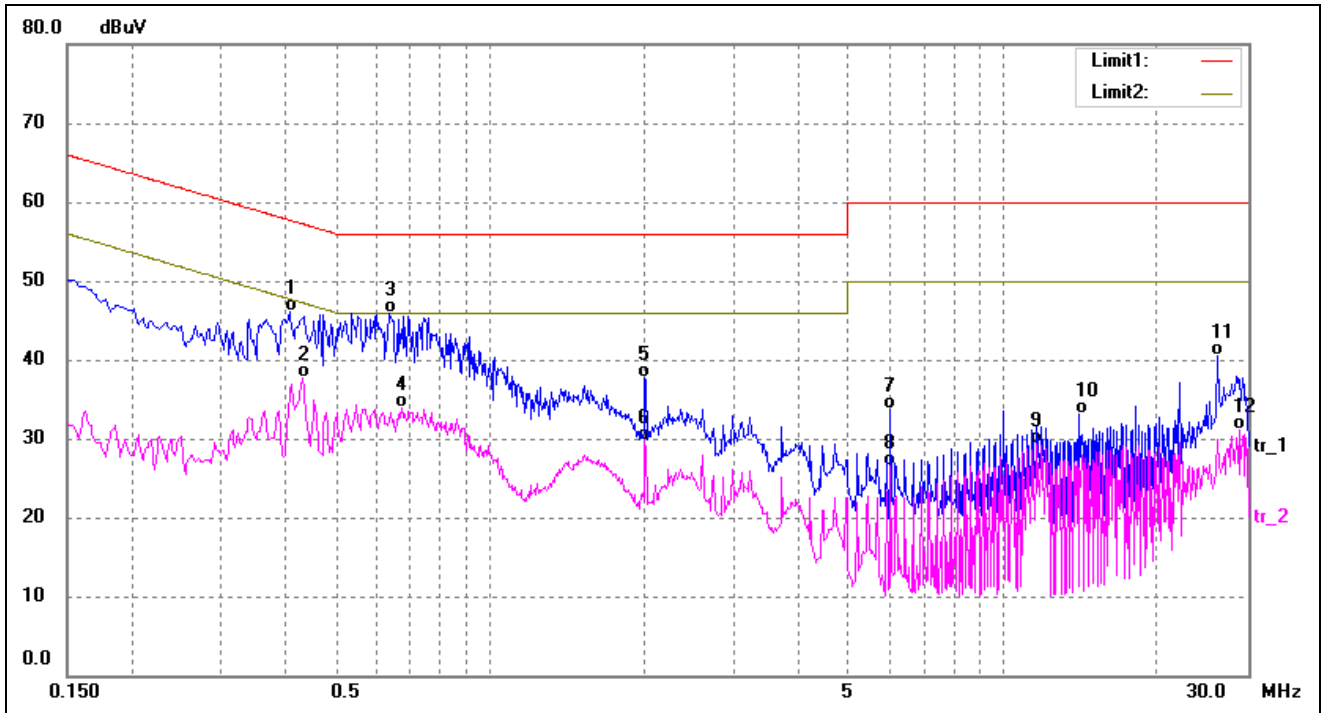

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4060	35.81	10.22	46.03	57.73	-11.70	QP
2	0.4300	27.42	10.23	37.65	47.25	-9.60	AVG
3	0.6340	35.64	10.20	45.84	56.00	-10.16	QP
4	0.6740	23.74	10.20	33.94	46.00	-12.06	AVG
5	2.0100	27.38	10.25	37.63	56.00	-18.37	AVG
6	2.0100	19.44	10.25	29.69	46.00	-16.31	QP
7	6.0340	23.39	10.33	33.72	60.00	-26.28	QP
8	6.0340	16.18	10.33	26.51	50.00	-23.49	AVG
9	11.6420	18.91	10.32	29.23	50.00	-20.77	AVG
10	14.0900	22.81	10.26	33.07	60.00	-26.93	QP
11	26.1460	30.09	10.39	40.48	60.00	-19.52	QP
12	28.9860	20.63	10.41	31.04	50.00	-18.96	AVG

Test Mode	TM1	AC120V 60Hz	Polarity:	Line
-----------	-----	-------------	-----------	------

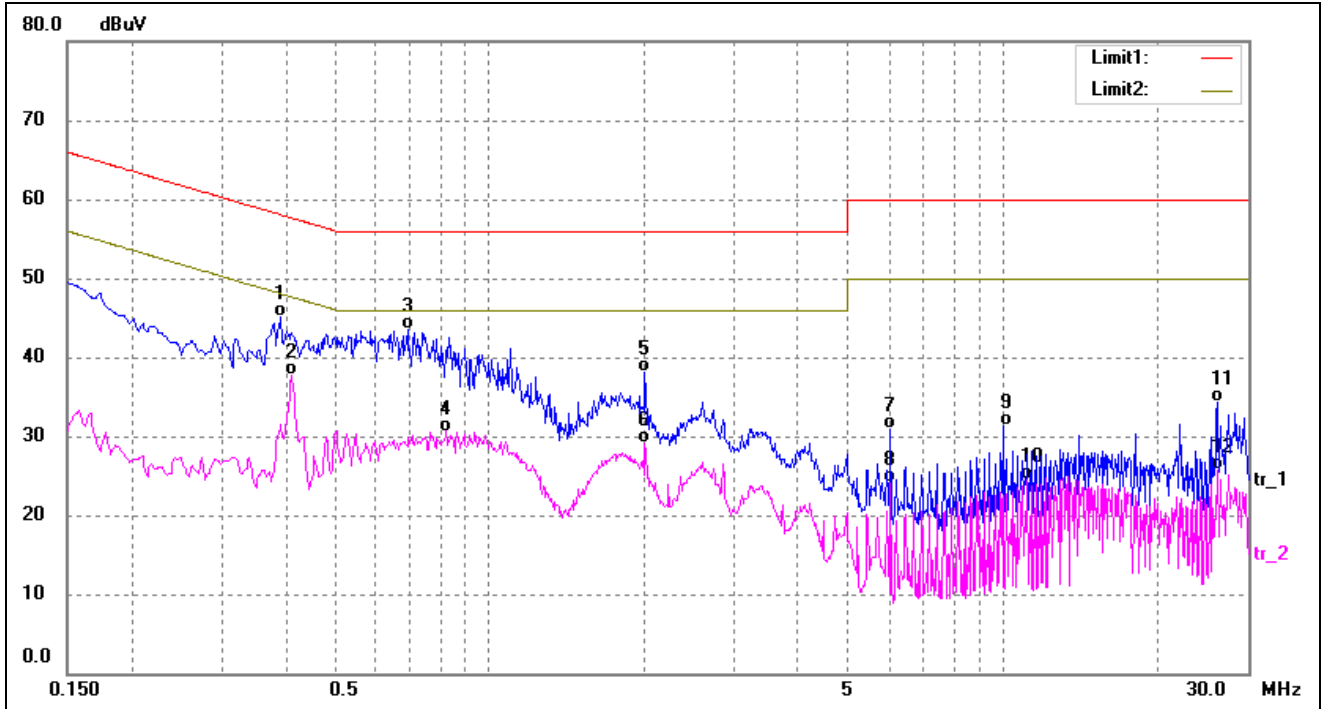

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3899	34.84	10.23	45.07	58.06	-12.99	QP
2	0.4100	27.46	10.22	37.68	47.65	-9.97	AVG
3	0.6900	33.27	10.19	43.46	56.00	-12.54	AVG
4	0.8220	20.43	10.17	30.60	46.00	-15.40	QP
5	2.0100	27.79	10.25	38.04	56.00	-17.96	QP
6	2.0100	18.91	10.25	29.16	46.00	-16.84	AVG
7	6.0340	20.64	10.33	30.97	60.00	-29.03	QP
8	6.0340	13.74	10.33	24.07	50.00	-25.93	AVG
9	10.0540	20.98	10.35	31.33	60.00	-28.67	QP
10	11.1420	14.10	10.33	24.43	50.00	-25.57	AVG
11	26.1420	23.84	10.39	34.23	60.00	-25.77	QP
12	26.1420	15.35	10.39	25.74	50.00	-24.26	AVG

6. Field Strength of Spurious Emissions

6.1 Standard Applicable

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

6.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

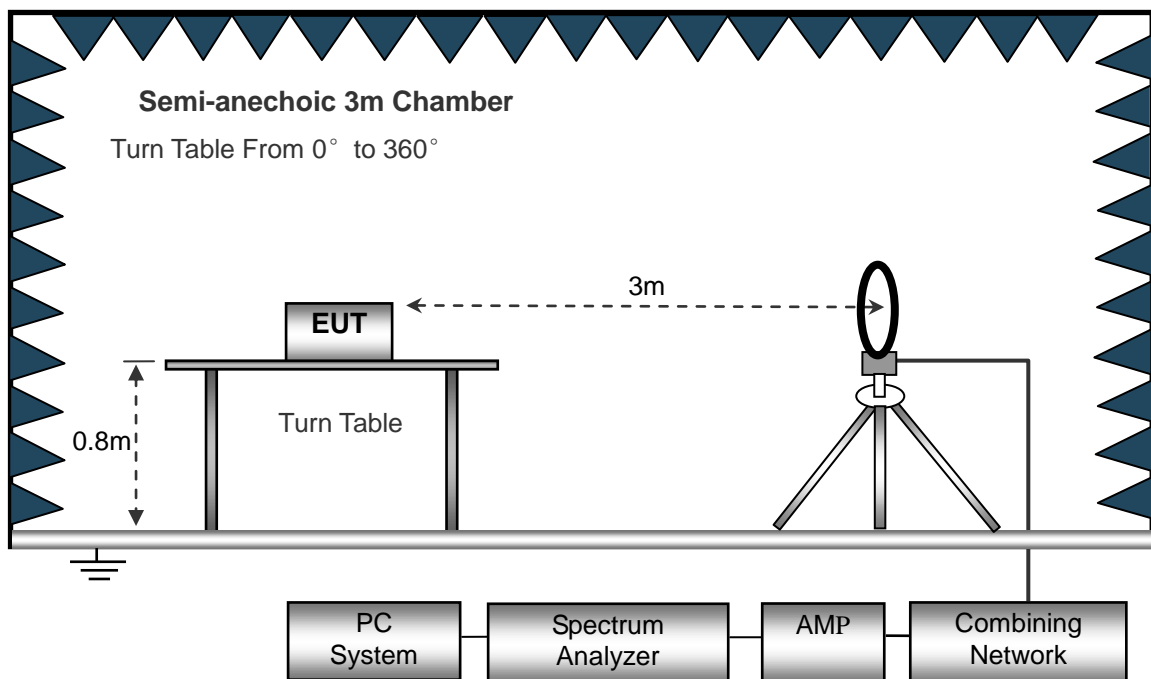

The test setup for emission measurement from 30 MHz to 1 GHz..

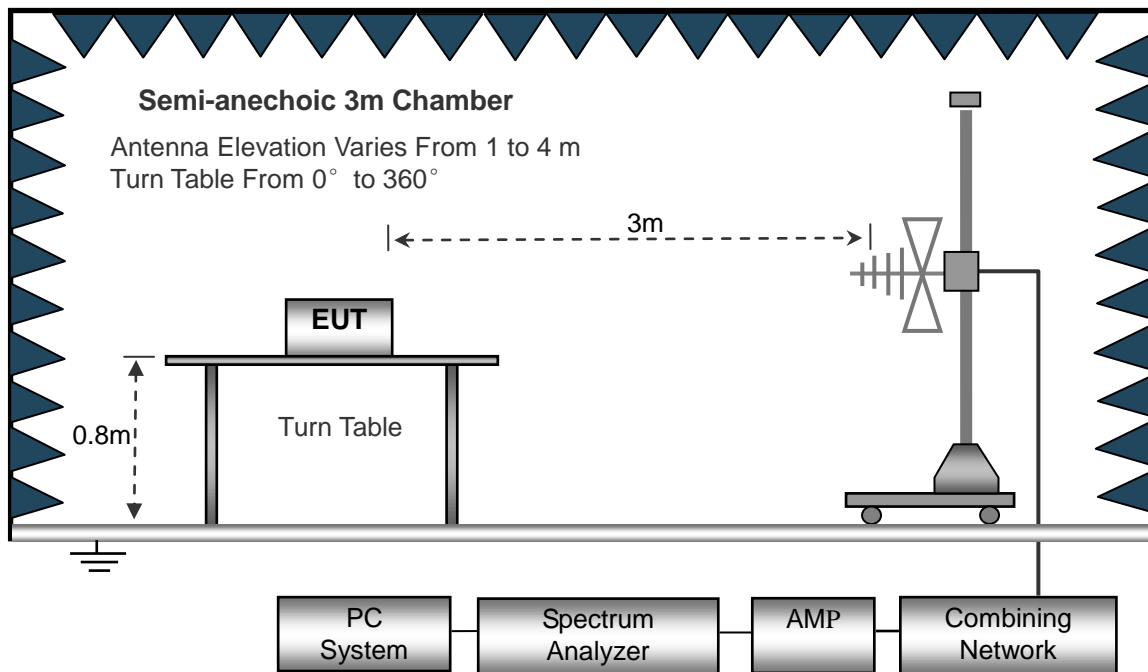

Frequency :9kHz-30MHz

RBW=10KHz

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

6.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

6.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	54%
ATM Pressure:	1012 mbar

6. Reference Measurement at open field site


The measurement was performed with set-up consisting of a single turn loop antenna with a diameter of 0.15 m, fed by a signal generator. The loop dimension was chosen to simulate the EUT as far as possible. The signal generator was set to a fixed output level with an unmodulated 10 kHz and 14 kHz sinusoidal signal. The radiated H fieldstrength at 10 kHz and 14 kHz generated by this set-up was measured with the same test setup as used in the SAC in 3 m distance first, and then repeated at the open field site in 3 m and 10 m distance

6.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Radiated Emissions Test Data (Below 30MHz)(Worst case EUT X axis)


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

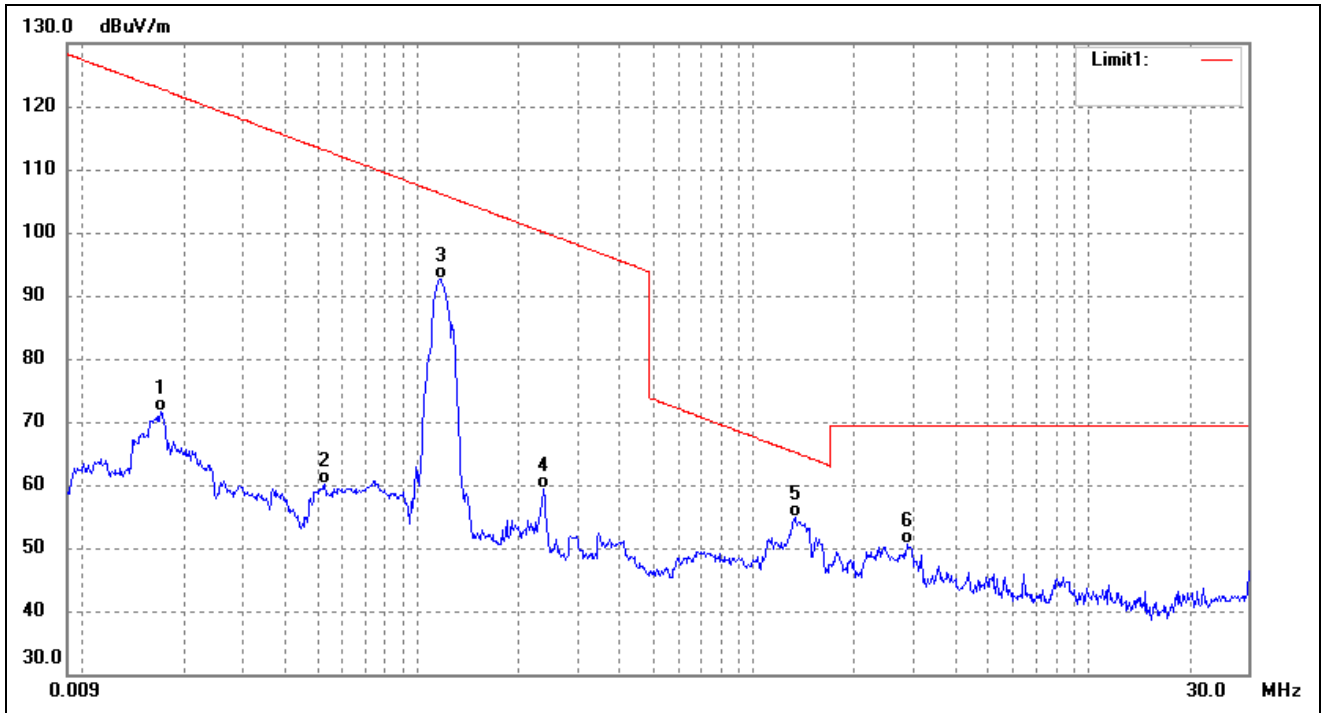

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0171	99.25	-27.63	71.62	122.77	-51.15	-	-	QP
2	0.0526	87.83	-27.75	60.08	113.07	-52.99	-	-	QP
3	0.1168	120.64	-27.98	92.66	106.18	-13.52	-	-	QP
4	0.2366	87.85	-28.51	59.34	100.08	-40.74	-	-	QP
5	1.3313	83.58	-28.63	54.95	65.14	-10.19	-	-	QP
6	2.8774	79.28	-28.54	50.74	69.50	-18.76	-	-	QP


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

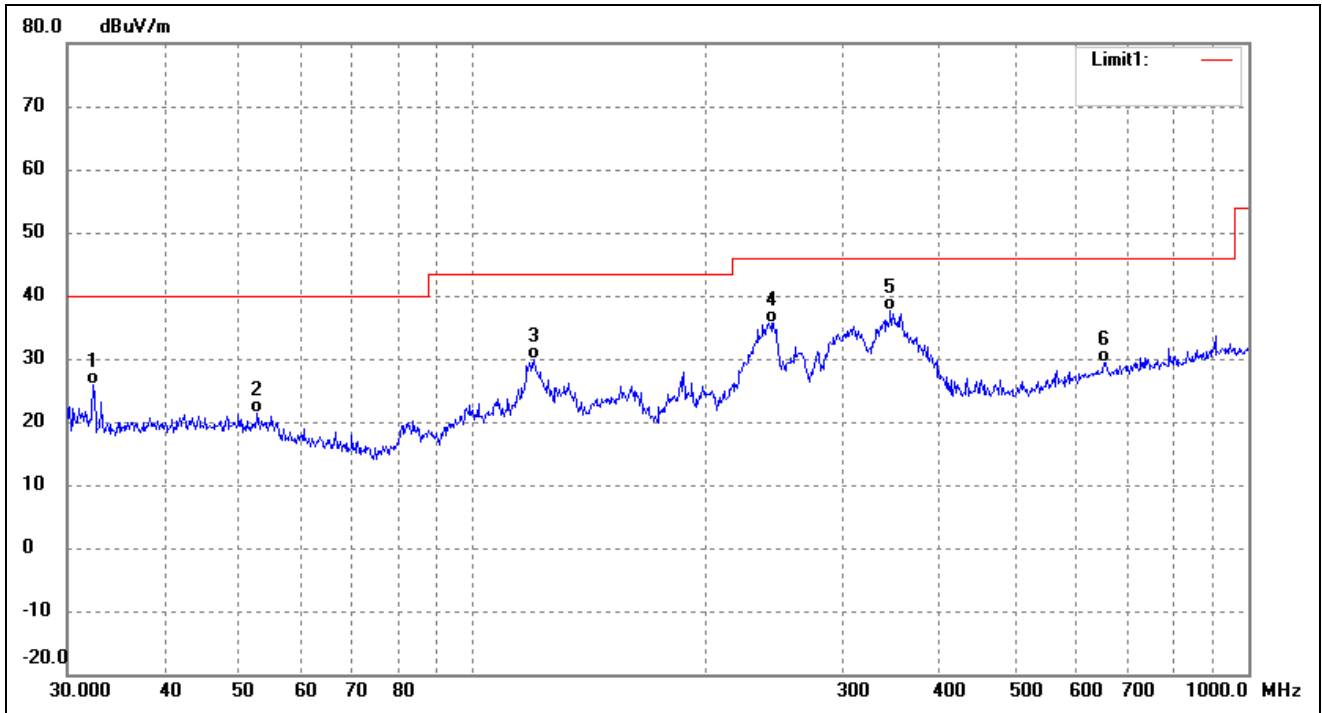

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	34.65	-8.79	25.86	40.00	-14.14	-	-	QP
2	52.7600	29.12	-7.80	21.32	40.00	-18.68	-	-	QP
3	119.8556	38.61	-8.81	29.80	43.50	-13.70	-	-	QP
4	242.5253	42.59	-6.97	35.62	46.00	-10.38	-	-	QP
5	345.5952	41.74	-4.22	37.52	46.00	-8.48	-	-	QP
6	651.9417	28.81	0.60	29.41	46.00	-16.59	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

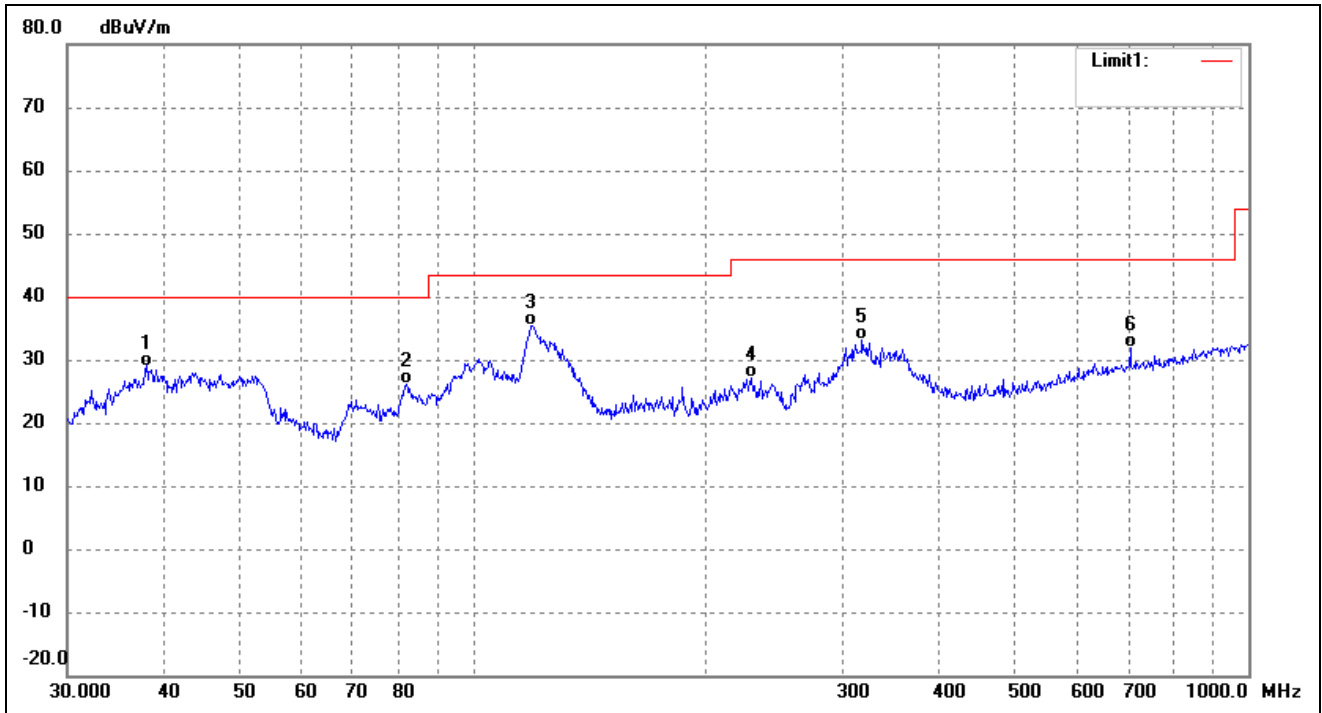

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.9450	36.57	-7.57	29.00	40.00	-11.00	-	-	QP
2	82.0706	37.93	-11.70	26.23	40.00	-13.77	-	-	QP
3	119.0180	44.13	-8.75	35.38	43.50	-8.12	-	-	QP
4	228.4904	34.57	-7.45	27.12	46.00	-18.88	-	-	QP
5	317.7011	37.87	-4.71	33.16	46.00	-12.84	-	-	QP
6	704.2261	30.36	1.41	31.77	46.00	-14.23	-	-	QP

Remark: '-Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

7. 20dB Emission bandwidth.

7.1 Standard Applicable

According to 15.215, 20dB emission bandwidth.

7.2 Test Procedure


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

7.4 Summary of Test Results/Plots

Test Channel(kHz)	20dB Emission Bandwidth(Hz)
118.822	23.4

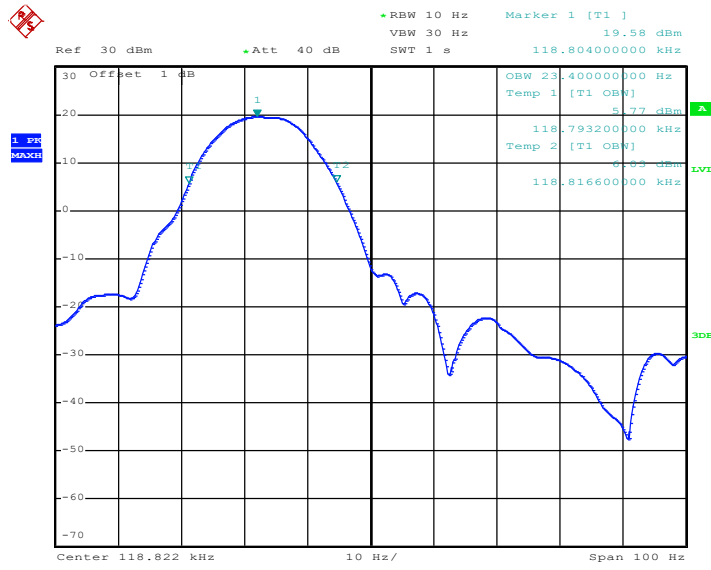

Date: 28.MAR.2023 15:00:07

Note: The RBW of the analyzer measuring Bandwidth cannot be adjusted to 1%-5% occupied bandwidth, the RBW of the test setting is the closest value.

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

***** END OF REPORT *****