

TEST REPORT

Reference No..... : WTN21X03018146W-1
FCC ID : 2AP2V-DESKLAMP11
Applicant..... : Shaoxing Prolux Lighting Co.,Ltd
Address : Ludong Industrial Zone, BaiGuan Street, ShangYu District, Shaoxing City,
Zhejiang Province, China
Product Name : DESK LAMP
Test Model..... : PL-0250QU
Standards..... : FCC Part 18
Date of Receipt sample.... : Mar.10, 2021
Date of Test : Mar.10, 2021 to Mar.19, 2021
Date of Issue : Mar.19, 2021
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. CONDUCTED EMISSIONS.....	9
3.1 STANDARD APPLICABLE	9
3.2 TEST PROCEDURE.....	9
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	9
3.4 ENVIRONMENTAL CONDITIONS.....	9
3.5 TEST RECEIVER SETUP	10
3.6 SUMMARY OF TEST RESULTS/PLOTS	10
4. RADIATED EMISSIONS	12
4.1 TEST PROCEDURE.....	12
4.2 TEST RECEIVER SETUP	14
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
4.4 ENVIRONMENTAL CONDITIONS.....	14
4.5 SUMMARY OF TEST RESULTS/PLOTS	14
APPENDIX PHOTOGRAPHS	18

Report version

Version No.	Date of issue	Description
Rev.00	Mar.19, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shaoxing Prolux Lighting Co.,Ltd
Address of applicant: Ludong Industrial Zone, BaiGuan Street, ShangYu District, Shaoxing City, Zhejiang Province, China

Manufacturer: Shaoxing Prolux Lighting Co.,Ltd
Address of manufacturer: Ludong Industrial Zone, BaiGuan Street, ShangYu District, Shaoxing City, Zhejiang Province, China

General Description of EUT	
Product Name:	DESK LAMP
Trade Name:	/
Model No.:	PL-0250QU
Adding Model(s):	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	110~205kHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Input:	AC120V/60Hz
Wireless output:	5W Max
Power adapter:	/
USB output:	DC5V, 2.1A

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Transmit	AC120V/60Hz

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
AC CABLE	1.6	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Wireless charging load	/	sk4559-8988	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Radiated Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	Compliant
§ 18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

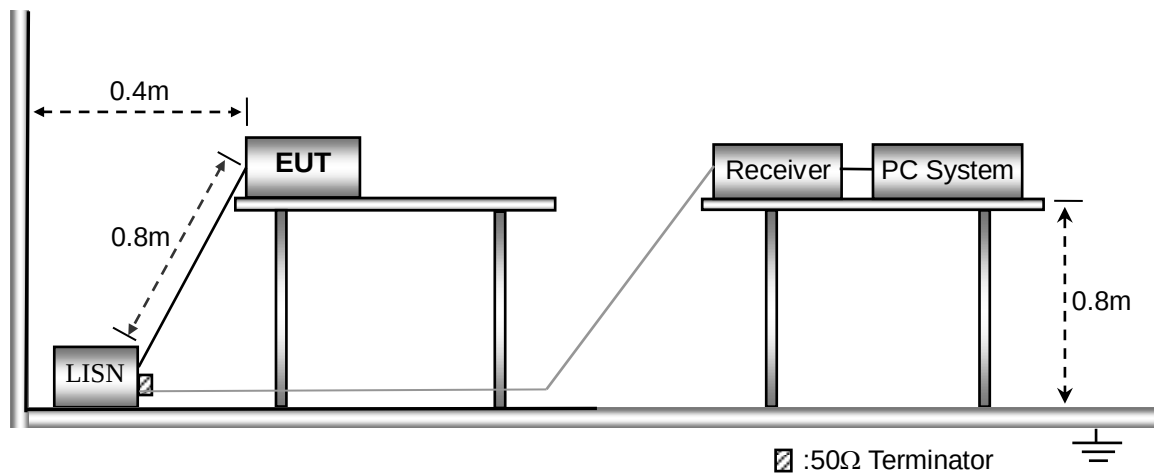

3.4 Environmental Conditions

Temperature:	24.5° C
Relative Humidity:	55%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency..... 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode..... Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

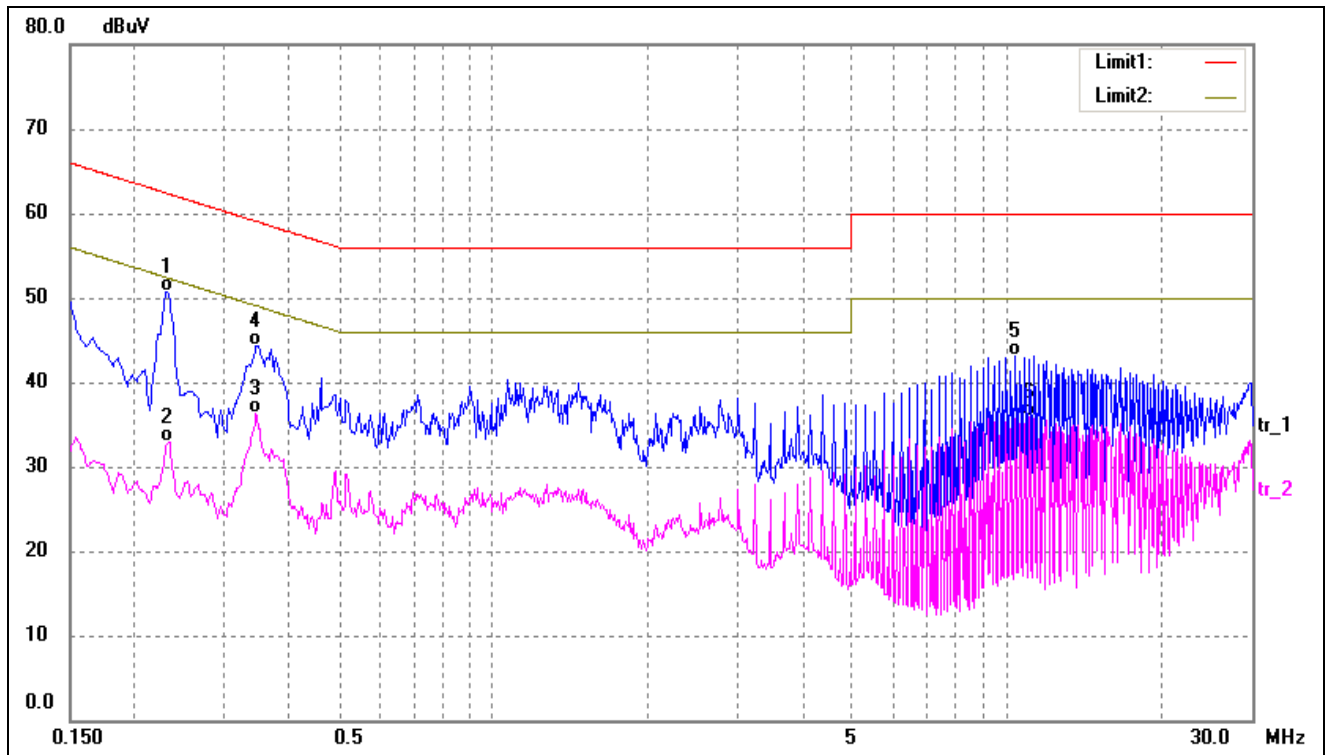

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.2300	40.45	10.26	50.71	62.45	-11.74	QP
2	0.2340	22.71	10.26	32.97	52.31	-19.34	AVG
3	0.3460	26.00	10.26	36.26	49.06	-12.80	AVG
4	0.3500	33.95	10.26	44.21	58.96	-14.75	QP
5	10.3780	32.86	10.30	43.16	60.00	-16.84	QP
6	11.0700	25.64	10.34	35.98	50.00	-14.02	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

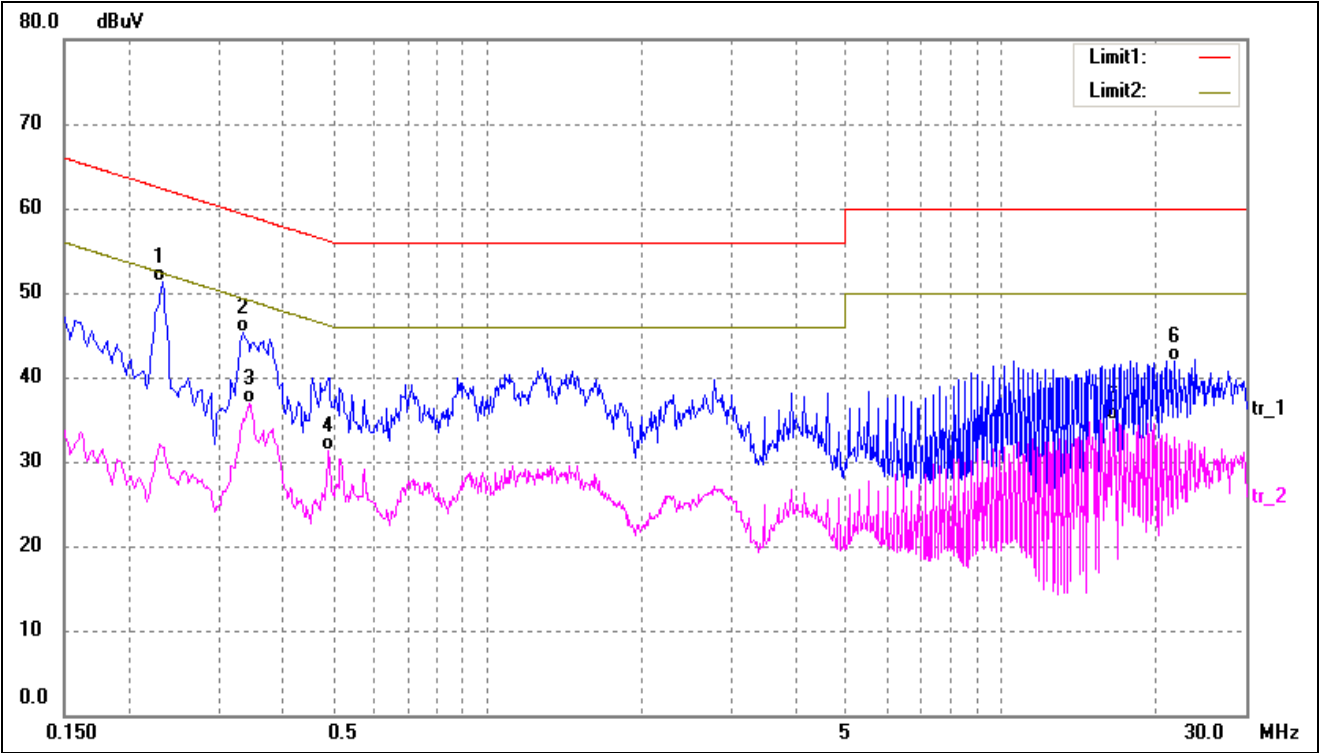

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.2340	41.00	10.26	51.26	62.31	-11.05	QP
2	0.3340	35.06	10.26	45.32	59.35	-14.03	QP
3	0.3460	26.68	10.26	36.94	49.06	-12.12	AVG
4	0.4900	21.01	10.22	31.23	46.17	-14.94	AVG
5	16.4860	24.35	10.59	34.94	50.00	-15.06	AVG
6	21.7900	31.37	10.59	41.96	60.00	-18.04	QP

4. Radiated Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

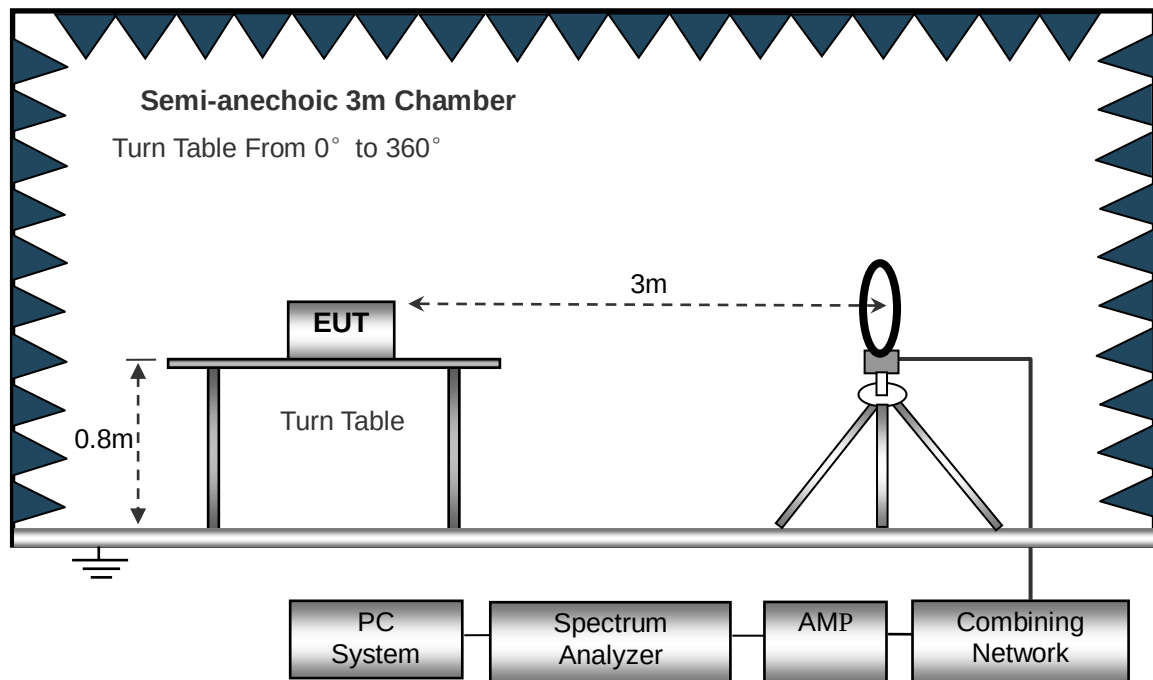

The test setup for emission measurement from 30 MHz to 1 GHz..

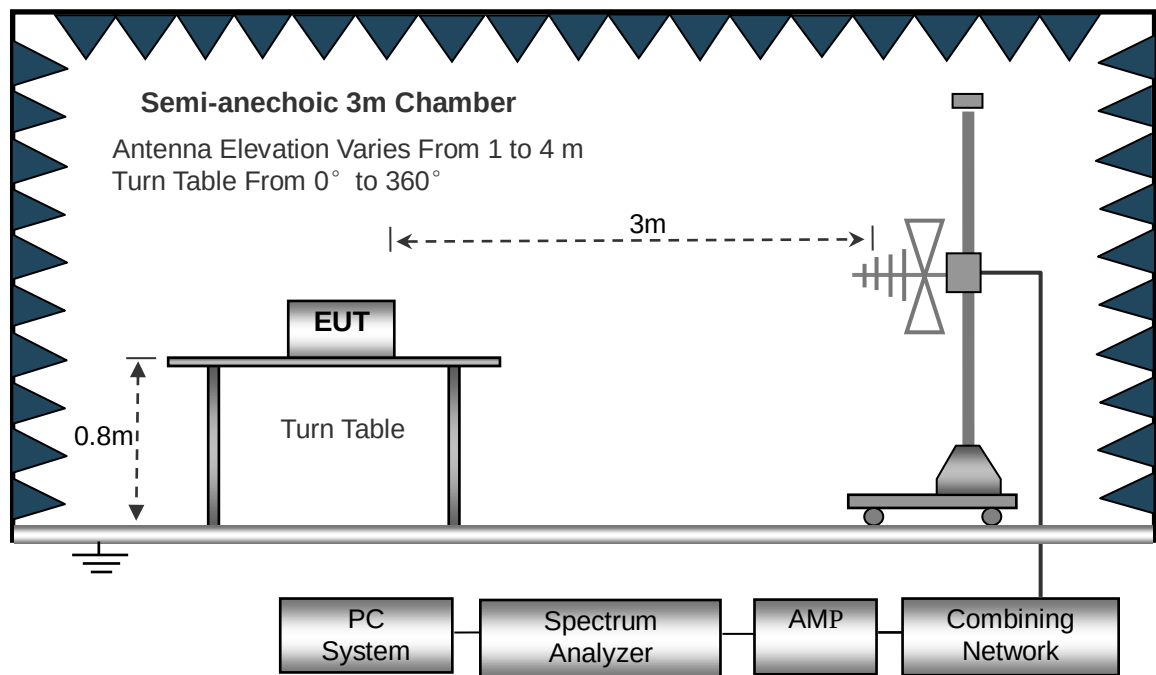

The test setup for emission measurement above 1 GHz..

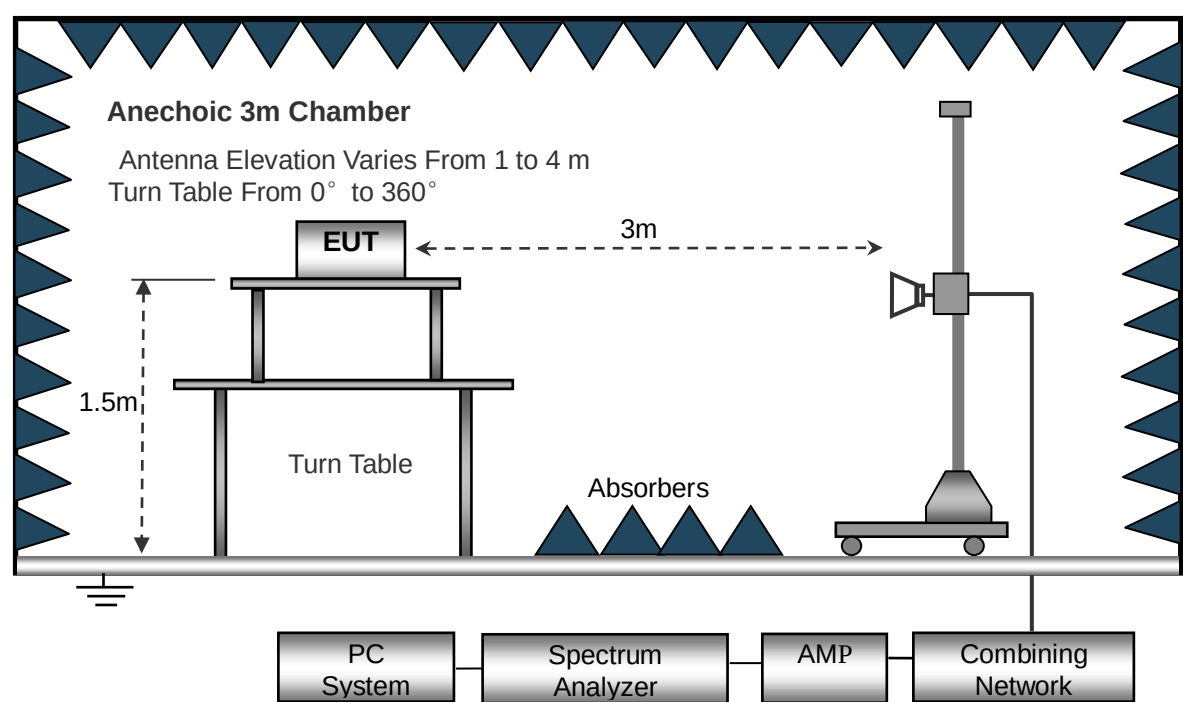

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$

4.4 Environmental Conditions

Temperature:	24.5 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

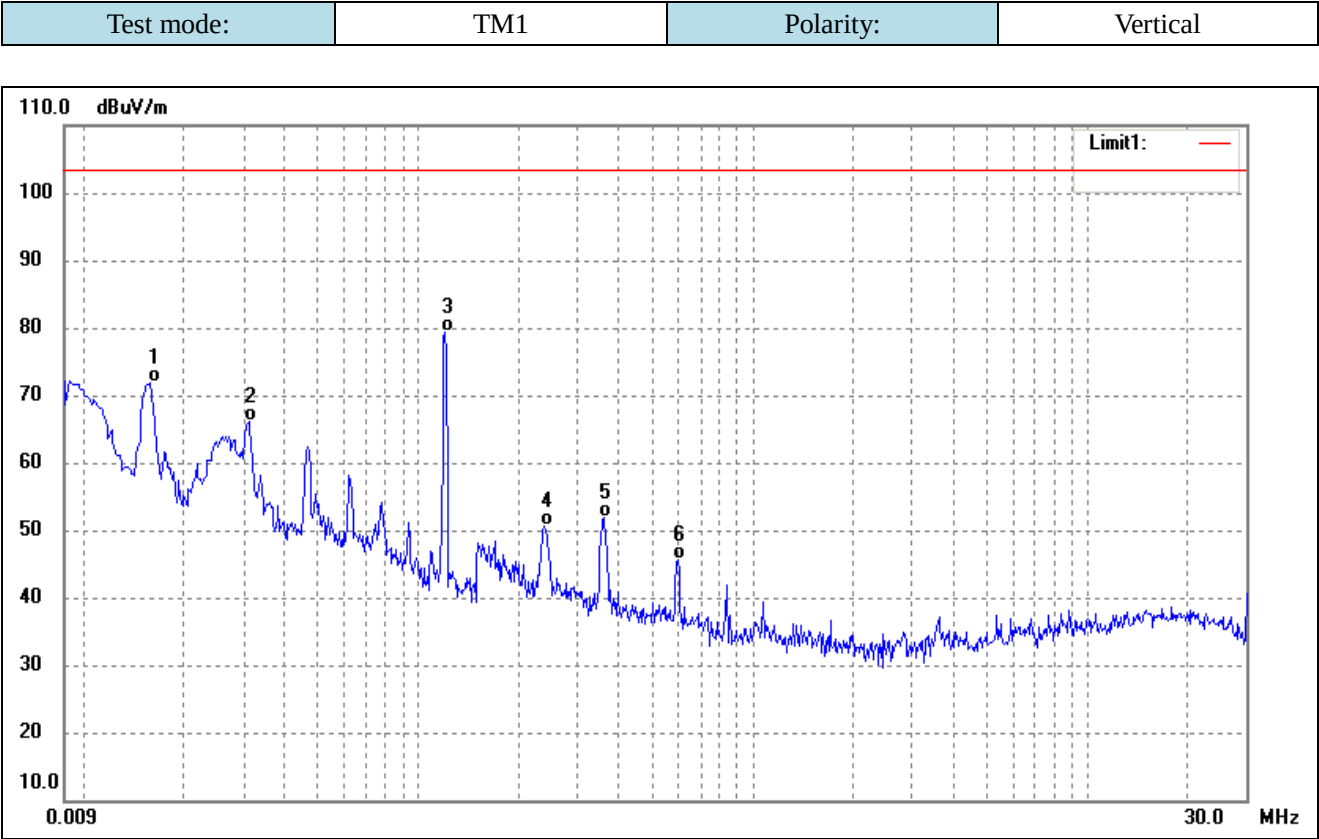

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	0.0159	78.43	-6.63	71.80	103.50	-31.70	-	-	QP
2	0.0313	72.07	-6.03	66.04	103.50	-37.46	-	-	QP
3	0.1204	84.38	-5.12	79.26	103.50	-24.24	-	-	QP
4	0.2378	57.74	-7.11	50.63	103.50	-52.87	-	-	QP
5	0.3577	59.77	-7.87	51.90	103.50	-51.60	-	-	QP
6	0.5979	52.79	-7.21	45.58	103.50	-57.92	-	-	QP


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

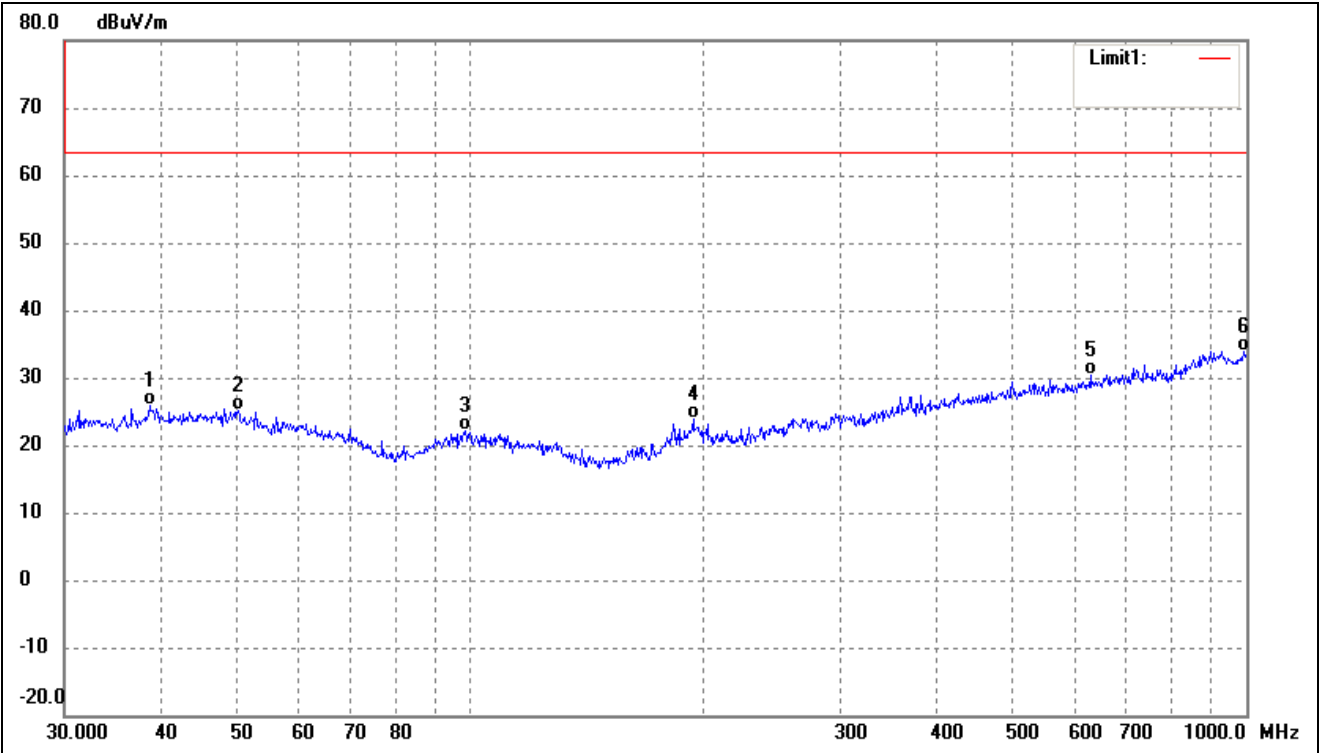

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.6160	38.44	-12.51	25.93	63.50	-37.57	-	-	QP
2	50.2324	36.81	-11.60	25.21	63.50	-38.29	-	-	QP
3	98.4866	35.66	-13.57	22.09	63.50	-41.41	-	-	QP
4	193.7728	36.76	-12.85	23.91	63.50	-39.59	-	-	QP
5	629.4772	32.63	-2.19	30.44	63.50	-33.06	-	-	QP
6	993.0114	32.08	1.78	33.86	63.50	-29.64	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

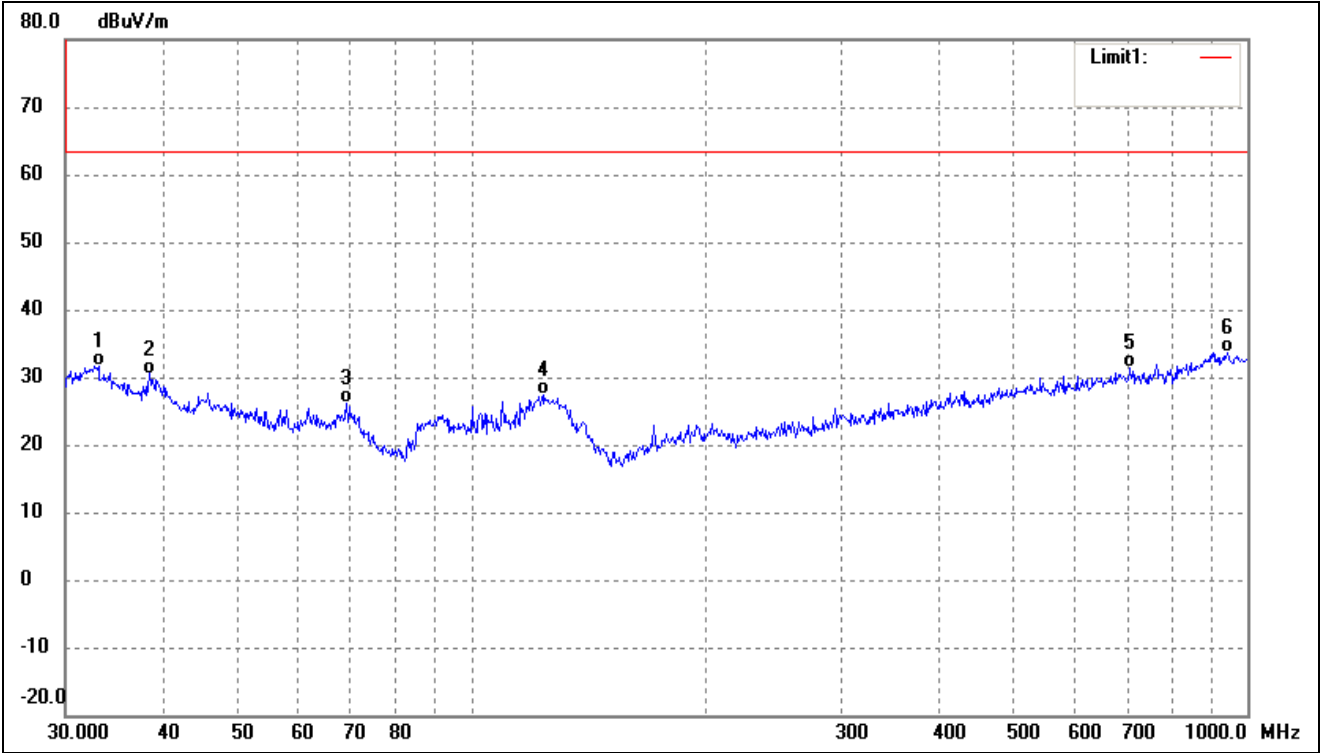

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	33.0950	45.69	-13.98	31.71	63.50	-31.79	-	-	QP
2	38.4809	43.06	-12.56	30.50	63.50	-33.00	-	-	QP
3	69.1141	40.58	-14.51	26.07	63.50	-37.43	-	-	QP
4	124.1330	42.83	-15.40	27.43	63.50	-36.07	-	-	QP
5	706.6999	32.95	-1.63	31.32	63.50	-32.18	-	-	QP
6	942.1305	32.15	1.51	33.66	63.50	-29.84	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******