

RF TEST REPORT



Report No.: FCC_IC_RF_SL18052401-EMG-002 Rev: 1.0
Supersede Report No.:

Applicant	Electronic Minds Group SpA.		
Product Name	UMTS/HSPA+ Module		
Model No.	UC20-G		
Host Name	EMD-AVL-001		
Test Standard	47CFR Part22,47CFR Part24 RSS-132, Issue 3 RSS133, Issue 6		
Test Method	TIA-603-E: 2016 RSS Gen Issue 4, Nov 2014		
FCC ID	2AP3N-2018EMDAVL1		
IC ID	23978-2018EMDAVL1		
Date of test	06/15/2018-06/17/2018		
Issue Date	06/17/2018		
Test Result	<u>Pass</u>	Fail	
Equipment complied with the specification			[x]
Equipment did not comply with the specification			[]
Deon Dai		Chen Ge	
Test Engineer		Engineering Reviewer	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only			

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & Radio Equipment Directive (RED)
Japan	MIC (RCB 208)	RF, Telecom
HongKong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY.....	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION.....	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	7
6.3	EUT test modes/configuration Description.....	8
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	9
7.1	Supporting Equipment	9
7.1	Cabling Description	9
7.2	Test Software Description	9
8	TEST SUMMARY.....	10
9	MEASUREMENT UNCERTAINTY	11
9.1	Radiated Emissions (30MHz to 1GHz).....	11
9.2	Radiated Emissions (1GHz to 40GHz).....	11
9.3	RF conducted measurement.....	12
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	13
10.1	Radiated Spurious Emission below 1GHz.....	13
10.2	Radiated Spurious Emissions above 1GHz.....	15
	ANNEX A. TEST INSTRUMENT.....	18
	ANNEX B. SIEMIC ACCREDITATION	19

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_RF_SL18052401-EMG-002	None	Original	06/17/2018
FCC_IC_RF_SL18052401-EMG-002 Rev: 1.0	Rev:1.0	Update per reviewer	06/19/2018

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Electronic Minds Group SpA
Product: Remote Transmission Unit
Model: UC20-G

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	Electronic Minds Group SpA
Applicant Address	Alcantara 200, Office 601, Las Condes, Santiago, Chile, 75501
Manufacturer Name	Electronic Minds Group SpA
Manufacturer Address	Alcantara 200, Office 601, Las Condes, Santiago, Chile, 75501

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	UMTS/HSPA+ Module
Model No.	UC20-G
Host Name	EMD-AVL-001
Trade Name	e-minds
Serial No.	N/A
Input Power	24Vdc
Power Adapter Manu/Model	N/A
Date of EUT received	06/12/2018
Hardware Version	N/A
Software Version	N/A
Equipment Class/ Category	PCB,
Operating Frequencies	UMTS-FDD Band V TX: 826.4-846.6MHz, RX: 871.4 - 891.6MHz UMTS-FDD Band II TX: 1852.4-1907.6MHz, RX: 1932.4-1987.6MHz
Port/Connectors	SMA
Remark	NONE

6.2 Radio Description

Item	UMTS	UMTS
Operating Band /Radio Type	UMTS Band II	UMTS Band V
Bandwidth	3.84MHz	3.84MHz
Modulation	QPSK	QPSK
Antenna Type	Whip Antenna	Whip Antenna
Antenna Gain	5.47 dBi	6.1 dBi
Frequency	TX: 1852.4-1907.6MHz RX: 1932.4-1987.6MHz	TX: 826.4 - 846.6MHz RX: 871.4 - 891.6MHz

6.3 EUT test modes/configuration Description

Test mode

	Final Test Mode	Note
Final_test_mode_1	Continuous transmission, single channel	LTE
Final_test_mode_2	Continuous transmission, single channel	UMTS

Remark: UMTS band II, V is evaluated.

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
-	-	-	-	-	-

7.1 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
-	-	-	-	-	-	-	-

7.2 Test Software Description

Test Item	Software	Description
RF Testing	N/A	Enable EUT continuous TX mode and change to different channel

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
E.R.P/ E.I.R.P.	FCC	47CFR24.232, 47CFR27.50	FCC	TIA-603-E: 2016	<input checked="" type="checkbox"/> Pass*
	IC	RSS-130, RSS-132, RSS-133	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A
Occupied Bandwidth	FCC	47CFR24.238(a), 47CFR27.53	FCC	TIA-603-E: 2016	<input checked="" type="checkbox"/> Pass*
	IC	RSS-130, RSS-132, RSS-133	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A
Peak-Average Ratio	FCC	47CFR24.232, 47CFR27.50	FCC	TIA-603-E: 2016	<input checked="" type="checkbox"/> Pass*
	IC	RSS-130, RSS-132, RSS-133	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A
Spurious and harmonic Emission at antenna port	FCC	47CFR2.1051, 47CFR24.238, 47CFR27.53	FCC	TIA-603-E: 2016	<input checked="" type="checkbox"/> Pass*
	IC	RSS-130, RSS-132, RSS-133	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A
Band Edge	FCC	47CFR2.1053, 47CFR24.238, 47CFR27.53	FCC	TIA-603-E: 2016	<input checked="" type="checkbox"/> Pass*
	IC	RSS-130, RSS-132, RSS-133	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A
Radiated spurious and harmonic emission	FCC	47CFR2.1053, 47CFR24.238, 47CFR27.53	FCC	TIA-603-E: 2016	<input checked="" type="checkbox"/> Pass
	IC	RSS-130, RSS-132, RSS-133	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A
Frequency stability	FCC	47CFR2.1055, 47CFR24.135, 47CFR27.54	FCC	TIA-603-E: 2016	<input checked="" type="checkbox"/> Pass*
	IC	RSS-130, RSS-132, RSS-133	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> All measurement uncertainties do not take into consideration for all presented test results. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. Please refer to FCC ID: 2AP3N-2018EMDAVL1 & IC ID: 23978-2018EMDAVL1 test report for Pass* test items. 				

9 Measurement Uncertainty

9.1 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

9.2 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

9.3 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174


The total derived measurement uncertainty is +/- 0.95 dB.

10 Measurements, Examination and Derived Results

10.1 Radiated Spurious Emission below 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR27.53 RSS-130, RSS-132, RSS-133	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR24.238 RSS-130, RSS-132, RSS-133	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>

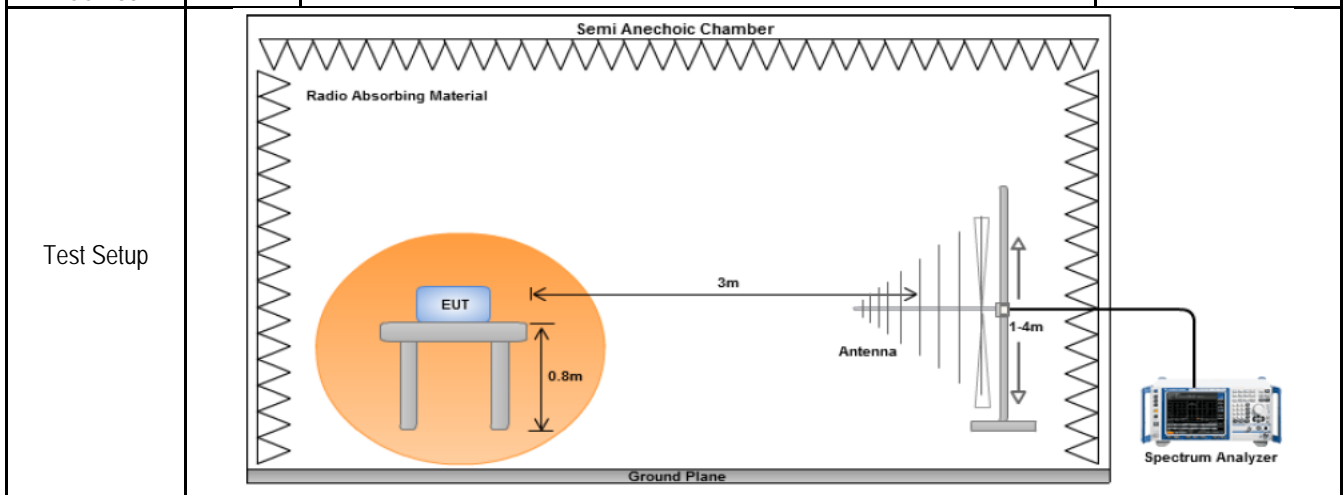

Test Procedure	<p>Substitution method:</p> <ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. Steps 4 were repeated for the next frequency point, until all selected frequency points were measured.
----------------	--

Test Date	06/15/2018	Environmental condition	Temperature 24°C Relative Humidity 42% Atmospheric Pressure 1012mbar
-----------	------------	-------------------------	--

Remark	<p>Limit calculation: $Emission\ limit = P_{dBm} - [43 + 10 \log(PW)] = 10 \log(1000 \times PW) - 43 - 10 \log(PW) = 30\ dBm - 43 = -13\ dBm$ All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.</p>
--------	--

Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
--------	--

Test Data Yes (See below) N/A
 Test Plot Yes (See below) N/A

Test was done by Deon Dai at 10m chamber.

Radiated Emission Test Results for UMTS

Test specification	Below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	24		
	Humidity (%)	42		
	Atmospheric (mbar):	1012		
Mains Power:	24Vdc			
Tested by:	Deon Dai			
Test Date:	06/15/2018			
Remarks:	UMTS Band 2 and 5			

UMTS band 2 Middle Channel, QPSK

Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
815.5	-46.85	269	102	V	815.5	-36.41	0	0.51	-36.92	-13	-23.92
815.5	-48.22	147	200	H	815.5	-39.43	0	0.51	-39.94	-13	-26.94
240.01	-61.29	18	105	V	240.01	-51.17	0	0.22	-51.39	-13	-38.39
240.01	-59.88	288	180	H	240.01	-48.06	0	0.22	-48.28	-13	-35.28

UMTS band 5 Middle Channel, QPSK


Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
912.08	-51.25	148	110	V	912.08	-40.66	0	0.89	-41.55	-13	-28.55
912.08	-50.95	359	201	H	912.08	-41.97	0	0.89	-42.86	-13	-29.86
815.49	-59.52	246	122	V	815.49	-48.01	0	0.51	-48.52	-13	-35.52
815.49	-58.49	187	189	H	815.49	-47.05	0	0.51	-47.56	-13	-34.56

Note: Dipole antenna was used for substitution method.

10.2 Radiated Spurious Emissions above 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR27.53 RSS-130, RSS-132, RSS-133	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR24.238 RSS-130, RSS-132, RSS-133	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>

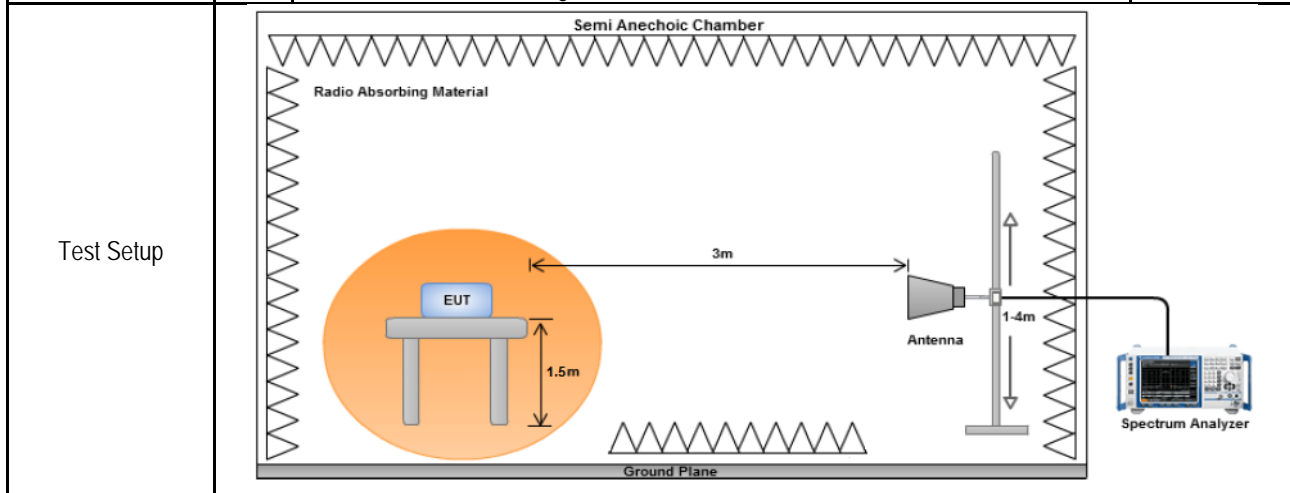

Test Procedure	<p>Substitution method:</p> <ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The centre of the substitution antenna should be approximately at the same location as the centre of the transmitter. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. Steps 4 were repeated for the next frequency point, until all selected frequency points were measured.
----------------	---

Test Date	06/15/2018 – 06/17/2018	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
-----------	-------------------------	-------------------------	--

Remark	<p>The EUT was scanned up to 25GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.</p> <p>Limit calculation: $Emission\ limit = P\ dBm - [43 + 10 \log(PW)] = 10 \log(1000 \times PW) - 43 - 10 \log(PW) = 30\ dBm - 43 = -13\ dBm$</p> <p>All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.</p>
--------	--

Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
--------	--

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by *Deon Dai* at 10m chamber.

Radiated Emission Test Results (Above 1GHz)

UMTS Band II Low Channel, QPSK

Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
3705	-57.38	159	102	V	3705	-47.58	10.34	3.19	-40.43	-13	-27.43
3705	-52.56	211	201	H	3705	-43.06	10.34	3.19	-35.91	-13	-22.91
5557.65	-63.09	186	122	V	5557.65	-53.19	10.73	3.06	-45.52	-13	-32.52
5557.65	-66.79	34	198	H	5557.65	-57.09	10.73	3.06	-49.42	-13	-36.42

UMTS Band II Middle Channel, QPSK

Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
3759.5	-57.29	154	100	V	3759.5	-48.39	10.34	3.19	-41.24	-13	-28.24
3559.5	-53.09	189	200	H	3559.5	-43.89	10.34	3.19	-36.74	-13	-23.74
5638	-55.43	143	120	V	5638	-46.13	10.6	3.16	-38.69	-13	-25.69
5638	-57.23	144	210	H	5638	-47.83	10.6	3.16	-40.39	-13	-27.39

UMTS Band II High Channel, QPSK

Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
3815	-55.33	266	120	V	3815	-45.83	9.62	2.78	-38.99	-13	-25.99
3815	-54.22	119	188	H	3815	-44.92	9.62	2.78	-38.08	-13	-25.08
5722.65	-54.57	222	113	V	5722.65	-45.37	10.91	2.82	-37.28	-13	-24.28
5722.65	-59.89	12	200	H	5722.65	-50.79	10.91	2.82	-42.7	-13	-29.7

UMTS Band V Low Channel, QPSK

Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1653.5	-50.74	104	120	V	1653.5	-41.64	8.13	1.18	-34.69	-13	-21.69
1653.5	-60.02	41	199	H	1653.5	-50.72	8.13	1.18	-43.77	-13	-30.77
2476.95	-60.68	135	108	V	2476.95	-51.18	9.14	2.5	-44.54	-13	-31.54
2476.95	-65.59	199	202	H	2476.95	-55.99	9.14	2.5	-49.35	-13	-36.35

UMTS Band V Middle Channel, QPSK

Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1671.5	-52.15	144	105	V	1671.5	-43.04	8.13	1.18	-36.09	-13	-23.09
1671.5	-60.71	336	211	H	1671.5	-51.36	8.13	1.18	-44.41	-13	-31.41
2506.35	-62.59	19	144	V	2506.35	-53.27	9.14	2.5	-46.63	-13	-33.63
2506.35	-66.46	298	149	H	2506.35	-56.81	9.14	2.5	-50.17	-13	-37.17

















UMTS Band V High Channel, QPSK






Indicated			Test Antenna		Substituted						
Frequency (MHz)	Raw (dBm)	Degree	Height (cm)	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1690.48	-53.4	360	101	V	1690.48	-44.38	9.01	1.36	-36.73	-13	-23.73
1690.48	-60.67	214	200	H	1690.48	-51.35	9.01	1.36	-43.7	-13	-30.7
2528.9	-63.03	298	199	V	2528.9	-53.81	9.14	2.5	-47.17	-13	-34.17
2528.9	-66.21	99	211	H	2528.9	-57.01	9.14	2.5	-50.37	-13	-37.37

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
Keysight EXA 44GHz Spectrum Analyzer	N9010A	MY51440112	11/08/2017	1 Year	11/08/2018	<input checked="" type="checkbox"/>
R & S Wideband Communication Tester	CMW500	108852	08/03/2017	1 Year	08/03/2018	<input checked="" type="checkbox"/>
Pre-Amplifier (1-40GHz)	SAS-474	579	04/04/2018	1 Year	04/04/2019	<input checked="" type="checkbox"/>
Preamplifier (100KHz-7GHz)	LPA-6-30	11140711	02/09/2018	1 Year	02/09/2019	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	01/13/2018	1 Year	01/13/2019	<input checked="" type="checkbox"/>
Horn Antenna (1-18GHz)	3115	10SL0059	11/09/2017	1 Year	11/09/2018	<input checked="" type="checkbox"/>
Horn Antenna (700MHz-18GHz)	SAS-571	411	05/13/2018	1 Year	05/13/2019	<input checked="" type="checkbox"/>
Tuned Dipole Antenna 30 - 1000 MHz (4pcs set)	AD-100	40133	03/08/2018	1 Year	03/08/2019	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3-meter site
FCC Site Registration		10-meter site
IC Site Registration		3-meter site
IC Site Registration		10-meter site
EU NB		Radio Equipment: EN45011: EN ISO/IEC 17065
		Electromagnetic Compatibility: EN45011 – EN ISO/IEC 17065
Singapore iDA CB (Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3-meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radiocommunications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2