### 5.0 x 2.2 x 1.6 (mm) WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

### 1. Explanation of Product Number

H 2 U 2 6 2 G K B A 0 1 0 0



### 2. Features

- \*Stable and reliable in performances
- \*Low profile, compact size
- \*RoHS compliance
- \*SMT processes compatible

### 3. Applications

- \*ISM 2.4 GHz applications
- \*ZigBee/BLE applications
- \*Bluetooth earphone systems
- \*Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- \*IEEE802.11 b/g/n
- \*Wireless PCMCIA cards or USB dongles

### 4. Description

Unictron's AA029 chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2484MHz. Fabricated with proprietary design and processes, AA029 shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.

Shenzhen Xi angbo Yi Technology Co., Ltd.

Prepared by : Xenia	Designed by : Phillip	Checked I	by: Mike A	pproved by	Herbert
TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip An		DOCUMENT	H2U262GKBA	0100	REV.
(AA029) Engin	eering Specification	NO.		Chicago and	G
to the same of the same	THE CAPACIAN STREET		PAGE	1 OF	10

## 5. Layout Guide & Electrical Specifications 5-1. Layout Guide (unit: mm) Solder Land Pattern: The solder land pattern (gray marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions. Signal Input Transmission Line with 50Ω Impedance Characteristic Bottom View Top View THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES Shenzhen Xi angbo Yi CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR Technology Co., Ltd. SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert DOCUMENT TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna REV. H2U262GKBA0100 (AA029) Engineering Specification NO. G PAGE 2


# 5-2. Electrical Specifications (Evaluation Board Dimensions: 100 x 50 mm²) 5-2-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		5.0 x 2.2 x 1.6	mm
Working Frequency	•	2400 ~ 2484	MHz
Bandwidth		140 (typical)	MHz
VSWR		2 Max. (typical)	
Characteristic Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@2442 MU=\	3.5 (typical)	dBi
Efficiency	(@2442 MHz)	65 (typical)	%

### 5-2. Return Loss & Smith Chart





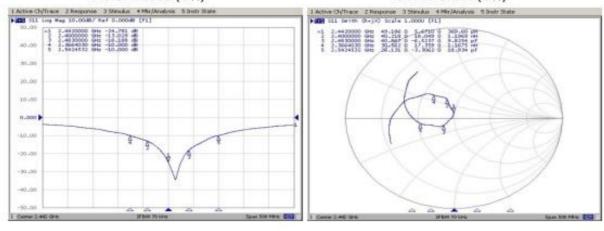

Shenzhen Xi angbo Yi Technology Co., Ltd.

Prepared by : Xenia	repared by : Xenia Designed by : Phillip		by : Mike	Approved by : Herbert		
TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification		DOCUMENT	H2U262GKBA010		REV.	
		NO.	Della Control Control		G	
	**************************************		D/	OE 2 OE	10	

# Outline Dimensions of Antenna & Evaluation Board (unit: mm) 6-1. Antenna Dimensions ₱5±0.35 1.All materials are RoHS compliant. 2." 8-C" Critical Dimensions. (0.3)(0.3)3."( )" Reference Dimensions. **PIN Definitions** PIN<sub>1</sub>

PIN<sub>2</sub>



### **Top View**

### **Bottom View**


Item	PIN 1	PIN 2
Terminal	Signal	Soldering Pad

Shenzhen Xi angbo Yi Technology Co., Ltd. THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

PAGE

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna DOCUMENT REV. H2U262GKBA0100 (AA029) Engineering Specification NO. G

### 6-2. Evaluation Board with Antenna

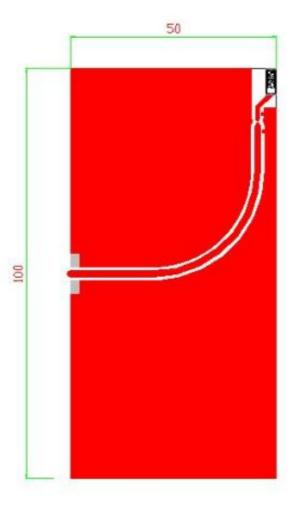

Unit: mm

Shenzhen Xi angbo Yi Technology Co., Ltd. THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE : 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification NO.


H2U262GKBA0100


G


PAGE 5 OF 10

### 7. Radiation Pattern (with 100 x 50 mm<sup>2</sup> Evaluation Board)

7-1. 3D Gain Pattern @ 2442 MHz (unit: dBi)

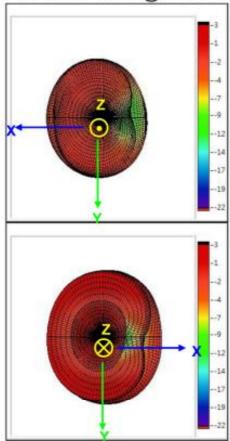

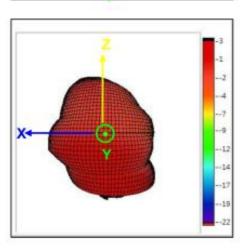

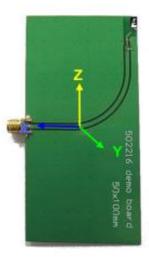

Shenzhen Xi angbo Yi Technology Co., Ltd. THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

PAGE

10

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert


TITLE : 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification NO.

| Approved by : Herbert | Rev. | Rev

# 7-2. 3D Efficiency Table

Frequency(MHz)	2400	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472	2484
Efficiency(dB)	-2.3	-2.0	-2.0	-2.0	-1.9	-1.9	-1.9	-1.8	-2.0	-2.0	-2.0	-1.8	-1.9	-2.0	-2.3
Efficiency (%)	59.3	62.4	63.4	63.8	64.4	65.3	65.2	65.5	63.5	63.1	63.7	65.5	65.0	63.1	59.0
Peak Gain (dBi)	2.8	3.1	3.3	3.4	3.5	3.5	3.5	3.5	3.4	3.3	3.5	3.8	3.8	3.7	3.5

### 7-3. 3D Efficiency vs. Frequency

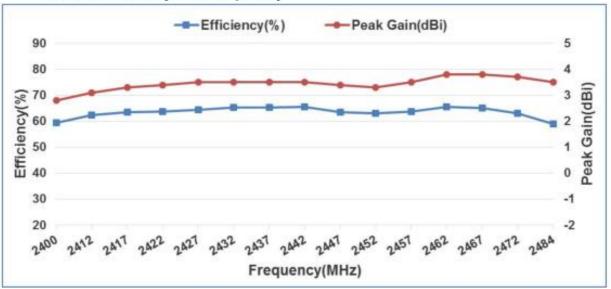


Shenzhen Xiangbo Yi Technology Co., Ltd.

Prepared by : Xenia	Designed by : Phillip	Checked I	by : Mike	Appr	oved by	: Herbert
TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification		DOCUMENT	H2U262GK	BA01	00	REV.
		NO.		7201101		G
		100000	PAGE	7	OF	10


### 8. Frequency tuning and Matching circuit

### 8-1. Chip antenna tuning scenario:

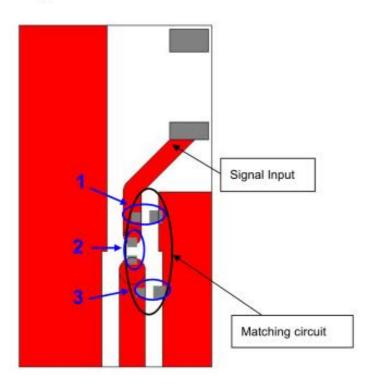

### 8-2. Matching circuit:


With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 100 x 50 mm<sup>2</sup> evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.



	System Matching Circ	cuit Component	
Location	Description	Vendor	Tolerance
1	N/A*	-	-
2	2.2nH, (0402)	DARFON	±0.1nH
3	1pF, (0402)	DARFON	±0.1pF


Shenzhen Xiangbo Yi Technology Co., Ltd.

Checked I	by : Mike	Approved by : Herbert		
DOCUMENT	H2U2620	KBA0100	REV.	
NO.	Carry Mark States		G	
	DOCUMENT	H2U2620	DOCUMENT H2U262GKBA0100	

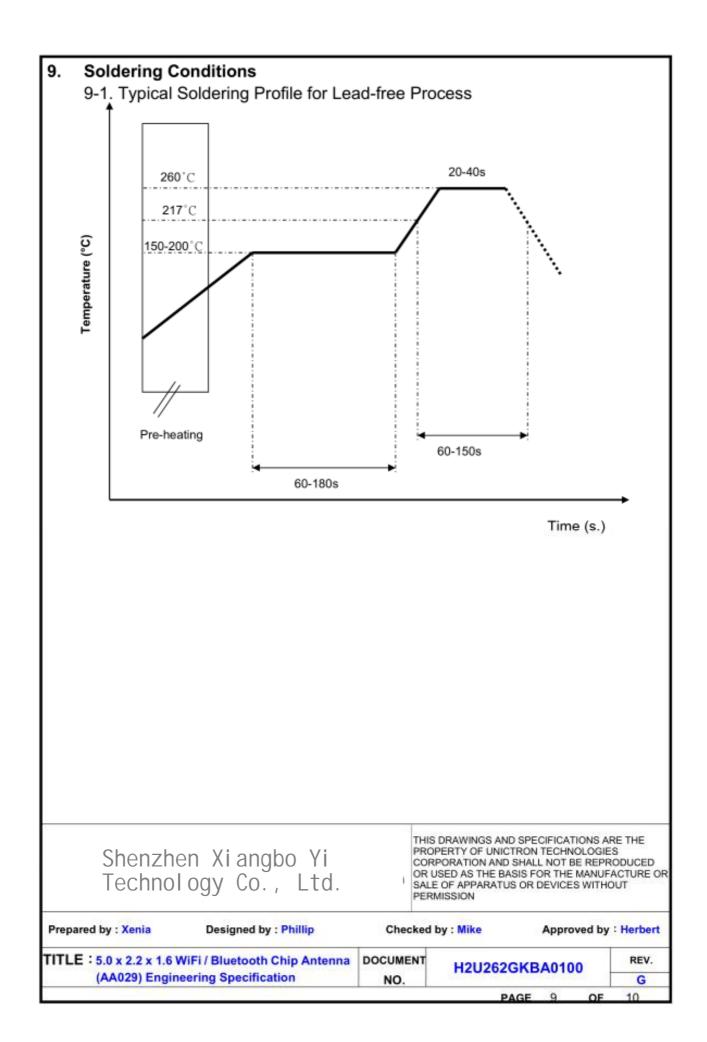

### 10. Packing

- (1) Quantity/Reel: 3000pcs/Reel
- (2) Plastic tape:
  - a. Tape Drawing

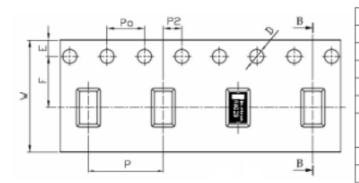

#### b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	12.00	±0.30
Р	8.00	±0.10
E	1.75	±0.10
F	5.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10
D	1.50	-0.00
Po	4.00	±0.10
10Po	40.00	±0.20

### 11. Operating & Storage Conditions

### 11-1. Operating

(1) Maximum Input Power: 2 W

(2) Operating Temperature: -40℃ to 85℃

### 11-2. Storage

(1) Storage Temperature: -5°C to 40°C

(2) Relative Humidity: 20% to 70%

(3) Shelf Life: 1 year

#### 12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.

Shenzhen Xiangbo Yi Technology Co., Ltd. THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE : 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna DOCUMENT HOUSE REV.

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

DOCUMENT NO.

H2U262GKBA0100

G

PAGE 10 OF 10