

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND RSS 247 REQUIREMENT

OF

Applicant:	WWZN Information Technology Company Limited Room 901, 9th Floor, No.19, Zhong Guancun Street, Haidian
	District, Beijing, 100080 China
Product Name:	Smart Watch
Brand Name:	TicWatch
Model No.:	WG12026, WG12016
Model Difference:	Enclosure difference
FCC ID:	2AP42-WG12026
IC:	24006-WG12026
Report Number:	ER/2018/60016
FCC Rule Part:	§15.247, Cat: DSS
IC Rule Part:	RSS-247 issue 2 Feb 2017
Issue Date:	Jul. 09, 2018
Date of Test:	Jun. 05, 2018~ Jun. 29, 2018
Date of EUT ceived:	<b>Re-</b> Jun. 05, 2018

#### We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Tested By:

Approved By:

Louis Chen / Engineer

Jim Chang / Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs Stateware stated are textus single stateware textus and textus Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/60016	Rev.00	Initial creation of docu- ment	All	Jul. 09, 2018	Stefanie Yu / Clerk

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



# **Table of Contents**

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	UMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY1	1
6	CONDUCTED EMISSION TEST12	2
7	PEAK OUTPUT POWER MEASUREMENT10	6
8	20dB & 99% BANDWIDTH MEASUREMENT19	9
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT2	5
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	1
11	FREQUENCY SEPARATION	0
12	NUMBER OF HOPPING FREQUENCY	2
13	TIME OF OCCUPANCY (DWELL TIME)64	4
14	ANTENNA REQUIREMENT	1



#### **GENERAL INFORMATION** 1

### **1.1 Product description**

#### General:

Product Name:	Smart Wa	Smart Watch		
Brand Name:	TicWatch	TicWatch		
Model No.:	WG12026	6, WG12016		
Model Difference:	Enclosure difference			
Product SW/HW version:	OWDT.180612.001 / 1000			
Radio SW/HW version:	OWDT.180612.001 / 1000			
	3.85Vdc Rechargeable Li-ion Battery or 5Vdc from USE			
Power Supply:	Battery:	Model No.: SP452929SF Supplier: TianJin Lishen Battery Joint-Stock CO., LTD		

#### Bluetooth BR+EDR:

Bluetooth Version:	Bluetooth V4.1 Dual Mode
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	13.17 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Antenna Designation:	PIFA Antenna, Antenna Gain: -1.78dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 5 of 71



#### 1.2 Test Methodology of Applied Standards

Canada RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

FCC Part 15, Subpart C §15.247

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

#### **1.3 Test Facility**

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Numbers are: 509634 / TW0001

Canada Registration Number: 4620E-1

#### **1.4 Special Accessories**

There is no special accessory used while test was conducted.

#### **1.5 Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 2 SYSTEM TEST CONFIGURATION

# 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

# 2.3 Test Procedure

# 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

# 2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

# 2.4 Measurement Results Explanation Example

# For all conducted test items:


The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

**Note:**The spectrum analyzer offset is derived from RF cable loss 1.1dB+ attenuator 10dB. Total offset = 1.1 + 10 = 11.1dB.

Report No.: ER/2018/60016 Page 7 of 71



# 2.5 Configuration of Tested System Fig. 2-1 Conducted (Antenna Port) Emission Configuration



# Fig 2-3 Conduction (AC Power Line) Radiated Emission



# Fig 2-2 Radiated Emission



#### Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	MY53140006	N/A	Un-Shielded
3.	Notebook	Lenovo	L420	LR-7HXZA	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 3 UMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	RSS-247 §5.4 (2)	Peak Output Power	Compliant
§15.247(a)(1)	RSS-247 §5.1 (1) RSS-Gen §6.6	20dB & 99% Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	RSS-247 §5.1 (2)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Time of Occupancy	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant



#### **DESCRIPTION OF TEST MODES** 4

#### 4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition. 1
- Test program used to control the EUT for staying in continuous transmitting and receiving 2 mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst 3 case.

#### **RADIATED EMISSION TEST:**

	RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		


#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case H position was reported.

#### ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST						
		Peak Output Power,	20dB Band Width			
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DQPK	DH5		
		Band E	Edge			
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, 8-DQPK	DH5, 3DH5		
		Frequency S	Separation			
Bluetooth	2402 to 2480	2402, 2441, 2480	8-DQPK	3DH5		
	Number of hopping frequency					
Bluetooth	2402 to 2480	2402, 2441, 2480	8-DQPK	3DH5		
	Time of Occupancy (Dwell time)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DQPK	DH1/DH3/DH5		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





#### MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



#### CONDUCTED EMISSION TEST 6

### 6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 6.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EXA Spectrum Analyzer	Agilent	N9010A	MY57120290	2018/02/14	2019/02/13		
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01		
DC Power Supply	Anritsu	E3640A	MY40000811	2017/12/18	2018/12/17		


#### 6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 6.4 Test SET-UP (Block Diagram of Configuration)

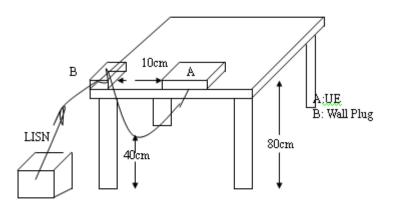

#### 6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.


#### **6.6 Measurement Result**

Note: Refer to next page for measurement data and plots. Note2: The \* reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# AC POWER LINE CONDUCTED EMISSION TEST DATA

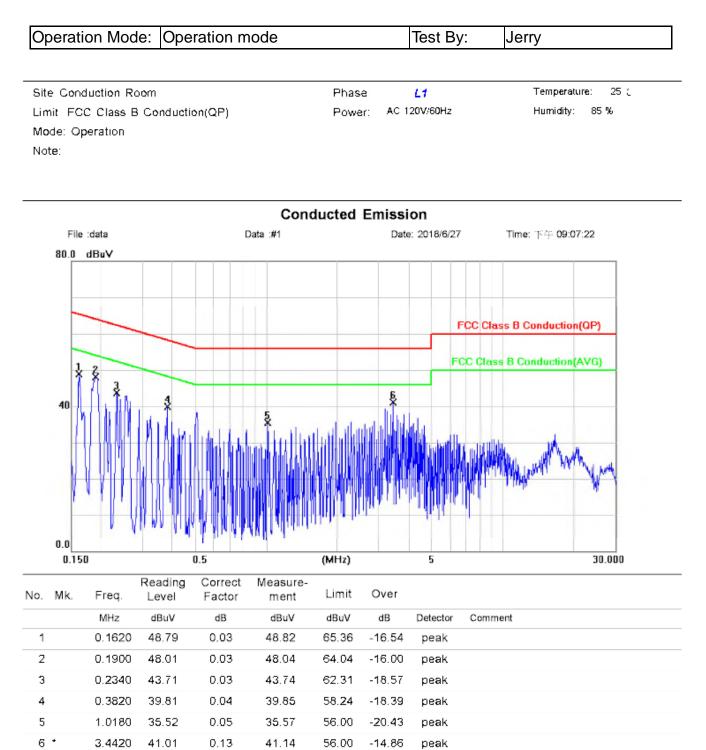


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Site Conduction Room Limit: FCC Class B Conduction(QP) Mode: Operation Note:

Phase N AC 120V/60Hz Power:

Temperature 25 🖯 Humidity 85 %

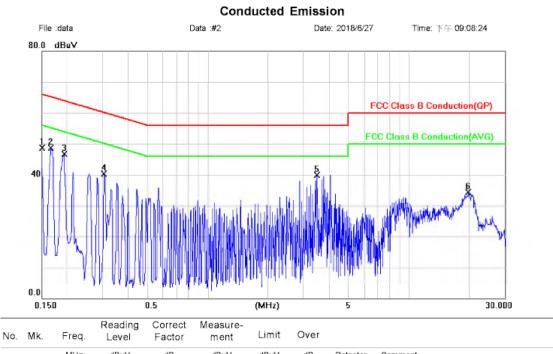

	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1500	48.60	0.03	48.63	66.00	-17.37	peak	
2	0,1660	48.69	0.03	48.72	65.16	-16.44	peak	
3	0.1940	46.69	0.03	46.72	63 86	-17.14	peak	
4	0.3060	40.26	0.04	40.30	60.08	-19.78	peak	
5 •	3,5060	39.77	013	39.90	56 00	-16.10	peak	
6	19,7540	33.85	0.40	34.25	60.00	-25.75	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### PEAK OUTPUT POWER MEASUREMENT 7


### 7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts and the e.i.r.p. shall not exceed 0.5 W if the hop set uses less than 75 hopping channels.

#### 7.2 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
	A				0040/04/04			
Power Meter	Anritsu	ML2496A	1804001	2018/02/01	2019/01/31			
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01			
Power Sensor	Anritsu	MA2411B	1726104	2018/02/01	2019/01/31			
DC Power Supply	Anritsu	E3640A	MY40000811	2017/12/18	2018/12/17			

#### 7.3 Test Set-up:



#### 7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 7.5 Measurement Result

#### 1M BR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	12.62	18.281	1000
39	2441	12.41	17.418	1000
78	2480	11.79	15.101	1000

#### 1M BR mode (Average):

СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	11.58	14.388	1000
39	2441	11.38	13.740	1000
78	2480	10.76	11.912	1000

2M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	12.74	18.793	125
39	2441	12.54	17.947	125
78	2480	11.92	15.560	125

#### 2M EDR mode (Average):

СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance	Output Power (mW)	Limit (mW)
0	2402	9.28	8.472	125
39	2441	9.06	8.054	125
78	2480	8.45	6.998	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	13.17	20.749	125
39	2441	12.93	19.634	125
78	2480	12.33	17.100	125

#### 3M EDR mode (Average):

		-		
СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance	Output Power (mW)	Limit (mW)
0	2402	9.29	8.492	125
39	2441	9.07	8.072	125
78	2480	8.46	7.015	125

NOTE: cable loss as 1dB that offsets in the spe \*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 1M BR mode EIRP

Channel	Frequency (MHz)	Max. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	11.58	-1.78	9.550	4000
39	2441	11.38	-1.78	9.120	4000
78	2480	10.76	-1.78	7.907	4000

#### 2M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	9.28	-1.78	5.623	4000
39	2441	9.06	-1.78	5.346	4000
78	2480	8.45	-1.78	4.645	4000

#### 3M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	9.29	-1.78	5.636	4000
39	2441	9.07	-1.78	5.358	4000
78	2480	8.46	-1.78	4.656	4000

\* Note: EIRP = Average Power + Gain

NOTE: cable loss as 1.1dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 20dB & 99% BANDWIDTH MEASUREMENT 8


### 8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

#### 8.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
EXA Spectrum Ana- lyzer	Agilent	N9010A	MY5712029 0	2018/02/14	2019/02/13	
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01	
DC Power Supply	Anritsu	E3640A	MY4000081 1	2017/12/18	2018/12/17	

#### 8.3 Test Set-up



#### 8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Turn on the 99% bandwidth function, max reading.
- Repeat above procedures until all test default channel is completed

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 8.5 Measurement Result

			QPSK		8-DPS	<b>n</b>
20 dB BW	2/3 BW	СН	20 dB BW	2/3 BW	СН	2
(MHz)	(MHz)		(MHz)	(MHz)		(
0.924	0.62	Low	1.314	0.88	Low	1
0.925	0.62	Mid	1.313	0.88	Mid	1
0.924	0.62	High	1.313	0.88	High	1
	<b>BW</b> (MHz) 0.924 0.925	BWBW(MHz)(MHz)0.9240.620.9250.62	BW BW CH   (MHz) (MHz) -   0.924 0.62 Low   0.925 0.62 Mid	BW BW CH BW   (MHz) (MHz) (MHz) (MHz)   0.924 0.62 Low 1.314   0.925 0.62 Mid 1.313	BW BW CH BW BW   (MHz) (MHz) (MHz) (MHz) (MHz)   0.924 0.62 Low 1.314 0.88   0.925 0.62 Mid 1.313 0.88	BW BW CH BW BW CH   (MHz) (MHz) (MHz) (MHz) (MHz) -   0.924 0.62 Low 1.314 0.88 Low   0.925 0.62 Mid 1.313 0.88 Mid

СН	20 dB BW	2/3 BW
	(MHz)	(MHz)
Low	1.268	0.85
Mid	1.267	0.84
High	1.267	0.84

8-DPSK


GFS	SK
-----	----

#### π/4-DQPSK


011			-		
	99%		99%		99%
СН	Bandwidth	СН	Bandwidth	СН	Bandwidth
	(MHz)		(MHz)		(MHz)
Low	0.88549	Low	1.1659	Low	1.1717
Mid	0.88453	Mid	1.1672	Mid	1.1721
High	0.88347	High	1.1675	High	1.1716
		-			



#### BW CH-Low (GFSK mode)

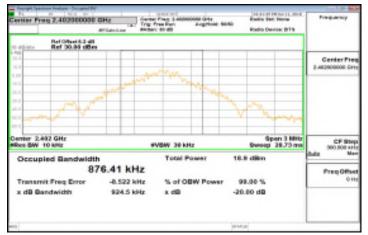


#### CH-Mid (GFSK mode)

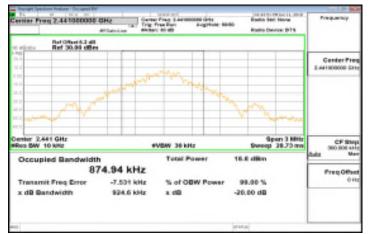


# CH-High (GFSK mode)




#### CH-Low (π/4-DQPSK mode)

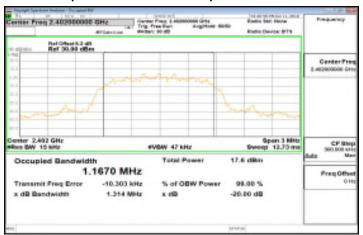

#### CH-Mid (π/4-DQPSK mode)

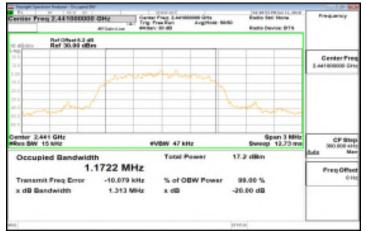

# CH-High (π/4-DQPSK mode)

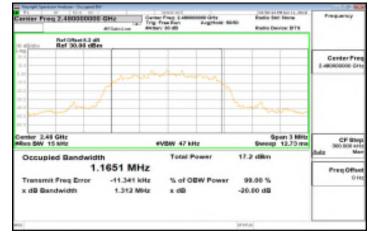

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, is any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司


f (886-2) 2298-0488



#### CH-Low (8-DPSK mode)

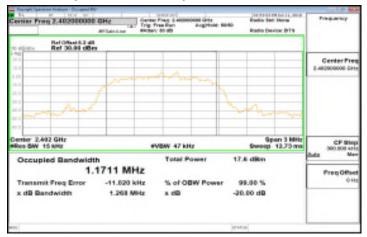

#### CH-Mid (8-DPSK mode)

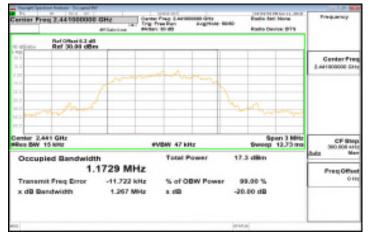


# CH-High (8-DPSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to here states the states the states the state here in the test report releasing to the state for an exercisaring etc. and releasing to the states the states are states to be days only. Firs 月 ろは、 and the states are states the states are states are states are states are states to be days only. Firs A states are states the states are states may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.




# 99% Bandwidth BW CH-Low (GFSK mode)

SGS



#### CH-Mid (GFSK mode)

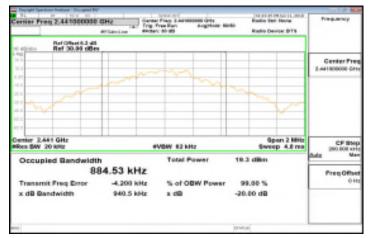


# CH-High (GFSK mode)




#### CH-Low (π/4-DQPSK mode)



#### CH-Mid (π/4-DQPSK mode)

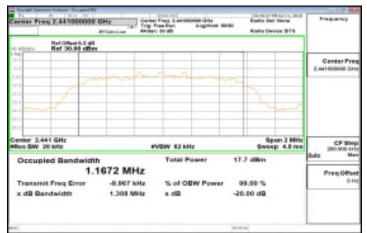

# CH-High ( $\pi/4$ -DQPSK mode)

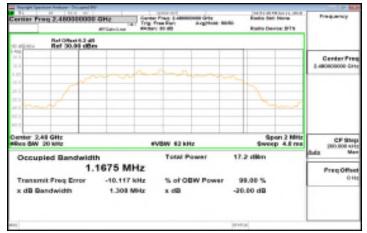

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms\_and\_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, is any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488




#### CH-Low (8-DPSK mode)



#### CH-Mid (8-DPSK mode)



# CH-High (8-DPSK mode)

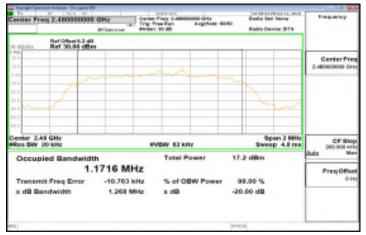

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to here states the states the states the state here in the test report releasing to the state for an exercisaring etc. and releasing to the states the states are states to be days only. Firs 月 ろは、 and the states are states the states are states are states are states are states to be days only. Firs A states are states the states are states may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com
	1		Member of SGS Group



#### CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


#### 9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9 limit.

#### 9.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
EXA Spectrum Ana- lyzer	Agilent	N9010A	MY57120290	2018/02/14	2019/02/13	
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01	
DC Power Supply	Anritsu	E3640A	MY40000811	2017/12/18	2018/12/17	

#### 9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# 9.4 Measurement Procedure

### Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

# **Conducted Spurious Emission:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

#### FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 9.5 Measurement Result


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report reterior by to the sample(s) results anippe(s) are retained to so days only. 除非另有說明,此報告結果僅對測試之樣品負責, 同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




# Hopping mode **BR Band Edge CH-Low**

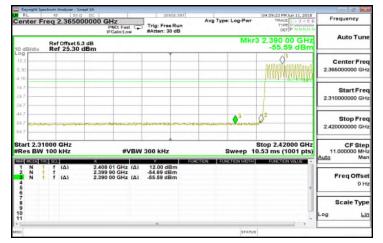

#### BR Band Edge CH-High

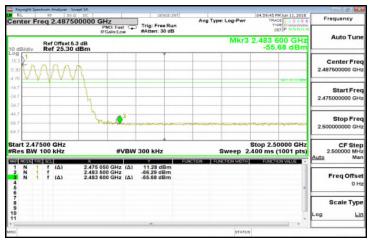

# EDR Band Edge CH-Low

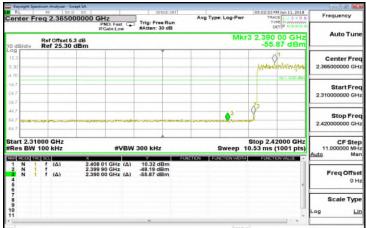

# EDR Band Edge CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Difference states are states and states an prosecuted to the fullest extent of the law.

. SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488







# Non-Hopping BR Band Edge CH-Low

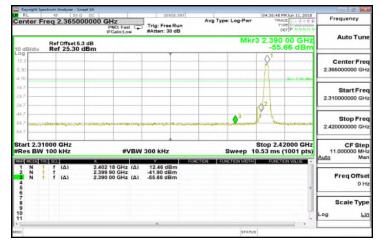


#### BR Band Edge CH-High

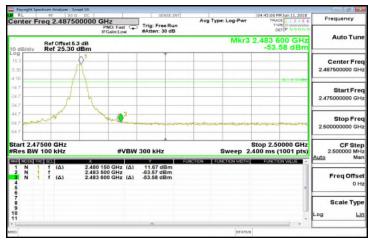

#### EDR Band Edge CH-Low

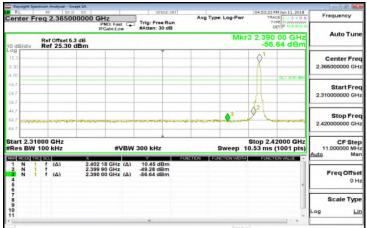

# EDR Band Edge CH-High

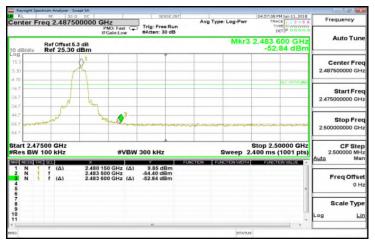

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Difference states are states ar prosecuted to the fullest extent of the law.

. SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279 f (886-2) 2298-0488 台灣檢驗科技股份有限公司




### **Conducted Spurious Emission Measurement Result** Ch Low 30MHz – 3GHz (BR Mode)

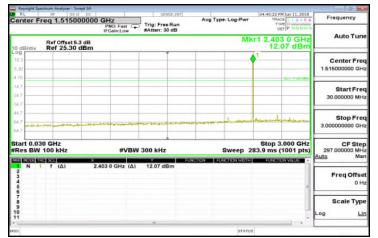

#### Ch Low 3GHz – 26.5GHz (BR Mode)

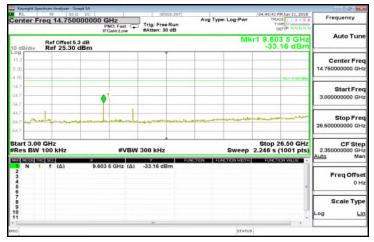


# Ch Mid 30MHz – 3GHz (BR Mode)

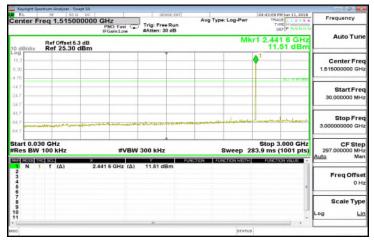


# Ch Mid 3GHz – 26.5GHz (BR Mode)



# Ch High 30MHz – 3GHz (BR Mode)

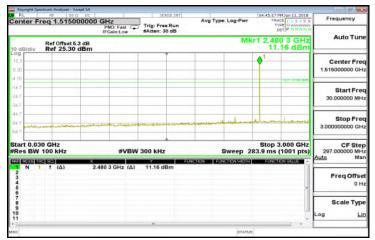

# Ch High 3GHz – 26.5GHz (BR Mode)

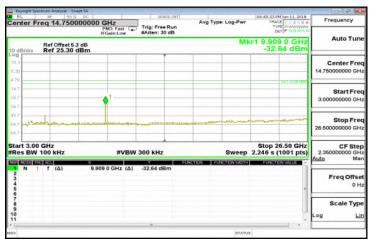

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司


f (886-2) 2298-0488




#### Ch Low 30MHz – 3GHz (EDR Mode)

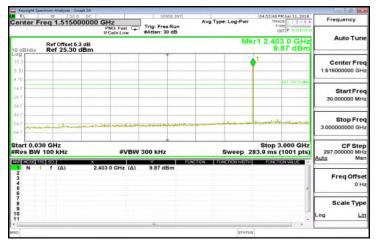


#### Ch Low 3GHz – 26.5GHz (EDR Mode)

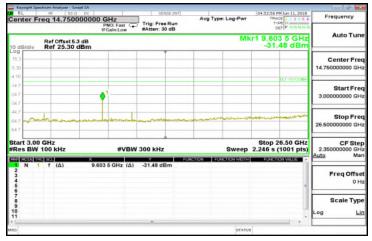


# Ch Mid 30MHz – 3GHz (EDR Mode)

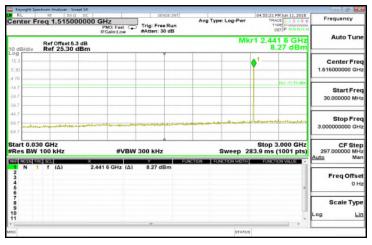


### Ch Mid 3GHz – 26.5GHz (EDR Mode)

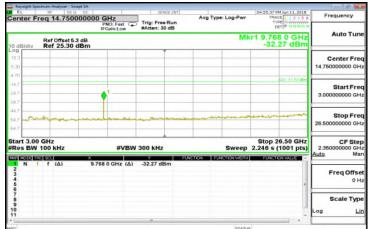

#### Ch High 30MHz – 3GHz (EDR Mode)

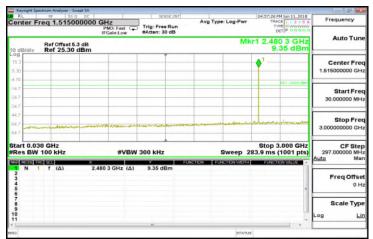

# Ch High 3GHz – 26.5GHz (EDR Mode)

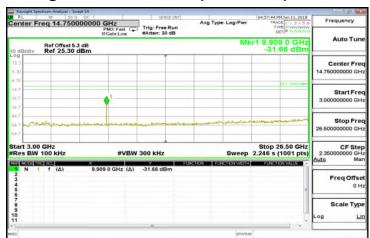

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



# 10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

#### **Standard Applicable** 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, must also comply with the §15.209 & RSS-Gen §8.10 Table 6 limit.

And according to §15.33(a) (1) & RSS-Gen §8.9 Table 4 & 5, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **10.2 Measurement Equipment Used**

	966 Chamber						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Bi-log Antenna	SCHWAZBECK	VULB9168	378	2017/12/29	2018/12/28		
Horn Antenna	Schwarzbeck	BBHA9120D	1441	2017/08/04	2018/08/03		
Horn Antenna	Schwarzbeck	BBHA9170	184	2017/12/12	2018/12/11		
Loop Antenna	ETS.LINDGREN	6502	148045	2017/09/26	2018/09/25		
3m Site NSA	SGS	966 chamber	N/A	2018/01/02	2019/01/01		
Spectrum Analyzer	Agilent	E4446A	MY51100003	2018/05/15	2019/05/14		
EMI Test Receiver	R&S	ESCI7	100335	2018/02/02	2019/02/01		
Pre-Amplifier	HP	8449B	3008A00578	2018/01/02	2019/01/01		
Pre-Amplifier	HP	8447D	2944A07676	2018/01/02	2019/01/01		
Pre-Amplifier	EMC Instruments	EMC184045B	980135	2017/10/27	2018/10/26		
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	2018/01/02	2019/01/01		
Low Loss Cable	Huber Suhner	966_RX	9	2018/01/02	2019/01/01		

NOTE: N.C.R refers to Not Calibrated Required.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




#### 10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

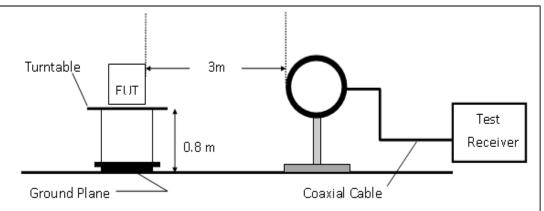

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

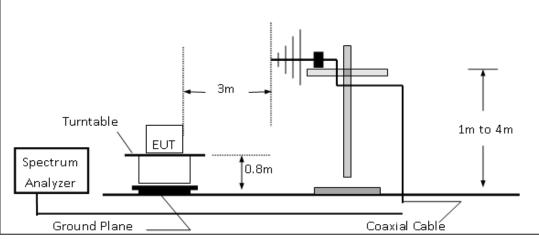

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

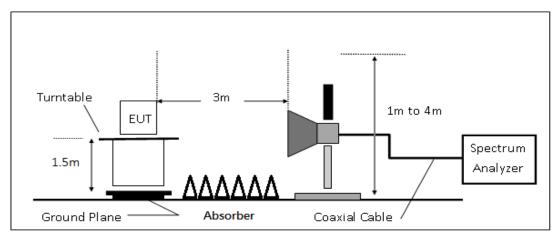

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **10.4 Measurement Procedure**

### **Radiated Emission**

- 1. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
  - (1) Span = wide enough to fully capture the emission being measured
  - (2) RBW = 1 MHz for  $f \ge 1$  GHz, 100 kHz for f < 1 GHz, VBW  $\ge$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c)

Duty Cycle = On time/100 milliseconds

On time = N1\*L1=N2\*L2+...+N(n-1)\*LN(n-1)+N(n)\*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20\*log (duty Cycle)

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **10.5 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

#### FS = RA + AF + CL - AG

Where	8	CL = Cable Attenuation Factor (Cable Loss)		
	RA = Reading Amplitude	AG = Amplifier Gain		
	AF = Antenna Factor			

The limit of the emission level is expressed in dBuV/m, which converts 20\*log(uV/m)

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre\_Amplifier Gain(dB)

#### 10.6 Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

#### 10.7 **Measurement Result**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs Stateware stated are textus single stateware textus and textus Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




#### Radiated Band Edge Measurement Result: (Hopping Mode)

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date :2018-06-26 Temp./Humi. :23 deg\_C / 62 RH Engineer :Kane Measurement Antenna Pol. :VERTICAL

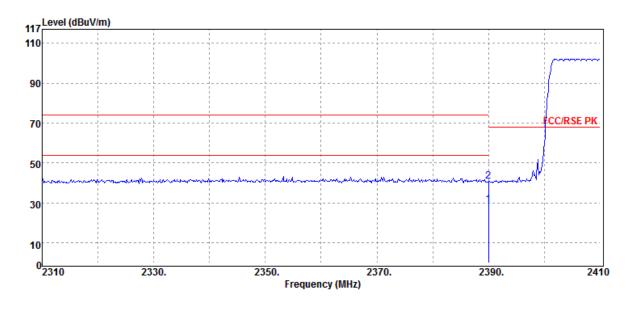

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.96	0.20	29.16	54.00	-24.84
2390.00	Peak	40.62	0.20	40.82	74.00	-33.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 37 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

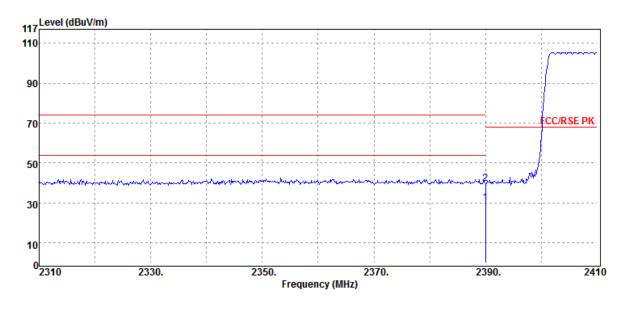

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.77	0.20	29.97	54.00	-24.03
2390.00	Peak	39.32	0.20	39.52	74.00	-34.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 38 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Kane Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :VERTICAL

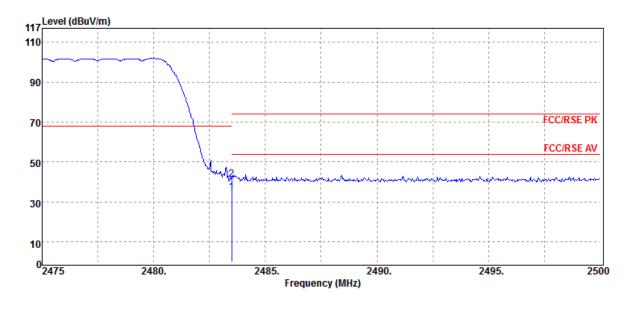

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	34.28	0.53	34.81	54.00	-19.19
2483.50	Peak	40.79	0.53	41.32	74.00	-32.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 39 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

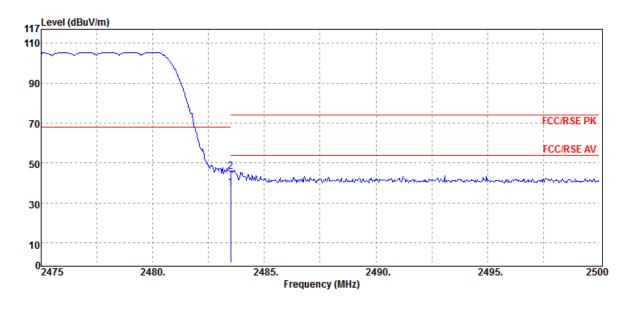

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.50	Average	37.01	0.53	37.54	54.00	-16.46
	2483.50	Peak	45.19	0.53	45.72	74.00	-28.28
_	2483.50	PK/QP/AV Average	dBµV 37.01	0.53	37.54	dBµV/m 54.00	-16.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 40 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :VERTICAL

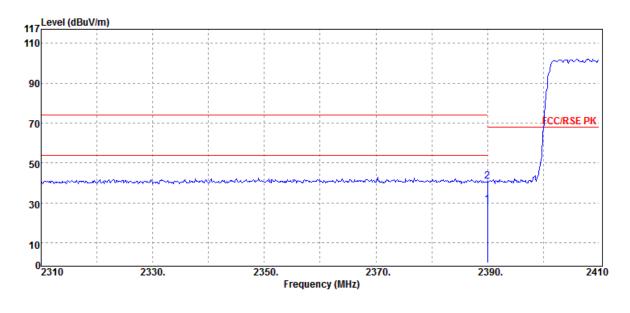

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.85	0.20	29.05	54.00	-24.95
2390.00	Peak	40.56	0.20	40.76	74.00	-33.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 41 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

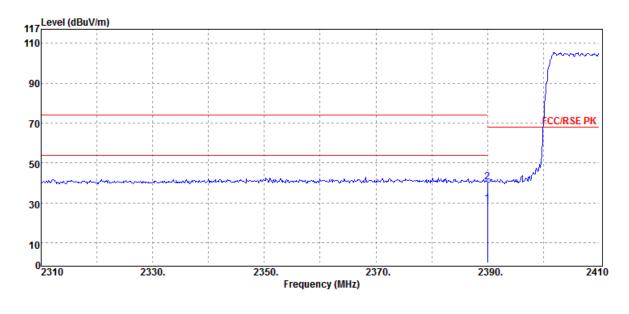

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	29.26	0.20	29.46	54.00	-24.54
Peak	40.24	0.20	40.44	74.00	-33.56
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage29.26	ModeReading LevelPK/QP/AVdBµVdBAverage29.260.20	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage29.260.2029.46	Mode Reading Level FS @3m   PK/QP/AV dBµV dB dBµV/m dBµV/m   Average 29.26 0.20 29.46 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 42 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Kane Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :VERTICAL

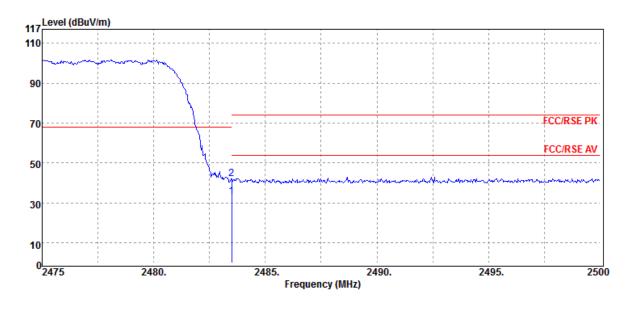

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
 2483.50	Average	32.57	0.53	33.10	54.00	-20.90
2483.50	Peak	41.65	0.53	42.18	74.00	-31.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 43 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

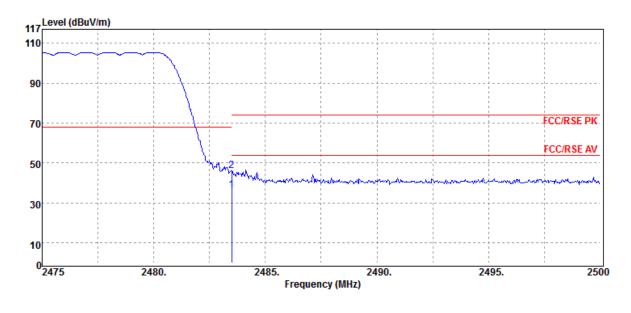

F	req.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	-
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
24	83.50	Average	36.06	0.53	36.59	54.00	-17.41
24	83.50	Peak	45.46	0.53	45.99	74.00	-28.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




### Radiated Emission – Band Edge (Non-Hopping Mode):

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BR(1M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :VERTICAL

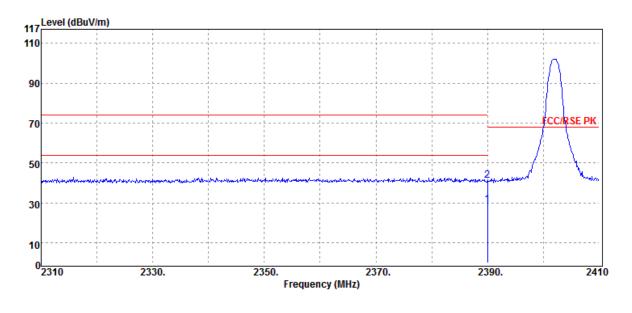

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	28.98	0.20	29.18	54.00	-24.82
2390.00	Peak	41.27	0.20	41.47	74.00	-32.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 45 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:BR(1M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

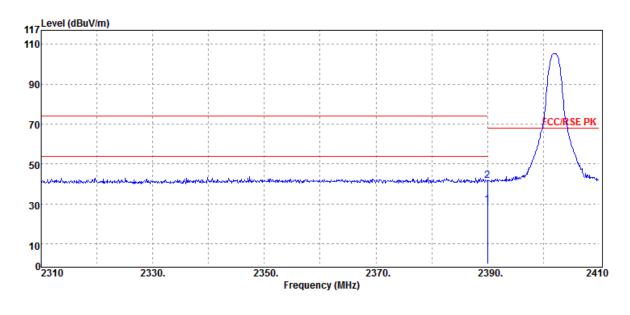

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.28	0.20	29.48	54.00	-24.52
2390.00	Peak	41.44	0.20	41.64	74.00	-32.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/60016 Page 46 of 71



**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:BR(1M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date :2018-06-26 Temp./Humi. :23 deg\_C / 62 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

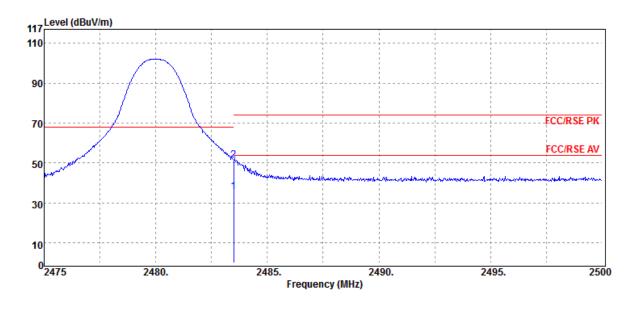

Spectrum	Factor	Actual	Limit	Margin
Reading Level		FS	@3m	-
dBµV	dB	dBµV/m	dBµV/m	dB
35.20	0.53	35.73	54.00	-18.27
50.88	0.53	51.41	74.00	-22.59
	Reading Level dBµV 35.20	Reading LeveldBµVdB35.200.53	Reading Level FS   dBµV dB dBµV/m   35.20 0.53 35.73	Reading Level FS @3m   dBµV dB dBµV/m dBµV/m   35.20 0.53 35.73 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 47 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:BR(1M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

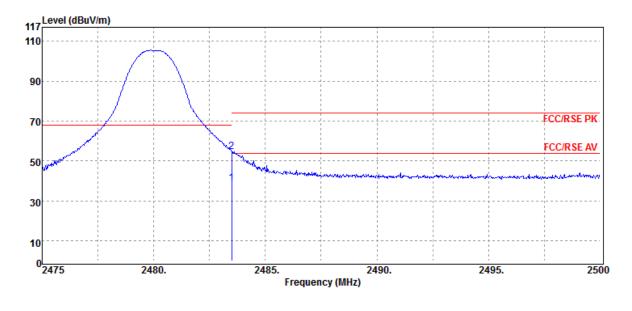

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	38.46	0.53	38.99	54.00	-15.01
2483.50	Peak	54.26	0.53	54.79	74.00	-19.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/60016 Page 48 of 71



**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR(3M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date :2018-06-26 Temp./Humi. :23 deg\_C / 62 RH Engineer :Kane Measurement Antenna Pol. :VERTICAL

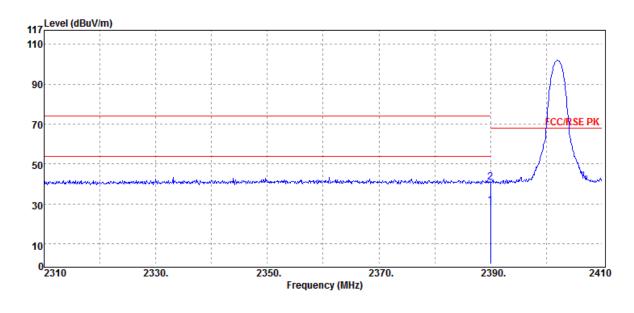

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
 2390.00	Average	28.92	0.20	29.12	54.00	-24.88
2390.00	Peak	40.72	0.20	40.92	74.00	-33.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 49 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR(3M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

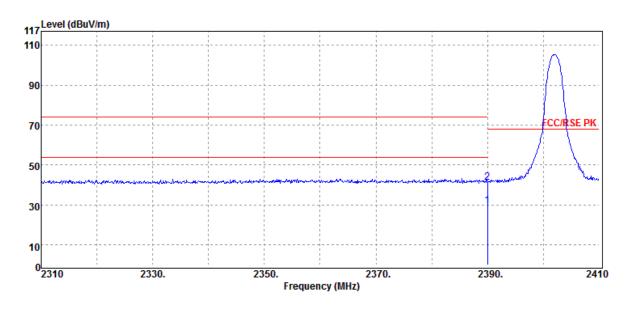

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.26	0.20	29.46	54.00	-24.54
2390.00	Peak	41.16	0.20	41.36	74.00	-32.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 50 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR(3M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Kane Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :VERTICAL

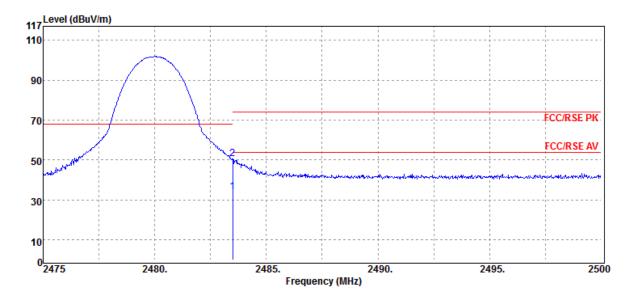

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	33.45	0.53	33.98	54.00	-20.02
2483.50	Peak	50.12	0.53	50.65	74.00	-23.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 51 of 71




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:EDR(3M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

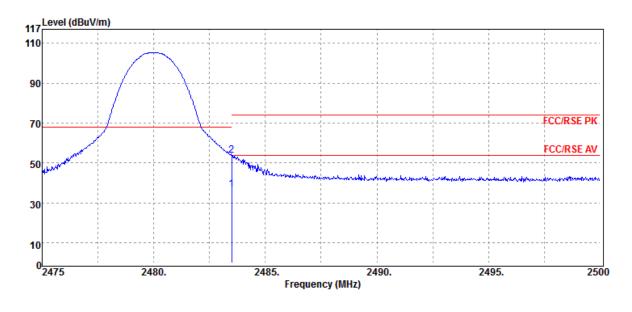

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m	_	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	2483.50	Average	36.22	0.53	36.75	54.00	-17.25	
	2483.50	Peak	53.30	0.53	53.83	74.00	-20.17	
_	2483.50	PK/QP/AV Average	dBµV 36.22	0.53	dBµV/m 36.75	dBµV/m 54.00	-17.25	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/60016 Page 52 of 71



## **Radiated Spurious Emission Measurement Result:** For Frequency form 30MHz to 1000MHz

Operation Band	:EDR(3M)
Fundamental Frequency	:2441 MHz
Operation Mode	:Tx CH MID
EUT Pol.	:H Plane

Test Date	:2018-06-26
Temp./Humi.	:23 deg_C / 62 RH
Engineer	:Kane
Measurement Antenna Pol.	:VERTICAL

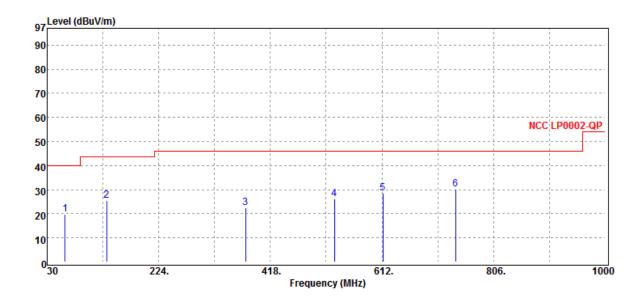

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
61.04	Peak	27.82	-8.05	19.77	40.00	-20.23
133.79	Peak	34.08	-8.67	25.41	43.50	-18.09
375.32	Peak	26.51	-3.96	22.55	46.00	-23.45
529.55	Peak	27.20	-1.18	26.02	46.00	-19.98
613.94	Peak	28.51	0.07	28.58	46.00	-17.42
740.04	Peak	26.56	3.56	30.12	46.00	-15.88


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 53 of 71

RH



Operation Band:EDR(Fundamental Frequency:2441Operation Mode:Tx CHEUT Pol.:H Pla	MHz Temp./Hun H MID Engineer	i. :2018-06-26 :23 deg_C / 62 :Kane ent Antenna Pol. :HORIZONTAL
---	---------------------------------	---

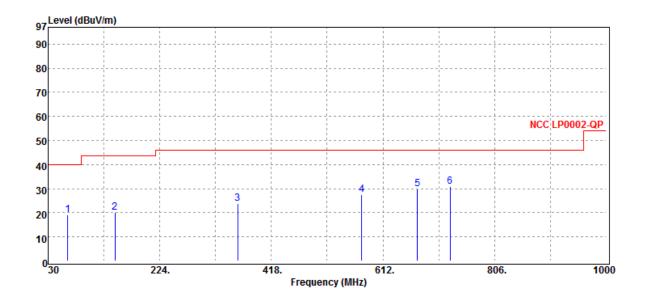

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
63.95	Peak	27.86	-8.75	19.11	40.00	-20.89
146.40	Peak	27.78	-7.59	20.19	43.50	-23.31
359.80	Peak	28.09	-4.26	23.83	46.00	-22.17
575.14	Peak	27.52	-0.14	27.38	46.00	-18.62
672.14	Peak	28.99	0.99	29.98	46.00	-16.02
728.40	Peak	27.98	2.89	30.87	46.00	-15.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


Report No.: ER/2018/60016 Page 54 of 71



## **Radiated Spurious Emission Measurement Result:** For Frequency above 1 GHz

Operation Band	:EDR(3M)
Fundamental Frequency	:2402 MHz
Operation Mode	:Tx CH LOW
EUT Pol.	:H Plane

Test Date :2018-06-26 Temp./Humi. :23 deg\_C / 62 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

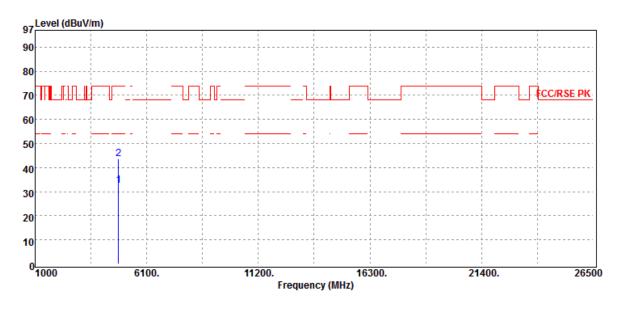

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	4804.00	Average	26.82	5.65	32.47	54.00	-21.53	
	4804.00	Peak	37.93	5.65	43.58	74.00	-30.42	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/60016 Page 55 of 71



Operation Band	:EDR(3M)
Fundamental Frequency	:2402 MHz
Operation Mode	:Tx CH LOW
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

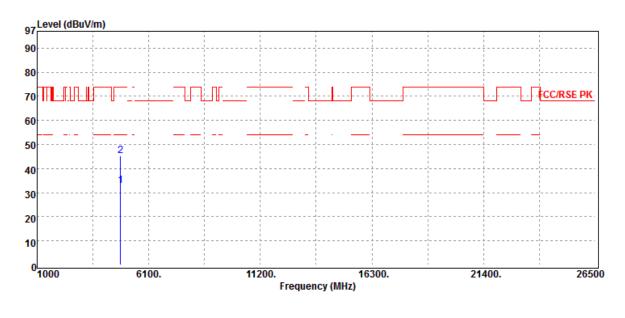

Limit Margin
@3m
dBµV/m dB
54.00 -21.18
74.00 -28.73


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 56 of 71



Operation Band	:EDR(3M)
Fundamental Frequency	:2441 MHz
Operation Mode	:Tx CH MID
EUT Pol.	:H Plane

Test Date :2018-06-26 Temp./Humi. :23 deg\_C / 62 RH Engineer :Kane Measurement Antenna Pol. :VERTICAL

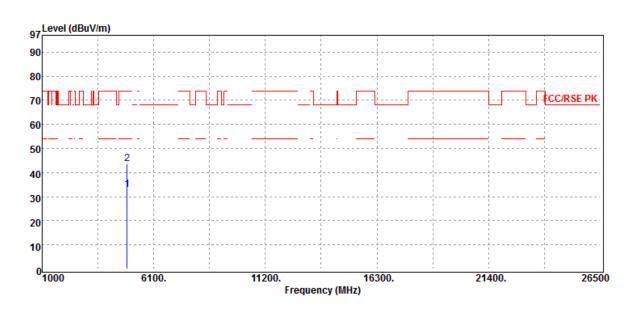

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	26.92	5.90	32.82	54.00	-21.18
4882.00	Peak	37.66	5.90	43.56	74.00	-30.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/60016 Page 57 of 71



:EDR(3M)
:2441 MHz
:Tx CH MID
:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

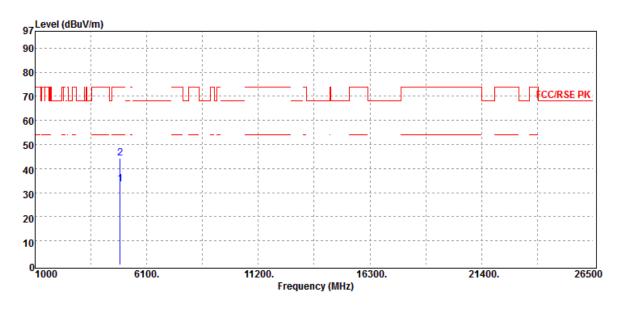

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	27.67	5.90	33.57	54.00	-20.43
4882.00	Peak	38.34	5.90	44.24	74.00	-29.76


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/60016 Page 58 of 71



Operation Band	:EDR(3M)
Fundamental Frequency	:2480 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:H Plane

Test Date :2018-06-26 Temp./Humi. :23 deg\_C / 62 RH Engineer :Kane Measurement Antenna Pol. :VERTICAL

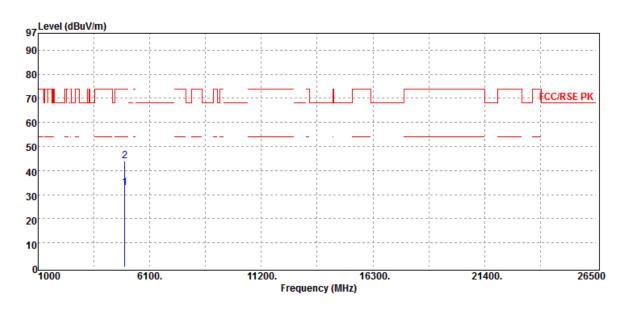

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	26.83	6.05	32.88	54.00	-21.12
4960.00	Peak	37.86	6.05	43.91	74.00	-30.09
4960.00	Peak	37.86	6.05	43.91	74.00	-30.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/60016 Page 59 of 71



Operation Band	:EDR(3M)
Fundamental Frequency	:2480 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-06-26 :23 deg\_C / 62 RH :Kane :HORIZONTAL

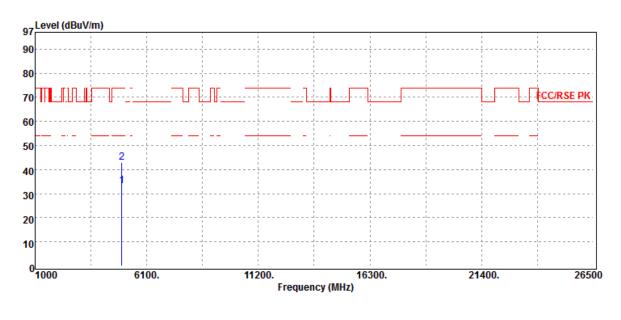

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	-
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	27.11	6.05	33.16	54.00	-20.84
Peak	37.06	6.05	43.11	74.00	-30.89
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage27.11	ModeReading LevelPK/QP/AVdBµVdBAverage27.116.05	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage27.116.0533.16	Mode Reading Level FS @3m   PK/QP/AV dBµV dB dBµV/m dBµV/m   Average 27.11 6.05 33.16 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## **11 FREQUENCY SEPARATION**


#### **Standard Applicable** 11.1

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

#### 11.2 **Measurement Equipment Used**

Conducted Emission Test Site						
EQUIPMENTMFRMODELSERIALLASTCATYPENUMBERNUMBERCAL.					CAL DUE.	
EXA Spectrum Analyzer	Agilent	N9010A	MY57120290	2018/02/14	2019/02/13	
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01	
DC Power Supply	Anritsu	E3640A	MY40000811	2017/12/18	2018/12/17	

#### Test Set-up 11.3



#### 11.4 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

# **Frequency Separation Test Data**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 12 NUMBER OF HOPPING FREQUENCY


### **Standard Applicable** 12.1

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

#### 12.2 **Measurement Equipment Used**

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
EXA Spectrum Ana- lyzer	Agilent	N9010A	MY5712029 0	2018/02/14	2019/02/13	
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01	
DC Power Supply	Anritsu	E3640A	MY4000081 1	2017/12/18	2018/12/17	

### 12.3 Test Set-up



### 12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

## 12.5 Measurement Result

### Tabular Data of Total Channel Number


	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

## **Channel Number**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report feller only to the sample(s) tested and sources in a construction of sources only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



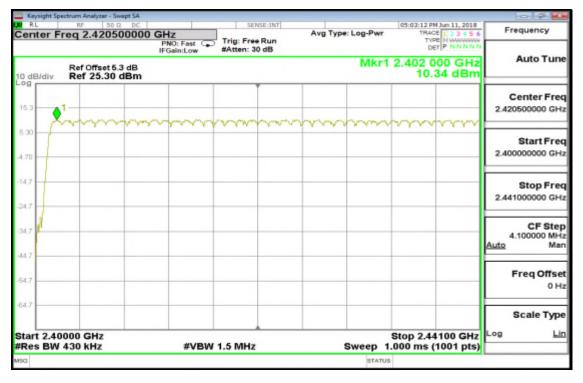

### 2.402GHz - 2.441GHz

### 2.441GHz - 2.4835GHz

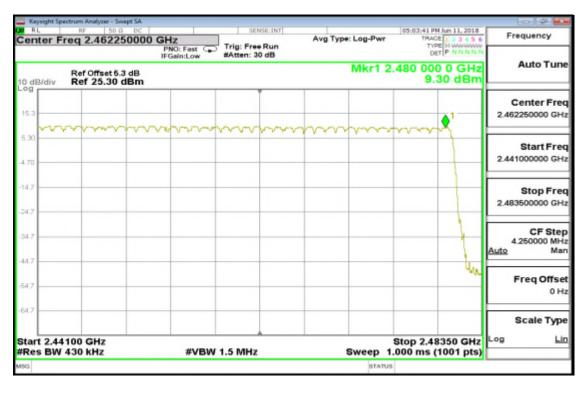

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 13 TIME OF OCCUPANCY (DWELL TIME)


### 13.1 **Standard Applicable**

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

### 13.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
EXA Spectrum Ana- lyzer	Agilent	N9010A	MY57120290	2018/02/14	2019/02/13	
Attenuator	Mini-Circuit	BW-S10W2+	2	2018/01/02	2019/01/01	
DC Power Supply	Anritsu	E3640A	MY40000811	2017/12/18	2018/12/17	

#### 13.3 Test Set-up



### **13.4 Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep =  $2 \sim 8 \text{ms}$ .
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2

DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 \* 20 ) (S), Hop Over Occupancy Time comes to  $(800 / 6 / 20)^{*}(0.4 * 20) = 53.33$ 

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

13.5 Tabular Result of the Measurement

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	116.80	400ms	2.74	3.00
0	DH3	256.32	400ms	0.62	1.00
	DH5	302.61	400ms	0.35	1.00
39	DH1	116.80	400ms	2.74	3.00
	DH3	257.12	400ms	0.62	1.00
	DH5	302.61	400ms	0.35	1.00
78	DH1	115.84	400ms	2.76	3.00
	DH3	255.68	400ms	0.63	1.00
	DH5	302.61	400ms	0.00	1.00

### GFSK (1Mbps)

### π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	2DH1	118.72	400ms	2.70	3.00
39	2DH3	257.12	400ms	0.62	1.00
	2DH5	301.23	400ms	0.35	1.00

### 8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	3DH1	118.40	400ms	2.70	3.00
39	3DH3	256.32	400ms	0.62	1.00
	3DH5	302.61	400ms	0.35	1.00

A period time = 0.4 (s) \* 79 = 31.6 (s)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### GFSK (1Mbps):

CH Low	DH1 time slot = DH3 time slot = DH5 time slot =		(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	116.80 (ms) 256.32 (ms) 302.61 (ms)
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	1.607 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	116.80 (ms) 257.12 (ms) 302.61 (ms)
CH High	DH1 time slot = DH3 time slot = DH5 time slot =	1.598 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	115.84 (ms) 255.68 (ms) 302.61 (ms)
π/4 -DQPS	K (2Mbps):				
CH Mid	2DH1 time slo = 2DH3 time slo = 2DH5 time slo =	0.371 * 1.607 * 2.824 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	118.72 (ms) 257.12 (ms) 301.23 (ms)

### 8-DPSK (3Mbps):

CH Mid	3DH1 time slo =	0.370 *	(1600/2/79) *	31.6 =	118.40 (ms)
	3DH3 time slo =	1.602 *	(1600/4/79) *	31.6 =	256.32 (ms)
	3DH5 time slo =	2.837 *	(1600/6/79) *	31.6 =	302.61 (ms)



GFSK (1Mbps) for AFH Mode					
Hopping Channel	ΡΑСΚΕΤ ΤΥΡΕ	Measurement	Limit		
Number	FACKETTIFE	Result (ms)	(ms)		
20	DH5	151.31	400ms		
π/4 DQPSK (2Mbps) for AFH Mode					
Hopping Channel	PACKET TYPE	Measurement	Limit		
Number	FACKETTIFE	Result (ms)	(ms)		
20	2DH5	150.61	400ms		
8-DPSK (3Mbps) for AFH Mode					
Hopping Channel	PACKET TYPE	Measurement	Limit		
Number	FAUREI ITPE	Result (ms)	(ms)		
20	3DH5	151.31	400ms		

#### 13.6 **Measurement Result**


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




## **CH-Low DH1**

## CH-Mid DH1

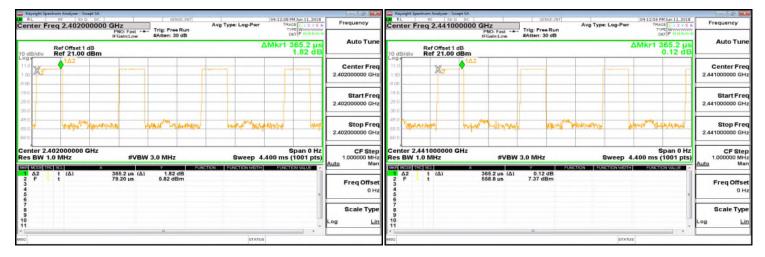


# **CH-Low DH3**

# **CH-Mid DH3**

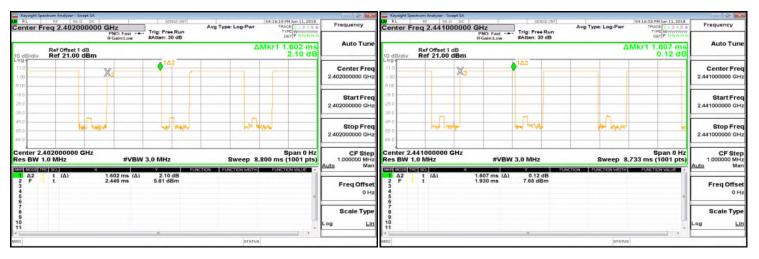

# **CH-Low DH5**

# **CH-Mid DH5**

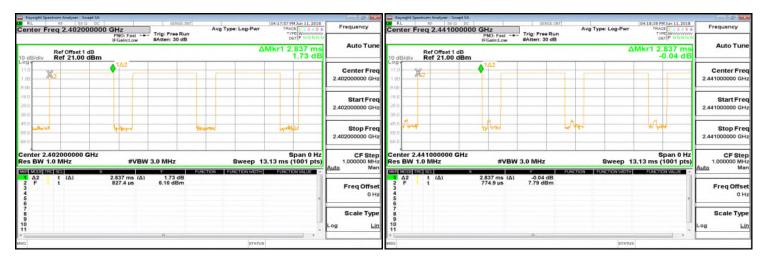

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Difference states are states ar prosecuted to the fullest extent of the law.

|No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

f (886-2) 2298-0488


www.tw.sqs.com

Member of SGS Group




# **CH-High DH1**

## CH-Mid 2DH1

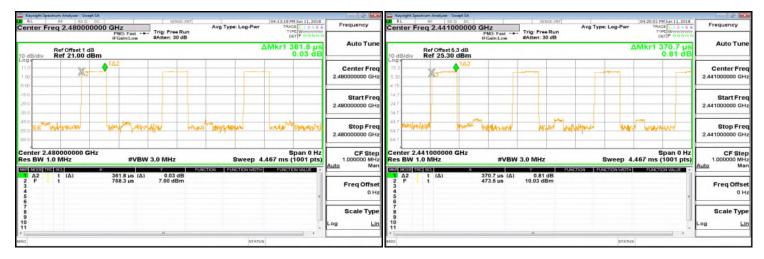


# **CH-High DH3**

# CH-Mid 2DH3

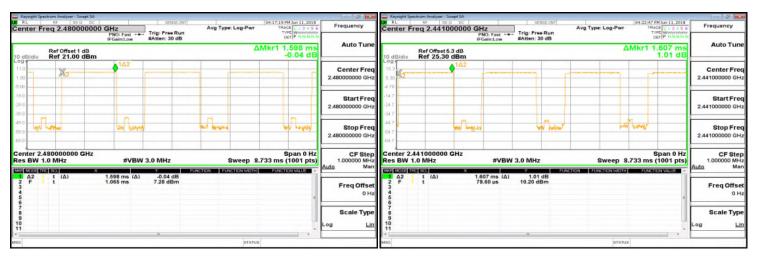

# **CH-High DH5**

# CH-Mid 2DH5

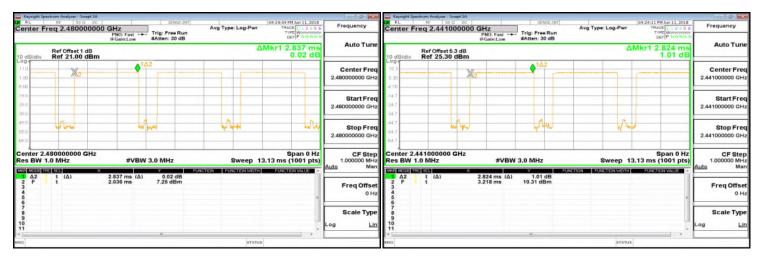

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Difference states are states ar prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sqs.com



## CH-Mid 3DH1



## CH-Mid 3DH3



# CH-Mid 3DH5



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Difference states are states and states an prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



## **14 ANTENNA REQUIREMENT**

#### **Standard Applicable** 14.1

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

### 14.2 Antenna Connected Construction

An embedded-in antenna design is used.

The antenna is designed with unique type RF connector and has no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.