

FCC RADIO TEST REPORT

FCC ID: 2AP4P-OPENEAR-LENTO

Sample : Open Ear Headphones

Trade Mark : ALOVA

Main Model : OPENEAR Lento

Additional Model : OPENEAR Alto, OPENEAR Mosso,
OPENEAR Mezzo

Report No. : UNIA23111509ER-61

Prepared for

SHENZHEN ALEX TECHNOLOGY CO., LTD.

7th Floor, Building B, Tangxi Zhigu, Xijing Road, Xixiang, Baoan,
Shenzhen, China

Prepared by

Shenzhen United Testing Technology Co., Ltd.

D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

TEST RESULT CERTIFICATION

Applicant: SHENZHEN ALEX TECHNOLOGY CO., LTD.
Address.....: 7th Floor, Building B, Tangxi Zhigu, Xijing Road, Xixiang, Baoan, Shenzhen, China

Manufacturer: SHENZHEN ALEX TECHNOLOGY CO., LTD.
Address.....: 7th Floor, Building B, Tangxi Zhigu, Xijing Road, Xixiang, Baoan, Shenzhen, China

Product description

Product: Open Ear Headphones
Trade Mark.....: ALOVA
Model Name.....: OPENEAR Lento, OPENEAR Alto, OPENEAR Mosso, OPENEAR Mezzo

Test Methods: FCC Rules and Regulations Part 15 Subpart C Section 15.249, ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: Nov. 16, 2023 ~ Dec. 13, 2023
Date of Issue: Dec. 14, 2023
Test Result: Pass

Prepared by:

Jason Ye/Editor

Reviewer:

Kelly Cheng/Supervisor

Approved & Authorized Signer:

Liuze/Manager

Table of Contents

Pages

1 TEST SUMMARY	4
1.1 TEST PROCEDURES AND RESULTS	4
1.2 TEST FACILITY	5
1.3 MEASUREMENT UNCERTAINTY	6
1.4 ENVIRONMENTAL CONDITIONS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CARRIER FREQUENCY OF CHANNELS	8
2.3 TEST MODE	8
2.4 TEST SETUP	9
2.5 EQUIPMENT USED IN TESTED SYSTEM	9
2.6 MEASUREMENT INSTRUMENTS LIST	10
3 CONDUCTED EMISSION	11
3.1 TEST LIMIT	11
3.2 TEST SETUP	11
3.3 TEST PROCEDURE	11
3.4 TEST RESULT	12
4 RADIATED EMISSION	15
4.1 TEST LIMIT	15
4.2 TEST SETUP	16
4.3 TEST PROCEDURE	17
4.4 TEST RESULT	17
5 BAND EDGE	40
5.1 TEST LIMIT	40
5.2 TEST PROCEDURE	40
5.3 TEST RESULT	40
6 20dB BANDWIDTH	45
6.1 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	45
6.2 MEASUREMENT EQUIPMENT USED	45
6.3 TEST PROCEDURE	45
6.4 TEST RESULT	45
7 ANTENNA REQUIREMENT	58
8 PHOTO OF TEST	59

1 TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

Item	FCC Rules	Description Of Test	Result
1	FCC Part 15.207	Conducted Emission	Pass
2	FCC Part 15.209/15.249	Radiated Emission	Pass
3	FCC Part 15.249/15.205	Band Edge	Pass
4	FCC Part 15.215	20dB Bandwidth	Pass
5	FCC Part 15.203	Antenna Requirement	Pass

Note:

“N/A” denotes test is not applicable in this Test Report.

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
Address : D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 31584

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
UNI	ANSI	9kHz ~ 150kHz	2.96	
		150kHz ~ 30MHz	2.44	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
UNI	ANSI	9kHz ~ 30MHz	2.50	
		30MHz ~ 1000MHz	4.80	
		Above 1000MHz	4.13	

C. RF Conducted Method:

Item	Measurement Uncertainty
Uncertainty of total RF power, conducted	$U_c = \pm 0.8$ dB
Uncertainty of RF power density, conducted	$U_c = \pm 2.6$ dB
Uncertainty of spurious emissions, conducted	$U_c = \pm 2$ %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2$ %

1.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 °C
Relative Humidity:	30~60 %
Air Pressure:	950~1050 hPa

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product:	Open Ear Headphones
Trade Mark:	ALOVA
Main Model:	OPENEAR Lento
Additional Model:	OPENEAR Alto, OPENEAR Mosso, OPENEAR Mezzo
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: OPENEAR Lento.
FCC ID:	2AP4P-OPENEAR-LENTO
Operation Frequency:	2402MHz~2480MHz
Number of Channels:	79CH
Field Strength of Fundamental:	Left earphone: 94.87dBuV/m(Peak)@3m Right earphone: 94.48dBuV/m(Peak)@3m
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Chip Antenna
Antenna Gain:	2.5dBi
Battery:	DC 3.7V, 500mAh
Adapter:	N/A
Power Source:	DC 5.0V from adapter or DC 3.7V from Li-battery

2.2 CARRIER FREQUENCY OF CHANNELS

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	21	2423	42	2444	63	2465
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		

2.3 TEST MODE

The EUT was programmed to be in continuously transmitting mode.


Channel List		
Test Channel	EUT Channel	Test Frequency (MHz)
Low	CH00	2402
Middle	CH39	2441
High	CH78	2480

2.4 TEST SETUP

Operation of EUT during Conducted and Radiation testing:



Operation of EUT during RF Conducted testing:

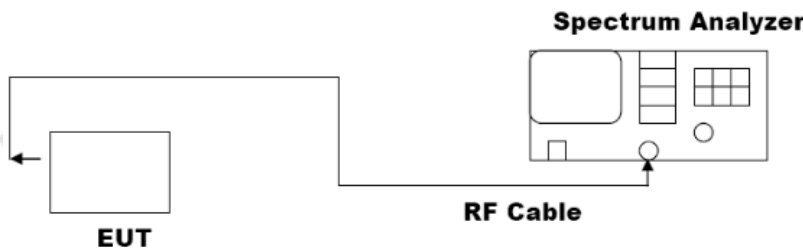

2.5 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model/Type No.	Cable Length(m)	Note
1	Open Ear Headphones	OPENEAR Lento	--	EUT
2	Adapter	MDY-11-EX	--	AE

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

2.6 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Conduction Emissions Measurement					
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2024.06.11
3	AAN	TESEQ	T8-Cat6	38888	2024.06.11
4	Pulse Limiter	CYBRTEK	EM5010	E115010056	2024.06.11
5	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2024.06.11
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2025.07.14
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2025.07.28
4	PREAMP	HP	8449B	3008A00160	2024.06.11
5	PREAMP	HP	8447D	2944A07999	2024.06.11
6	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2024.06.11
7	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2024.06.11
8	Signal Generator	Agilent	E4421B	MY4335105	2024.06.11
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2024.06.11
10	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2024.06.11
11	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2024.06.11
12	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2024.06.11
13	RF power divider	Anritsu	K241B	992289	2024.06.11
14	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2024.06.11
15	Active Loop Antenna	Com-Power	AL-130R	10160009	2024.06.11
16	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2024.09.22
17	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2025.07.14
18	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2024.07.14
19	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2024.09.22
20	Signal Generator	Agilent	N5183A	MY47420153	2024.09.22
21	Spectrum Analyzer	Rohde&Schwarz	FSP 40	100501	2024.09.22
22	Power Meter	KEYSIGHT	N1911A	MY50520168	2024.09.22
23	Frequency Meter	VICTOR	VC2000	997406086	2024.09.22
24	DC Power Source	HYELEC	HY5020E	055161818	2024.09.22

3 CONDUCTED EMISSION

3.1 TEST LIMIT


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 TEST SETUP

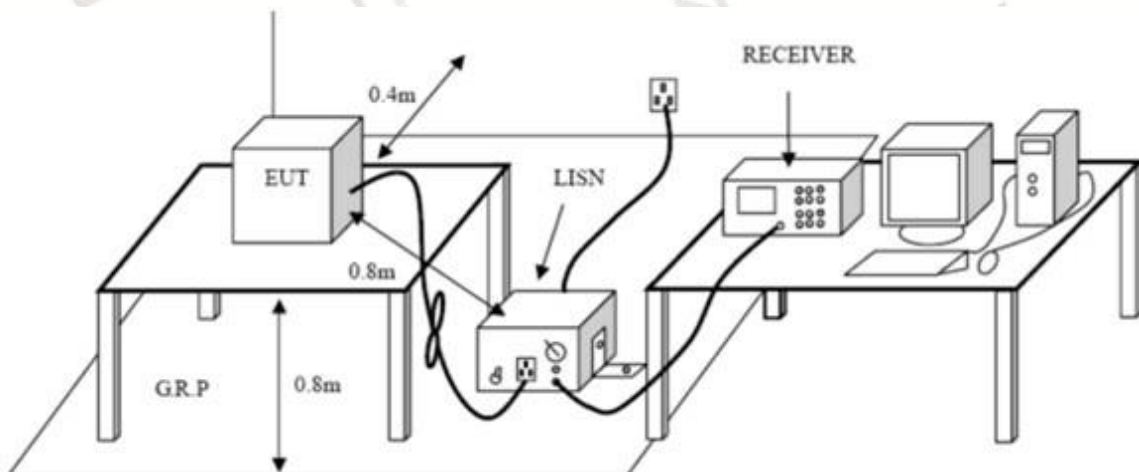

3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.


3.4 TEST RESULT

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were test at Low, Middle, and High channel, only the worst result of 8DPSK Low Channel was reported.


Temperature:	24°C	Relative Humidity:	48%
Test Date:	Nov. 17, 2023	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of 8DPSK 2402MHz		

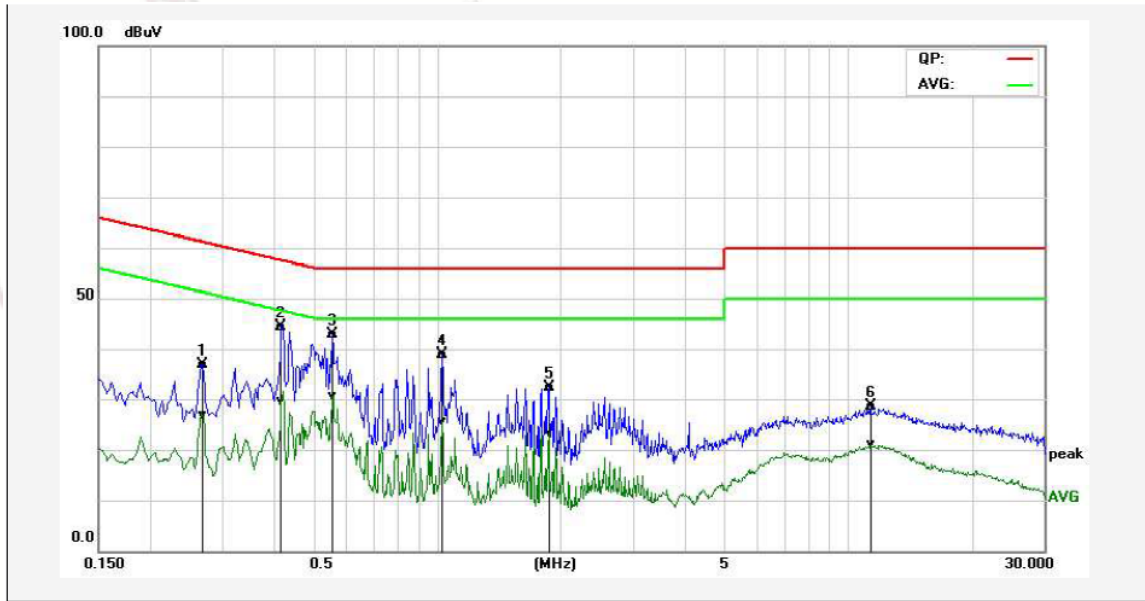

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.2700	26.06	16.01	10.77	36.83	26.78	61.12	51.12	-24.29	-24.34	Pass
2*	0.4180	33.53	18.81	10.80	44.33	29.61	57.49	47.49	-13.16	-17.88	Pass
3P	0.5580	31.94	19.88	10.83	42.77	30.71	56.00	46.00	-13.23	-15.29	Pass
4P	1.0300	28.08	14.73	10.91	38.99	25.64	56.00	46.00	-17.01	-20.36	Pass
5P	1.8700	21.31	12.42	11.03	32.34	23.45	56.00	46.00	-23.66	-22.55	Pass
6P	11.3500	14.50	7.02	14.16	28.66	21.18	60.00	50.00	-31.34	-28.82	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Nov. 17, 2023	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of 8DPSK 2402MHz		

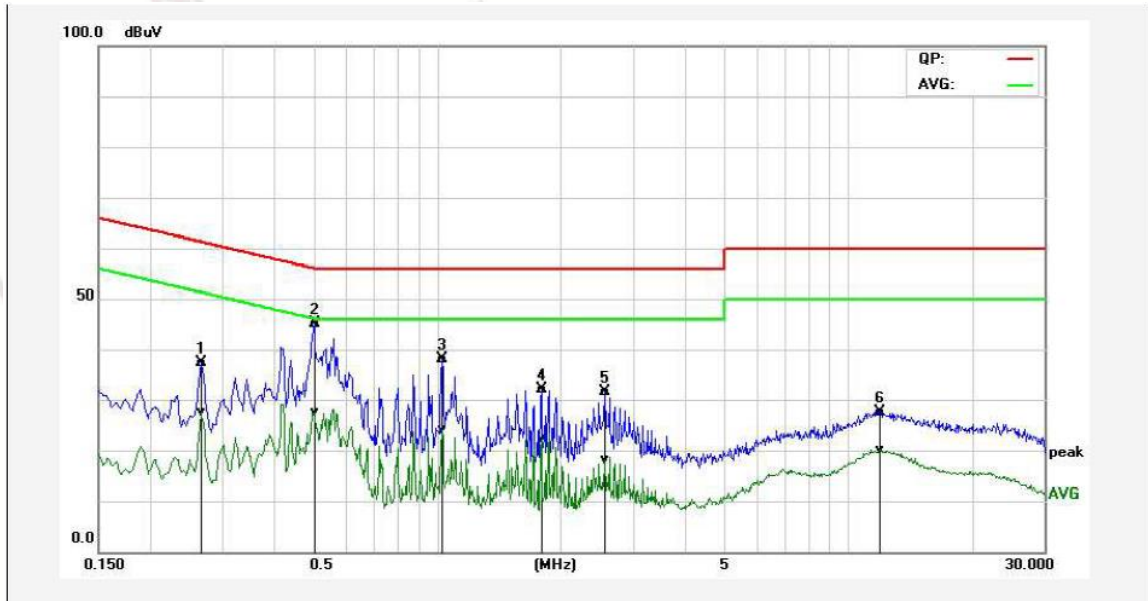

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.2660	26.51	16.81	10.77	37.28	27.58	61.24	51.24	-23.96	-23.66	Pass
2P	0.5020	34.39	16.74	10.83	45.22	27.57	56.00	46.00	-10.78	-18.43	Pass
3P	1.0300	27.15	13.28	10.91	38.06	24.19	56.00	46.00	-17.94	-21.81	Pass
4P	1.7940	21.09	11.25	11.02	32.11	22.27	56.00	46.00	-23.89	-23.73	Pass
5P	2.5540	20.36	6.95	11.21	31.57	18.16	56.00	46.00	-24.43	-27.84	Pass
6P	11.9740	13.18	5.66	14.55	27.73	20.21	60.00	50.00	-32.27	-29.79	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4 RADIATED EMISSION

4.1 TEST LIMIT

For unintentional device, according to § 15.209(a), except for Class B digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F (kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Limit: (Field strength of the fundamental signal)


Frequency	Limit (dBuV/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value

4.2 TEST SETUP


1. Radiated Emission Test-Up Frequency Below 30MHz

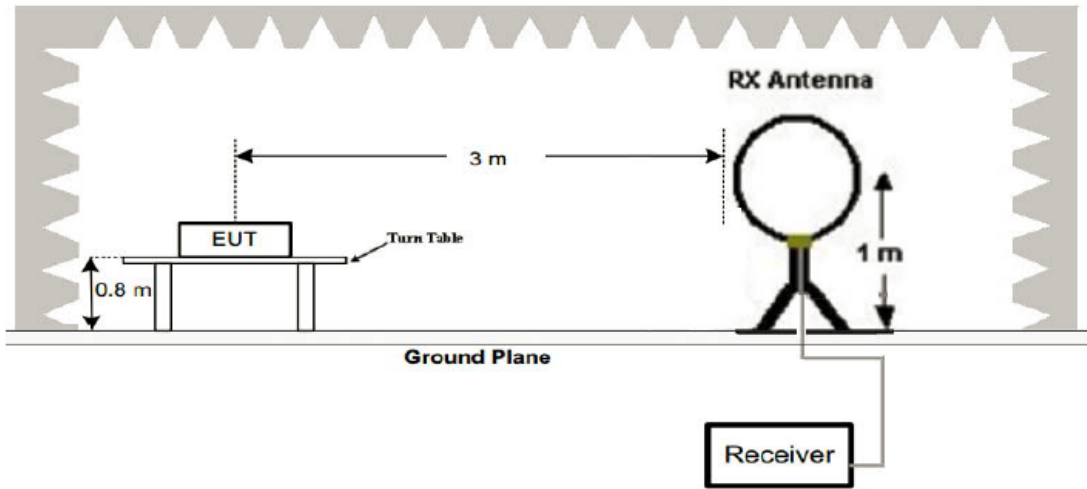

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

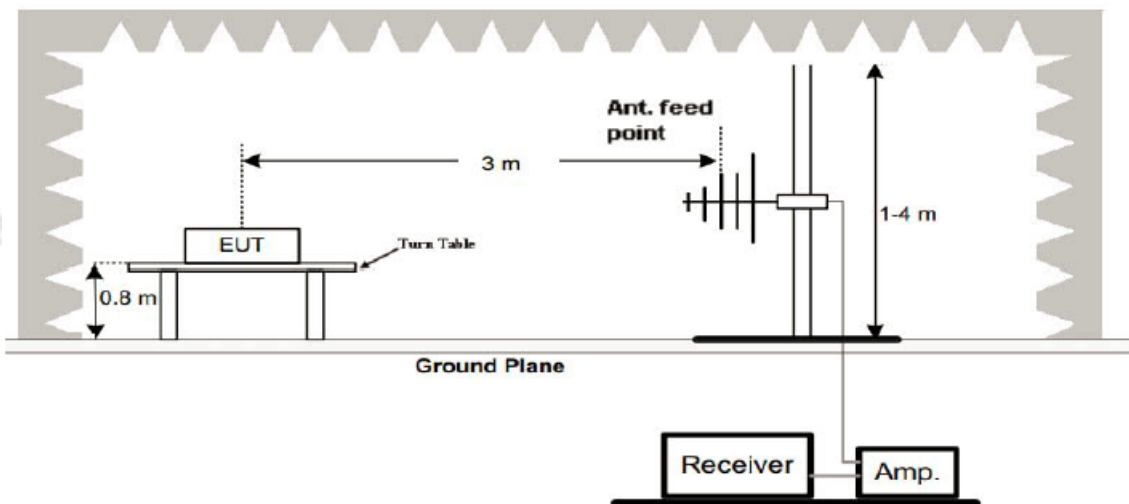

3. Radiated Emission Test-Up Frequency Above 1GHz

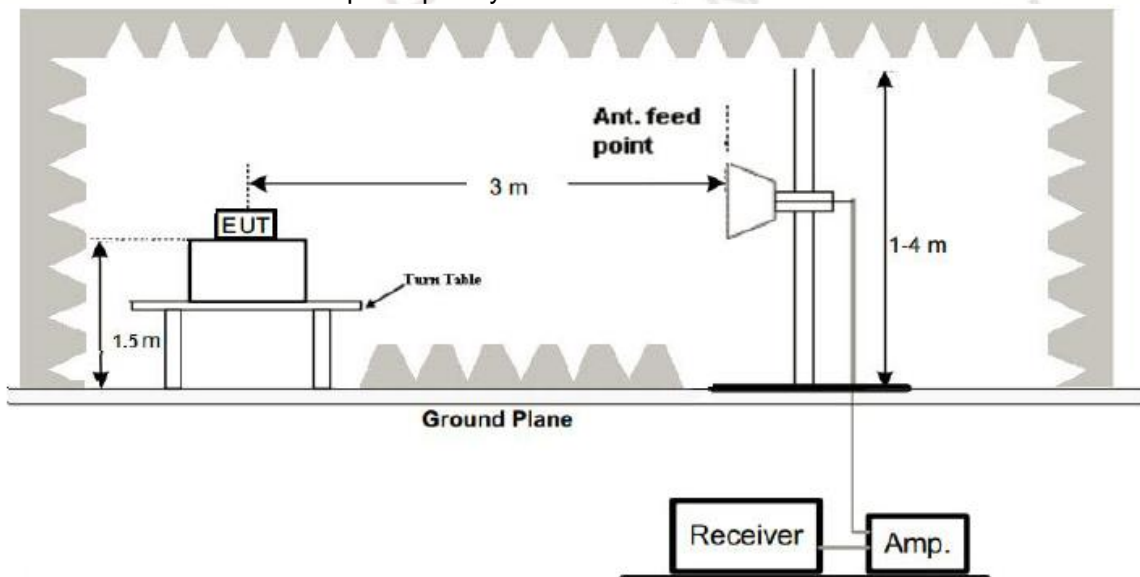

4.3 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 TEST RESULT


PASS

Remark:

1. All modes were test at Low, Middle, and High channel, only the worst result of 8DPSK Low Channel (Left earphone) and $\pi/4$ DQPSK Low Channel (Right earphone) was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.
3. Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Below 1GHz Test Results:


Temperature:	24°C	Relative Humidity:	48%
Test Date:	Nov. 17, 2023	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Horizontal
Test Mode:	Transmitting mode of 8DPSK 2402MHz (Left earphone)		

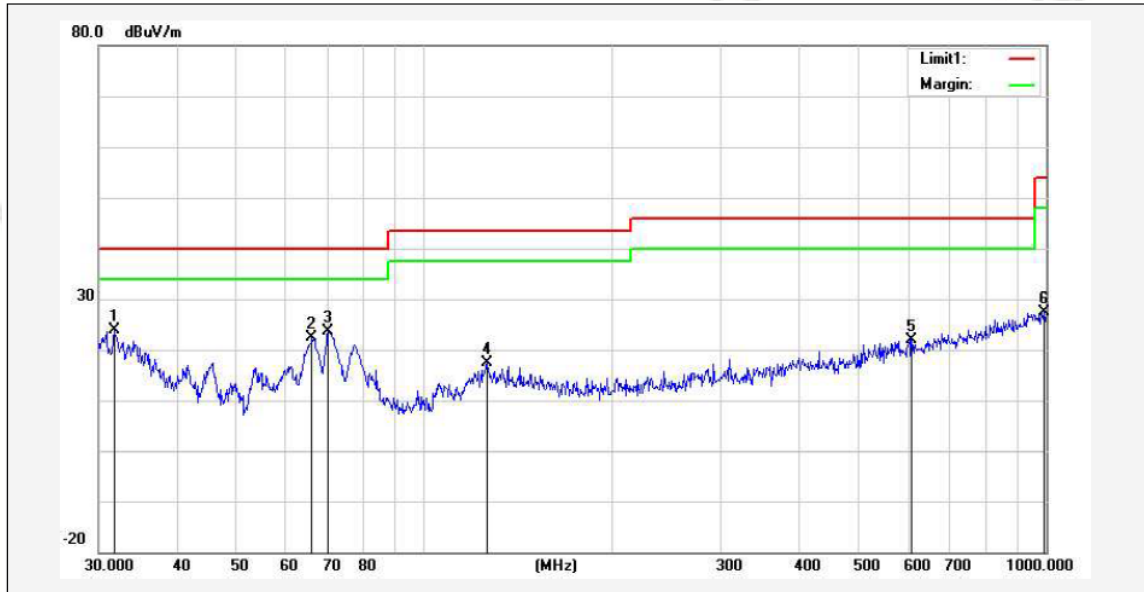

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	31.7313	33.64	-9.73	23.91	40.00	-16.09	92	100	peak
2	66.0342	42.50	-20.22	22.28	40.00	-17.72	66	100	peak
3	70.0903	43.81	-20.08	23.73	40.00	-16.27	84	100	peak
4	126.3286	31.27	-13.89	17.38	43.50	-26.12	21	100	peak
5	607.7867	28.84	-6.96	21.88	46.00	-24.12	114	100	peak
6	993.0114	28.00	-0.66	27.34	54.00	-26.66	168	100	peak

Remark: Result = Reading Level + Factor, Margin = Result– Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier


Temperature:	24°C	Relative Humidity:	48%
Test Date:	Nov. 17, 2023	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Vertical
Test Mode:	Transmitting mode of 8DPSK 2402MHz (Left earphone)		

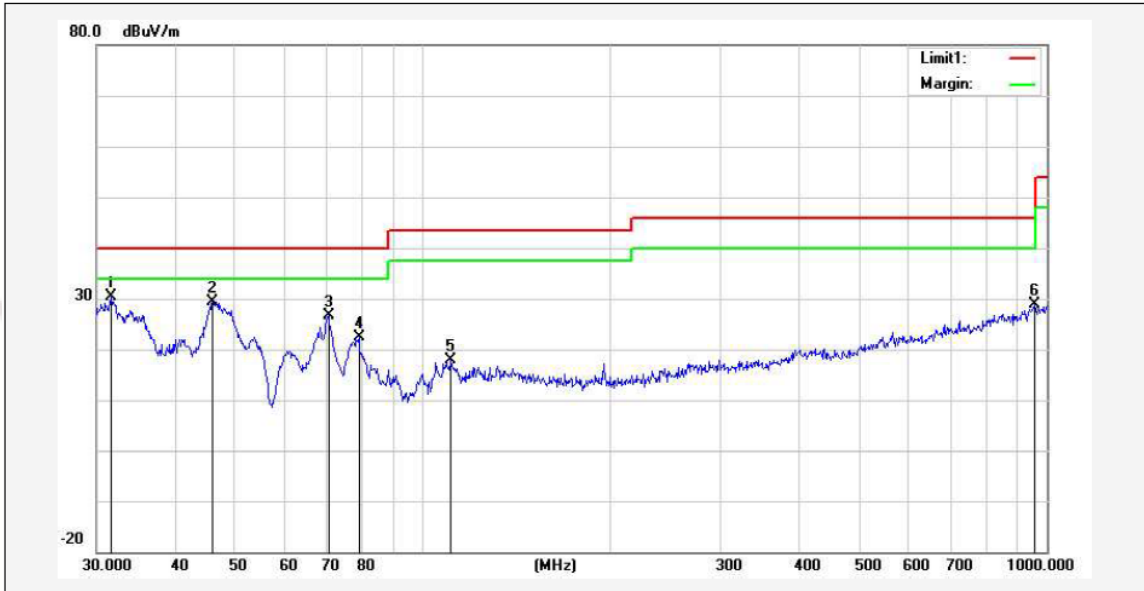

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	31.6202	39.91	-9.64	30.27	40.00	-9.73	152	100	peak
2	46.0164	47.22	-17.77	29.45	40.00	-10.55	229	100	peak
3	70.5836	46.74	-20.03	26.71	40.00	-13.29	107	100	peak
4	78.9652	42.14	-19.74	22.40	40.00	-17.60	64	100	peak
5	110.9571	33.79	-15.96	17.83	43.50	-25.67	33	100	peak
6	955.4381	29.66	-0.76	28.90	46.00	-17.10	243	100	peak

Remark: Result = Reading Level + Factor, Margin = Result – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier


Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 13, 2023	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Horizontal
Test Mode:	Transmitting mode of $\pi/4$ DQPSK 2402MHz (Right earphone)		

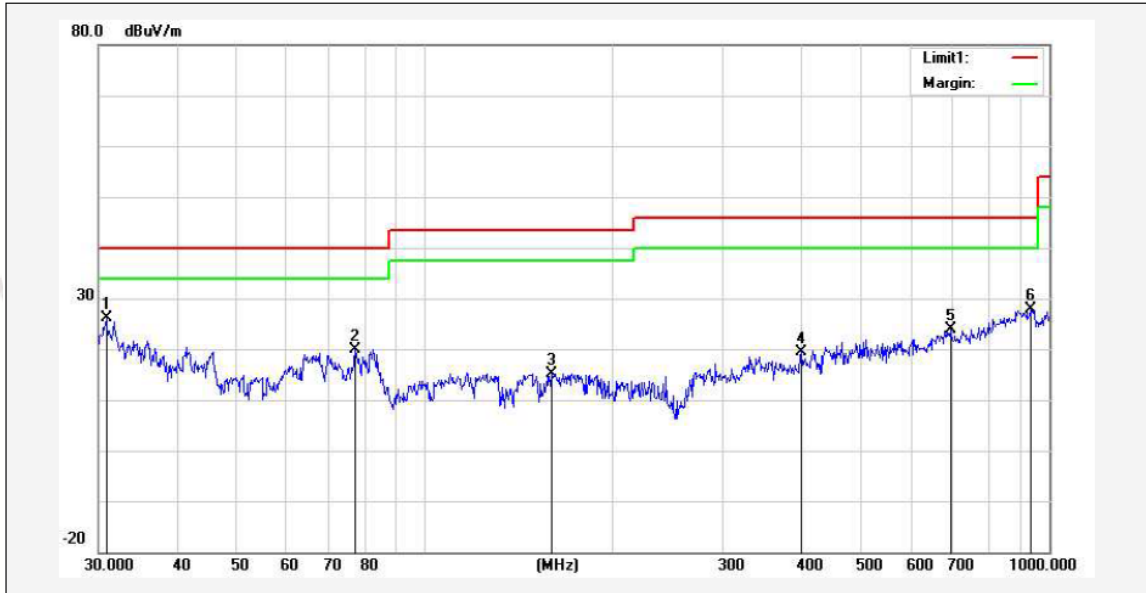

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	30.8535	35.62	-9.48	26.14	40.00	-13.86	159	100	peak
2	77.3212	40.46	-20.60	19.86	40.00	-20.14	147	100	peak
3	159.7844	30.85	-15.73	15.12	43.50	-28.38	113	100	peak
4	400.4318	30.77	-11.51	19.26	46.00	-26.74	68	100	peak
5	694.4174	32.45	-8.68	23.77	46.00	-22.23	106	100	peak
6	932.2714	32.62	-4.62	28.00	46.00	-18.00	54	100	peak

Remark: Result = Reading Level + Factor, Margin = Result– Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 13, 2023	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Vertical
Test Mode:	Transmitting mode of $\pi/4$ DQPSK 2402MHz (Right earphone)		

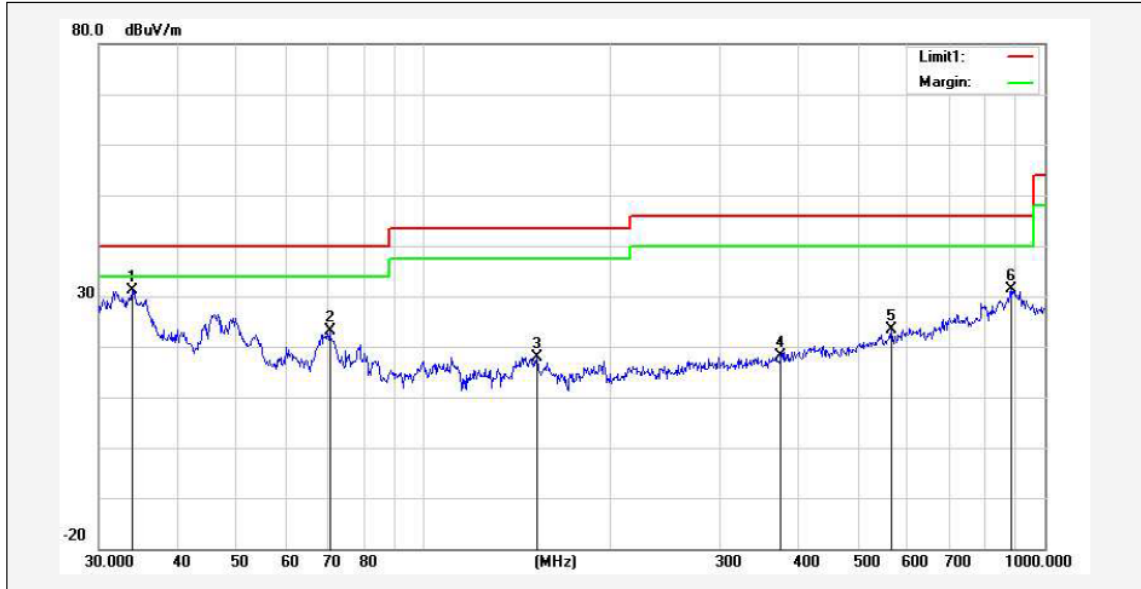

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.9174	42.39	-11.25	31.14	40.00	-8.86	43	100	peak
2	70.5836	44.05	-20.84	23.21	40.00	-16.79	156	100	peak
3	152.1297	33.36	-15.38	17.98	43.50	-25.52	114	100	peak
4	375.9384	30.73	-12.72	18.01	46.00	-27.99	67	100	peak
5	566.6222	33.58	-10.09	23.49	46.00	-22.51	89	100	peak
6	881.4067	36.88	-5.47	31.41	46.00	-14.59	21	100	peak

Remark: Result = Reading Level + Factor, Margin = Result – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

1. Measuring frequencies from 9 kHz to the 1 GHz, Radiated emission test from 9kHz to 30MHz was verified, and no any emission was found except system noise floor.
2. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz.

Above 1 GHz Test Results(Left earphone):

GFSK Modulation:
CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2402	99.75	-5.84	93.91	114	-20.09	PK
2402	78.98	-5.84	73.14	94	-20.86	AV
4804	55.65	-3.64	52.01	74	-21.99	PK
4804	34.97	-3.64	31.33	54	-22.67	AV
7206	52.06	-0.95	51.11	74	-22.89	PK
7206	31.63	-0.95	30.68	54	-23.32	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2402	99.2	-5.84	93.36	114	-20.64	PK
2402	78.43	-5.84	72.59	94	-21.41	AV
4804	55.1	-3.64	51.46	74	-22.54	PK
4804	34.42	-3.64	30.78	54	-23.22	AV
7206	51.51	-0.95	50.56	74	-23.44	PK
7206	31.08	-0.95	30.13	54	-23.87	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH39 (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441	96.73	-5.71	91.02	114	-22.98	PK
2441	76.32	-5.71	70.61	94	-23.39	AV
4882	52.99	-3.51	49.48	74	-24.52	PK
4882	32.31	-3.51	28.8	54	-25.2	AV
7323	49.4	-0.82	48.58	74	-25.42	PK
7323	28.97	-0.82	28.15	54	-25.85	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441	96.4	-5.71	90.69	114	-23.31	PK
2441	75.99	-5.71	70.28	94	-23.72	AV
4882	52.66	-3.51	49.15	74	-24.85	PK
4882	31.98	-3.51	28.47	54	-25.53	AV
7323	49.07	-0.82	48.25	74	-25.75	PK
7323	28.64	-0.82	27.82	54	-26.18	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	94.3	-5.65	88.65	114	-25.35	PK
2480	73.78	-5.65	68.13	94	-25.87	AV
4960	50.45	-3.43	47.02	74	-26.98	PK
4960	29.77	-3.43	26.34	54	-27.66	AV
7440	46.86	-0.75	46.11	74	-27.89	PK
7440	26.43	-0.75	25.68	54	-28.32	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	93.89	-5.65	88.24	114	-25.76	PK
2480	73.37	-5.65	67.72	94	-26.28	AV
4960	50.04	-3.43	46.61	74	-27.39	PK
4960	29.36	-3.43	25.93	54	-28.07	AV
7440	46.45	-0.75	45.7	74	-28.3	PK
7440	26.02	-0.75	25.27	54	-28.73	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

$\pi/4$ DQPSK Modulation:
CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2402	99.67	-5.84	93.83	114	-20.17	PK
2402	79.12	-5.84	73.28	94	-20.72	AV
4804	55.79	-3.64	52.15	74	-21.85	PK
4804	35.11	-3.64	31.47	54	-22.53	AV
7206	52.2	-0.95	51.25	74	-22.75	PK
7206	31.77	-0.95	30.82	54	-23.18	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2402	99.42	-5.84	93.58	114	-20.42	PK
2402	78.87	-5.84	73.03	94	-20.97	AV
4804	55.54	-3.64	51.9	74	-22.1	PK
4804	34.86	-3.64	31.22	54	-22.78	AV
7206	51.95	-0.95	51	74	-23	PK
7206	31.52	-0.95	30.57	54	-23.43	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH39 (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	96.56	-5.71	90.85	114	-23.15	PK
2441	76.14	-5.71	70.43	94	-23.57	AV
4882	52.81	-3.51	49.3	74	-24.7	PK
4882	32.13	-3.51	28.62	54	-25.38	AV
7323	49.22	-0.82	48.4	74	-25.6	PK
7323	28.79	-0.82	27.97	54	-26.03	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	96.19	-5.71	90.48	114	-23.52	PK
2441	75.77	-5.71	70.06	94	-23.94	AV
4882	52.44	-3.51	48.93	74	-25.07	PK
4882	31.76	-3.51	28.25	54	-25.75	AV
7323	48.85	-0.82	48.03	74	-25.97	PK
7323	28.42	-0.82	27.6	54	-26.4	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	94.12	-5.65	88.47	114	-25.53	PK
2480	73.79	-5.65	68.14	94	-25.86	AV
4960	50.46	-3.43	47.03	74	-26.97	PK
4960	29.78	-3.43	26.35	54	-27.65	AV
7440	46.87	-0.75	46.12	74	-27.88	PK
7440	26.44	-0.75	25.69	54	-28.31	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	93.78	-5.65	88.13	114	-25.87	PK
2480	73.45	-5.65	67.8	94	-26.2	AV
4960	50.12	-3.43	46.69	74	-27.31	PK
4960	29.44	-3.43	26.01	54	-27.99	AV
7440	46.53	-0.75	45.78	74	-28.22	PK
7440	26.1	-0.75	25.35	54	-28.65	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

8DPSK Modulation:
CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	100.71	-5.84	94.87	114	-19.13	PK
2402	80.11	-5.84	74.27	94	-19.73	AV
4804	56.78	-3.64	53.14	74	-20.86	PK
4804	36.1	-3.64	32.46	54	-21.54	AV
7206	53.19	-0.95	52.24	74	-21.76	PK
7206	32.76	-0.95	31.81	54	-22.19	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	100.5	-5.84	94.66	114	-19.34	PK
2402	79.9	-5.84	74.06	94	-19.94	AV
4804	56.57	-3.64	52.93	74	-21.07	PK
4804	35.89	-3.64	32.25	54	-21.75	AV
7206	52.98	-0.95	52.03	74	-21.97	PK
7206	32.55	-0.95	31.6	54	-22.4	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH39 (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	97.48	-5.71	91.77	114	-22.23	PK
2441	76.96	-5.71	71.25	94	-22.75	AV
4882	53.63	-3.51	50.12	74	-23.88	PK
4882	32.95	-3.51	29.44	54	-24.56	AV
7323	50.04	-0.82	49.22	74	-24.78	PK
7323	29.61	-0.82	28.79	54	-25.21	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	97.2	-5.71	91.49	114	-22.51	PK
2441	76.68	-5.71	70.97	94	-23.03	AV
4882	53.35	-3.51	49.84	74	-24.16	PK
4882	32.67	-3.51	29.16	54	-24.84	AV
7323	49.76	-0.82	48.94	74	-25.06	PK
7323	29.33	-0.82	28.51	54	-25.49	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	95.14	-5.65	89.49	114	-24.51	PK
2480	74.83	-5.65	69.18	94	-24.82	AV
4960	51.5	-3.43	48.07	74	-25.93	PK
4960	30.81	-3.43	27.38	54	-26.62	AV
7440	47.91	-0.75	47.16	74	-26.84	PK
7440	27.48	-0.75	26.73	54	-27.27	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	94.88	-5.65	89.23	114	-24.77	PK
2480	74.57	-5.65	68.92	94	-25.08	AV
4960	51.24	-3.43	47.81	74	-26.19	PK
4960	30.55	-3.43	27.12	54	-26.88	AV
7440	47.65	-0.75	46.9	74	-27.1	PK
7440	27.22	-0.75	26.47	54	-27.53	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Above 1 GHz Test Results(Right earphone):

GFSK Modulation:
CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	99.52	-5.84	93.68	114	-20.32	PK
2402	79.16	-5.84	73.32	94	-20.68	AV
4804	55.83	-3.64	52.19	74	-21.81	PK
4804	35.15	-3.64	31.51	54	-22.49	AV
7206	52.24	-0.95	51.29	74	-22.71	PK
7206	31.81	-0.95	30.86	54	-23.14	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	99.03	-5.84	93.19	114	-20.81	PK
2402	78.67	-5.84	72.83	94	-21.17	AV
4804	55.34	-3.64	51.7	74	-22.3	PK
4804	34.66	-3.64	31.02	54	-22.98	AV
7206	51.75	-0.95	50.8	74	-23.2	PK
7206	31.32	-0.95	30.37	54	-23.63	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH39 (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441	98.93	-5.71	93.22	114	-20.78	PK
2441	78.56	-5.71	72.85	94	-21.15	AV
4882	55.23	-3.51	51.72	74	-22.28	PK
4882	34.55	-3.51	31.04	54	-22.96	AV
7323	51.64	-0.82	50.82	74	-23.18	PK
7323	31.21	-0.82	30.39	54	-23.61	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2441	98.48	-5.71	92.77	114	-21.23	PK
2441	78.11	-5.71	72.4	94	-21.6	AV
4882	54.78	-3.51	51.27	74	-22.73	PK
4882	34.1	-3.51	30.59	54	-23.41	AV
7323	51.19	-0.82	50.37	74	-23.63	PK
7323	30.76	-0.82	29.94	54	-24.06	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	98.31	-5.65	92.66	114	-21.34	PK
2480	77.93	-5.65	72.28	94	-21.72	AV
4960	54.6	-3.43	51.17	74	-22.83	PK
4960	33.92	-3.43	30.49	54	-23.51	AV
7440	51.01	-0.75	50.26	74	-23.74	PK
7440	30.58	-0.75	29.83	54	-24.17	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	97.97	-5.65	92.32	114	-21.68	PK
2480	77.59	-5.65	71.94	94	-22.06	AV
4960	54.26	-3.43	50.83	74	-23.17	PK
4960	33.58	-3.43	30.15	54	-23.85	AV
7440	50.67	-0.75	49.92	74	-24.08	PK
7440	30.24	-0.75	29.49	54	-24.51	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

$\pi/4$ DQPSK Modulation:
CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2402	100.32	-5.84	94.48	114	-19.52	PK
2402	80.06	-5.84	74.22	94	-19.78	AV
4804	56.73	-3.64	53.09	74	-20.91	PK
4804	36.05	-3.64	32.41	54	-21.59	AV
7206	53.14	-0.95	52.19	74	-21.81	PK
7206	32.71	-0.95	31.76	54	-22.24	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2402	99.99	-5.84	94.15	114	-19.85	PK
2402	79.73	-5.84	73.89	94	-20.11	AV
4804	56.4	-3.64	52.76	74	-21.24	PK
4804	35.72	-3.64	32.08	54	-21.92	AV
7206	52.81	-0.95	51.86	74	-22.14	PK
7206	32.38	-0.95	31.43	54	-22.57	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH39 (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	99.57	-5.71	93.86	114	-20.14	PK
2441	79.24	-5.71	73.53	94	-20.47	AV
4882	55.91	-3.51	52.4	74	-21.6	PK
4882	35.23	-3.51	31.72	54	-22.28	AV
7323	52.32	-0.82	51.5	74	-22.5	PK
7323	31.89	-0.82	31.07	54	-22.93	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	99.2	-5.71	93.49	114	-20.51	PK
2441	78.87	-5.71	73.16	94	-20.84	AV
4882	55.54	-3.51	52.03	74	-21.97	PK
4882	34.86	-3.51	31.35	54	-22.65	AV
7323	51.95	-0.82	51.13	74	-22.87	PK
7323	31.52	-0.82	30.7	54	-23.3	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	99.11	-5.65	93.46	114	-20.54	PK
2480	78.93	-5.65	73.28	94	-20.72	AV
4960	55.6	-3.43	52.17	74	-21.83	PK
4960	34.92	-3.43	31.49	54	-22.51	AV
7440	52.01	-0.75	51.26	74	-22.74	PK
7440	31.58	-0.75	30.83	54	-23.17	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	98.7	-5.65	93.05	114	-20.95	PK
2480	78.52	-5.65	72.87	94	-21.13	AV
4960	55.19	-3.43	51.76	74	-22.24	PK
4960	34.51	-3.43	31.08	54	-22.92	AV
7440	51.6	-0.75	50.85	74	-23.15	PK
7440	31.17	-0.75	30.42	54	-23.58	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

8DPSK Modulation:
CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	100.26	-5.84	94.42	114	-19.58	PK
2402	79.88	-5.84	74.04	94	-19.96	AV
4804	56.55	-3.64	52.91	74	-21.09	PK
4804	35.87	-3.64	32.23	54	-21.77	AV
7206	52.96	-0.95	52.01	74	-21.99	PK
7206	32.53	-0.95	31.58	54	-22.42	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2402	99.93	-5.84	94.09	114	-19.91	PK
2402	79.55	-5.84	73.71	94	-20.29	AV
4804	56.22	-3.64	52.58	74	-21.42	PK
4804	35.54	-3.64	31.9	54	-22.1	AV
7206	52.63	-0.95	51.68	74	-22.32	PK
7206	32.2	-0.95	31.25	54	-22.75	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH39 (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	99.78	-5.71	94.07	114	-19.93	PK
2441	79.3	-5.71	73.59	94	-20.41	AV
4882	55.97	-3.51	52.46	74	-21.54	PK
4882	35.29	-3.51	31.78	54	-22.22	AV
7323	52.38	-0.82	51.56	74	-22.44	PK
7323	31.95	-0.82	31.13	54	-22.87	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	99.43	-5.71	93.72	114	-20.28	PK
2441	78.95	-5.71	73.24	94	-20.76	AV
4882	55.62	-3.51	52.11	74	-21.89	PK
4882	34.94	-3.51	31.43	54	-22.57	AV
7323	52.03	-0.82	51.21	74	-22.79	PK
7323	31.6	-0.82	30.78	54	-23.22	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	99.41	-5.65	93.76	114	-20.24	PK
2480	79.12	-5.65	73.47	94	-20.53	AV
4960	55.79	-3.43	52.36	74	-21.64	PK
4960	35.1	-3.43	31.67	54	-22.33	AV
7440	52.2	-0.75	51.45	74	-22.55	PK
7440	31.77	-0.75	31.02	54	-22.98	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2480	99.04	-5.65	93.39	114	-20.61	PK
2480	78.75	-5.65	73.1	94	-20.9	AV
4960	55.42	-3.43	51.99	74	-22.01	PK
4960	34.73	-3.43	31.3	54	-22.7	AV
7440	51.83	-0.75	51.08	74	-22.92	PK
7440	31.4	-0.75	30.65	54	-23.35	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Emission Level – Limit

Remark:

1. Measuring frequencies from 1 GHz to the 25 GHz.
2. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
3. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
6. When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
7. For fundamental frequency, RBW>20dB Bandwidth, VBW>=3*RBW, Peak detector for PK value, RMS detector for AV value.

5 BAND EDGE

5.1 TEST LIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. Peak detector is for both.

5.3 TEST RESULT

PASS

Remark: All modes of were tested, only the worst result of 8DPSK (Left earphone) and $\pi/4$ DQPSK (Left earphone) was reported.

8DPSK (Left earphone):
 Operation Mode: TX CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	39.88	-5.81	34.07	74	-39.93	PK
2310	/	-5.81	/	54	/	AV
2390	39.6	-5.84	33.76	74	-40.24	PK
2390	/	-5.84	/	54	/	AV
2400	40.65	-5.84	34.81	74	-39.19	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	40.84	-5.81	35.03	74	-38.97	PK
2310	/	-5.81	/	54	/	AV
2390	40.78	-5.84	34.94	74	-39.06	PK
2390	/	-5.84	/	54	/	AV
2400	41.91	-5.84	36.07	74	-37.93	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	41.25	-5.65	35.6	74	-38.4	PK
2483.5	/	-5.65	/	54	/	AV
2500	40.6	-5.72	34.88	74	-39.12	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	41.98	-5.65	36.33	74	-37.67	PK
2483.5	/	-5.65	/	54	/	AV
2500	41.72	-5.72	36	74	-38	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

$\pi/4$ DQPSK (Right earphone):
 Operation Mode: TX CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	39.82	-5.81	34.01	74	-39.99	PK
2310	/	-5.81	/	54	/	AV
2390	39.54	-5.84	33.7	74	-40.3	PK
2390	/	-5.84	/	54	/	AV
2400	40.59	-5.84	34.75	74	-39.25	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310	40.78	-5.81	34.97	74	-39.03	PK
2310	/	-5.81	/	54	/	AV
2390	40.72	-5.84	34.88	74	-39.12	PK
2390	/	-5.84	/	54	/	AV
2400	41.85	-5.84	36.01	74	-37.99	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	41.19	-5.65	35.54	74	-38.46	PK
2483.5	/	-5.65	/	54	/	AV
2500	40.54	-5.72	34.82	74	-39.18	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	41.92	-5.65	36.27	74	-37.73	PK
2483.5	/	-5.65	/	54	/	AV
2500	41.66	-5.72	35.94	74	-38.06	PK
2500	/	-5.72	/	54	/	AV


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note:

1. Since the peak value is less than the average limit, the average value does not reflected in the report.

6 20dB BANDWIDTH

6.1 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

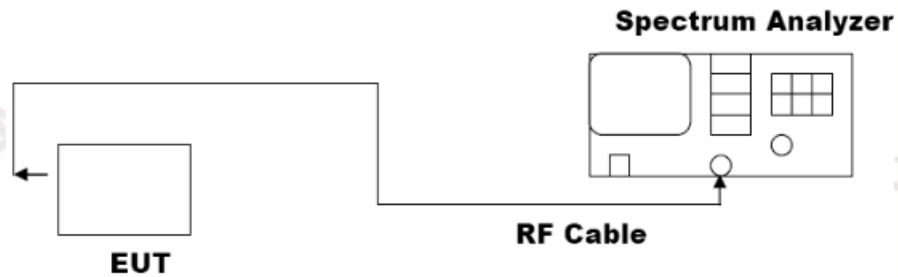

6.2 MEASUREMENT EQUIPMENT USED

Refer to Section 3.3.

6.3 TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 30 kHz. Set the Video bandwidth (VBW) = 100 kHz. In order to make an accurate measurement.
4. For 20dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
5. Measure and record the results in the test report.

6.4 TEST RESULT


PASS

Left earphone:


GFSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.028	PASS
CH39	2441	1.037	PASS
CH78	2480	1.062	PASS


CH00: 2402MHz

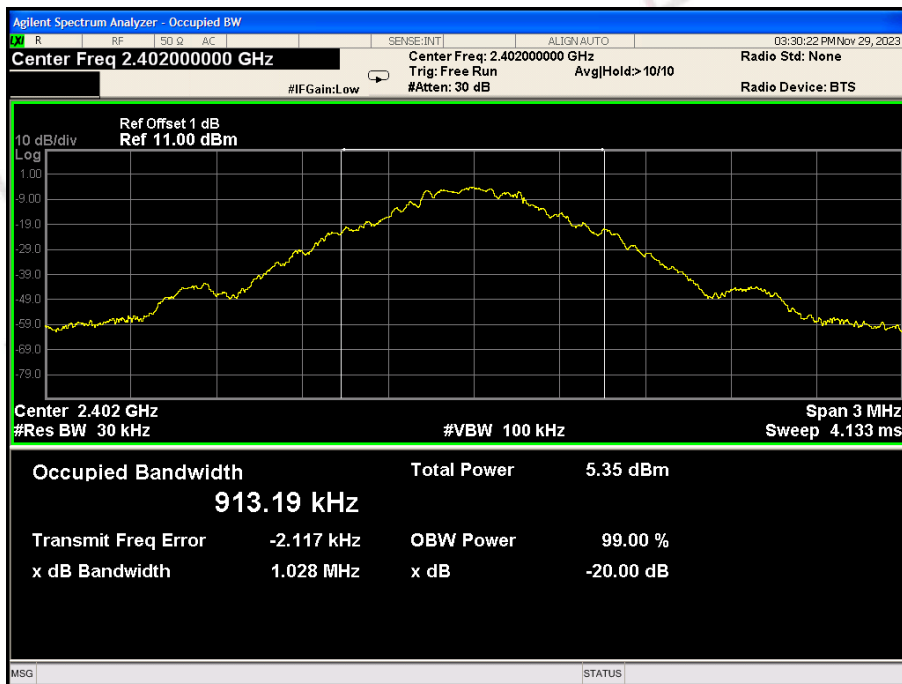

CH39: 2441MHz

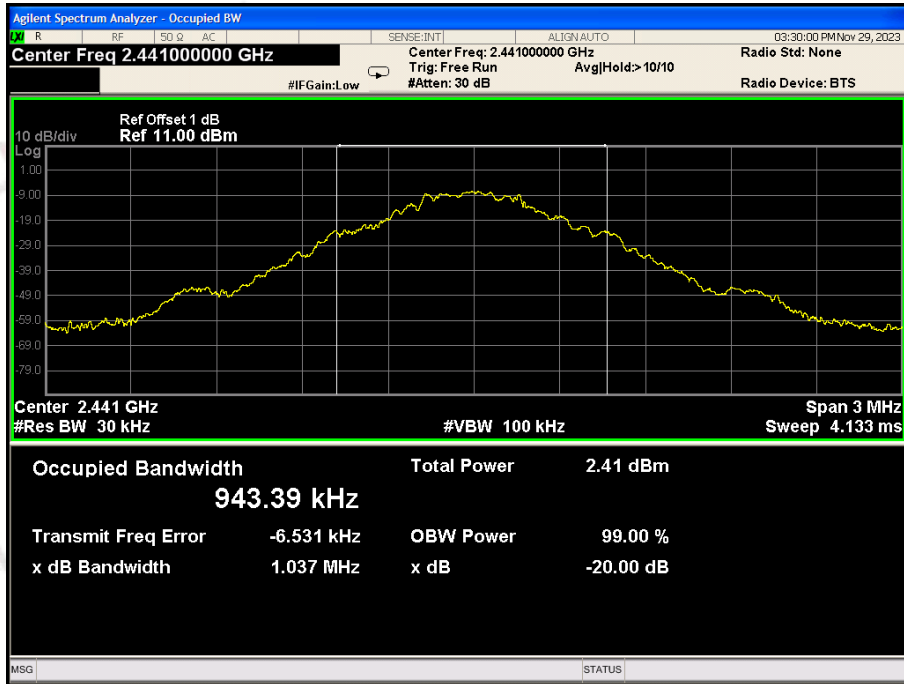


CH78: 2480MHz

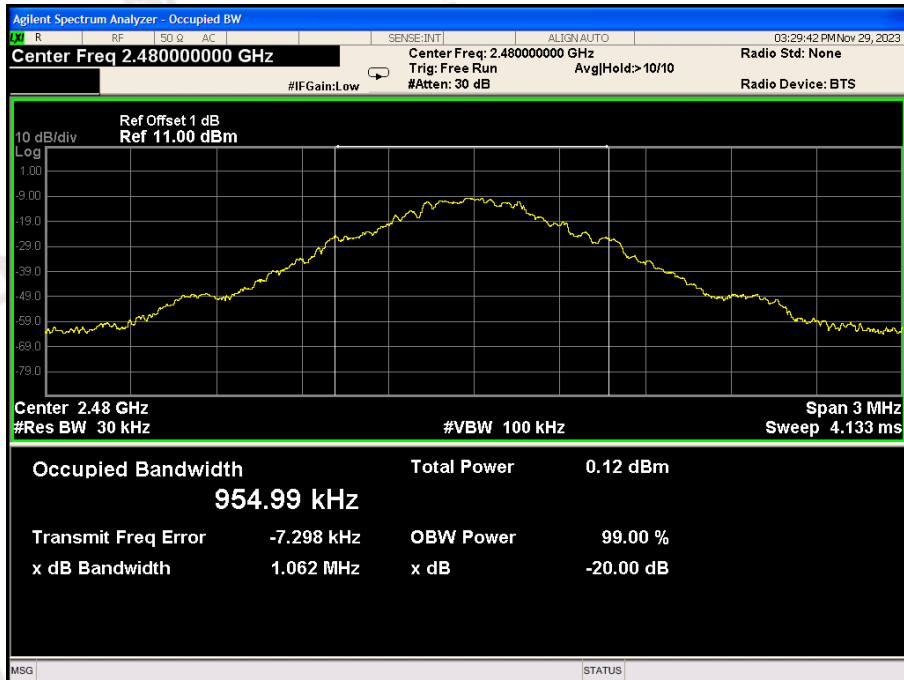


$\pi/4$ DQPSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.312	PASS
CH39	2441	1.329	PASS
CH78	2480	1.340	PASS


CH00: 2402MHz

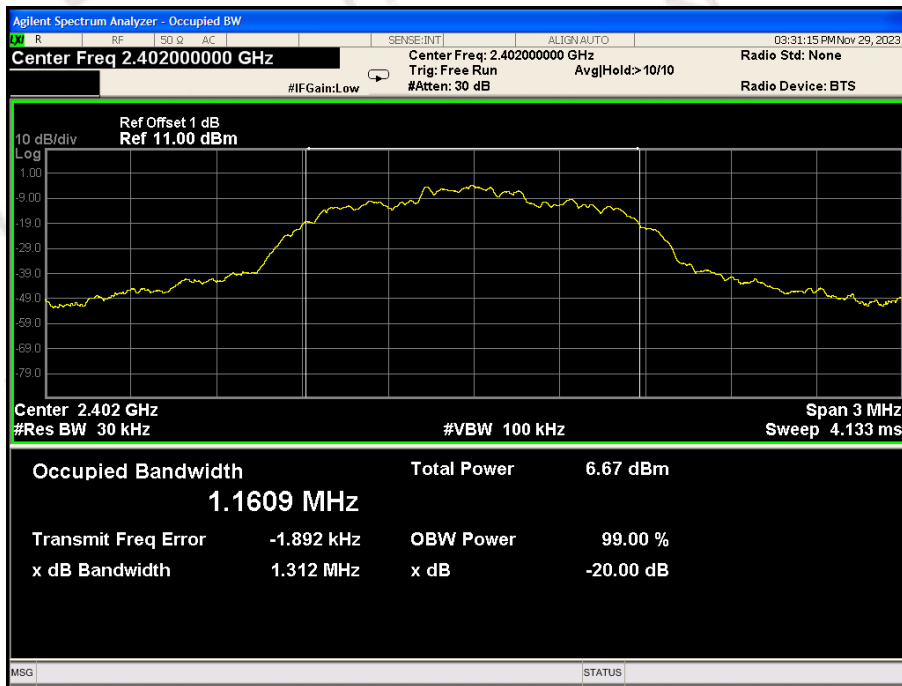

CH39: 2441MHz

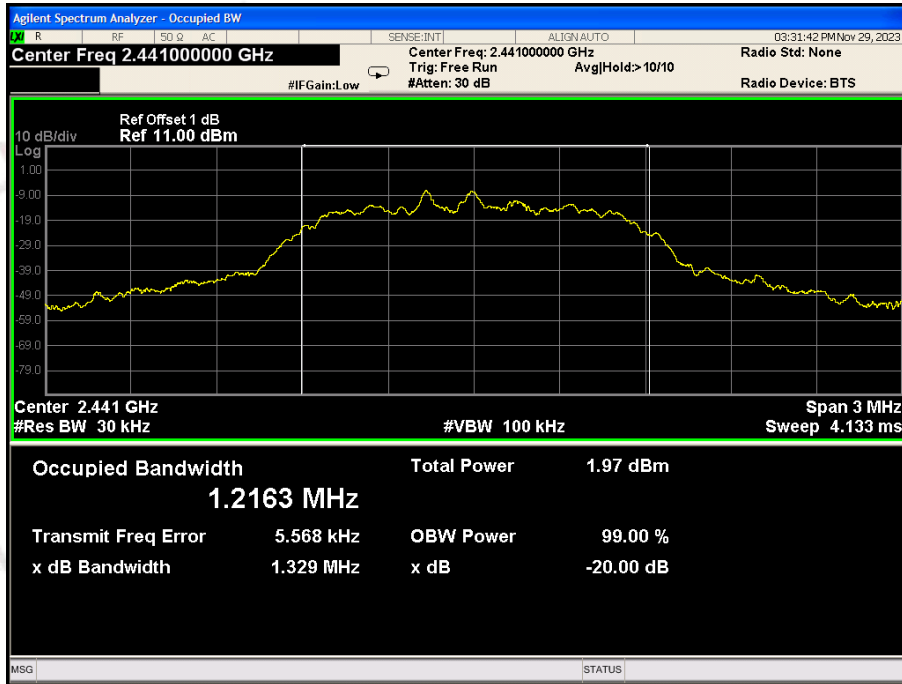


CH78: 2480MHz

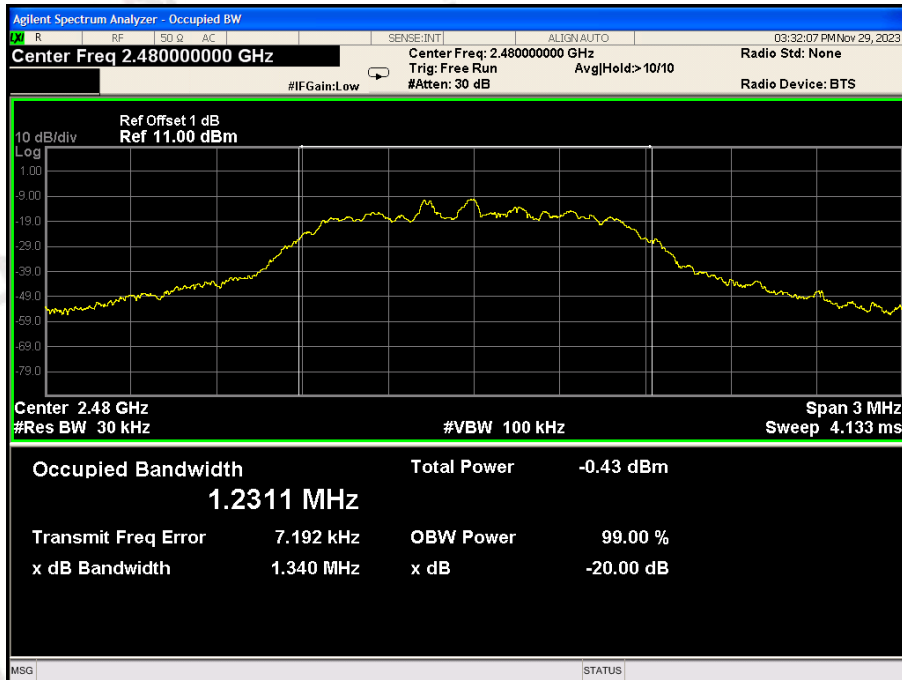


8DPSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.279	PASS
CH39	2441	1.306	PASS
CH78	2480	1.297	PASS


CH00: 2402MHz

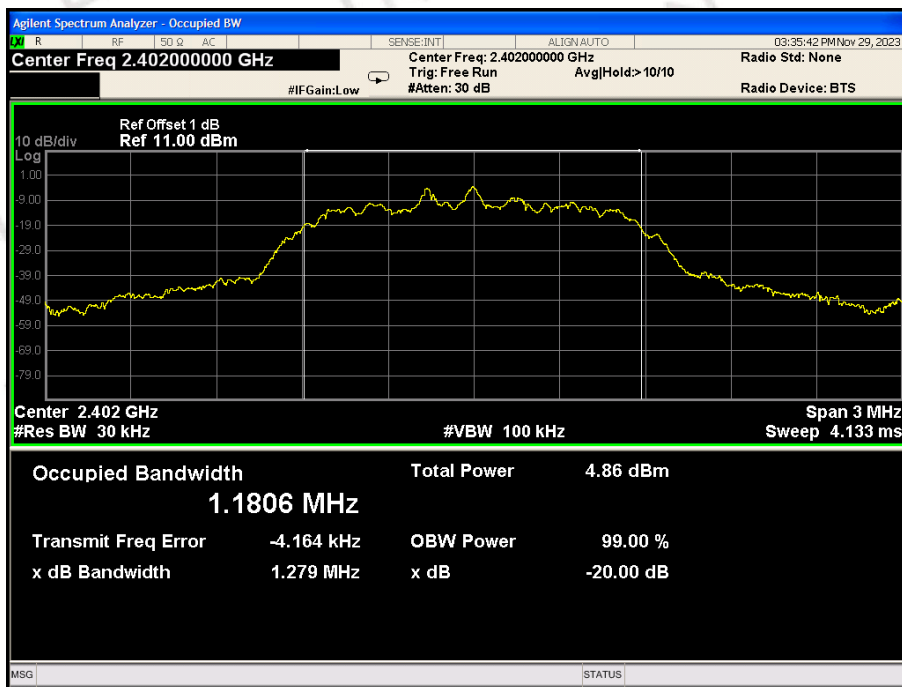

CH39: 2441MHz

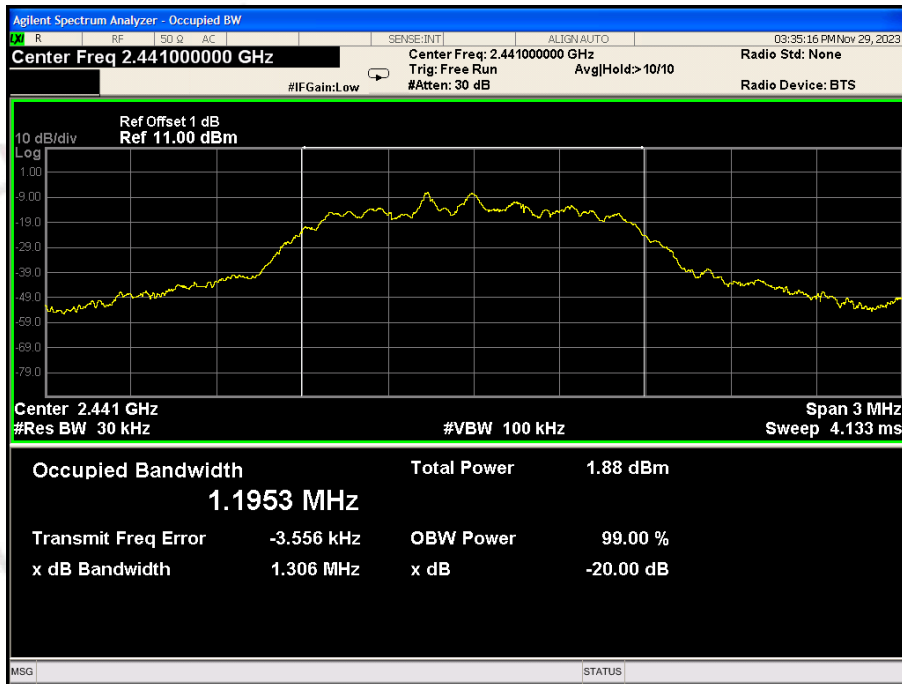

CH78: 2480MHz

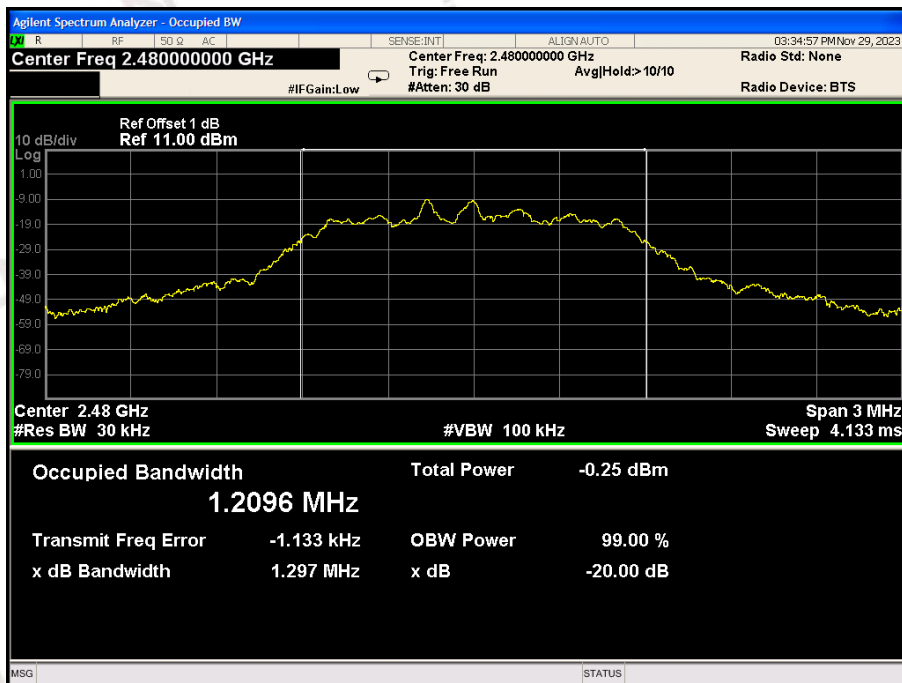


Right earphone:


GFSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.035	PASS
CH39	2441	1.060	PASS
CH78	2480	1.053	PASS


CH00: 2402MHz

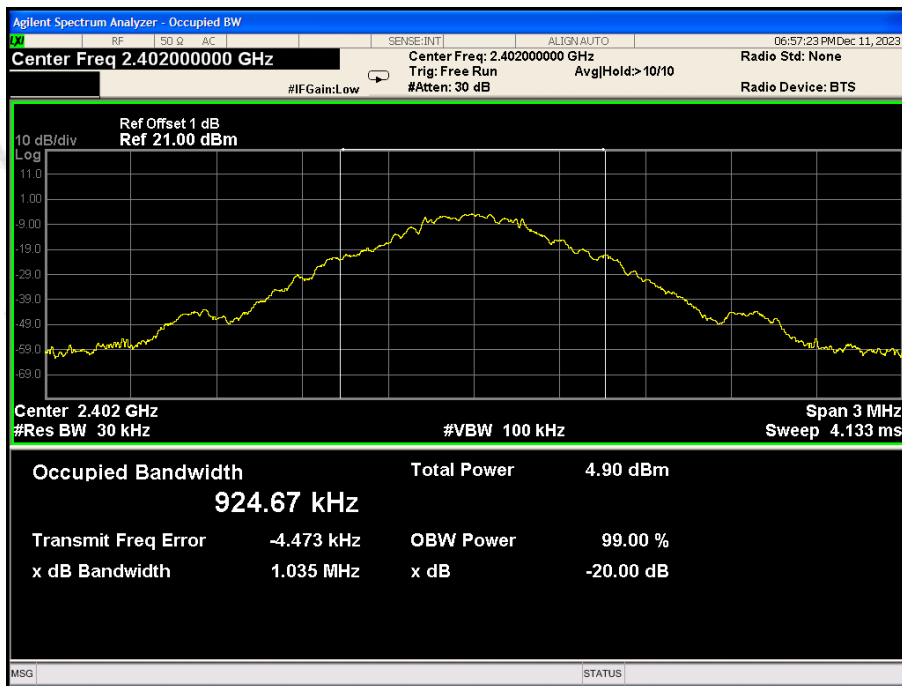

CH39: 2441MHz

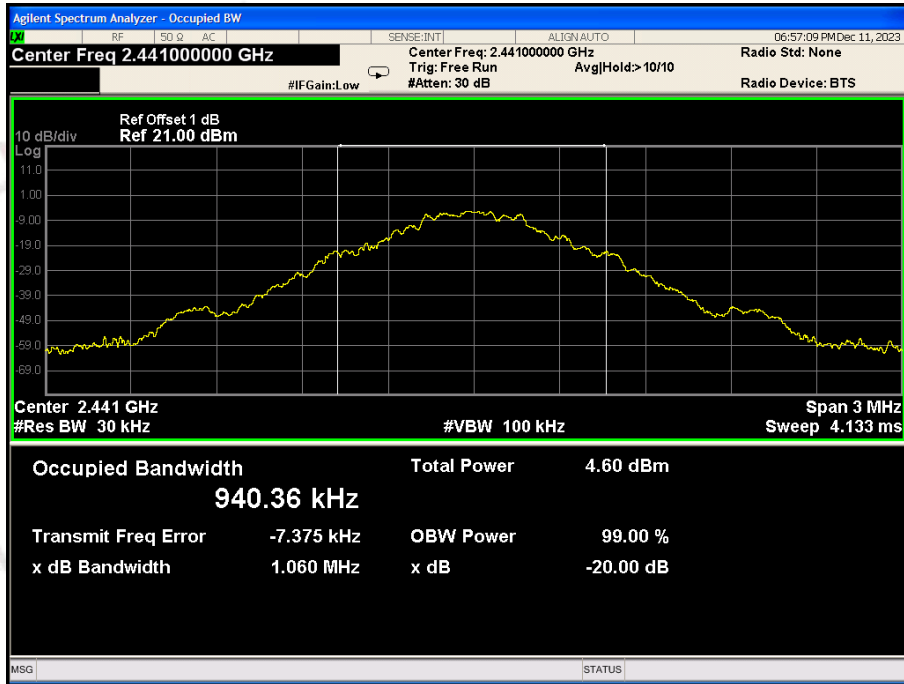


CH78: 2480MHz

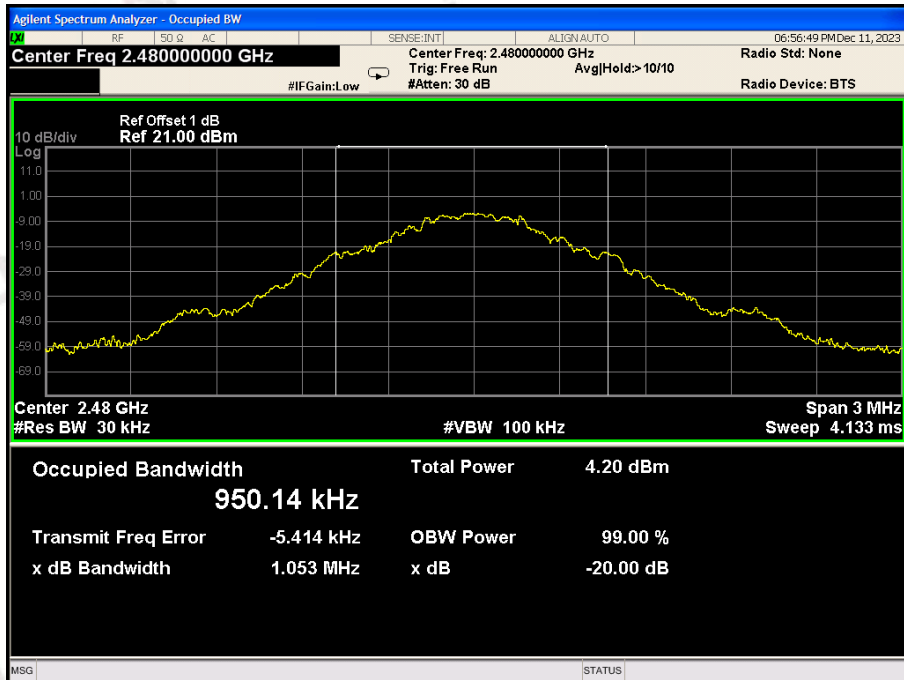


$\pi/4$ DQPSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.317	PASS
CH39	2441	1.315	PASS
CH78	2480	1.335	PASS


CH00: 2402MHz

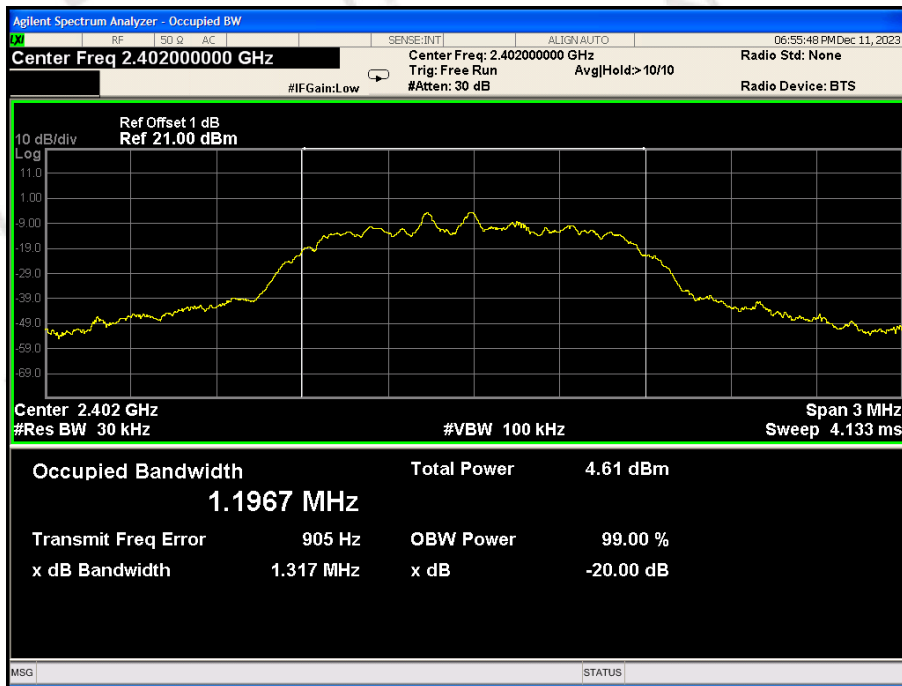

CH39: 2441MHz

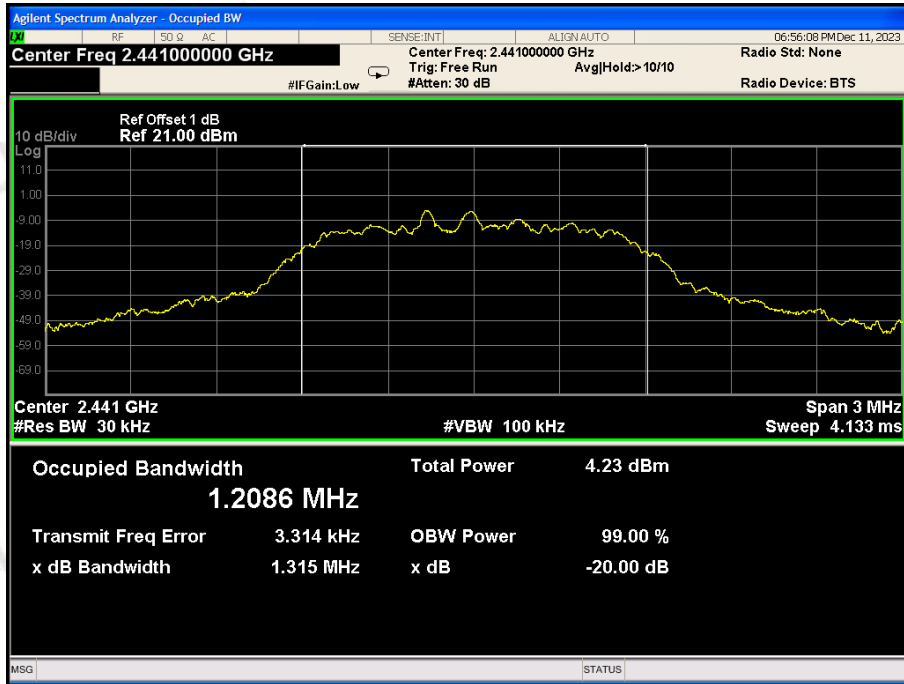


CH78: 2480MHz

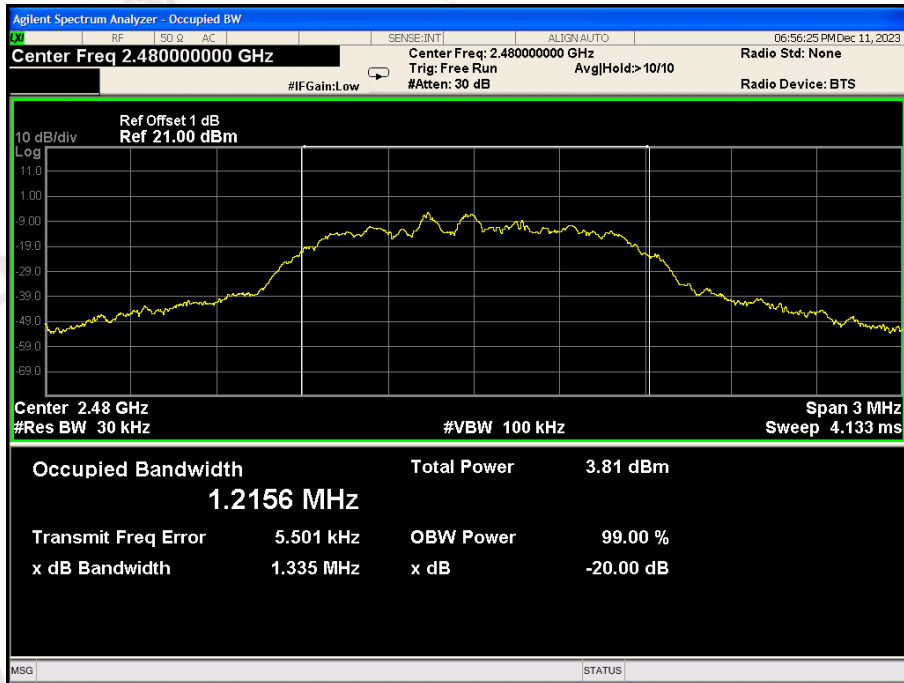


8DPSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.305	PASS
CH39	2441	1.298	PASS
CH78	2480	1.330	PASS


CH00: 2402MHz

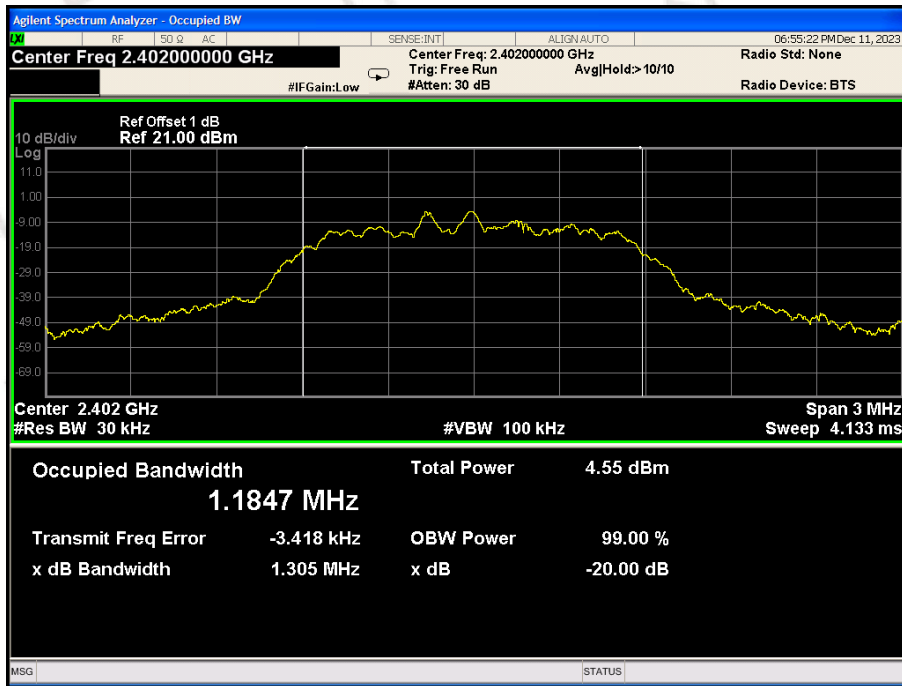

CH39: 2441MHz

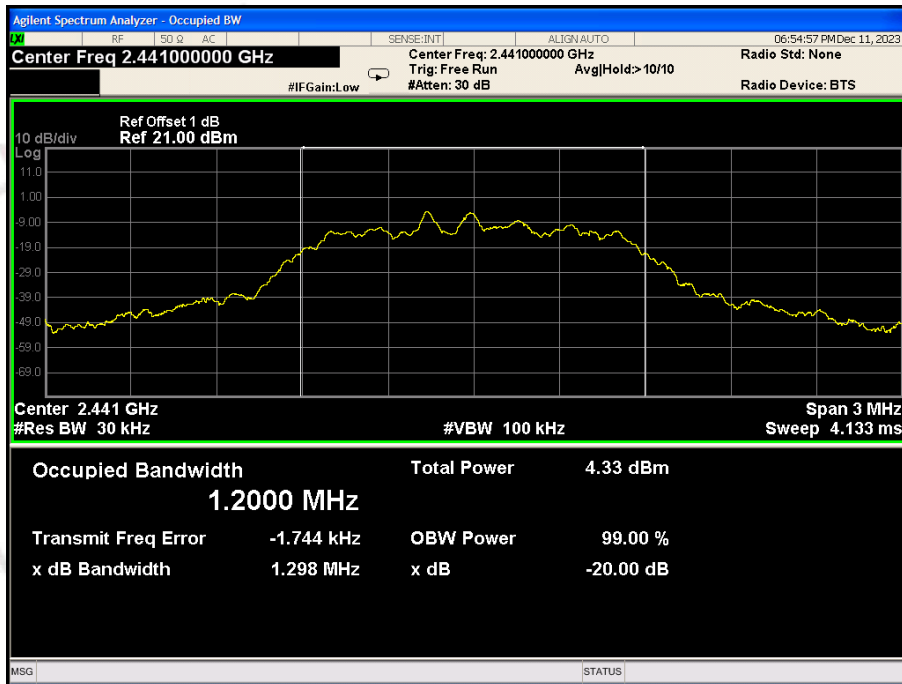

CH78: 2480MHz

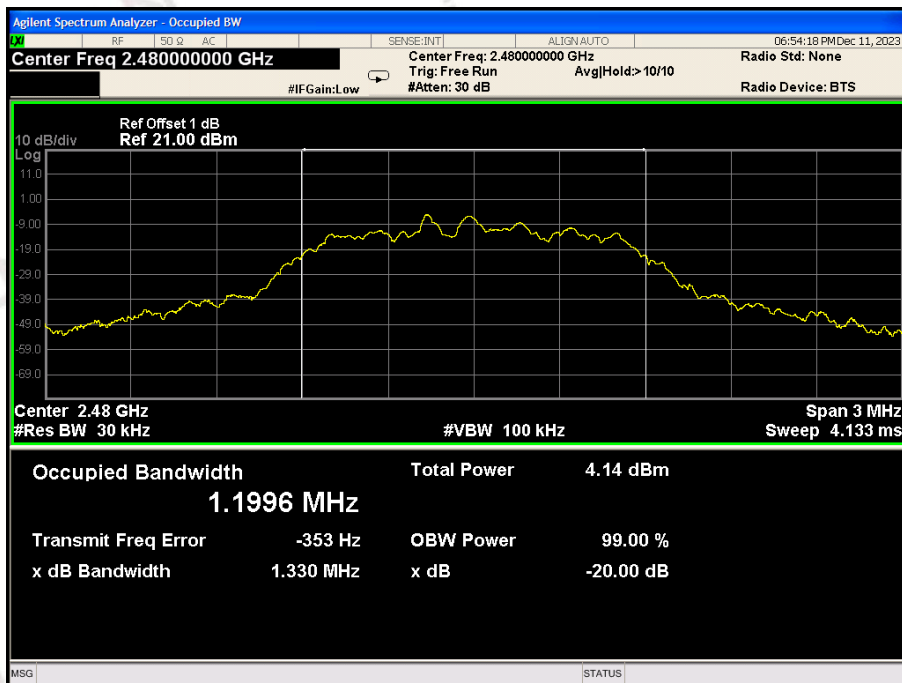

7 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


Antenna Connected Construction

The antenna used in this product is a Chip Antenna, The directional gains of antenna used for transmitting is 2.5dBi.


Left earphone ANTENNA:

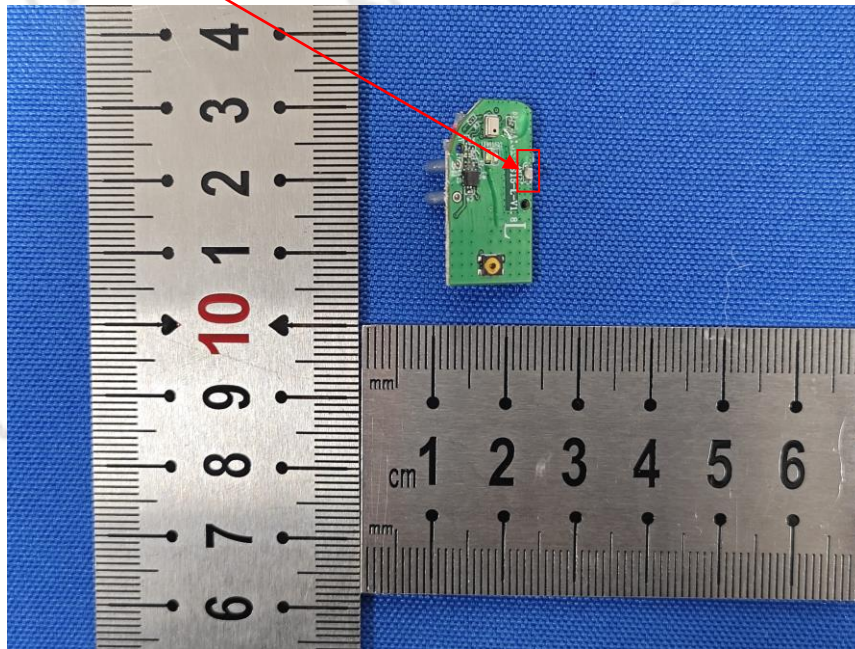

Right earphone ANTENNA:

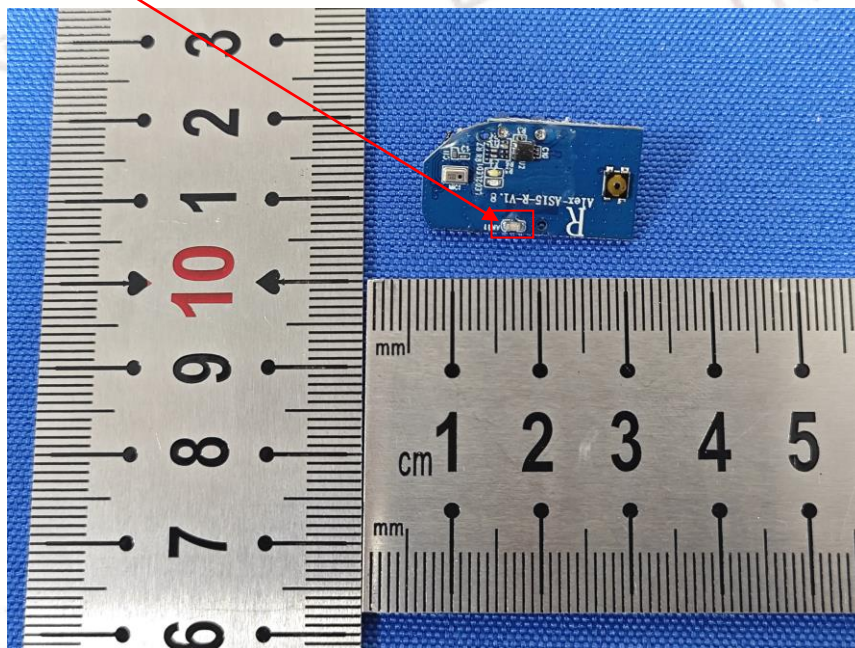

8 PHOTO OF TEST
8.1 RADIATED EMISSION
Left earphone:

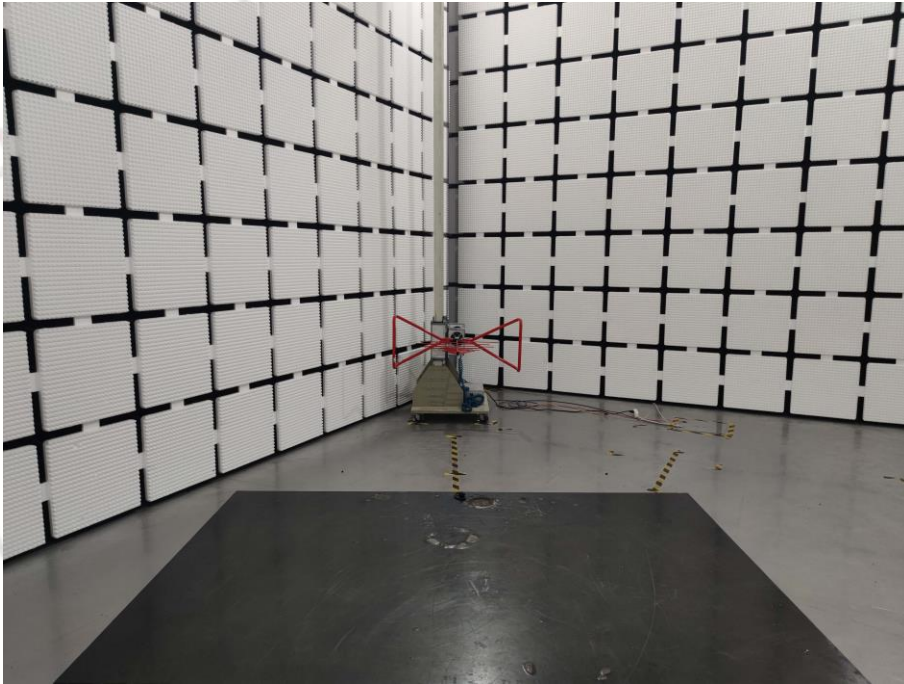


30MHz-1000MHz



Above 1GHz

Right earphone:

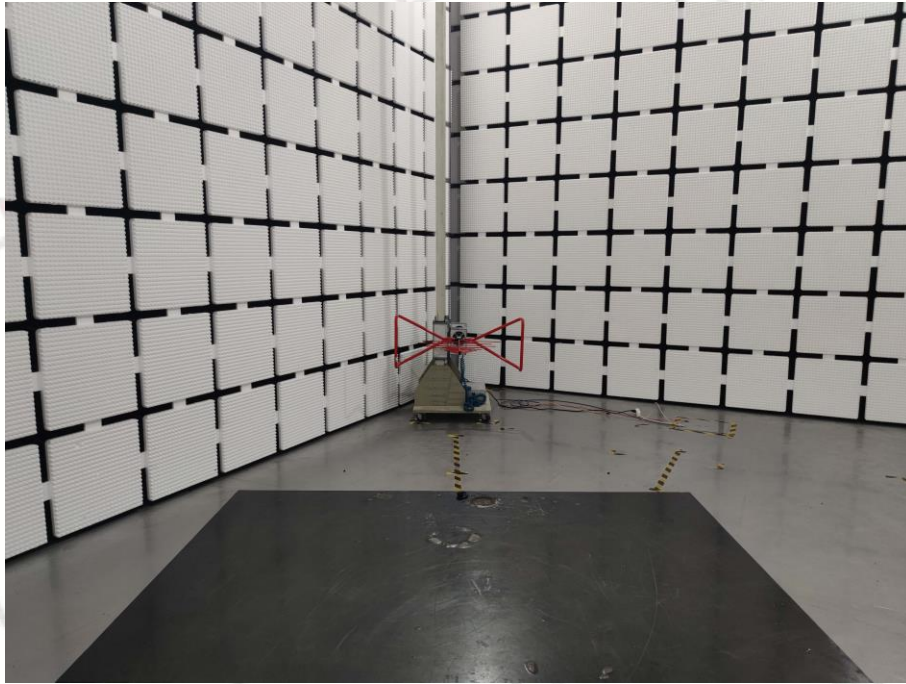

30MHz-1000MHz




Above 1GHz


8.2 CONDUCTED EMISSION



8.3 RF CONDUCTED Left earphone:

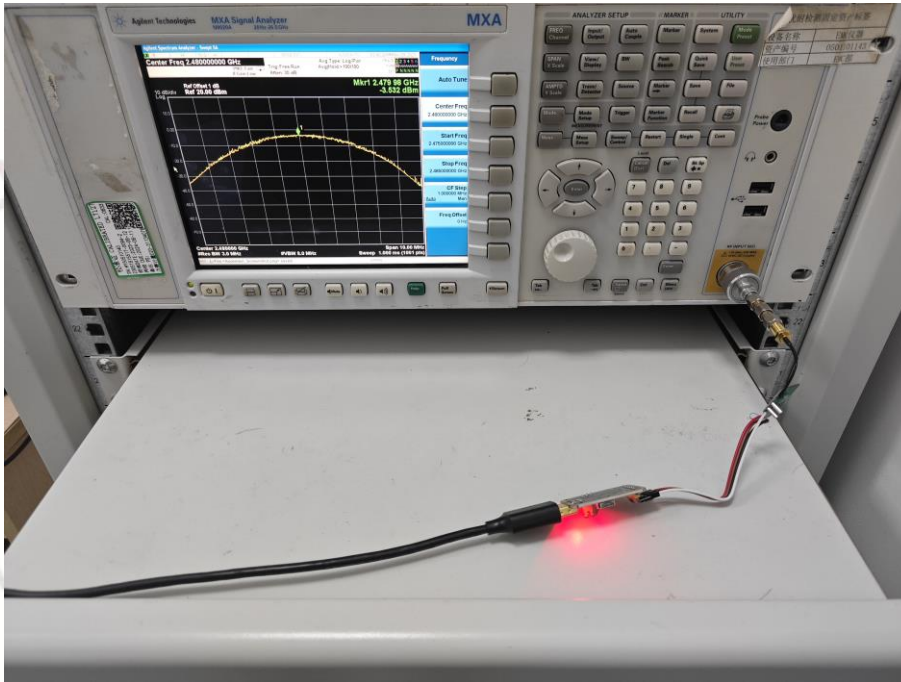

Right earphone:

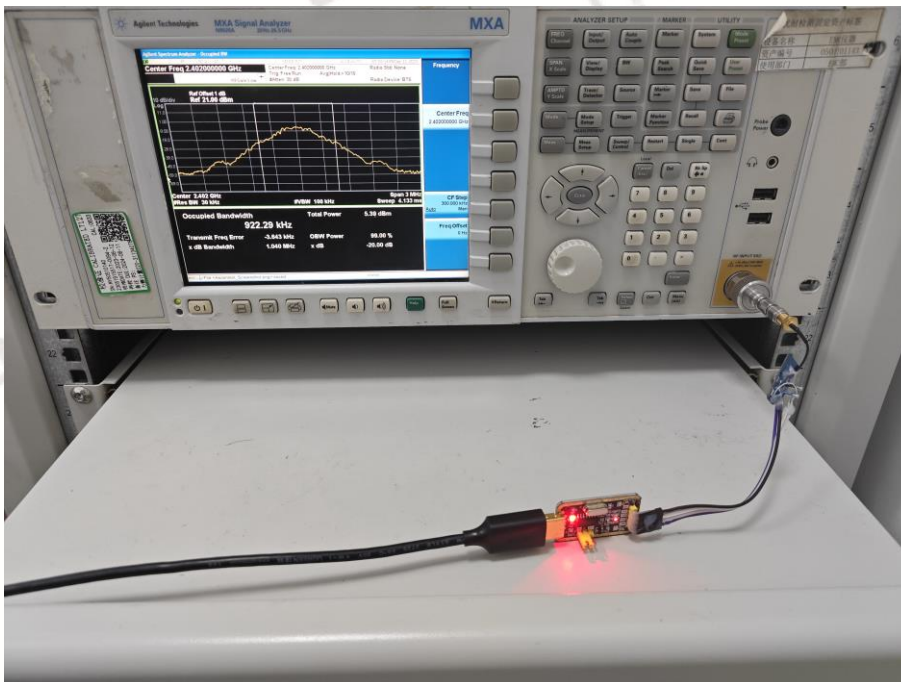

End of Report