



MPE TEST REPORT

Report No:STS2207061H01

Issued for

Dongguan Aohai Technology Co.,Ltd.

Block A & 3-5F of Block B, Zhenlong East Road No.6,
Jiaoyitang, Tangxia Town, Dongguan, Guangdong, China

Product Name:	Magnetic Wireless Portable Charger
Brand Name:	NA
Model Name:	BE-MQ25KW23
Series Model:	NS-MQ25Kxxxxxxxx, BE-MQ25Kxxxxxxxx ("x"=0-9, A-Z, a-z, - or blank, for market purpose only)
FCC ID:	2AP4X-MQ25KW23
Test Standard:	FCC CFR 47 part 1, 1.1310

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's Name.....: Dongguan Aohai Technology Co.,Ltd.
Address.....: Block A & 3-5F of Block B, Zhenlong East Road No.6, Jiaoyitang, Tangxia Town, Dongguan, Guangdong, China
Manufacturer's Name.....: Dongguan Aohai Technology Co.,Ltd.
Address.....: Block A & 3-5F of Block B, Zhenlong East Road No.6, Jiaoyitang, Tangxia Town, Dongguan, Guangdong, China

Product Description

Product Name: Magnetic Wireless Portable Charger
Brand Name: NA
Model Name.....: BE-MQ25KW23
Series Model.....: NS-MQ25Kxxxxxxx, BE-MQ25Kxxxxxxx ("x"=0-9, A-Z, a-z, - or blank, for market purpose only)
Standards.....: FCC CFR 47 part 1, 1.1310

Test Procedure: 680106 D01 RF Exposure Wireless Charging Apps v03

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date of receipt of test item: 12 July 2022

Date of performance of tests ...: 12 July 2022 ~ 22 July 2022

Date of Issue.....: 22 July 2022


Test Result: **Pass**

Testing Engineer : 

(Chris Chen)

Technical Manager : 

(Sean She)

Authorized Signatory : 

(Bovey Yang)



**Table of Contents****Page**

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
1.3 GENERAL DESCRIPTION OF THE EUT	6
1.4 EQUIPMENTS LIST FOR ALL TEST ITEMS	7
1.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	7
2. MAXIMUM PERMISSIBLE EXPOSURE	8
2.1 MAXIMUM PERMISSIBLE EXPOSURE	8
2.2 TEST PROCEDURE	9
2.3 TEST SETUP	9
2.4 TEST RESULTS	10
2.5 MAXIMUM PERMISSIBLE EXPOSURE	11



Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	22 July 2022	STS2207061H01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03

FCC CFR 47			
Standard Section	Test Item	Judgment	Remark
FCC CFR 47 part1, 1.1310 KDB680106 D01v03	Electric Field Strength (E) (V/m)	PASS	
	Magnetic Field Strength (H) (A/m)	PASS	

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	H-filed	$\pm 0.83\text{dB}$
2	E-filed	$\pm 0.91\text{dB}$



1.3 GENERAL DESCRIPTION OF THE EUT

Product Name	Magnetic Wireless Portable Charger
Trade Name	NA
Model Name	BE-MQ25KW23
Series Model	NS-MQ25Kxxxxxxxx, BE-MQ25Kxxxxxxxx ("x"=0-9, A-Z, a-z, - or blank, for market purpose only)
Model Difference	All models are identical except the model number or color for different market purpose.
Equipment Category	Non-ISM frequency
Antenna Type	Please refer to the Note 2.
Operating frequency	111-205kHz
Modulation Type	FSK
Rating	Input: Magsafe 7.5W
Hardware version number	N/A
Software version number	N/A
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	NOTE
1	N/A	MQ25KW23	Coil	NA	Antenna

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.



1.4 EQUIPMENTS LIST FOR ALL TEST ITEMS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Electric and Magnetic field Probe - Analyzer	Narda	EHP 200A	180ZX10220	2021.08.02	2022.08.01

1.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-1	Iphone	Iphone	Iphone 8	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) "YES" is means "with core"; "NO" is means "without core".



2. MAXIMUM PERMISSIBLE EXPOSURE

2.1 MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; *Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

Note 4: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.


2.2 TEST PROCEDURE

- 1) The RF exposure test was performed in an echoic chamber;
- 2) The measurement probe was placed at test distance(15 cm from edges, 20 cm from top) Which is between the edge of the charger and the geometric center of probe, for test setup A;
- 3) In addition to what is described in KDB 680106 D01, please measure and provide magnetic and electrical field strength at a distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm. Which is between the edge of the charger and the edge of probe, for test setup B;
- 4) The highest emission leve laws recorded and compared with limit as soon as measurement of each points (A,B, C,D, E)were completed;
- 5) The EUT was measured according to the dictates of KDB680106D01v03; And KDB Tracking Number 671578 ; TCB Workshop, October 2018, 5.2 RF Exposure Procedures


Remark : The EUT's test position A, B,C, D and E is valid for the E and H field measurements.

2.3 TEST SETUP

A:

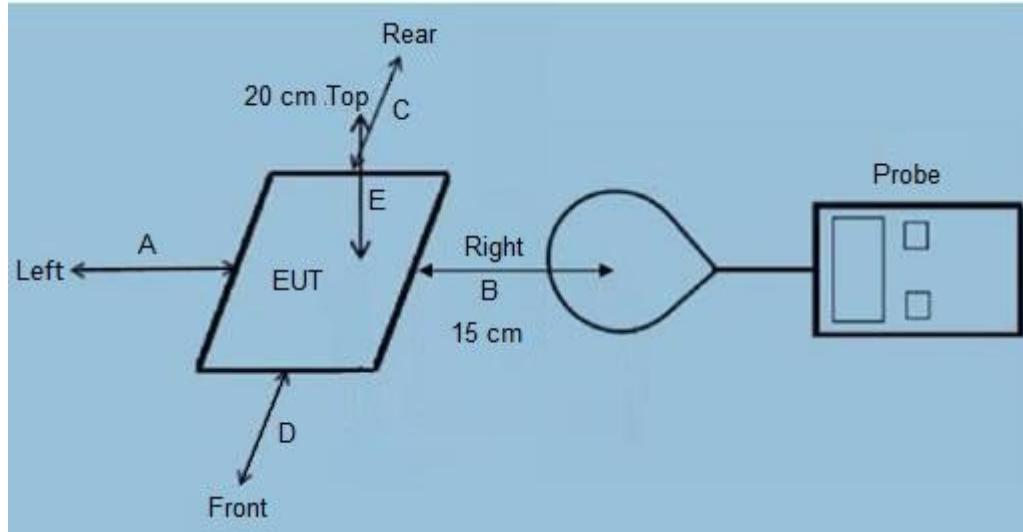

B:

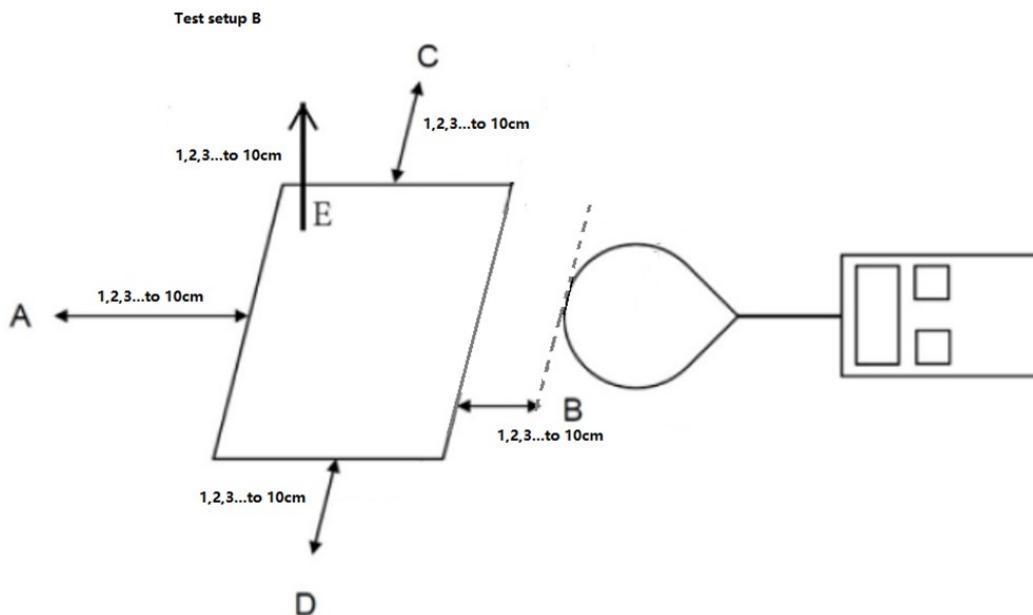

Remark: The E300 probe antenna diameter is 11.5cm.



2.4 TEST RESULTS

The EUT does comply with item 5 KDB680106 D01 v03.

- (1) Power transfer frequency is less than 1 MHz.
(Conform)
- (2) Output power from each primary coil is less than or equal to 15 watts.
(Conform)
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
(Conform)
- (4) Client device is placed directly in contact with the transmitter.
(Conform)
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
(No)
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
(Conform)





2.5 MAXIMUM PERMISSIBLE EXPOSURE

Test Result for Test setup A:

E-Filed Strength at (15 cm from edges A,B,C,D, 20 cm from top E) surrounding the EUT (V/m)

Charging Load Worse case	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Limits (V/m)
<5%	4.057	4.488	4.545	4.344	2.571	614
50%	4.018	4.484	4.539	4.339	2.525	614
>90 %	3.968	4.481	4.508	4.311	2.492	614

H-Filed Strength at (15 cm from edges A,B,C,D, 20 cm from top E) surrounding the EUT (A/m)

Charging Load Worse case	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Limits (A/m)
<5%	0.505	0.454	0.345	0.629	0.246	1.63
50%	0.455	0.417	0.332	0.611	0.245	1.63
>90 %	0.430	0.372	0.304	0.576	0.235	1.63

Note: Both the mode with AC power and the internal battery operating mode have been tested. The worst case is the internal battery operating mode, only report the worst case.



Test Result for Test setup B:

E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Limits (V/m)
1	4.050	4.487	4.535	4.335	2.571	614
2	3.595	4.192	4.082	3.845	2.533	614
3	3.267	3.890	4.081	3.464	2.476	614
4	2.779	3.714	3.710	3.464	2.312	614
5	2.653	3.230	3.582	3.163	2.136	614
6	2.581	2.989	3.572	2.677	1.978	614
7	2.501	2.702	3.466	2.181	1.786	614
8	2.499	2.482	3.450	1.863	1.714	614
9	2.483	2.357	3.106	1.432	1.625	614
10	2.220	2.100	2.662	1.301	1.595	614

H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Limits (A/m)
1	0.496	0.446	0.342	0.622	0.237	1.63
2	0.447	0.388	0.305	0.573	0.224	1.63
3	0.420	0.382	0.290	0.563	0.206	1.63
4	0.379	0.363	0.266	0.497	0.189	1.63
5	0.333	0.342	0.246	0.455	0.185	1.63
6	0.313	0.327	0.243	0.399	0.181	1.63
7	0.273	0.321	0.223	0.357	0.165	1.63
8	0.265	0.264	0.188	0.347	0.153	1.63
9	0.250	0.243	0.178	0.292	0.133	1.63
10	0.224	0.181	0.165	0.244	0.120	1.63

Note:

1. Both the mode with AC power and the internal battery operating mode have been tested. The worst case is the internal battery operating mode, only report the worst case.
2. <5%, 50%, >90% load all have been tested, only worse case Max load <5% is reported.



MPE SETUP PHOTO

Refer to photo document

*****END OF THE REPORT*****

