

Test Report

FCCID: 2AP56-B08W-5MP-HX

Date of issue: Aug. 12, 2019

Report Number: MTI19070107-6E1

Sample Description: IP Camera

Model(s): B08W-5MP-HX, B06W-3MP-HX, B06W-5MP-HX,
B07W-1080P-HX, B08W-3MP-HX, B16VW-5MP-HX,
SD5W-3MP-HX, SD5W-5MP-HX, SD7W-3MP-HX, SD7W-5MP-HX

Applicant: Shenzhen Zhaoyang Tianxia Technology CO., Ltd.

Address: Room217, Building C1, Bantian International Center, Bantian Street,
Longgang District, Shenzhen, China

Date of Test: July 10, 2019 to Aug. 12, 2019

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Table of Contents

1 GENERAL INFORMATION	5
1.1 DESCRIPTION OF EUT	5
1.2 OPERATION CHANNEL LIST	6
1.3 TEST CHANNEL LIST	6
1.4 ANCILLARY EQUIPMENT LIST	6
1.5 DESCRIPTION OF SUPPORT UNITS	6
2 SUMMARY OF TEST RESULTS	8
3 TEST FACILITIES AND ACCREDITATIONS	9
3.1 TEST LABORATORY	9
3.2 ENVIRONMENTAL CONDITIONS	9
3.3 MEASUREMENT UNCERTAINTY	9
3.4 TEST SOFTWARE	9
4 EQUIPMENT LIST	10
5 TEST RESULT	11
5.1 ANTENNA REQUIREMENT	11
5.1.1 Standard requirement	11
5.1.2 EUT Antenna	11
5.2 PEAK OUTPUT POWER	12
5.2.1 Limit	12
5.2.2 Test setup	12
5.2.3 Test procedure	12
5.2.4 Test results	13
5.3 POWER SPECTRAL DENSITY	14
5.3.1 Limit	14
5.3.2 Test Setup	14
5.3.3 Test Procedure	14
5.3.4 Test Results	15
5.4 CONDUCTED EMISSION	19
5.4.1 Limits	19
5.4.2 Test setup	19
5.4.3 Test procedure	20
5.4.4 Test results	21
5.5 RADIATED SPURIOUS	25
5.5.1 Limits	25
5.5.2 Test setup	26
5.5.3 Test procedure	27
5.5.4 Test results	28
5.5.4.1 Radiation emission	28
5.5.4.2 Band edge - radiated	32
5.5.4.3 Spurious Emission in Restricted Band 3260MHz-18000MHz	34
5.6 BAND EDGE - CONDUCTED	35
5.6.1 Limits	35
5.6.2 Test setup	35
5.6.3 Test procedure	35
5.6.4 Test results	36
5.7 6dB BANDWIDTH	40
5.7.1 Limit	40
5.7.2 Test setup	40
5.7.3 Test procedure	40
5.7.4 Test results	41
5.8 SPURIOUS RF CONDUCTED EMISSIONS	49
5.8.1 Conformance Limit	49
5.8.2 Measuring Instruments	49

5.8.3	<i>Test Setup</i>	49
5.8.4	<i>Test Procedure</i>	49
5.8.5	<i>Test Results</i>	49
PHOTOGRAPHS OF THE TEST SETUP		52
PHOTOGRAPHS OF THE EUT		54

Test Result Certification

Applicant's name: Shenzhen Zhaoyang Tianxia Technology CO., Ltd.

Address: Room217, Building C1, Bantian International Center, Bantian Street, Longgang District, Shenzhen, China

Manufacture's Name: Shenzhen Zhaoyang Shidai Technology Co., Ltd.

Address: F6, Block F, JIN HENG RUN Industrial Park, Xintang, Fucheng Street, Longhua District, Shenzhen, China

Product name: IP Camera

Trademark: SV3C

Model name: B08W-5MP-HX, B06W-3MP-HX, B06W-5MP-HX, B07W-1080P-HX, B08W-3MP-HX, B16VW-5MP-HX, SD5W-3MP-HX, SD5W-5MP-HX, SD7W-3MP-HX, SD7W-5MP-HX

Standards: FCC Part 15.247

Test Procedure: ANSI C63.10-2013
KDB 558074 D01 DTS Meas Guidance v05r02

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Tested by:

Jone Lee

July 26, 2019

Reviewed by:

Blue Zheng

Aug. 12, 2019

Approved by:

Smith Chen

Aug. 12, 2019

1 General information

1.1 Description of EUT

Product name:	IP Camera
Model name:	B08W-5MP-HX
Serial Model:	B06W-3MP-HX, B06W-5MP-HX, B07W-1080P-HX, B08W-3MP-HX, B16VW-5MP-HX, SD5W-3MP-HX, SD5W-5MP-HX, SD7W-3MP-HX, SD7W-5MP-HX
Model difference:	All the model are the same circuit and RF module, except the pixel and model No..
Operation frequency:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Modulation type:	IEEE 802.11b : DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Bit Rate of transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz) use 800 ns GI: 65.0/58.5/52.0/39.0/26.0/19.5/13.0/6.5 Mbps (MCS0~MCS7) 802.11n(40MHz) use 800 ns GI: 13.5/27/40.5/54/81/108/121.5/135Mbps
Antenna type:	External Antenna
Antenna gain:	3.5dBi
Max. output power:	13.73dBm
Power supply:	DC 12V from adapter
Battery:	N/A
Adapter information:	Model:KA1201A-1201000US Input:100-240V 50/60Hz 0.4A Max Output: DC 12V 1000mA
Hardware version:	Hi3516EV300+sony335
Software version:	V19.1.21.5.3-20190618

/	/	/	/	/	/	/	/
---	---	---	---	---	---	---	---

Note:

- (1)The support equipment was authorized by Declaration of Confirmation.
- (2)For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2 Summary of Test Results

Test procedures according to the technical standards:

No.	Standard Section	Test Item	Result	Remark
1	15.203	Antenna Requirement	Pass	
2	15.247 (b)	Peak Output Power	Pass	
3	15.247 (e)	Power Spectral Density	Pass	
4	15.207	Conducted Emission	Pass	
5	15.247 (d) & 15.209	Radiated Spurious Emission	Pass	
6	15.205	Band Edge Emission	Pass	
7	15.247 (a)(2)	6dB Bandwidth	Pass	
8	15.205	Spurious RF Conducted Emissions	Pass	

3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power, conducted	±0.16dB
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(<1G)	±4.68dB
5	All emissions, radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

3.4 Test software

Software Name	Manufacturer	Model	Version
Bluetooth and WiFi Test System	Shenzhen JS tonscrend co., ltd	JS1120-3	2.5.77.0418

5 Test Result

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT Antenna


The EUT antenna is External antenna (3.5dBi). It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Peak output power

5.2.1 Limit

Section	Test Item	Limit	Frequency Range (MHz)
15.247(b)(3)	Peak output power	1 watt or 30dBm	2400-2483.5

5.2.2 Test setup



5.2.3 Test procedure

The EUT was directly connected to the Power meter.

5.3 Power spectral density

5.3.1 Limit

Section	Test Item	Limit	Frequency Range (MHz)
15.247(e)	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5

5.3.2 Test Setup





5.3.3 Test Procedure


- a. The EUT tested system was configured as the statements of 2.1 unless otherwise a special operating condition is specified in the follows during the testing.
- b. Set analyzer center frequency to DTS channel center frequency.
- c. Set the span to 1.5 times the DTS channel bandwidth.
- d. Set the RBW \geq 3 kHz.
- e. Set the VBW \geq 3 x RBW.
- f. Detector = peak.
- g. Sweep time = auto couple.
- h. Trace mode = max hold.
- i. Allow trace to fully stabilize.
- j. Use the peak marker function to determine the maximum amplitude level.
- k. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3.4 Test Results


802.11b			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-15.052	8	Pass
2437 MHz	-15.053	8	Pass
2462 MHz	-16.023	8	Pass

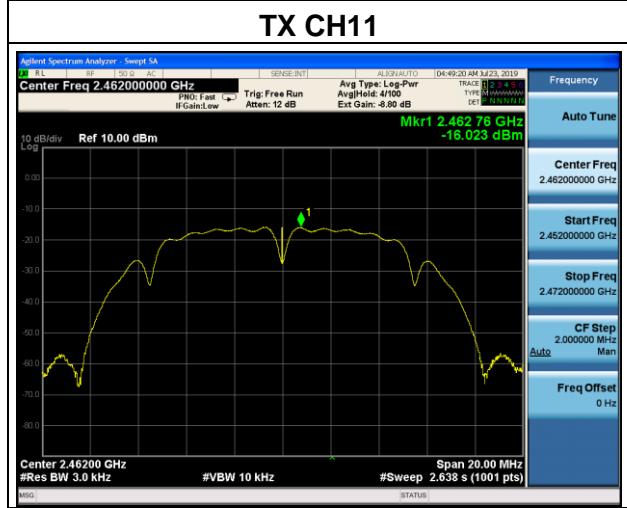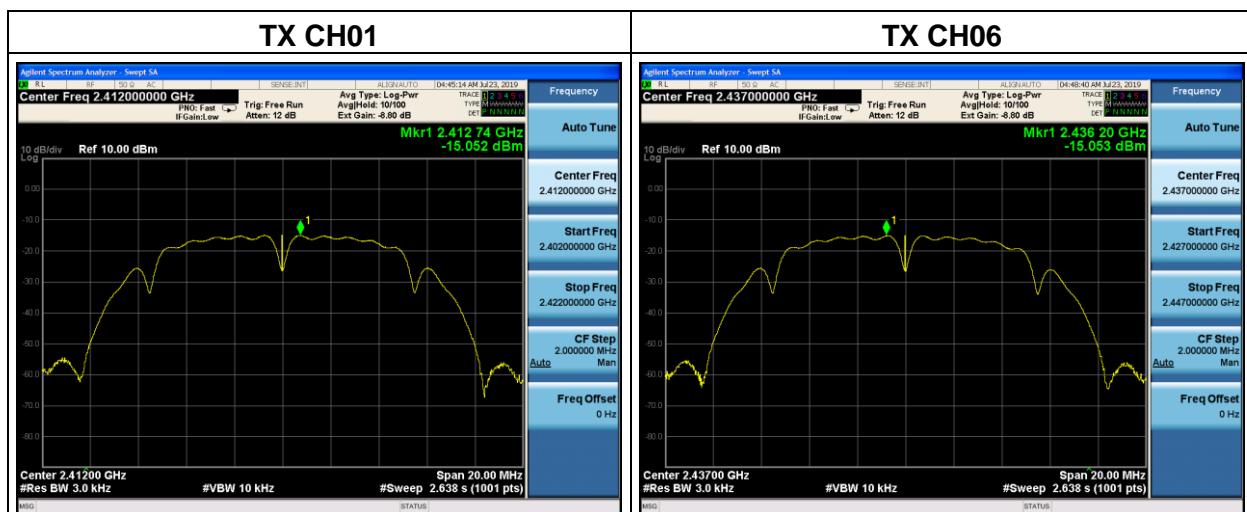


802.11g			
Frequency	Power Density (dBm/3kHz)	Limit 8(dBm/3kHz)	Result
2412 MHz	-12.978	8	Pass
2437 MHz	-11.701	8	Pass
2462 MHz	-13.473	8	Pass

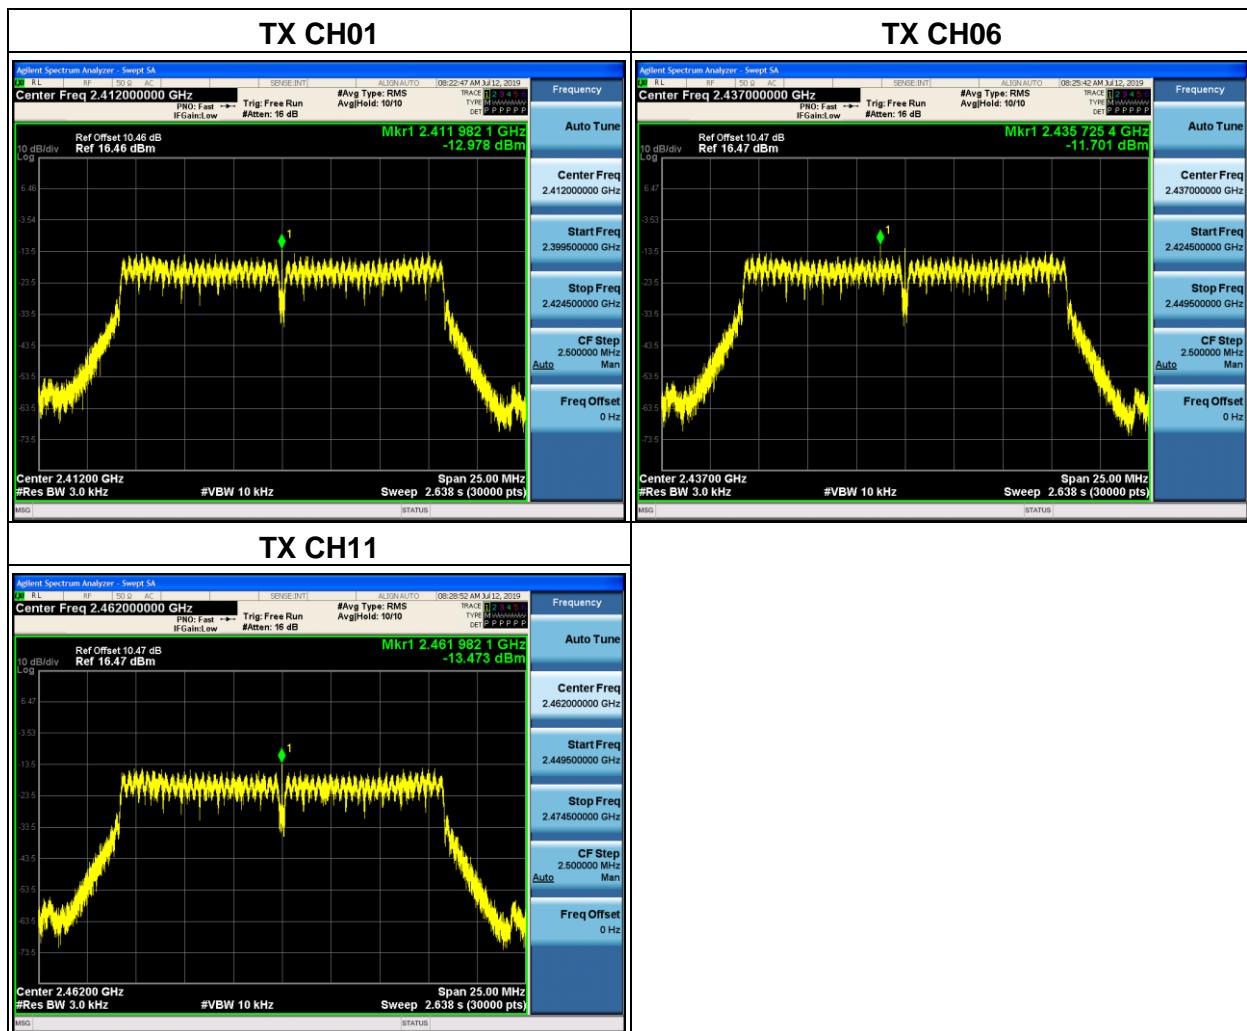

802.11n20			
Frequency	Power Density (dBm/3kHz)	Limit 8(dBm/3kHz)	Result
2412 MHz	-12.406	8	Pass
2437 MHz	-12.078	8	Pass
2462 MHz	-12.847	8	Pass

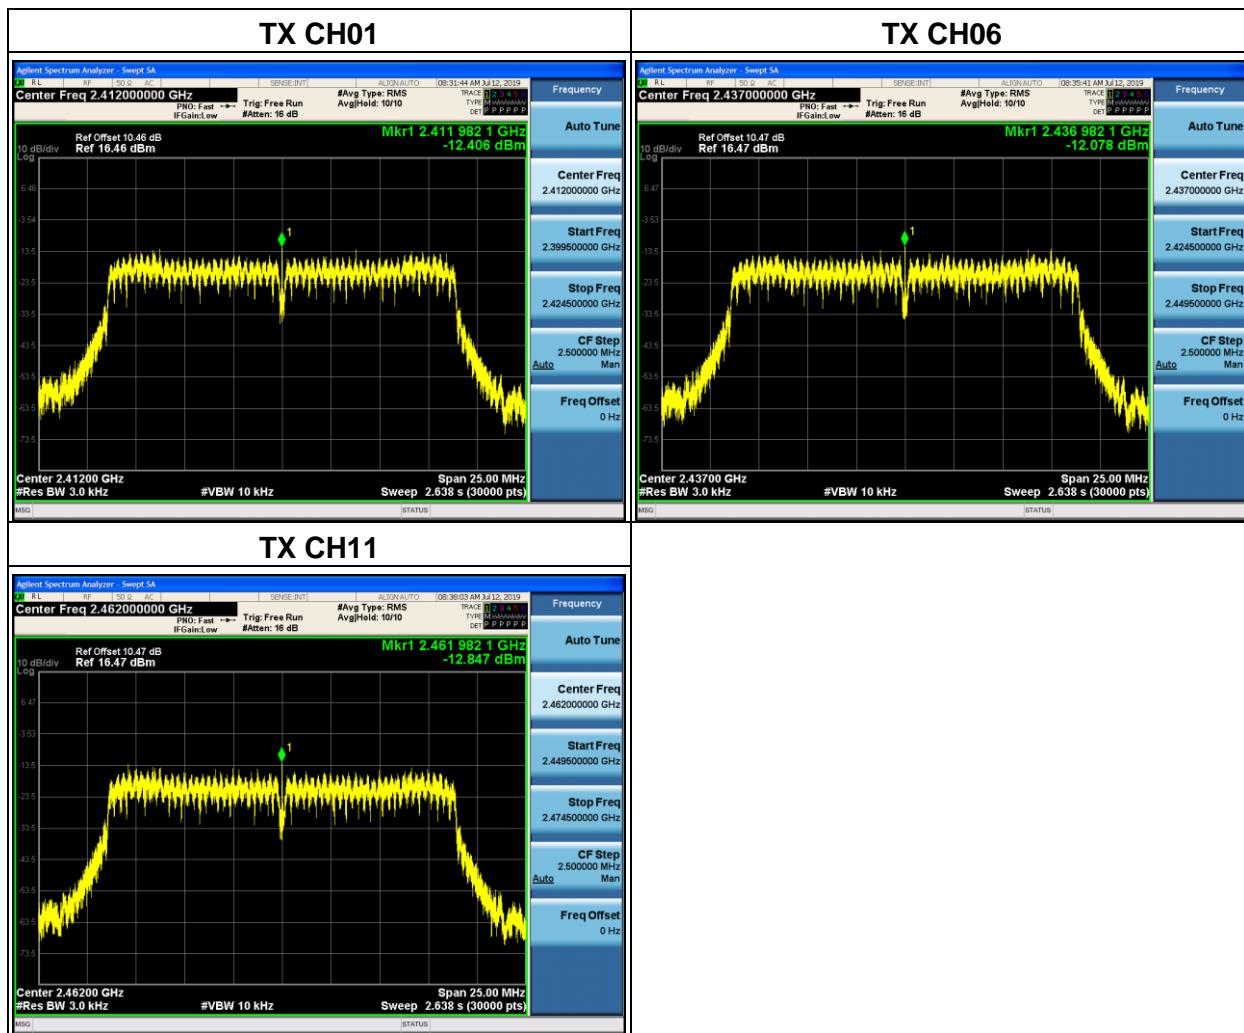

802.11n40			
Frequency	Power Density (dBm/3kHz)	Limit 8(dBm/3kHz)	Result
2422 MHz	-12.793	8	Pass
2437 MHz	-12.299	8	Pass
2452 MHz	-12.574	8	Pass

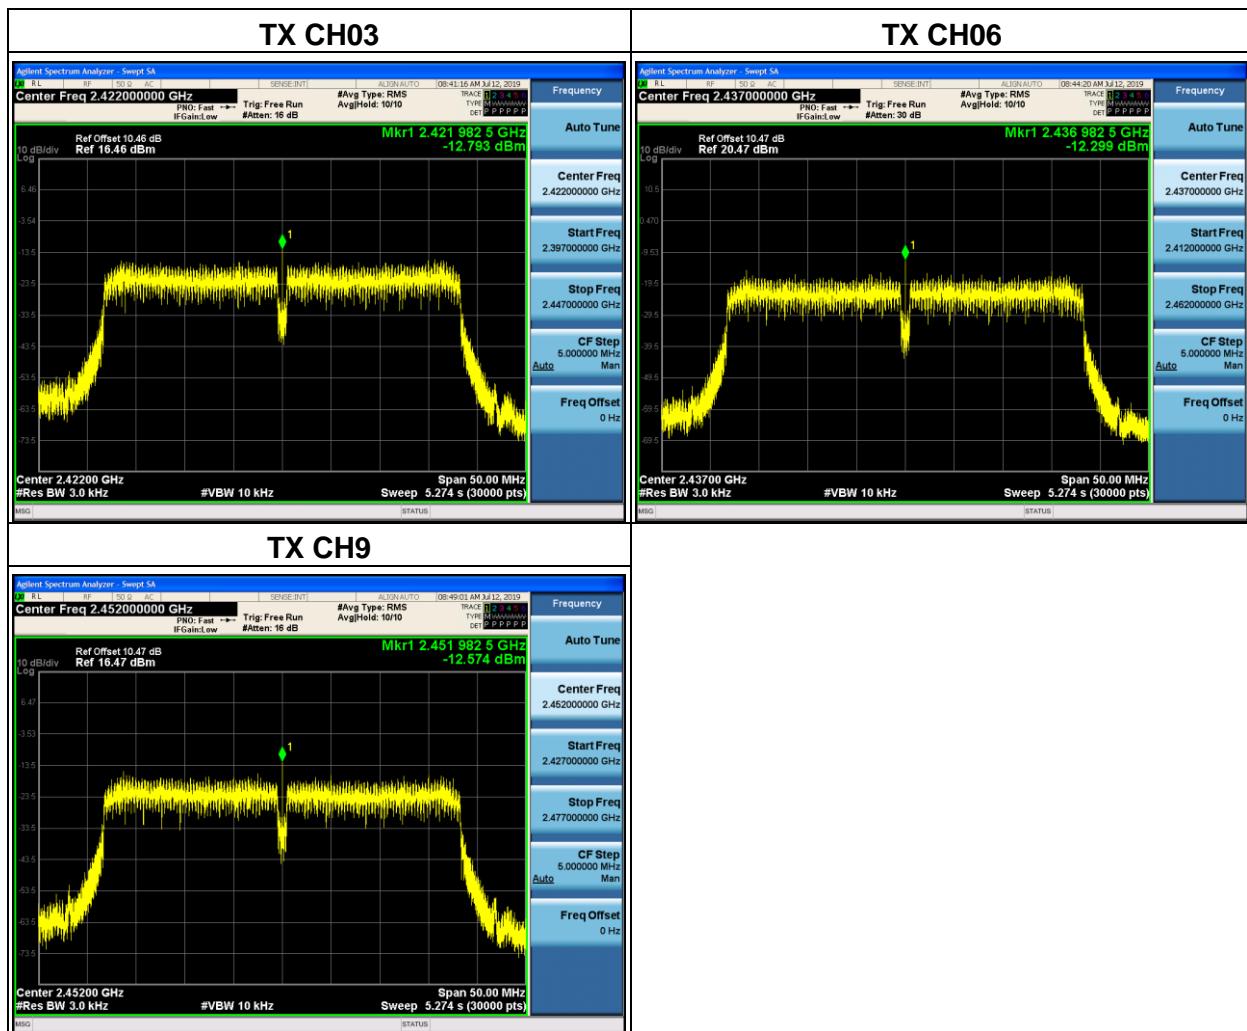

5.4 Conducted emission

5.4.1 Limits

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01.


FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note

(1)The tighter limit applies at the band edges.

(2)The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.4.2 Test setup

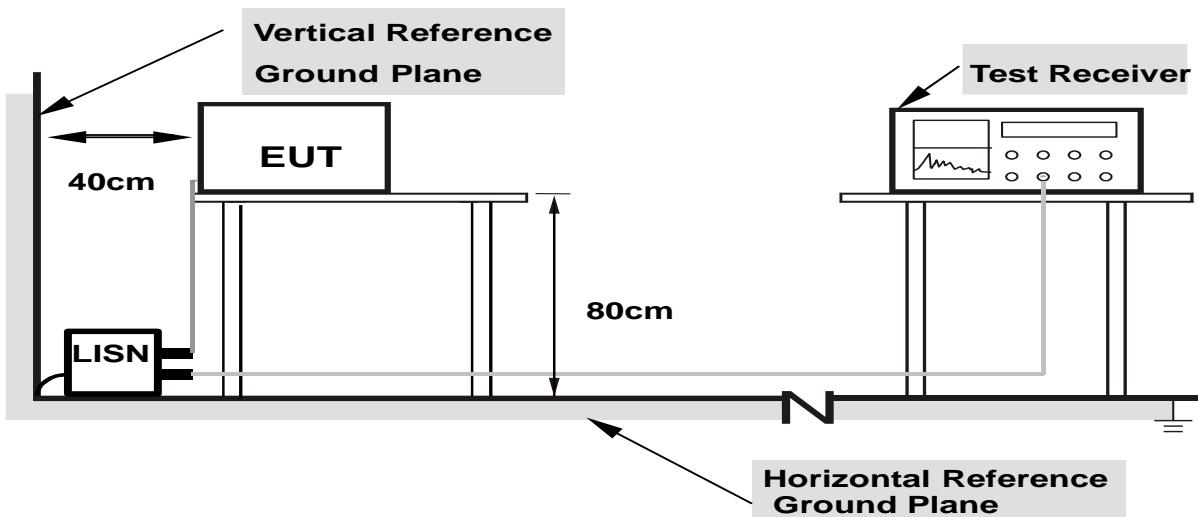

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.4.3 Test procedure

a. EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b. The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f. LISN at least 80 cm from nearest part of EUT chassis.


For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.5.2 Test setup


Radiated emission test-up frequency below 30MHz

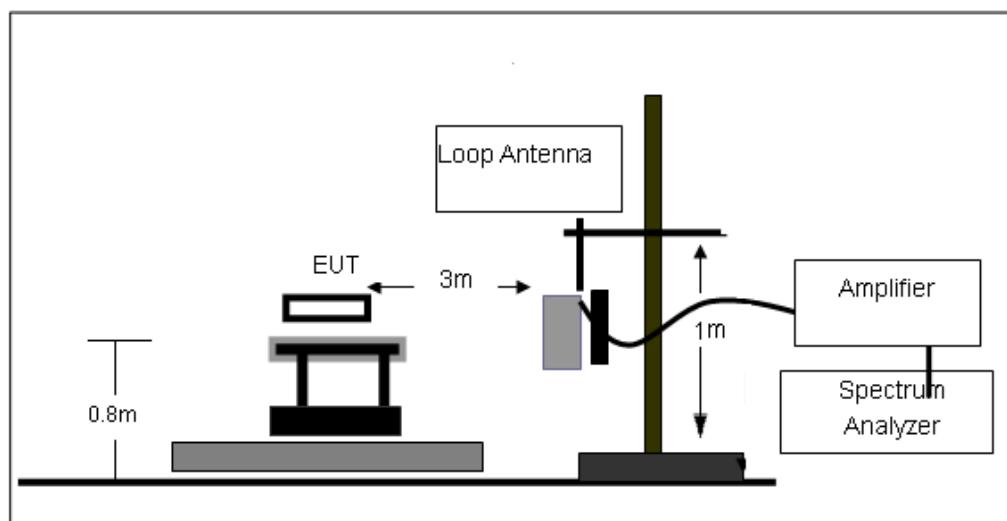

Radiated emission test-up frequency 30MHz~1GHz

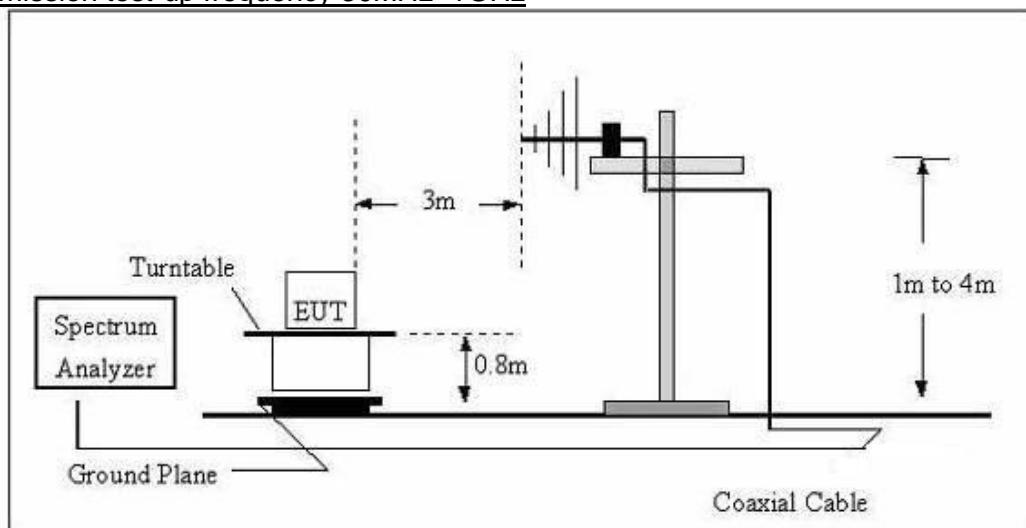

Radiated emission test-up frequency above 1GHz

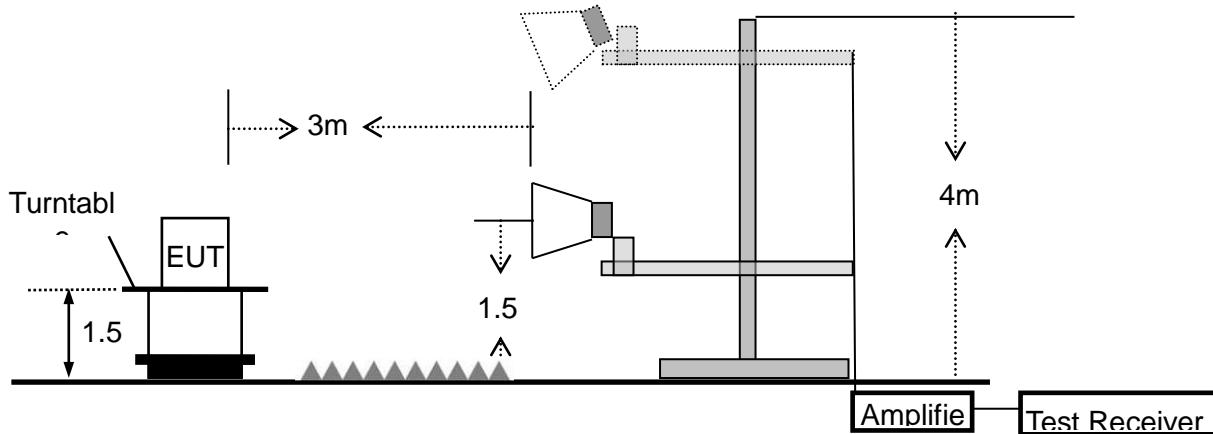


5.5.3 Test procedure

- a. EUT operating conditions. The EUT tested system was configured as the statements of 2.4 unless otherwise a special operating condition is specified in the follows during the testing.
- b. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- c. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the floor on a support that is RF transparent for the frequencies of interest. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m.
- f. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- h. For the actual test configuration, please refer to the related Item –EUT Test photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

EUT :	IP Camera	Model Name :	B08W-5MP-HX
Relative Humidity:	52%	Phase:	V
Pressure:	1010 hPa	Test Voltage :	DC 12V from adapter AC 120V/60Hz
Test Mode :	Charging+TX		

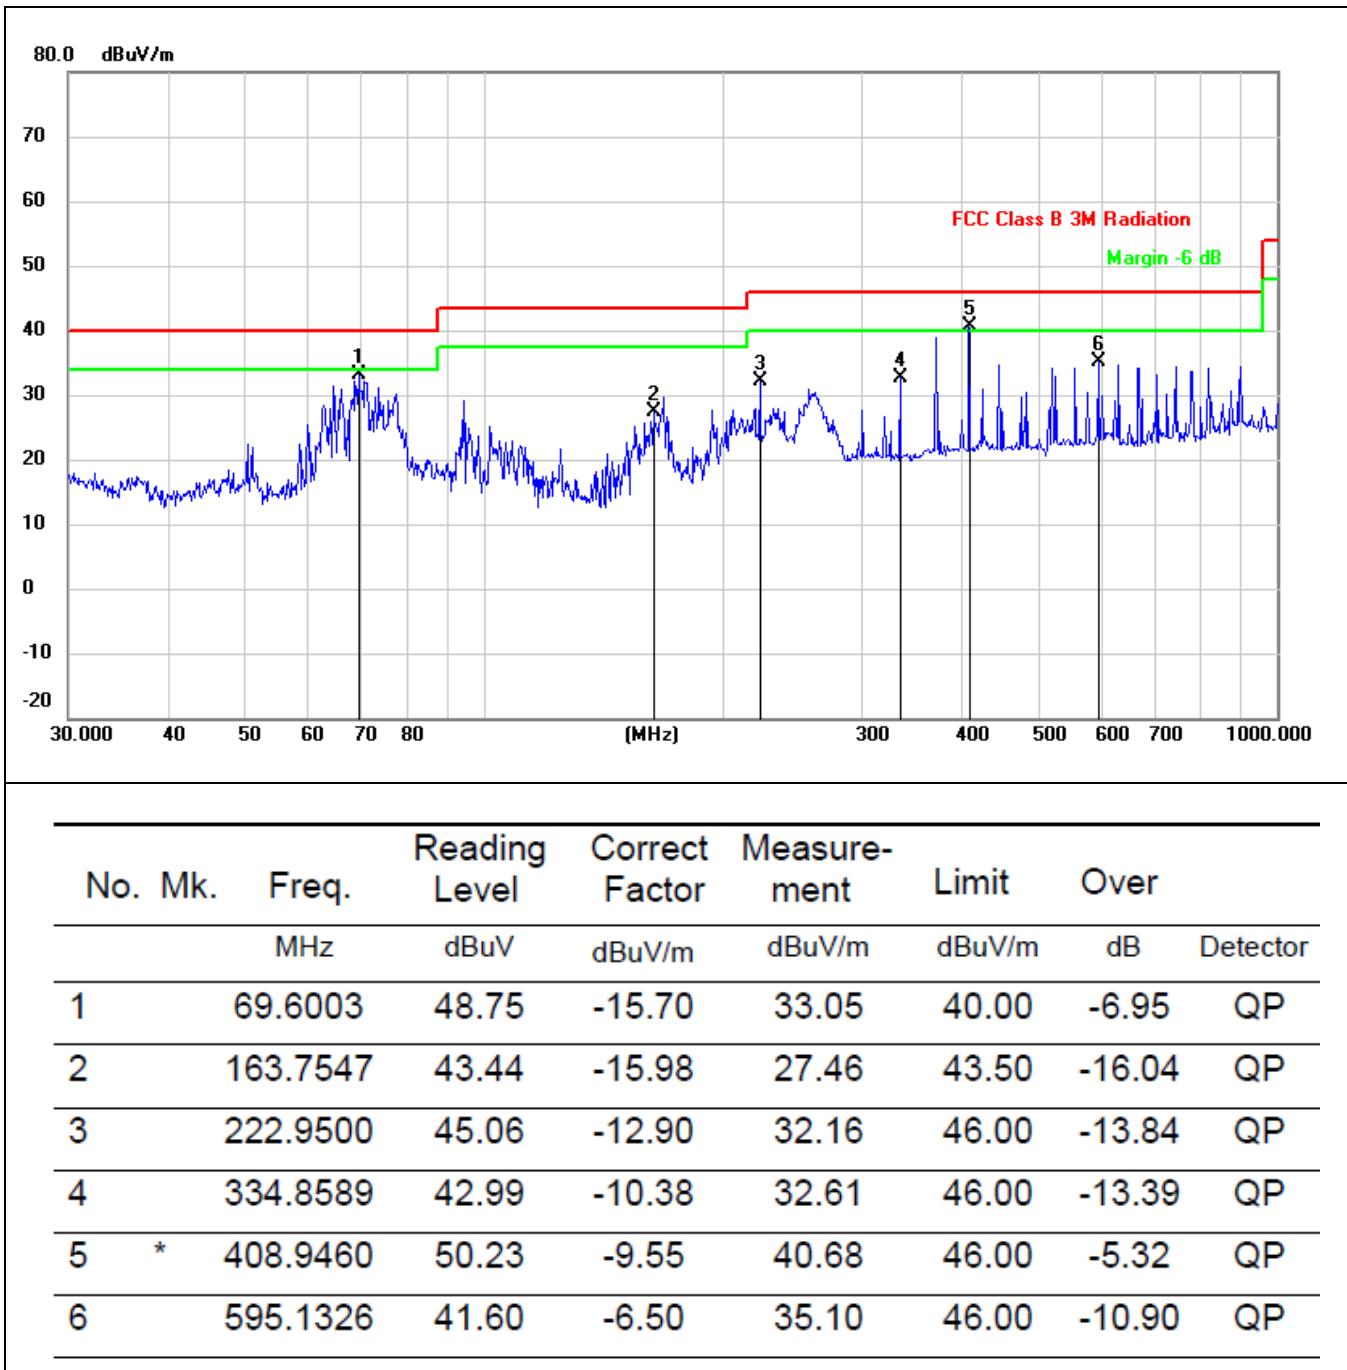


5.6 Band edge - Conducted

5.6.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.6.2 Test setup

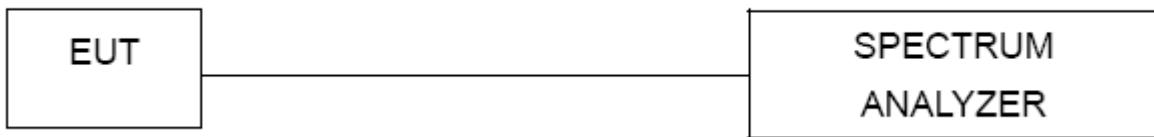

5.6.3 Test procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.


EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 unless otherwise a special operating condition is specified in the follows during the testing.


5.6.4 Test results


Test plots:


802.11b: Band Edge, Left Side

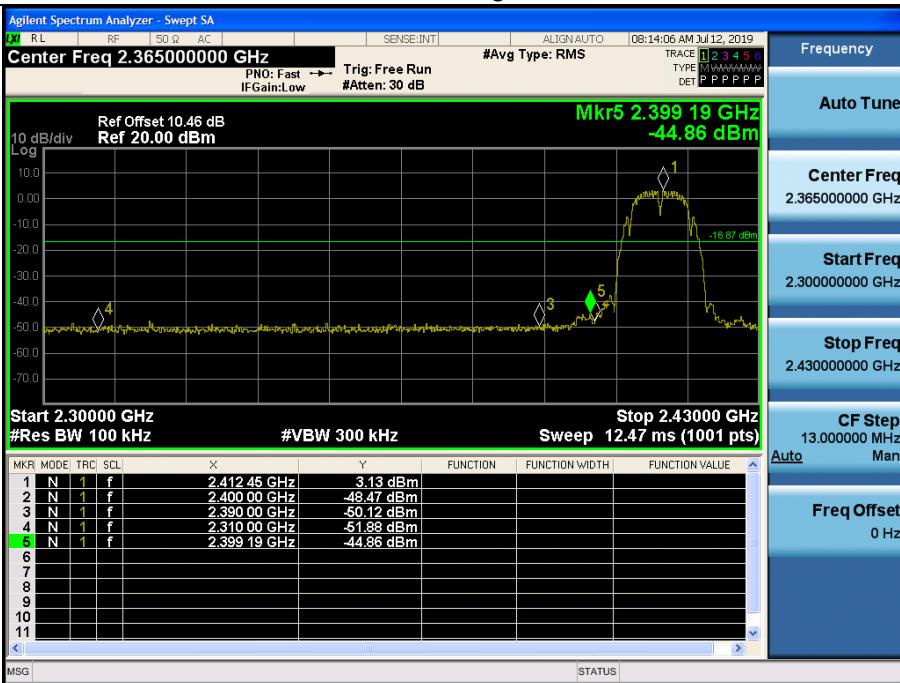

802.11b: Band Edge, Right Side

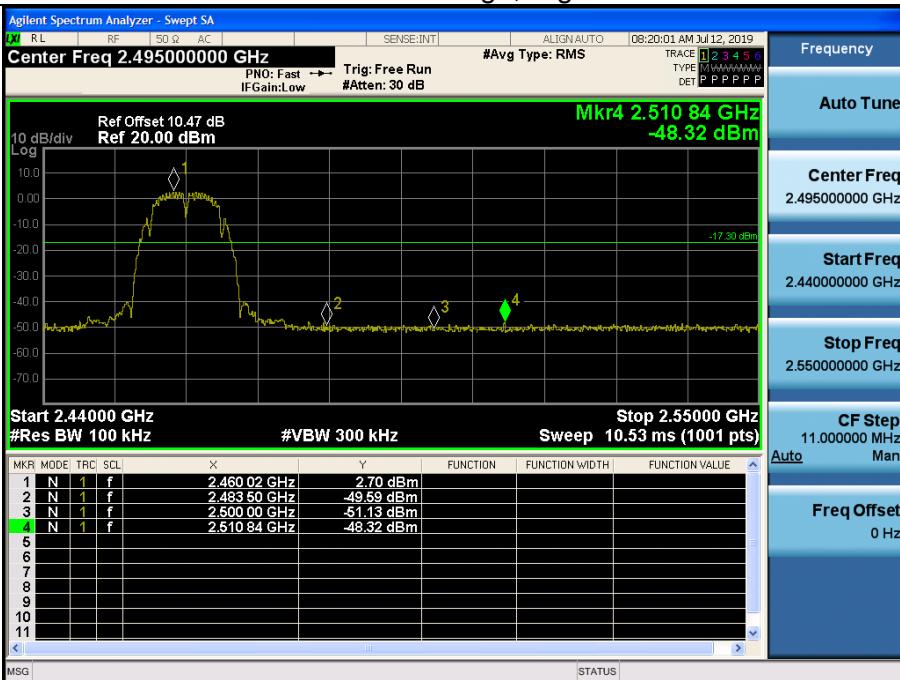

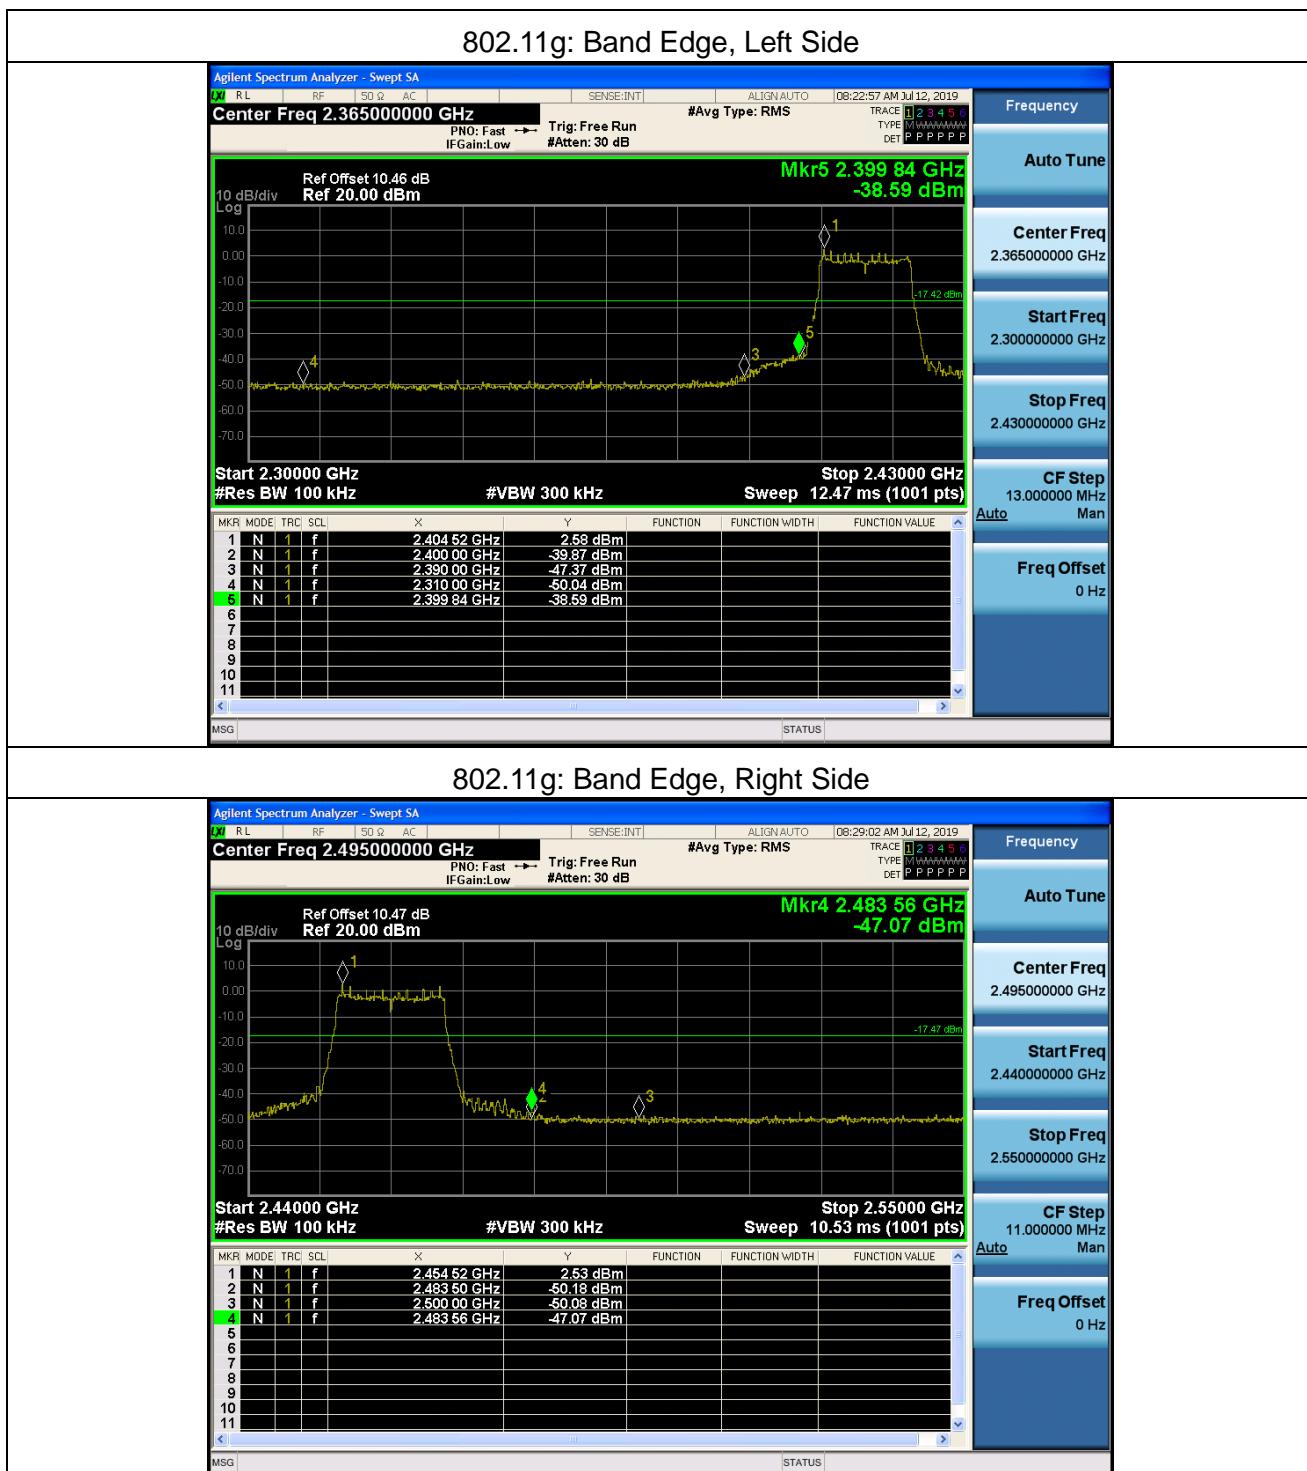

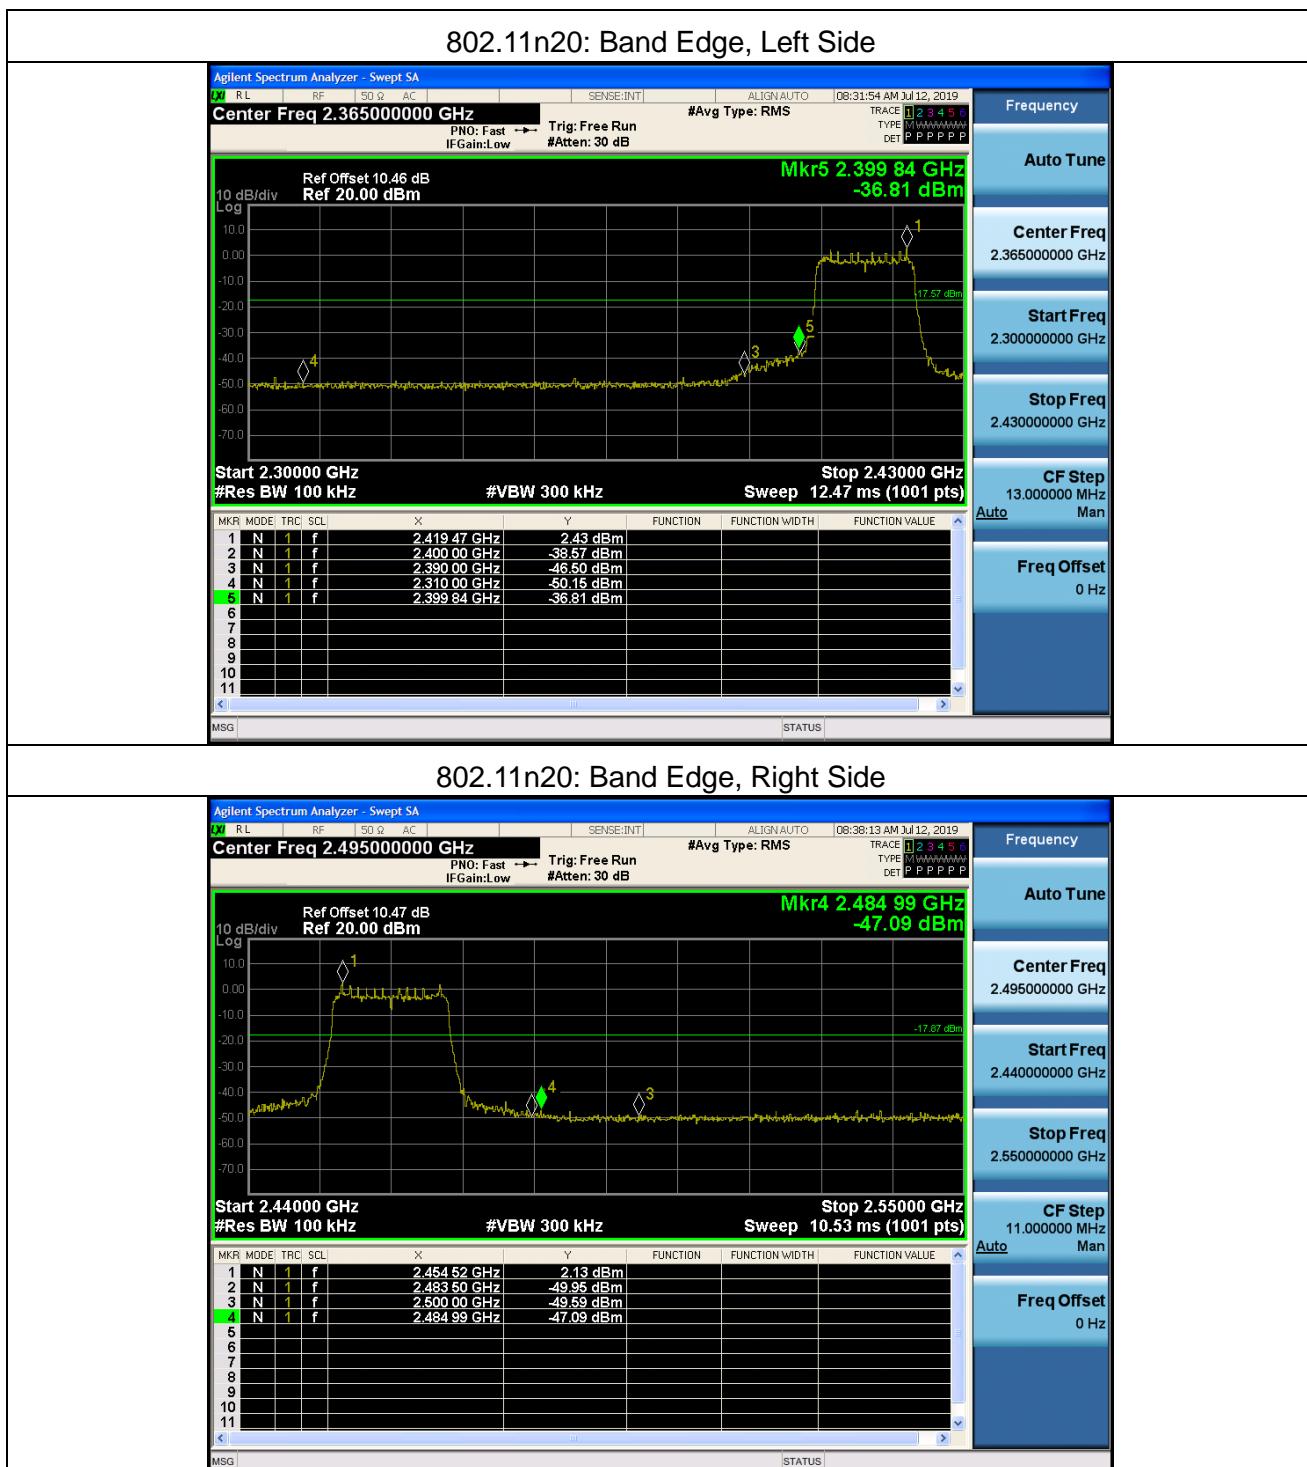


5.7 6dB bandwidth

5.7.1 Limit

Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5

5.7.2 Test setup

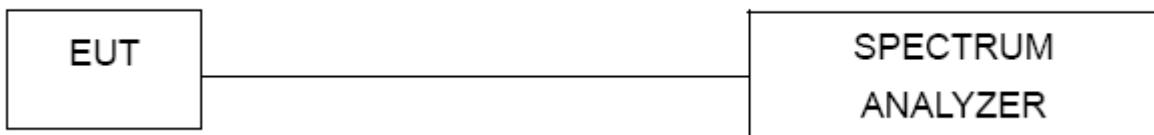

5.7.3 Test procedure

- Set RBW= 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


EUT Operation Conditions


The EUT tested system was configured as the statements of 2.4 unless otherwise a special operating condition is specified in the follows during the testing.

5.7.4 Test results

EUT :	IP Camera	Model Name :	B08W-5MP-HX
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter AC 120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.11	500	Pass
Middle	2437	10.08	500	Pass
High	2462	10.10	500	Pass

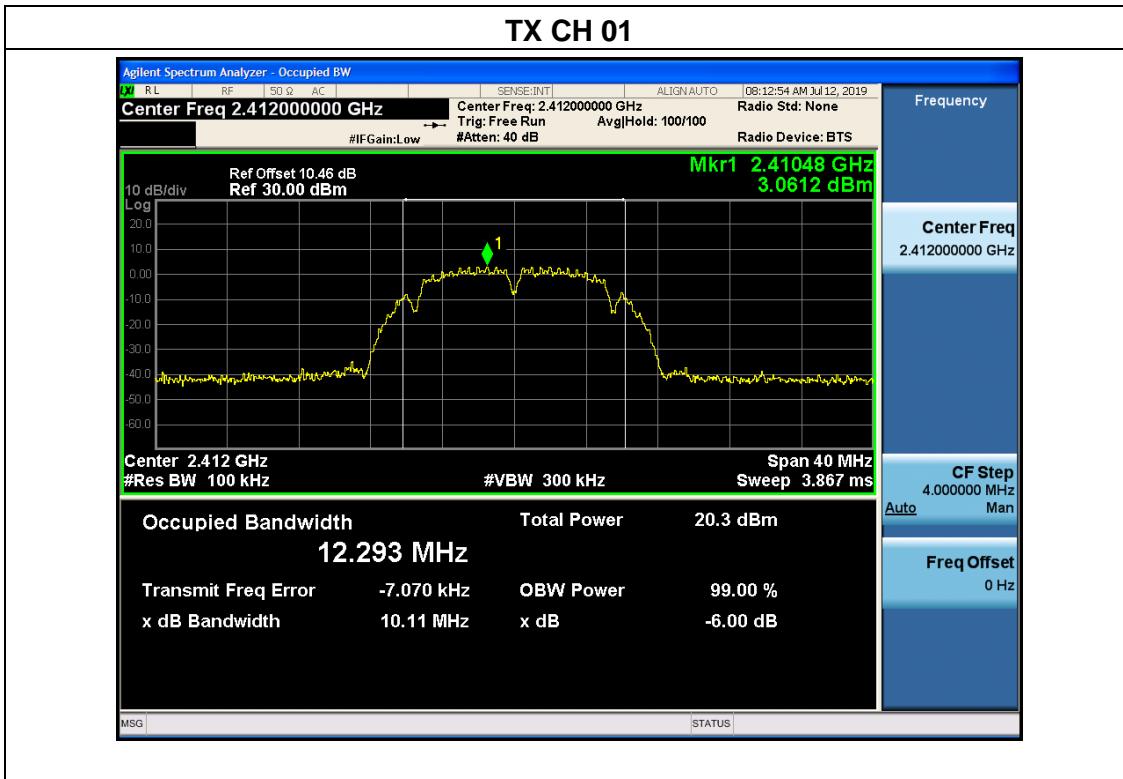


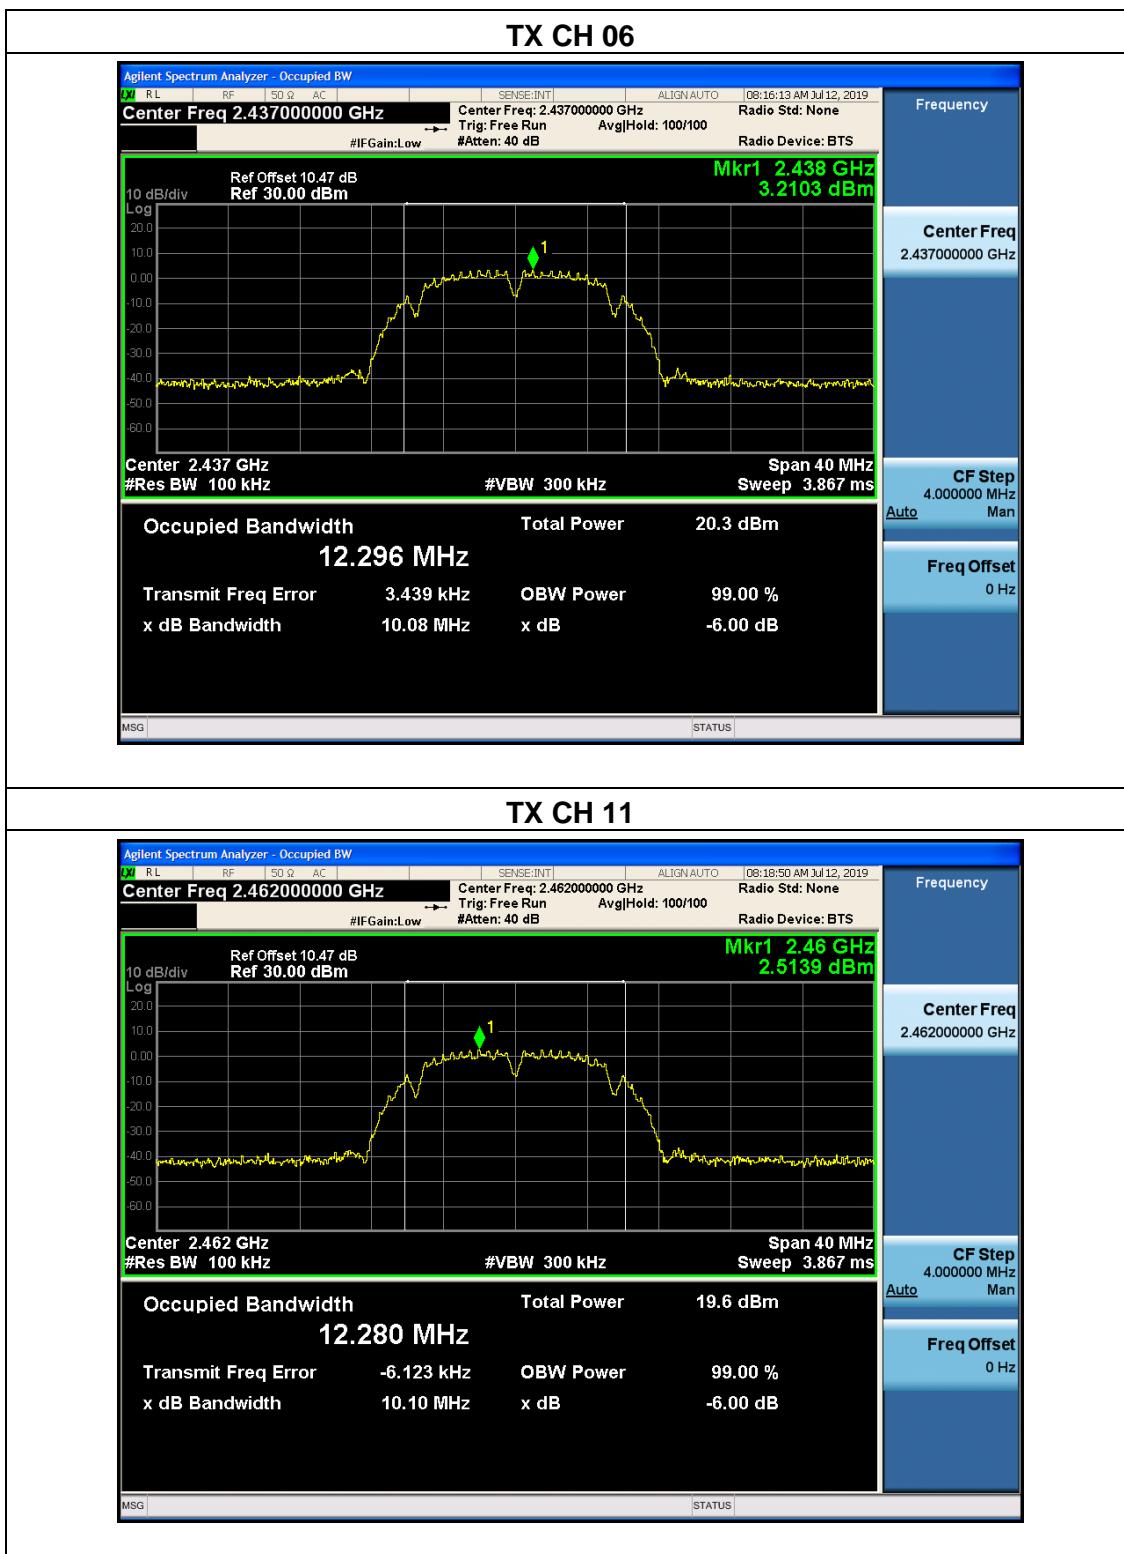

EUT :	IP Camera	Model Name :	B08W-5MP-HX
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter AC 120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.41	500	Pass
Middle	2437	16.40	500	Pass
High	2462	16.38	500	Pass

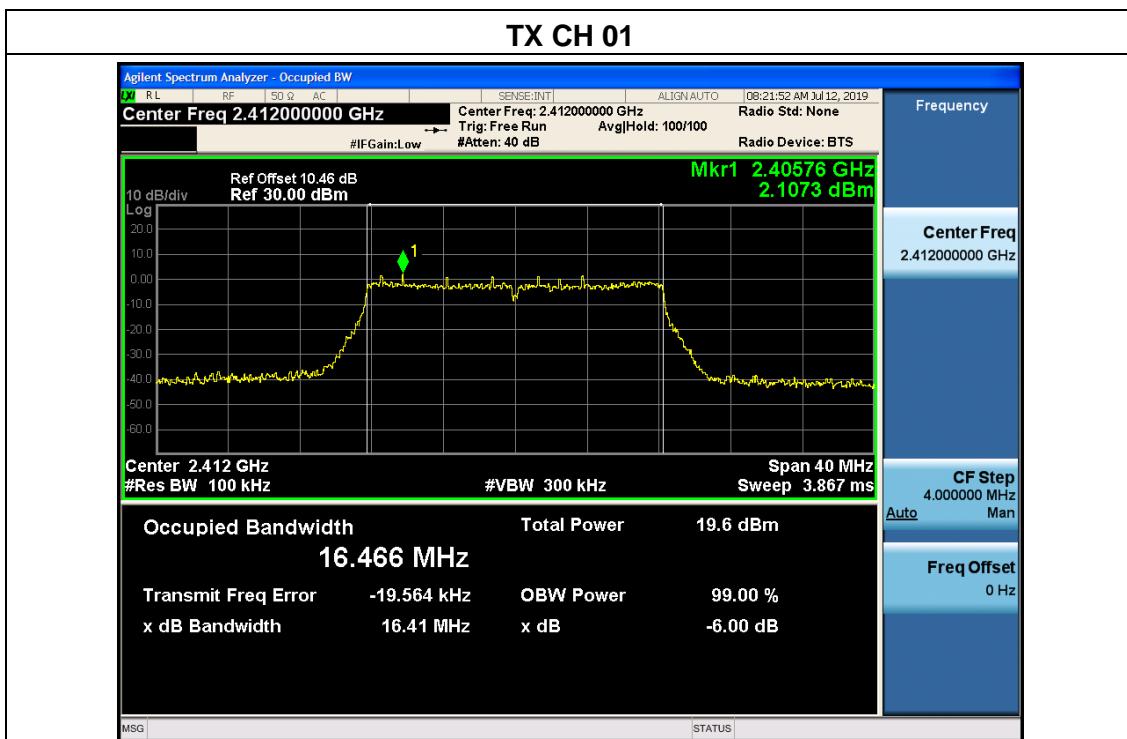


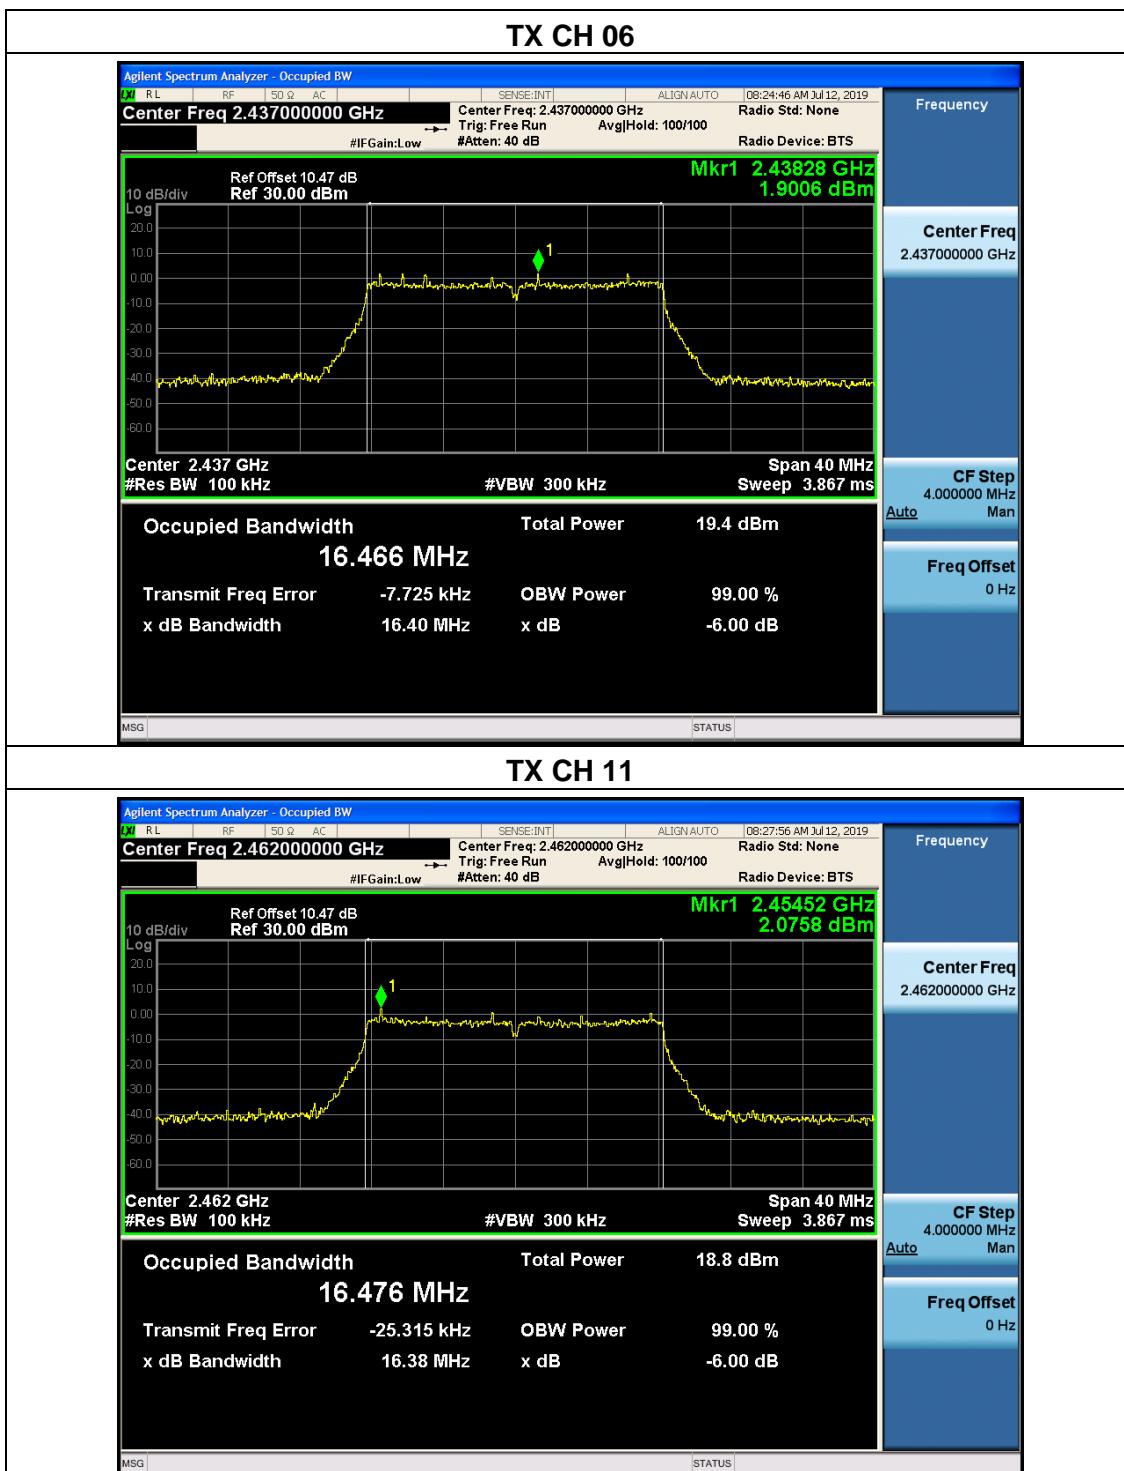

EUT :	IP Camera	Model Name :	B08W-5MP-HX
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter AC 120V/60Hz
Test Mode :	TX n20 Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.35	500	Pass
Middle	2437	17.32	500	Pass
High	2462	16.93	500	Pass

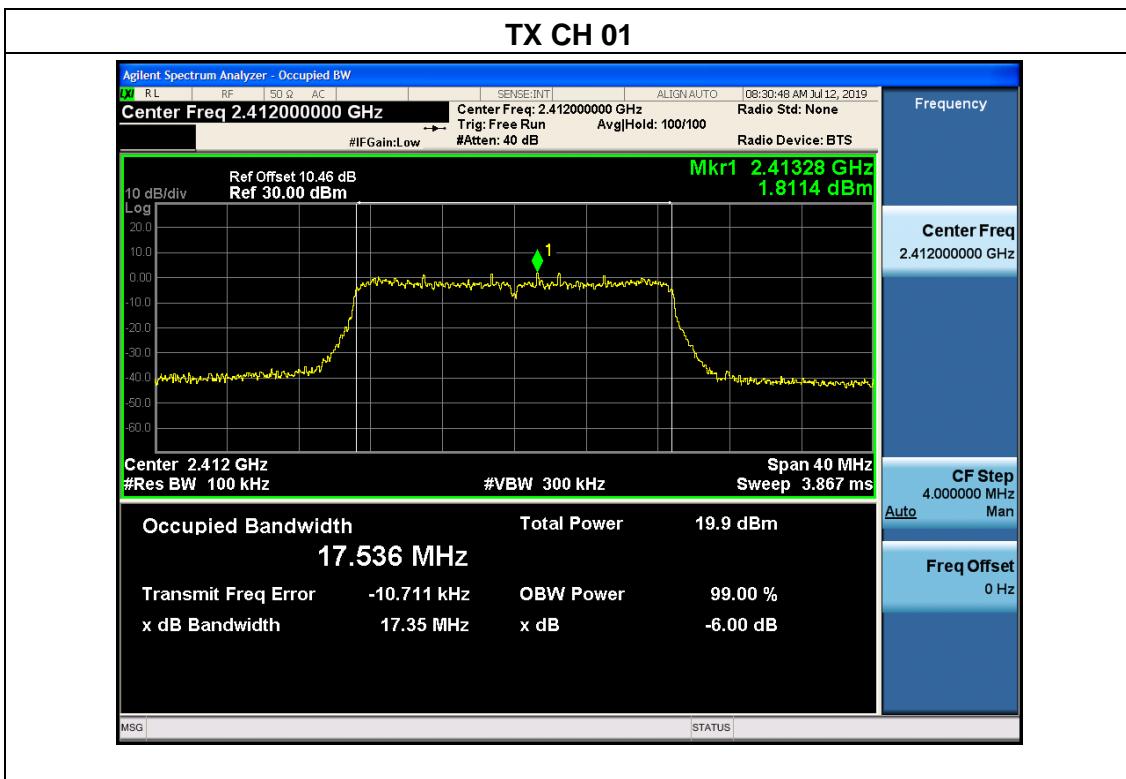


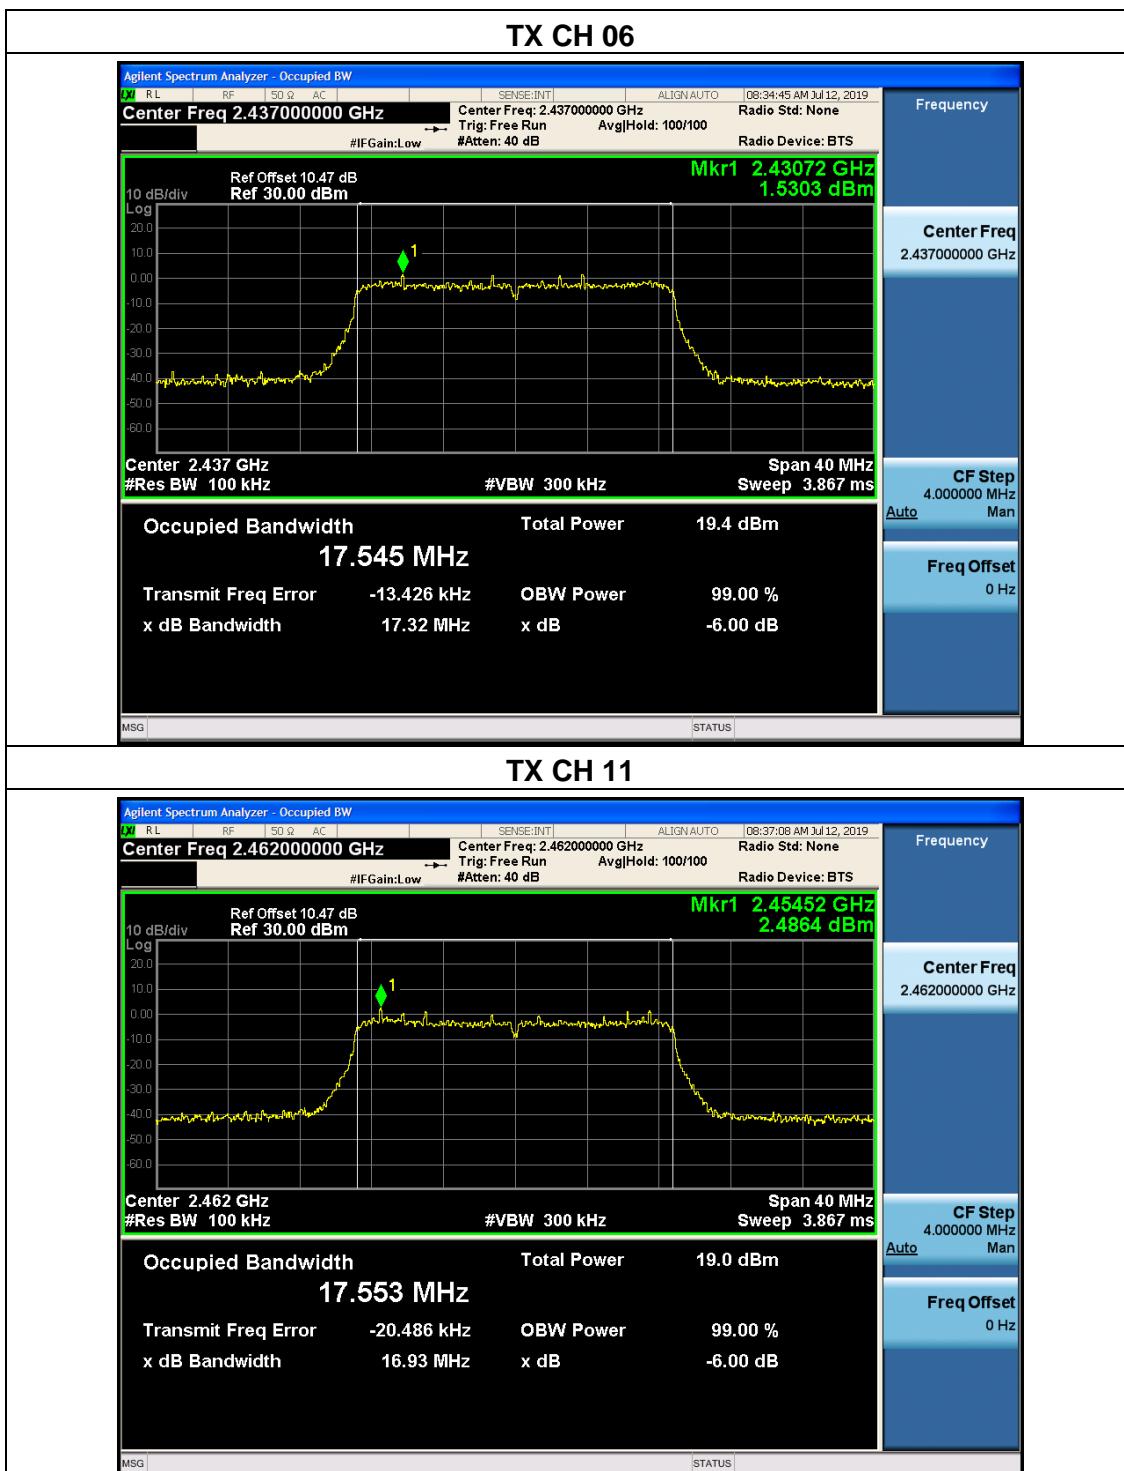

EUT :	IP Camera	Model Name :	B08W-5MP-HX
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V from adapter AC 120V/60Hz
Test Mode :	TX n40 Mode /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.31	500	Pass
Middle	2437	35.19	500	Pass
High	2452	35.15	500	Pass

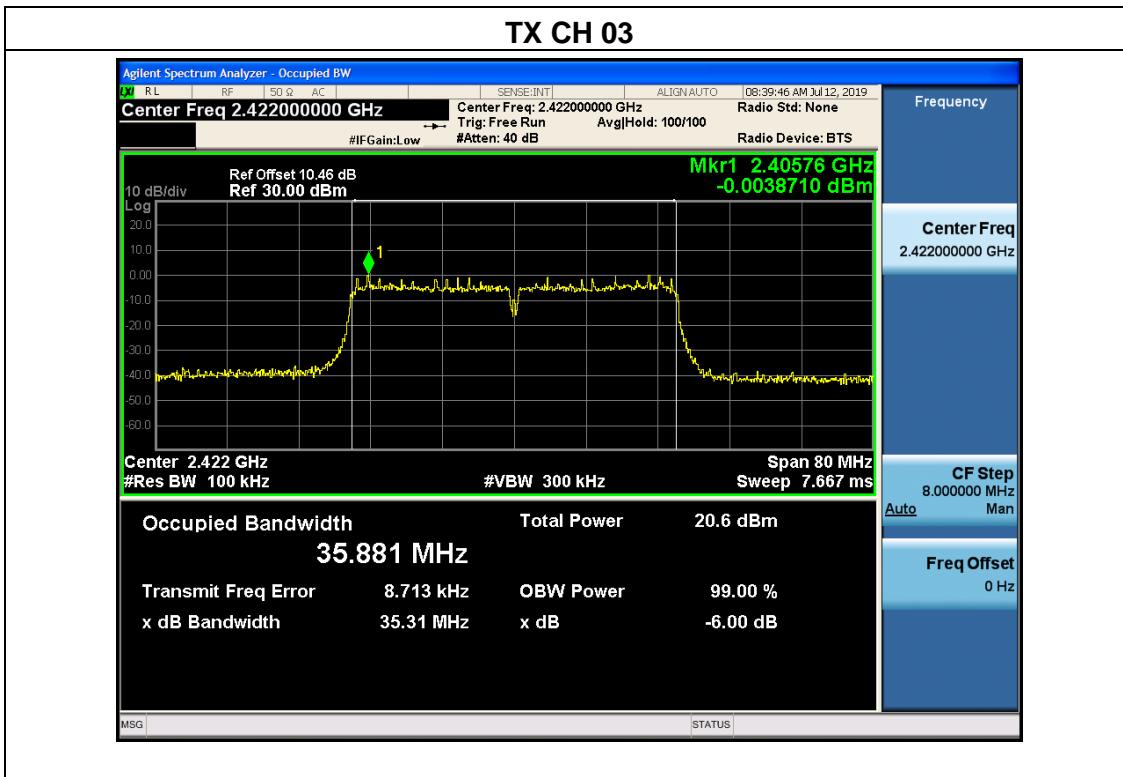

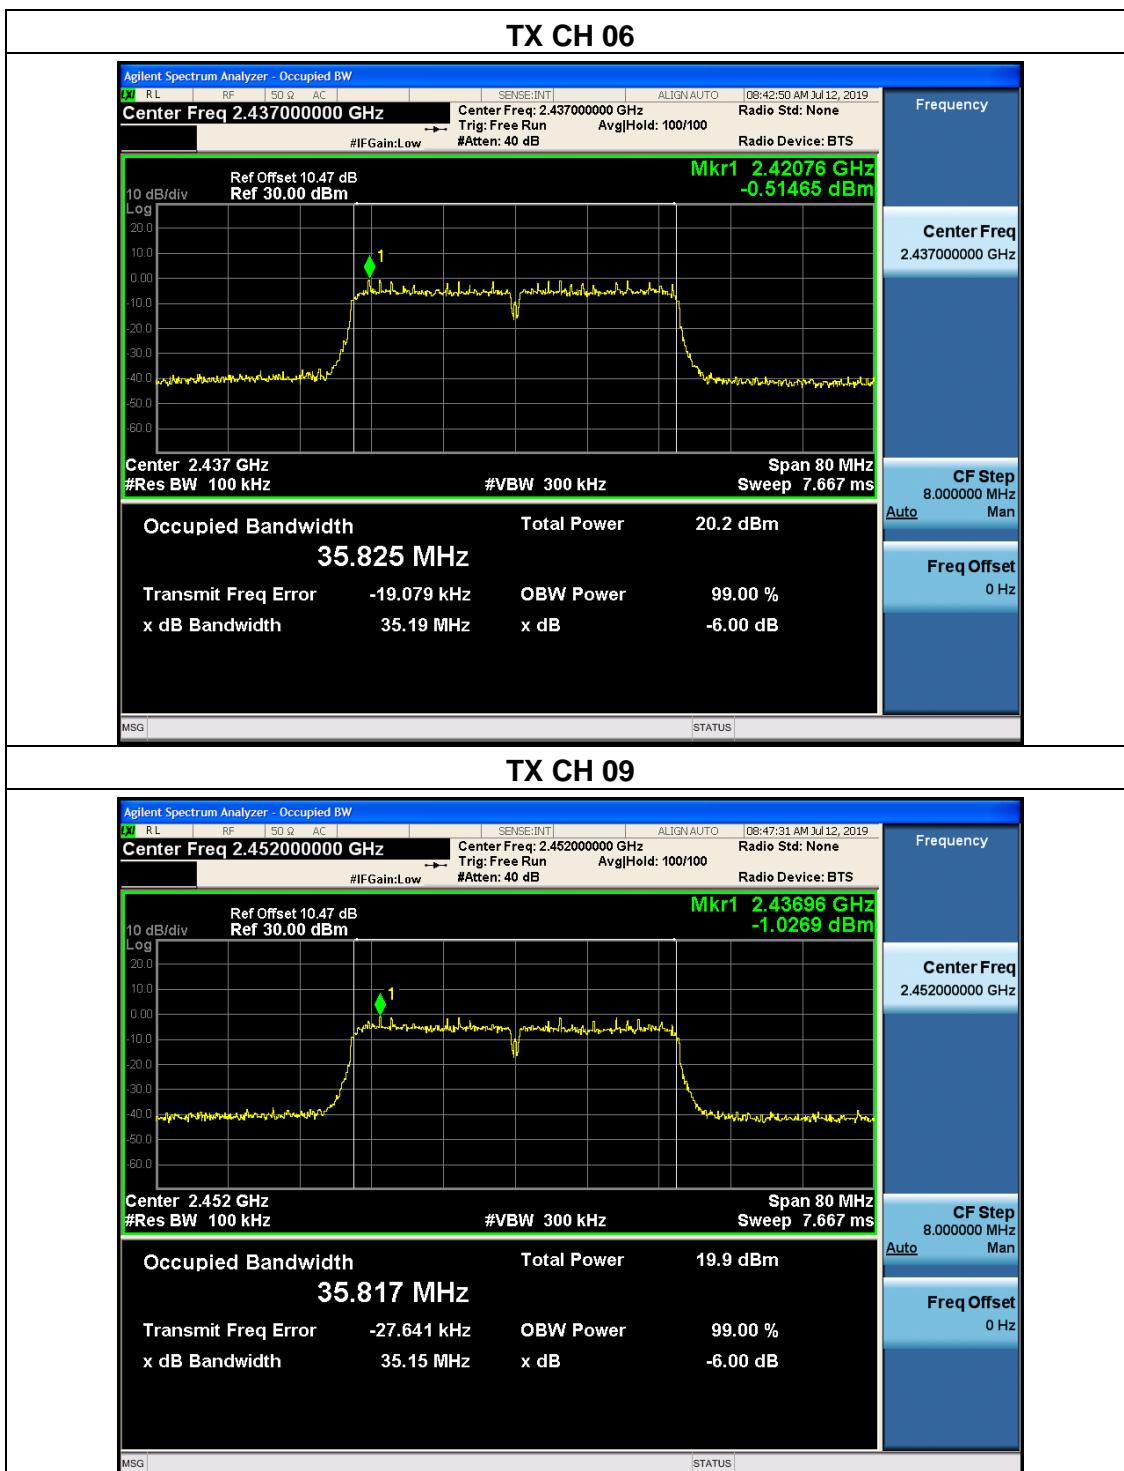

5.8 Spurious RF Conducted Emissions

5.8.1 Conformance Limit

Below -20dB of the highest emission level in operating band.

5.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

5.8.3 Test Setup

Please refer to Section 6.1 of this test report.


5.8.4 Test Procedure


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW=300KHz to measure the peak field strength, and measure frequency range from 9KHz to 26.5GHz.

5.8.5 Test Results

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.



Note1: The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is 802.11n20.

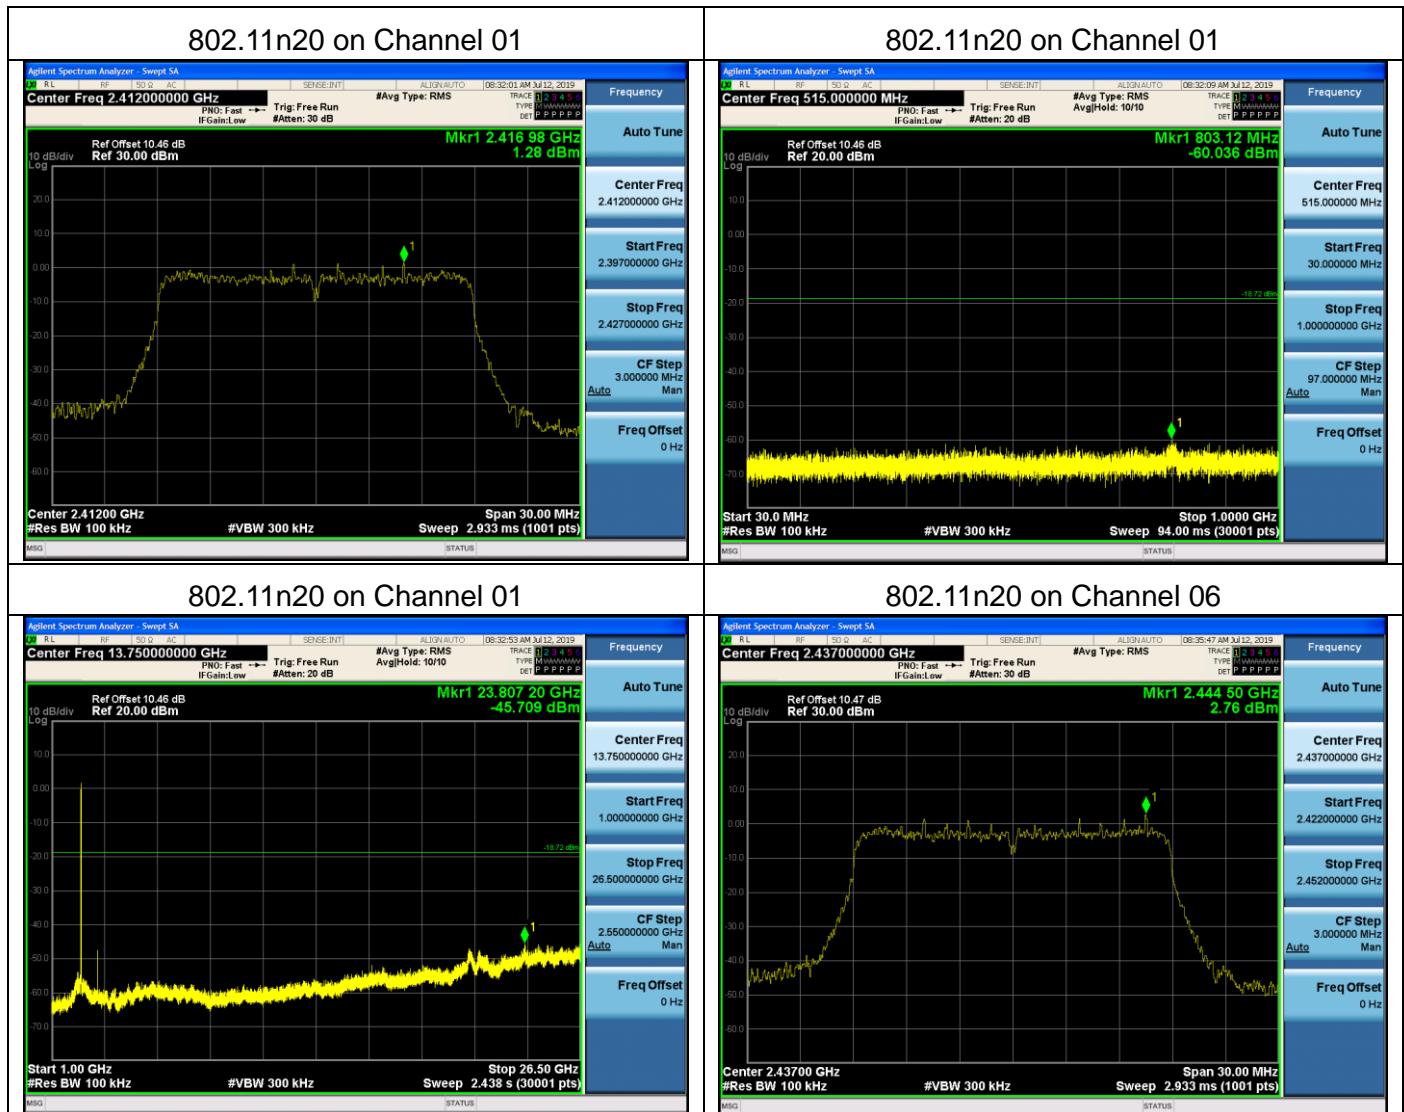

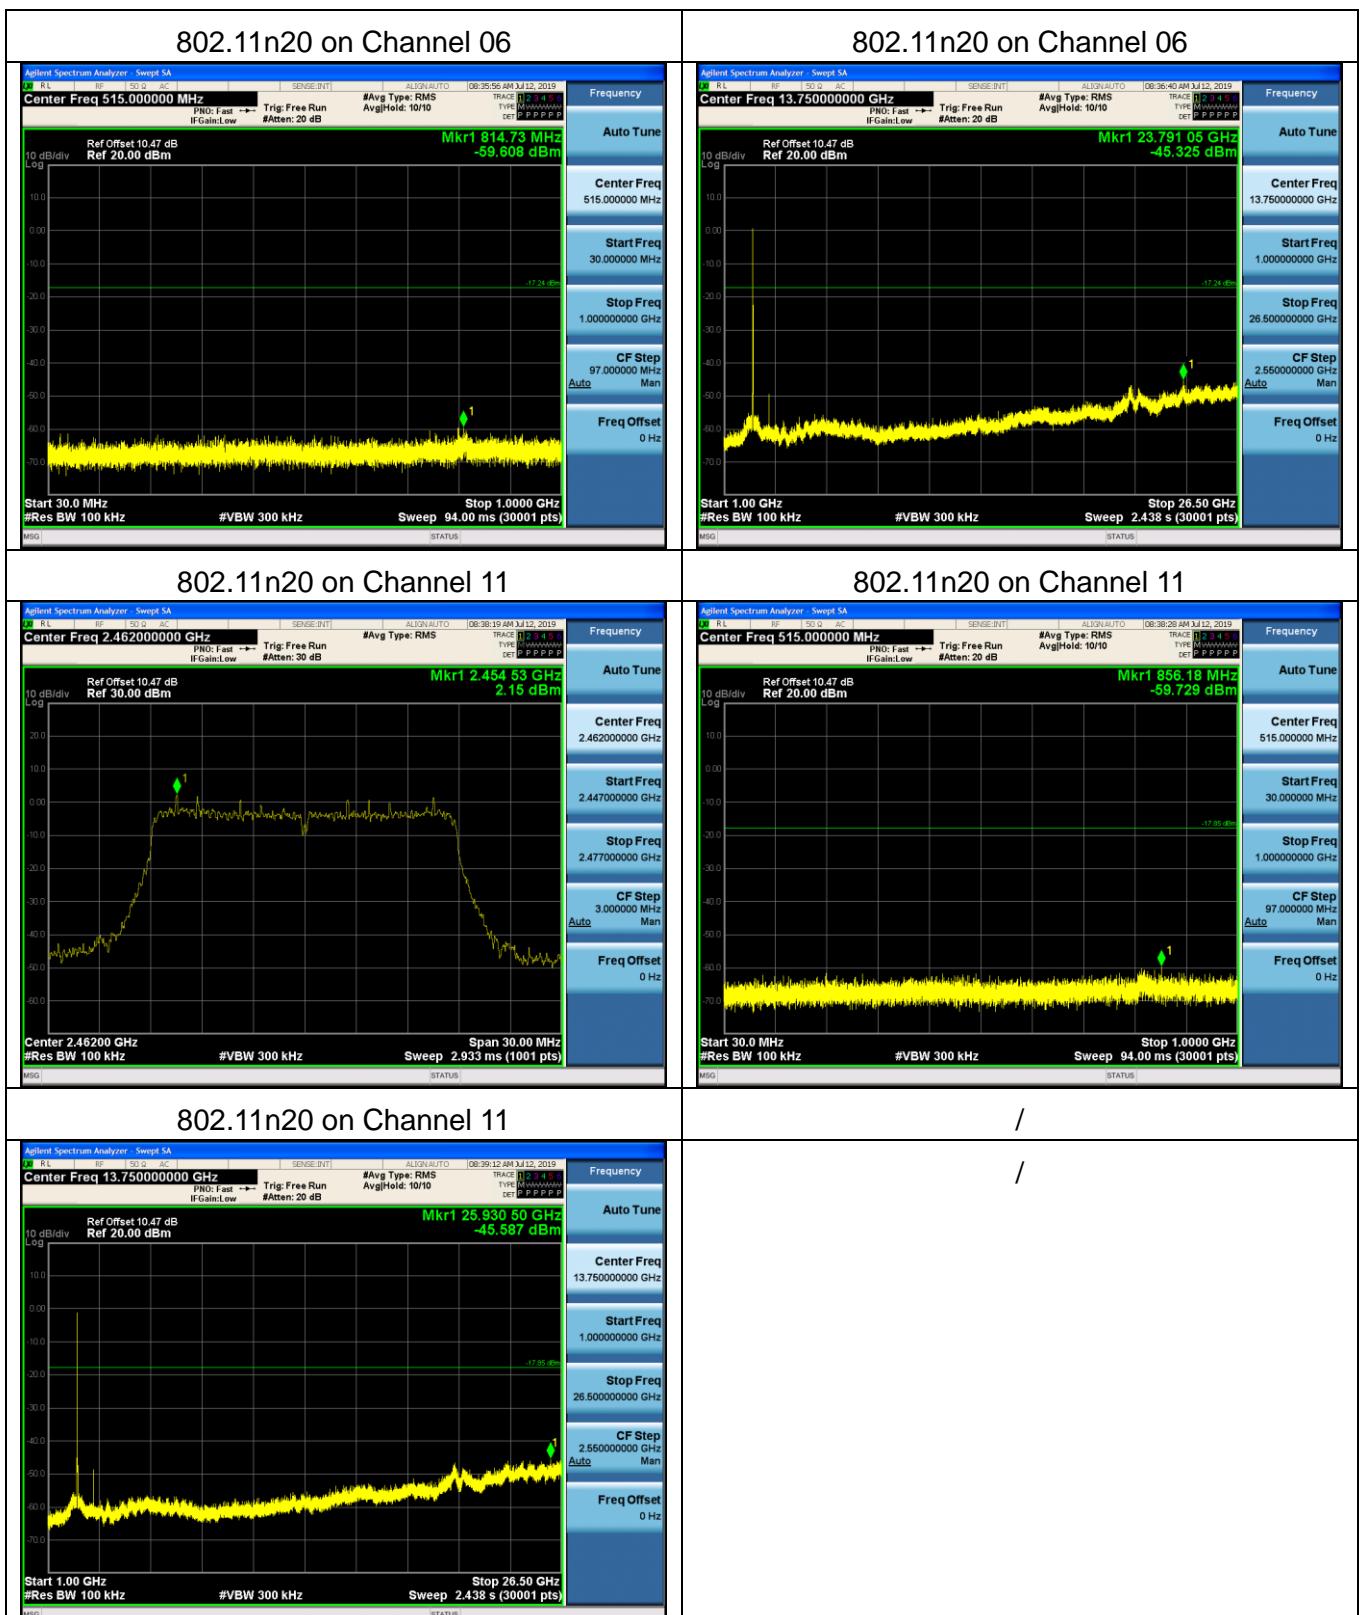


Photographs of the Test Setup

Radiated emission

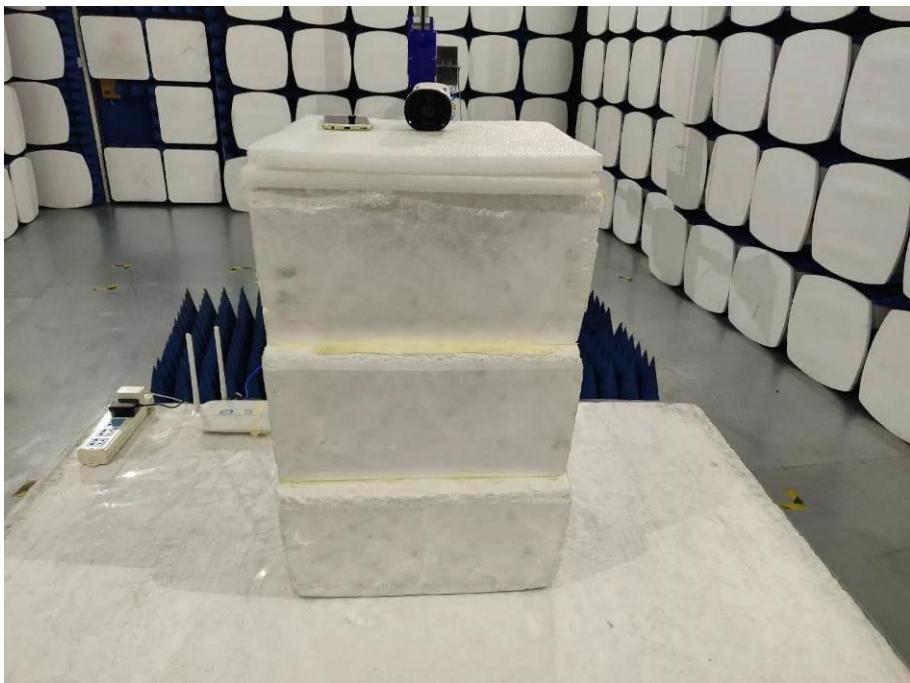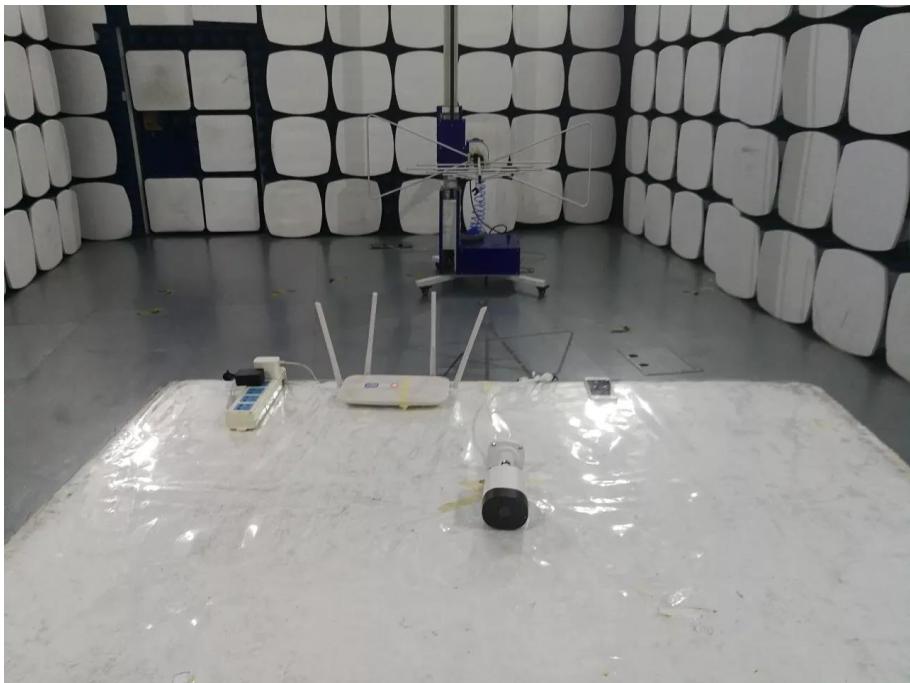

Conducted emission

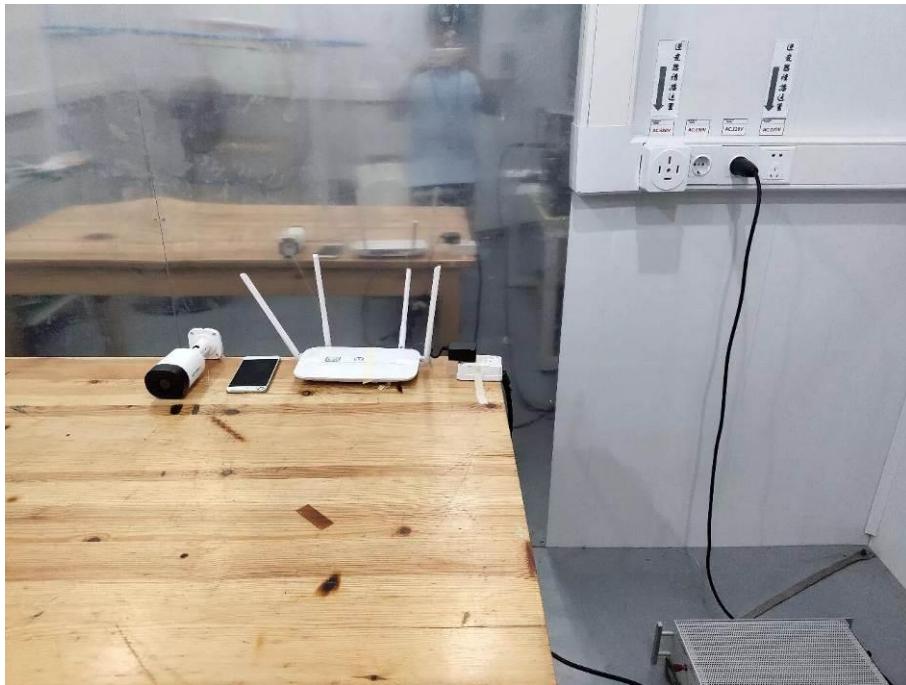

Photographs of the EUT

See the APPENDIX 1: EUT PHOTO in the report No.: MTi19070107-6E1-1.

----END OF REPORT----