

RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1804-7374-TFC247BLCAN-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 IC Testing Laboratory site: 3470A-2
Applicant	Luke Roberts GmbH
Address	Phorusgasse 8/2 1040 Vienna AUSTRIA
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02
Non-Standard Test Method	None
Test Scope	Full compliance test
Equipment under Test (EUT):	
Product Description	LED Pendant Luminaire with Bluetooth Low Energy Radio
Model(s)	LRF
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	LR-F01-v5
Software Version(s)	RF: Nordic Semiconductor S132 v.3.0.0
FCC-ID	2AP5D01LR
IC	23941-01LR
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2018-05-09	
Report:		
Compiled by	Wilfried Treffke	
Tested by (+ signature) (Responsible for Test)	Wilfried Treffke	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2018-07-27	
Total number of pages	94	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2018-07-27	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage


REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External	7
1.2	Photos – Equipment Internal	9
1.3	Photos – Test Setup.....	12
1.4	Support Equipment.....	13
1.5	Test Modes	14
1.6	Test Frequencies.....	15
1.7	Sample emission level calculation.....	16
2	Result Summary.....	17
3	Test Conditions and Results.....	18
3.1	Test Conditions and Results - Occupied bandwidth.....	18
3.2	Test Conditions and Results - 6 dB bandwidth.....	23
3.3	Test Conditions and Results - Maximum peak conducted output power	28
3.4	Test Conditions and Results - Power spectral density	30
3.5	Test Conditions and Results - AC powerline conducted emissions.....	35
3.6	Test Conditions and Results - Band-edge compliance.....	38
3.7	Test Conditions and Results - Conducted spurious emissions.....	42
3.8	Test Conditions and Results - Transmitter radiated emissions	47
3.9	Test Conditions and Results - Receiver radiated emissions	50
ANNEX A	Transmitter spurious emissions	53
ANNEX B	Receiver spurious emissions	85

1 Equipment (Test Item) Under Test

Description	LED Pendant Luminaire with Bluetooth Low Energy Radio	
Model	LRF	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	None	
Hardware Version(s)	LR-F01-v5	
Software Version(s)	RF: Nordic Semiconductor S132 v.3.0.0	
PMN	Model F	
HVIN	LRF02	
FVIN	RF: Nordic Semiconductor S132 v.3.0.0	
HMN	N/A	
FCC-ID	2AP5D01LR	
IC	23941-01LR	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth LE	
Modulation	GFSK	
Number of antenna ports	1	
Antenna	Type	Integrated antenna
	Model	SMD 2400
	Manufacturer	Proant
	Gain	3.0 dBi (antenna datasheet)
Supply Voltage	V _{NOM}	120 VAC
Operating Temperature	T _{NOM}	25 °C
AC/DC-Adaptor	Model	None
	Vendor	None
	Input	None
	Output	None
Manufacturer	Luke Roberts GmbH Phorusgasse 8/2 1040 Vienna AUSTRIA	


1.1 Photos – Equipment External

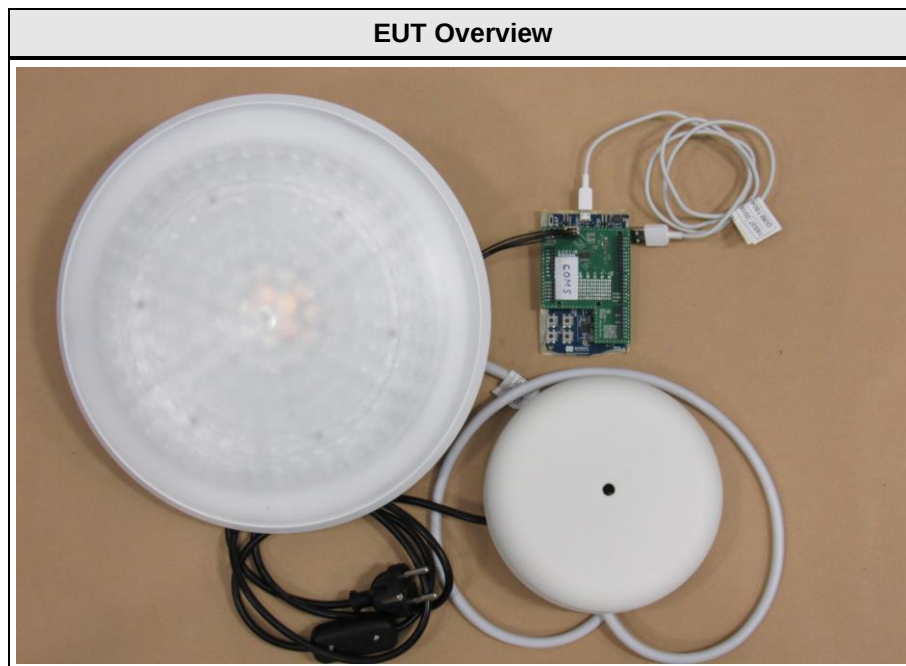



EUT Bottom







Power Supply

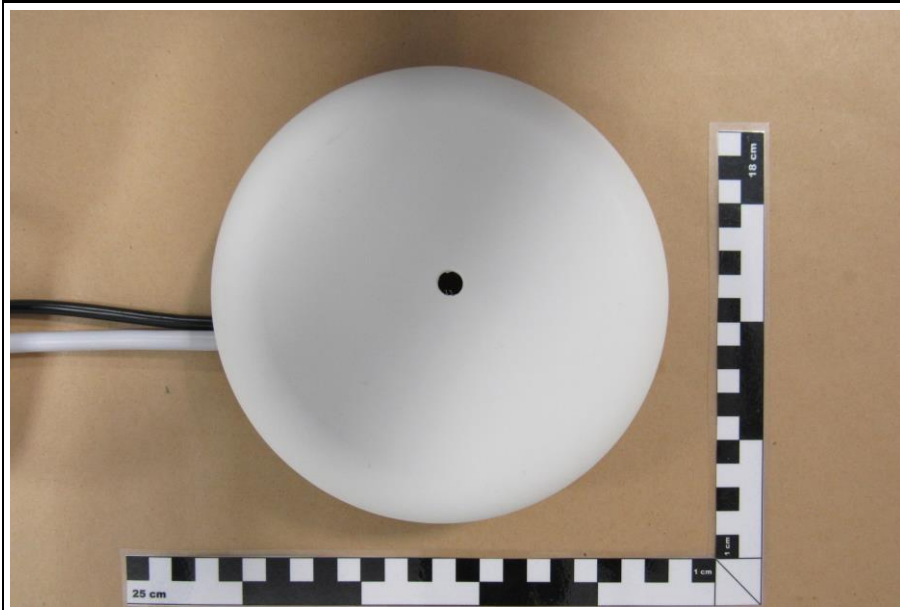



1.2 Photos – Equipment Internal

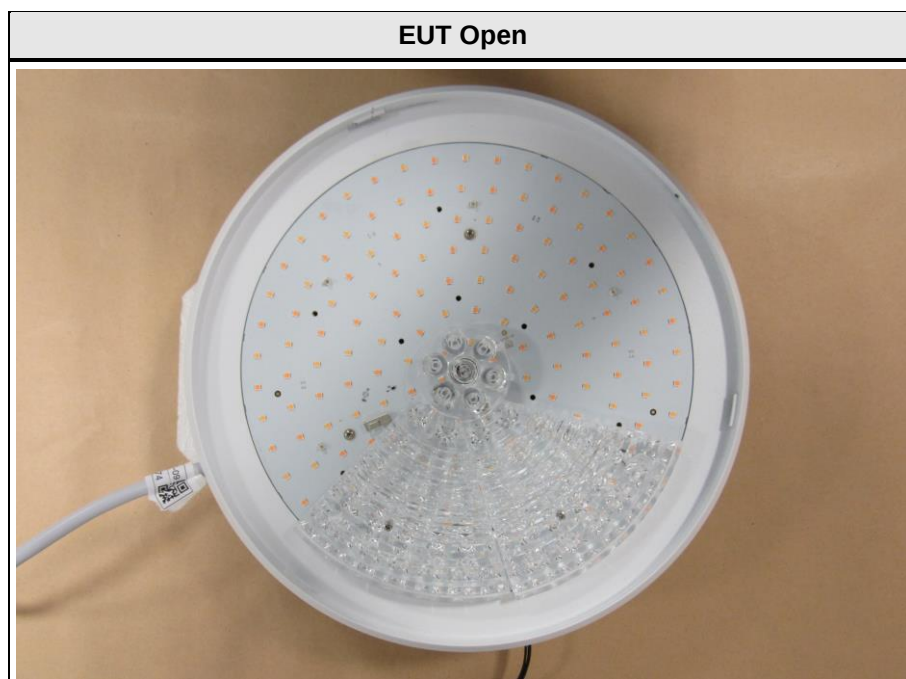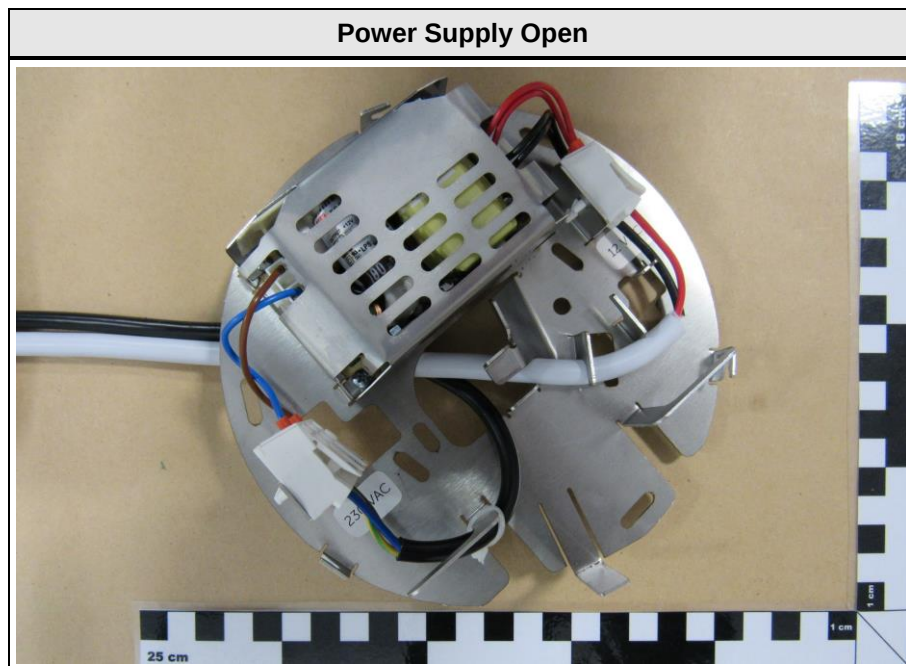

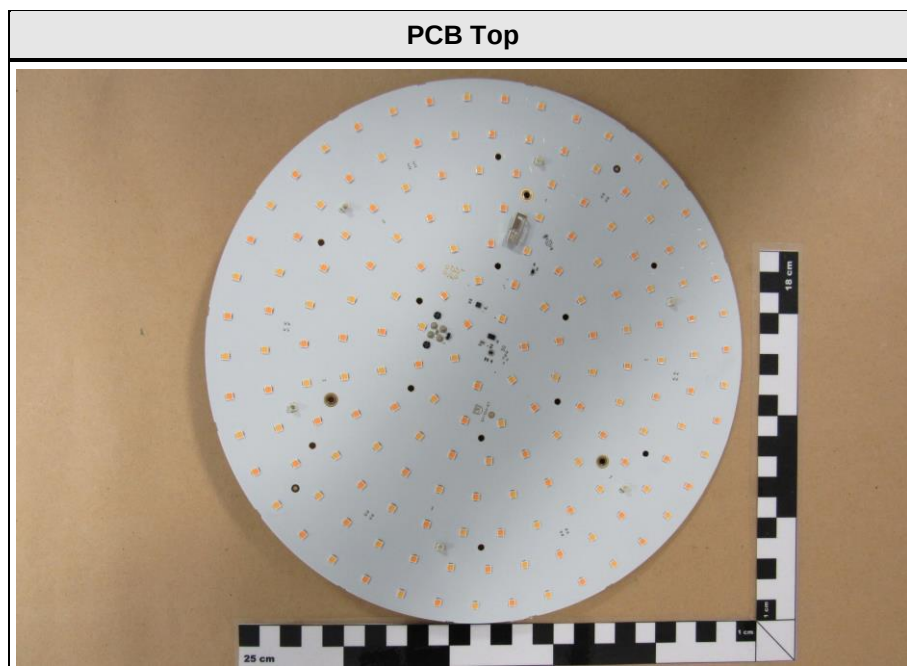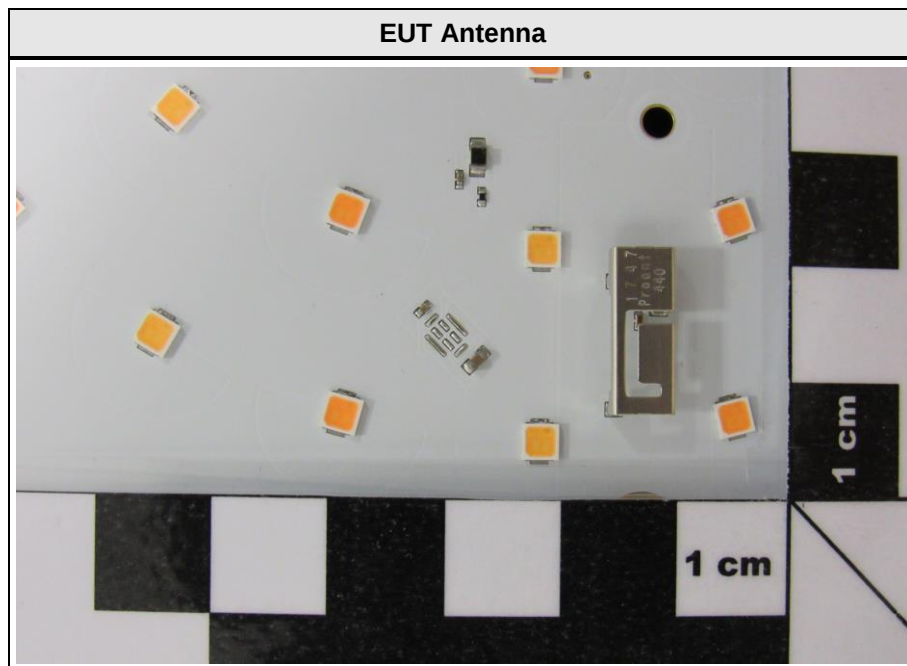

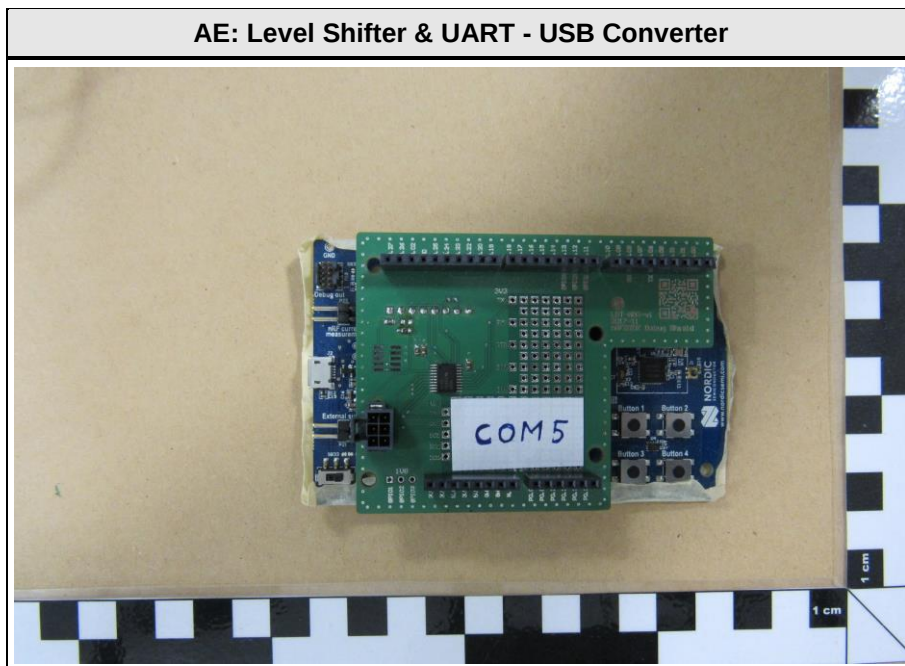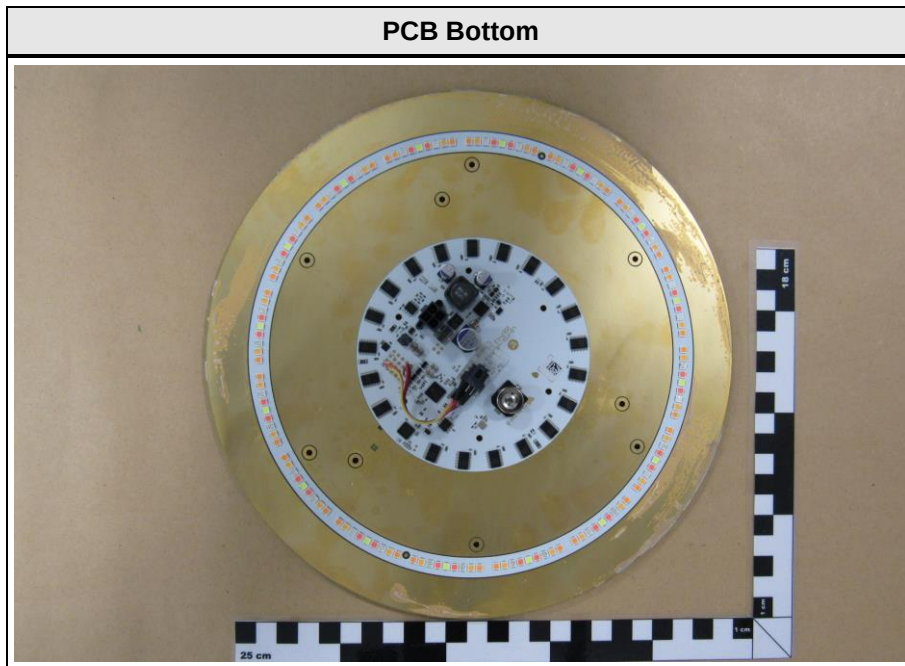

1.3 Photos – Test Setup

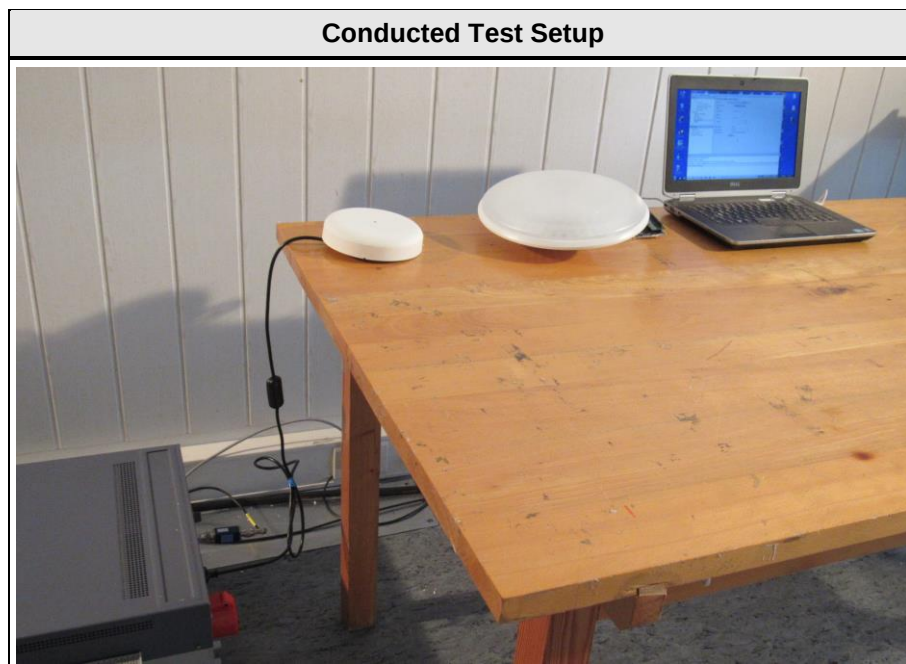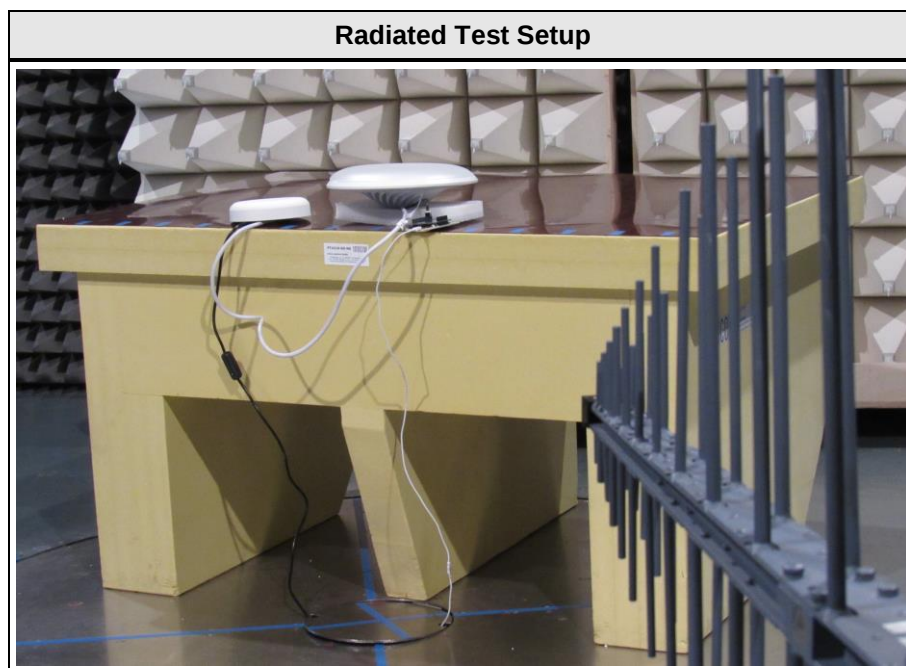

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Laptop	Dell	Latitude E6420	S/N HPJ4R1
AE	Level Shifter & UART - USB Converter	Luke Roberts	LRT-NDS-v1	Debug Shield
Description:				
AE	Auxillary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Duty cycle = 64%
Receive	Mode = Receive
Comment:	

1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	19	2440
F3	Tx / Rx	39	2480

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin
+21.5 dBμV	+ 26 dB = 47.5 dBμV/m	:	47.5 dBμV/m	- 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
RSS-Gen 6.6 Issue 4	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2 Issue 2	6 dB Bandwidth	ANSI C63.10-2013	PASS	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4 Issue 2	Maximum peak conducted power	ANSI C63.10-2013	PASS	
FCC § 15.247(e) ISED RSS-247 § 5.2 Issue 2	Power spectral density	ANSI C63.10-2013	PASS	
FCC § 15.207 ISED RSS-247 § 3.1 Issue 2	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Band edge compliance	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Conducted spurious emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-GEN § 8.9 Issue 4	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247 § 3.1 Issue 2	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen 6.6
Measurement Method	ANSI C63.10 6.9.3
Operator	Wilfried Treffke
Date	2018-05-29

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

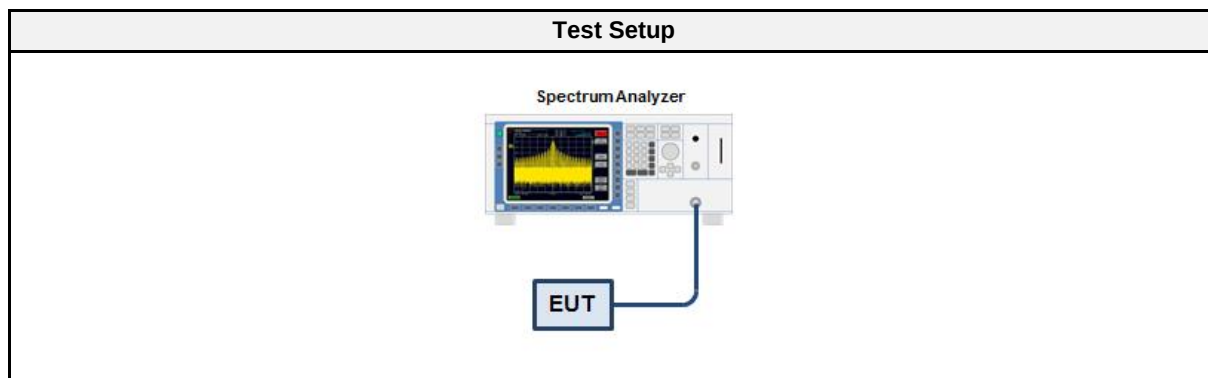

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.1.5 Procedure


Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to 1 % of the bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.045
GFSK	2440	1.050
GFSK	2480	1.050

Occupied Bandwidth


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Occupied Bandwidth [MHz]: 1.045

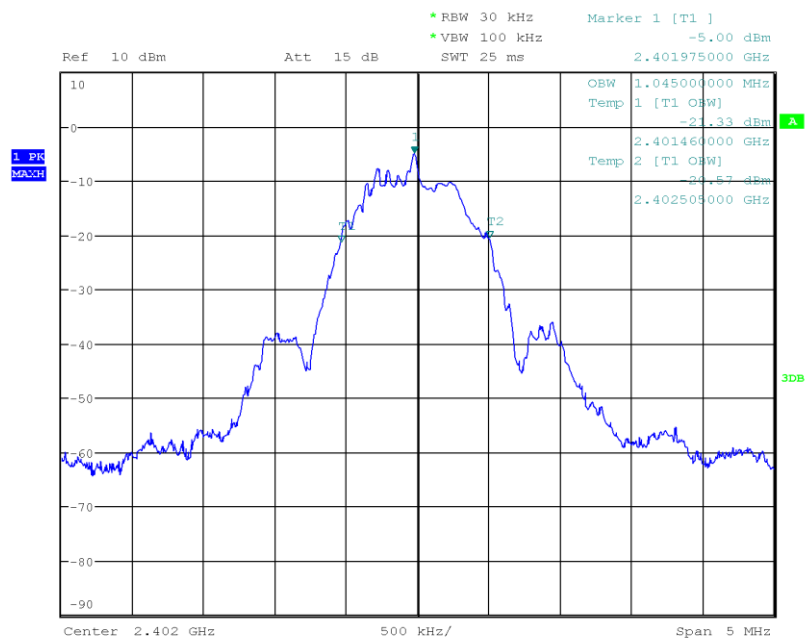

Date: 29.MAY.2018 10:38:05

Occupied Bandwidth


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Occupied Bandwidth [MHz]: 1.050

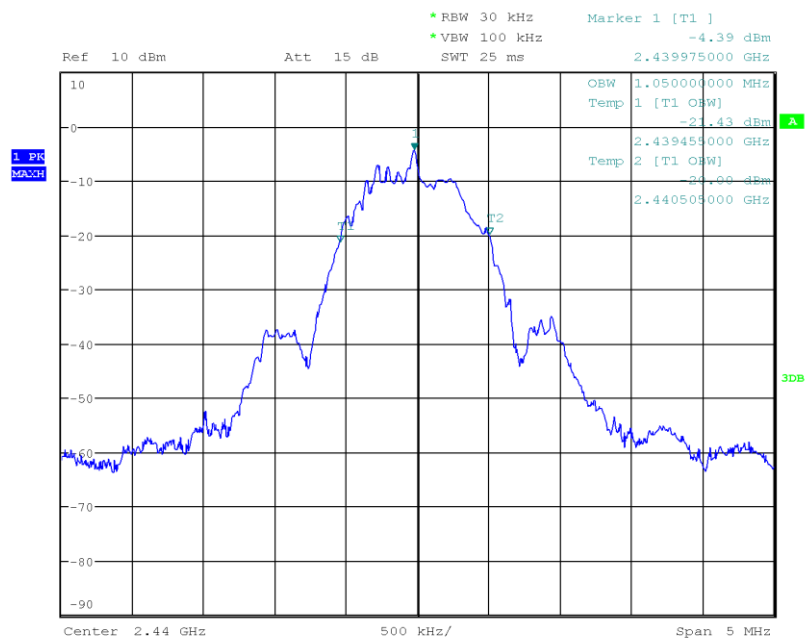

Date: 29.MAY.2018 10:32:32

Occupied Bandwidth

Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Occupied Bandwidth [MHz]: 1.050

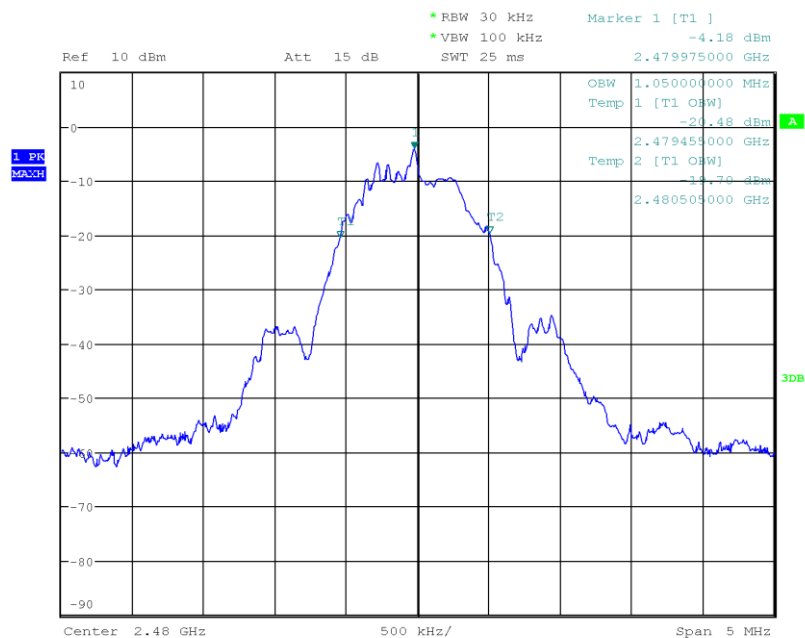

Date: 29.MAY.2018 10:41:08

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC 15.247(a)(2) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.8
Operator	Wilfried Treffke
Date	2018-05-29

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

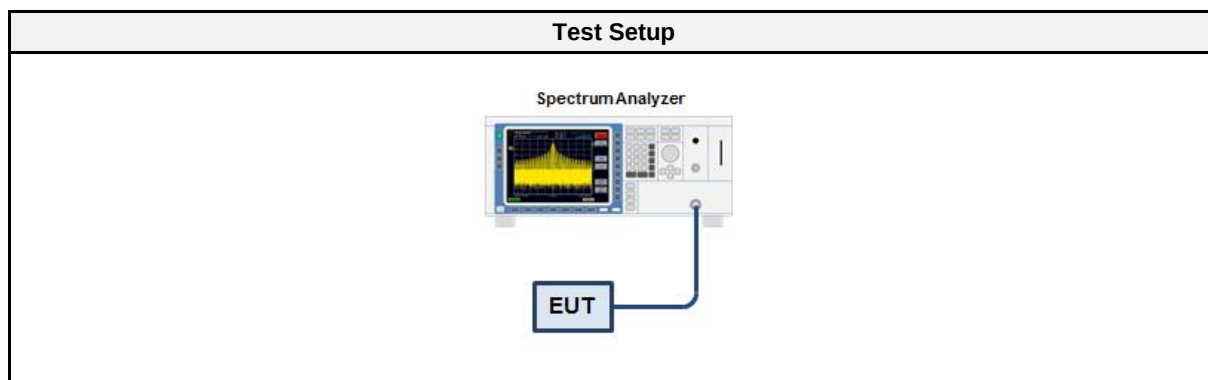

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.2.5 Procedure


Test Procedure
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	695	500	PASS
GFSK	2440	710	500	PASS
GFSK	2480	700	500	PASS

DTS (6 dB) Bandwidth


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Lower Frequency [MHz]: 2401.620
 Upper Frequency [MHz]: 2402.315
 6 dB Bandwidth [kHz]: 695

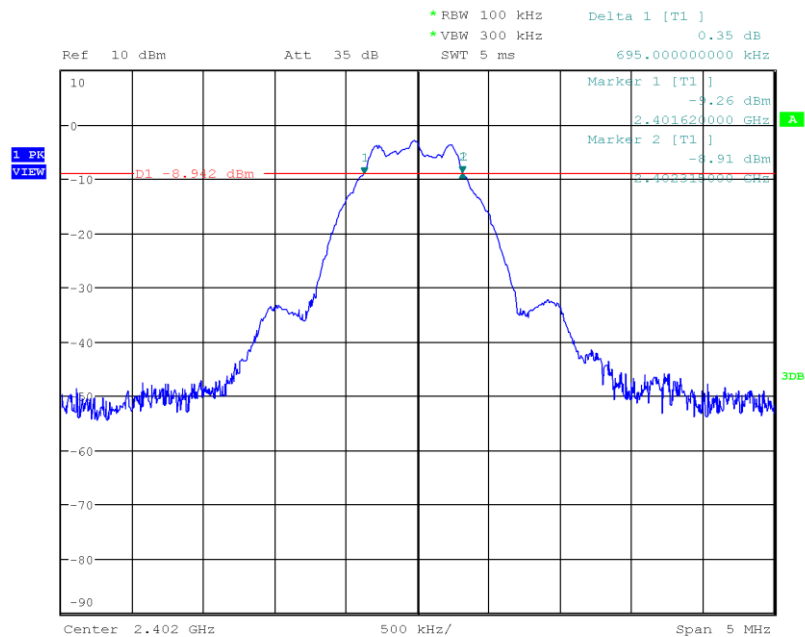

Date: 29.MAY.2018 10:46:57

DTS (6 dB) Bandwidth


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Lower Frequency [MHz]: 2439.610
 Upper Frequency [MHz]: 2440.320
 6 dB Bandwidth [kHz]: 710

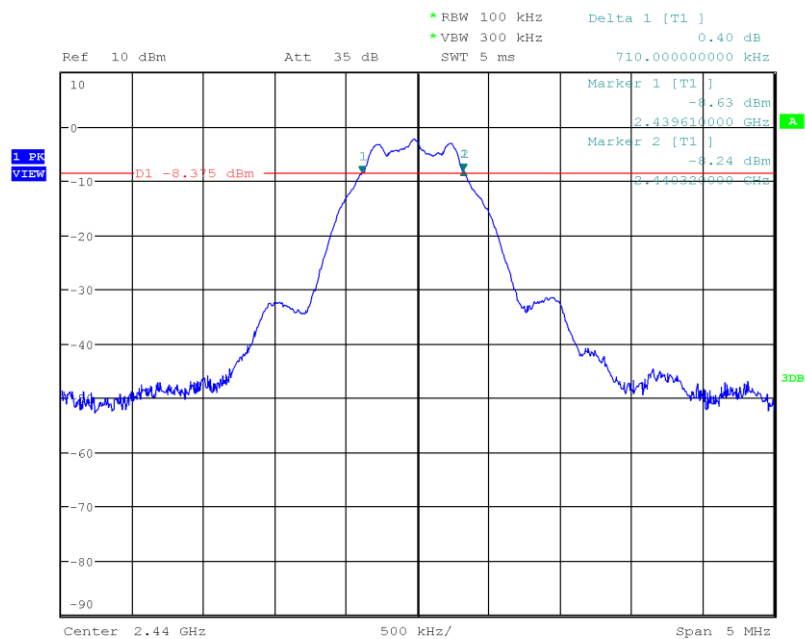

Date: 29.MAY.2018 10:49:08

DTS (6 dB) Bandwidth

Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Lower Frequency [MHz]: 2479.615
 Upper Frequency [MHz]: 2480.315
 6 dB Bandwidth [kHz]: 700

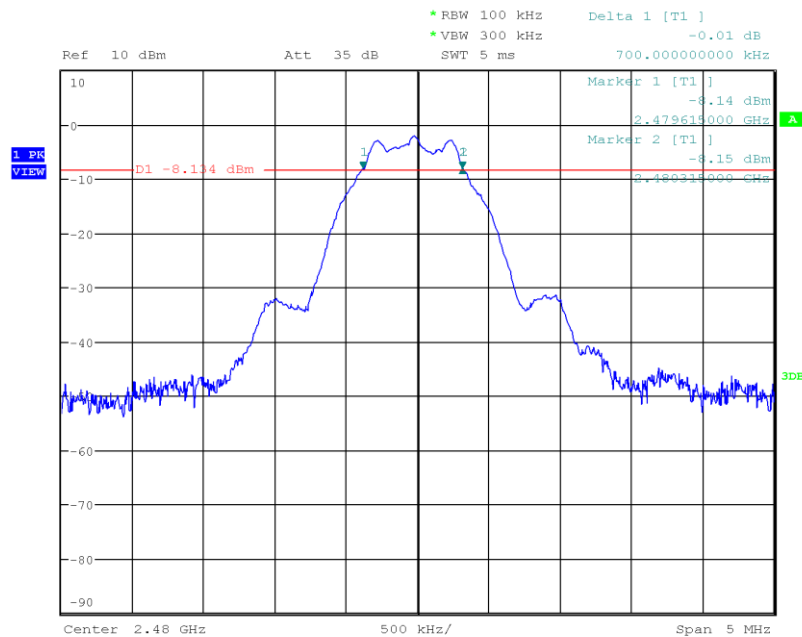

Date: 29.MAY.2018 10:50:26

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC 15.247(b)(1) / ISED RSS-247 5.4
Measurement Method	ANSI C63.10 11.9.1
Operator	Wilfried Treffke
Date	2018-05-29

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

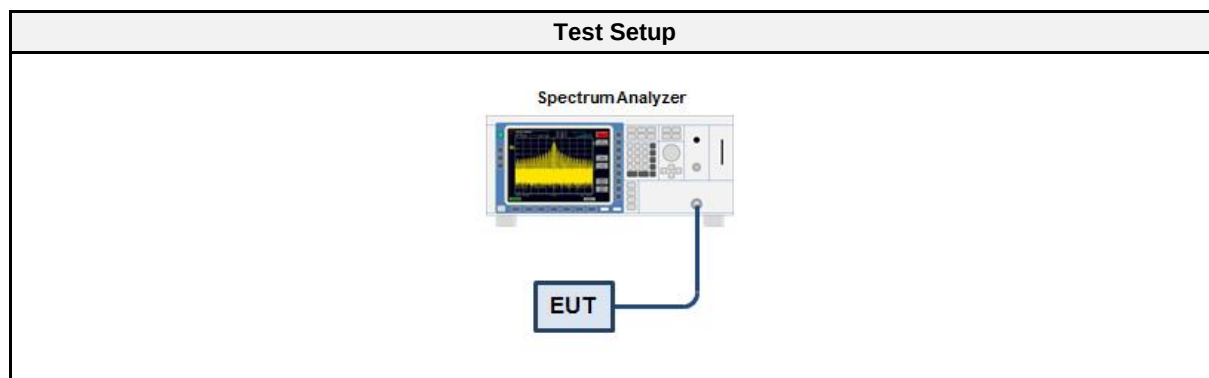

3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.3.5 Procedure

Test Procedure
1. EUT set to test hopping mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set $\geq$ DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
2402	-1.611	0.00069	1.0	PASS
2440	-1.041	0.00079	1.0	PASS
2480	-0.798	0.00083	1.0	PASS

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC 15.247(e) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Wilfried Treffke
Date	2018-05-29

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

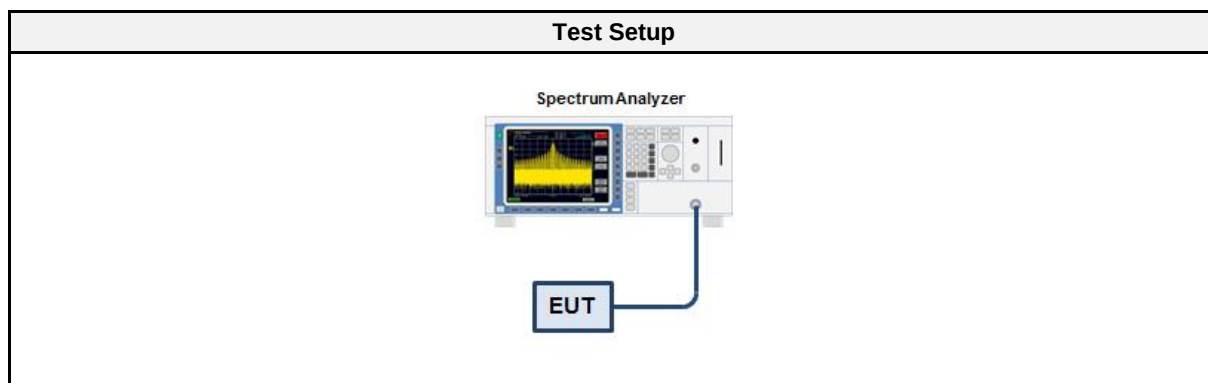

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.4.5 Procedure


Test Procedure
1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW $\geq$ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain

3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	-2.105	8.0	PASS
2440	-1.550	8.0	PASS
2480	-1.283	8.0	PASS
RBW = 100 kHz			

Peak Power Spectral Density


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Peak Frequency [MHz]: 2401.976
 Spectral Density [dBm/RBW]: -2.105
 Resolution Bandwidth [kHz]: 100 kHz

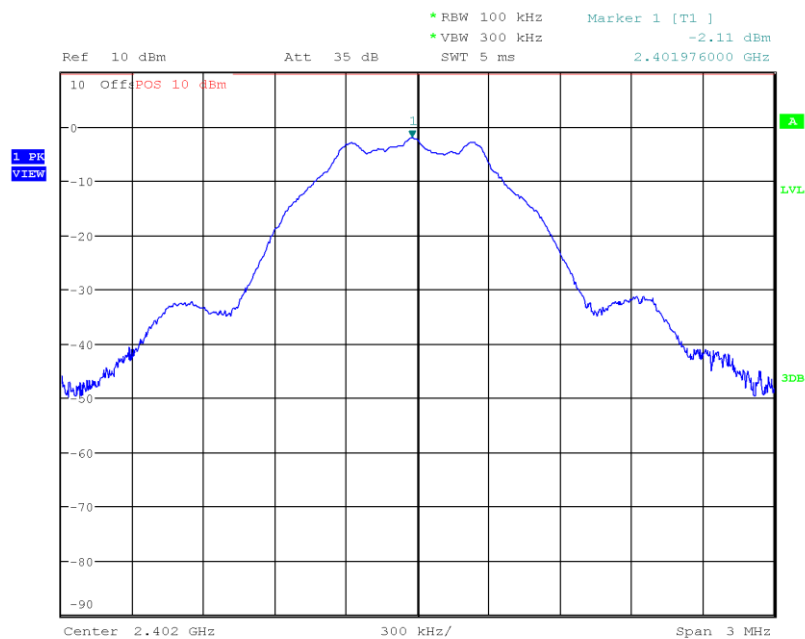

Date: 29.MAY.2018 11:11:25

Peak Power Spectral Density


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Peak Frequency [MHz]: 2439.973
 Spectral Density [dBm/RBW]: -1.550
 Resolution Bandwidth [kHz]: 100 kHz

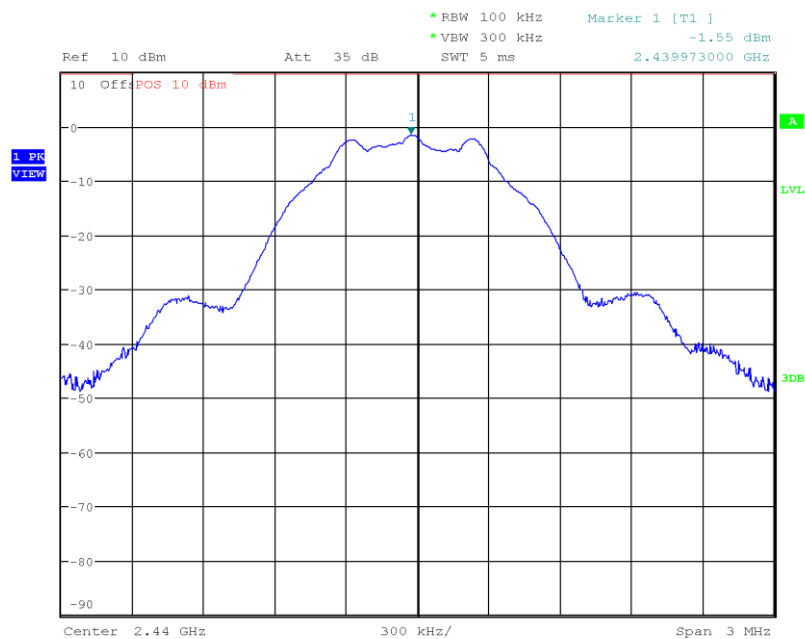

Date: 29.MAY.2018 11:13:19

Peak Power Spectral Density

Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Peak Frequency [MHz]: 2479.973
 Spectral Density [dBm/RBW]: -1.283
 Resolution Bandwidth [kHz]: 100 kHz

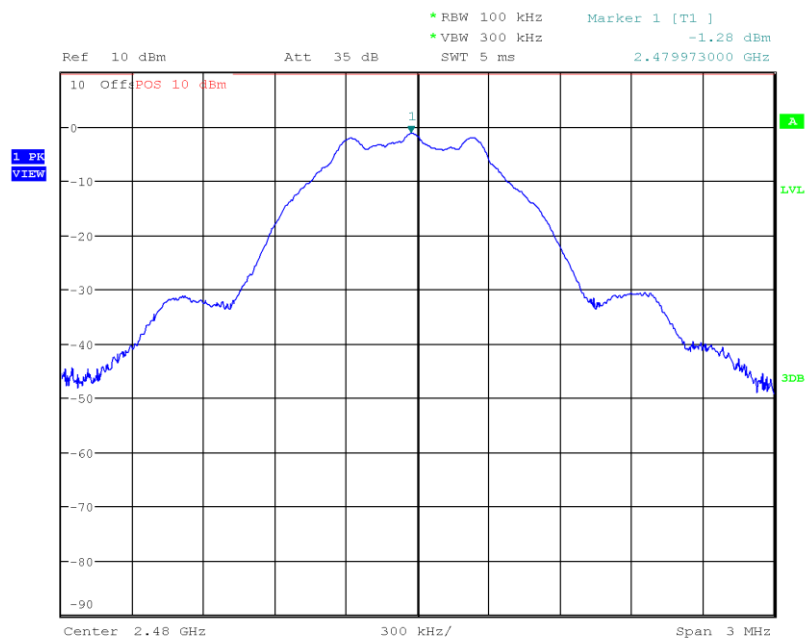

Date: 29.MAY.2018 11:14:57

3.5 Test Conditions and Results - AC powerline conducted emissions

3.5.1 Information


Test Information	
Reference	FCC 15.207
Measurement Method	ANSI C63.10 6.2
Operator	Wilfried Treffke
Date	2018-05-29

3.5.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dB μ V]	Average [dB μ V]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.5.3 Setup

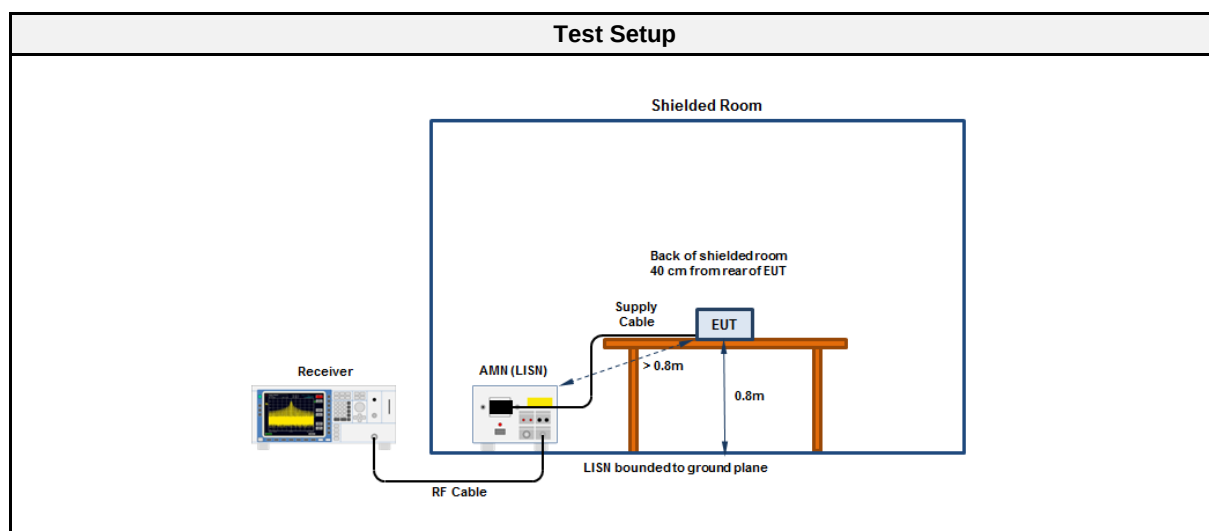

3.5.4 Equipment


Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	Rohde & Schwarz Vertriebs GmbH	ESR7	EF00943	2017-07	2018-07
LISN	R&S	ESH2-Z5	EF00182	2017-01	2019-01

EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Engel
 Test Conditions: Tnom: 25°C, Unom:
 LISN: ESH2-Z5 N
 Mode: BLE; Tx, 2440 MHz
 Test Date: 2018-05-29
 Note:

Index 1

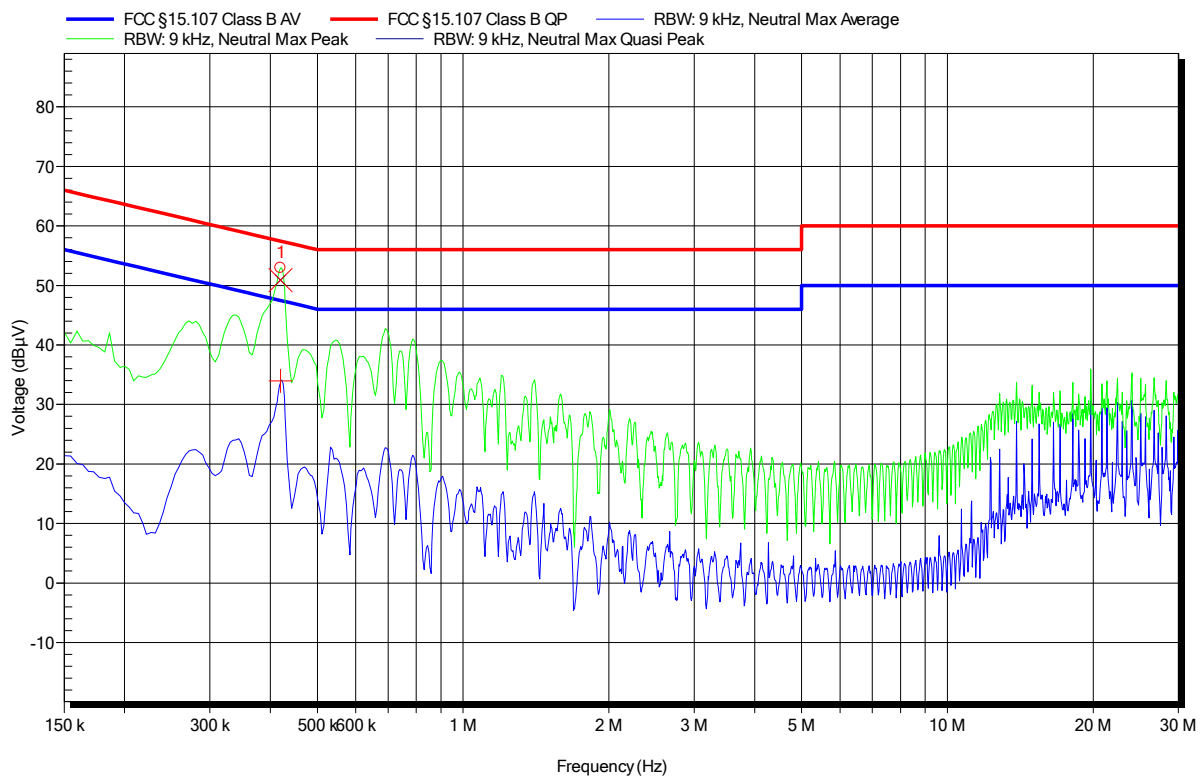


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	420 kHz	50.9 dBμV	57.45 dBμV	-6.55 dB	Pass
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	420 kHz	33.96 dBμV	47.45 dBμV	-13.49 dB	Pass

EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Engel
 Test Conditions: Tnom: 25°C, Unom:
 LISN: ESH2-Z5 L
 Mode: BLE; Tx, 2440 MHz
 Test Date: 2018-05-29
 Note:

Index 2

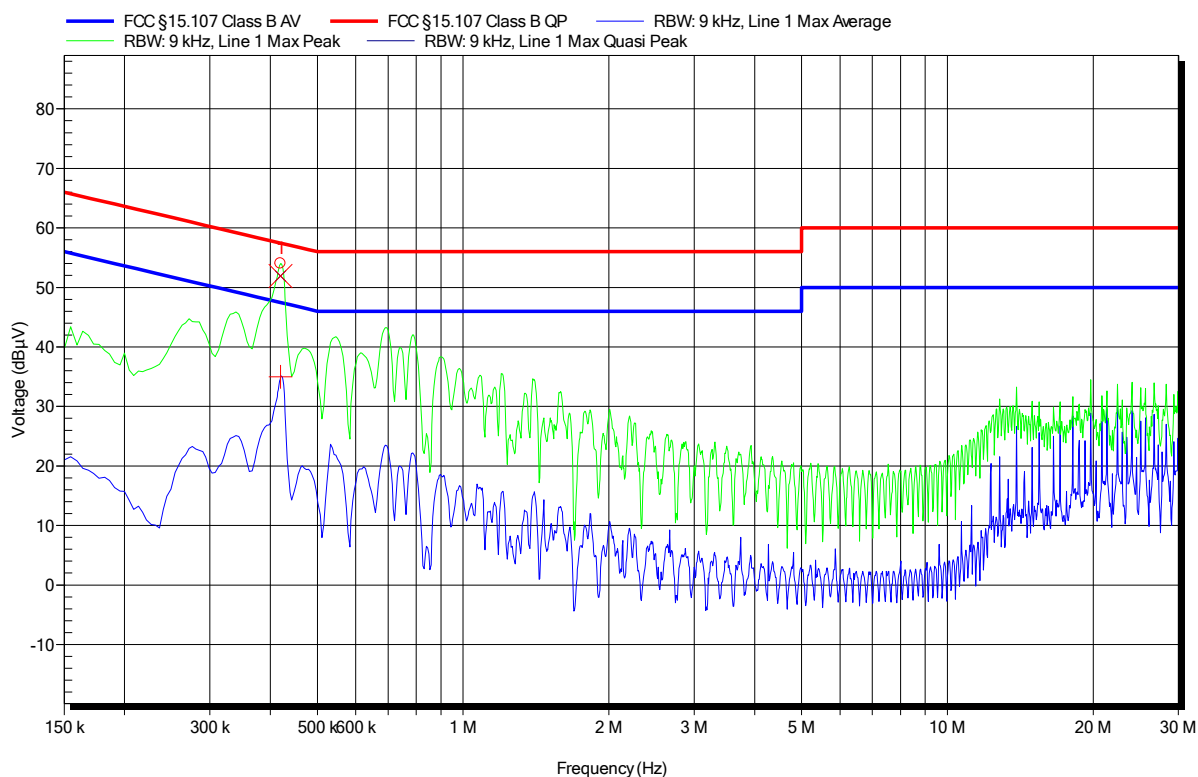

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	420 kHz	51.9 dBμV	57.45 dBμV	-5.54 dB	Pass
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	420 kHz	34.99 dBμV	47.45 dBμV	-12.46 dB	Pass

3.6 Test Conditions and Results - Band-edge compliance


3.6.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.13
Operator	Wilfried Treffke
Date	2018-05-29

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

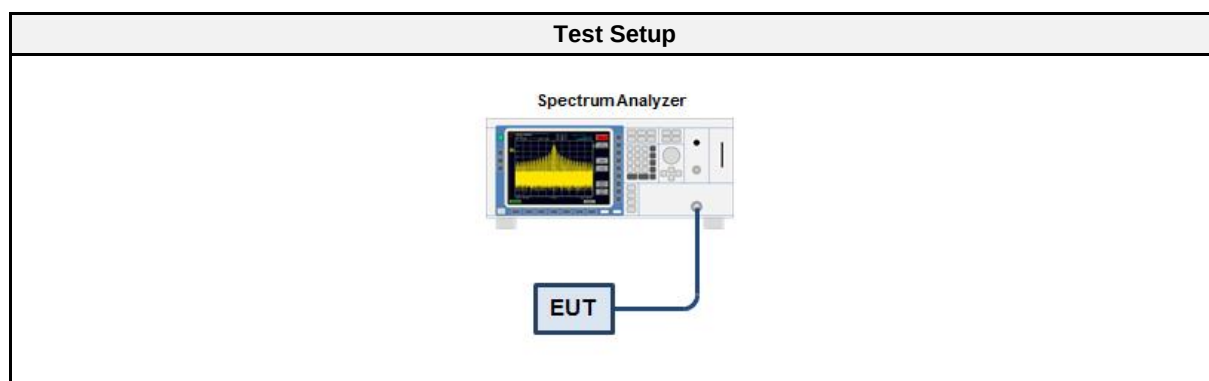

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.6.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.6.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-46.25	-20	PASS
GFSK	2480	-47.87	-20	PASS

Band-edge Compliance


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Band-edge: Lower
 In-band Frequency [MHz]: 2401.984
 Max. in-band Level [dBm/100 kHz]: -2.105
 Out-of-band Frequency [MHz]: 2399.552
 Max. out-of-band Level [dBm/100 kHz]: -48.353
 Attenuation [dB]: -46.25

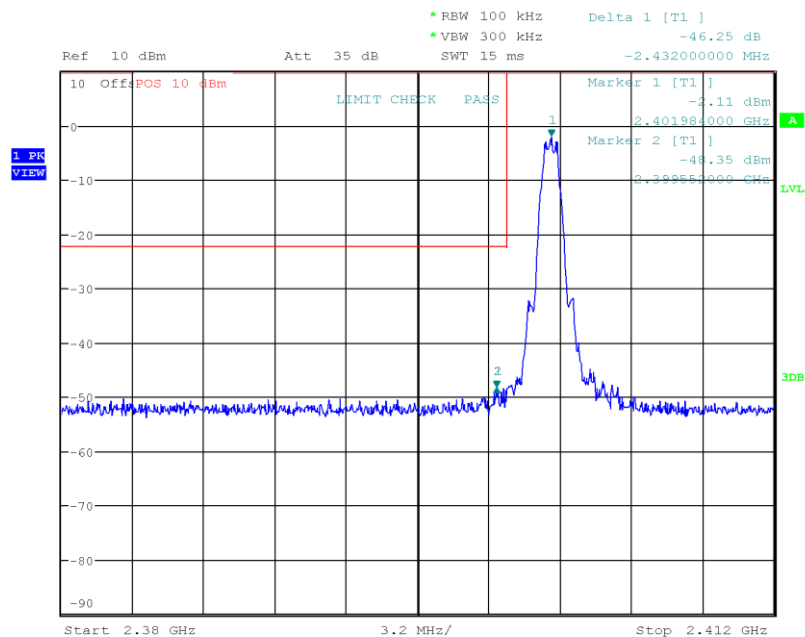

Date: 29.MAY.2018 11:19:44

Band-edge Compliance

Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Band-edge: Upper
 In-band Frequency [MHz]: 2479.975
 Max. in-band Level [dBm/100 kHz]: -1.298
 Out-of-band Frequency [MHz]: 2489.845
 Max. out-of-band Level [dBm/100 kHz]: -49.165
 Attenuation [dB]: -47.87

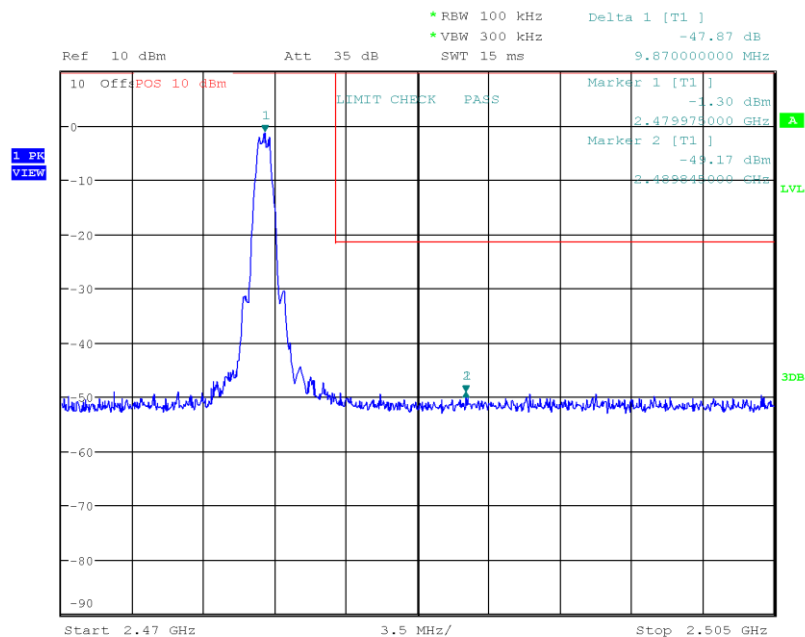

Date: 29.MAY.2018 11:23:12

3.7 Test Conditions and Results - Conducted spurious emissions


3.7.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.11
Operator	Wilfried Treffke
Date	2018-05-29

3.7.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.7.3 Setup

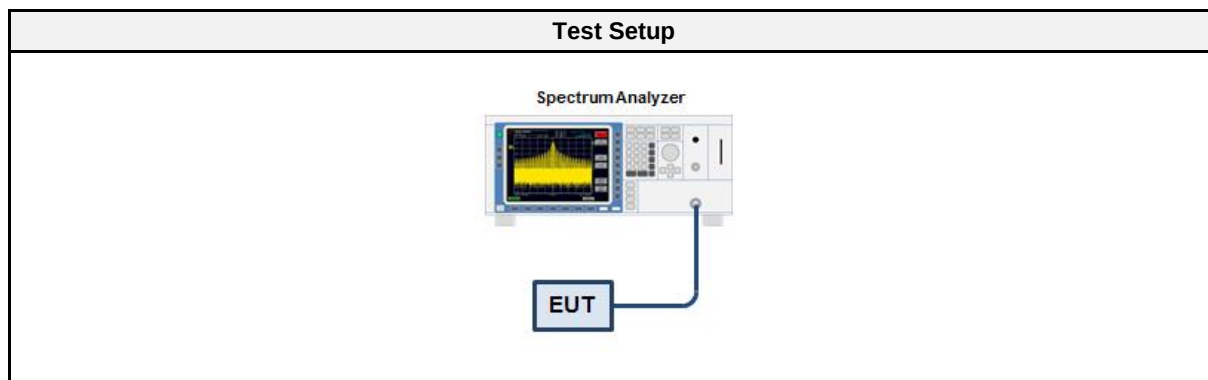

3.7.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.7.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.7.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS

Conducted Spurious Emissions


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Max. in-band Frequency [MHz]: 2402.0
 Max. in-band Level [dBm/100 kHz]: -2.4
 Out-of-band Limit [dBm/100 kHz]: -22.4

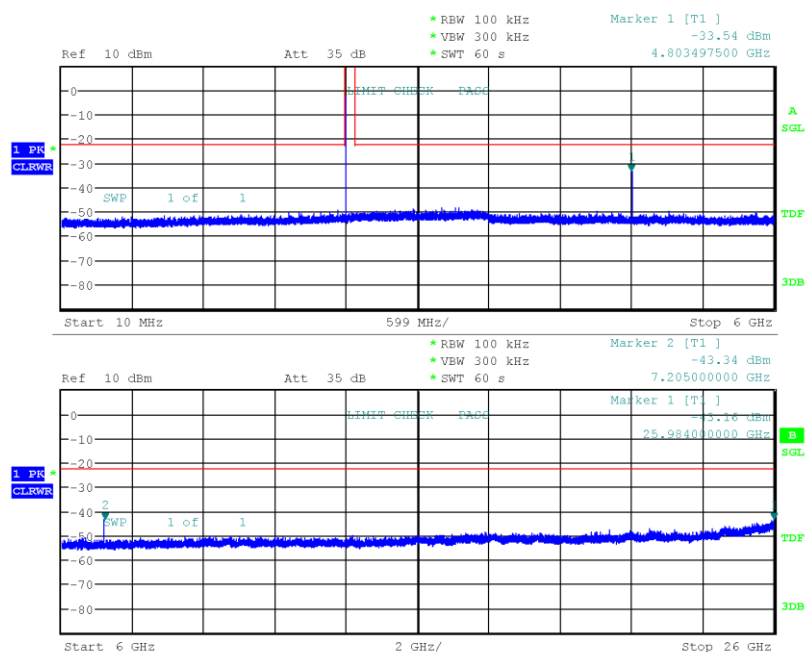

Date: 29.MAY.2018 11:37:52

Conducted Spurious Emissions


Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Max. in-band Frequency [MHz]: 2440.0
 Max. in-band Level [dBm/100 kHz]: -1.8
 Out-of-band Limit [dBm/100 kHz]: -21.8

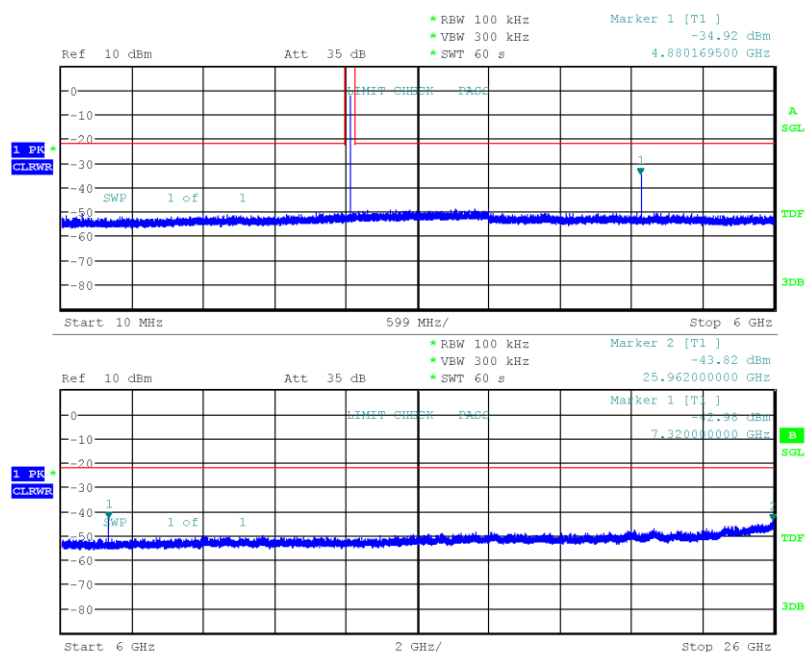

Date: 29.MAY.2018 11:43:20

Conducted Spurious Emissions

Project Number: G0M-1804-7374
 Applicant: Luke Roberts GmbH
 Model Description: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Sample ID: 15530
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: W. Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-05-29
 Max. in-band Frequency [MHz]: 2480.0
 Max. in-band Level [dBm/100 kHz]: -1.5
 Out-of-band Limit [dBm/100 kHz]: -21.5

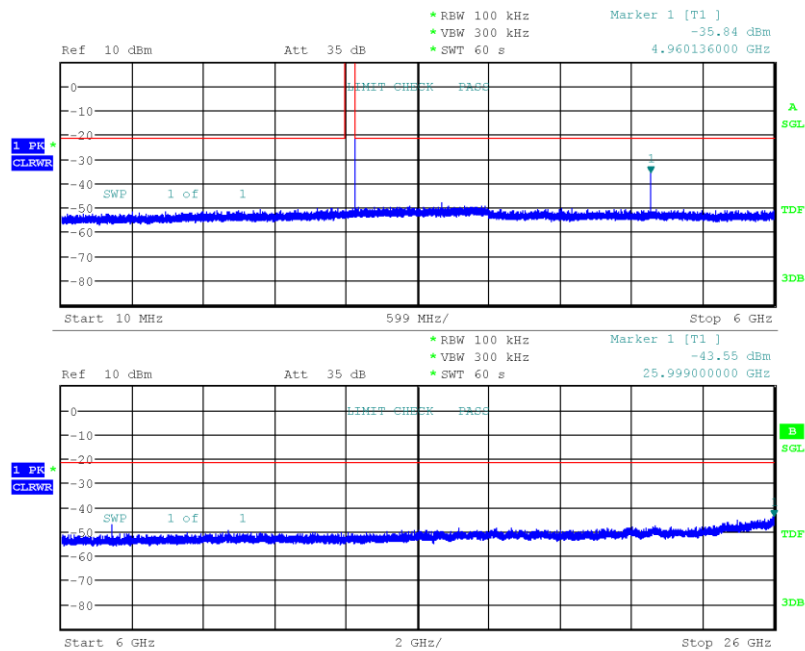

Date: 29.MAY.2018 11:48:07

3.8 Test Conditions and Results - Transmitter radiated emissions


3.8.1 Information


Test Information	
Reference	FCC 15.247(d) / ISSED RSS-GEN 8.9
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2018-05-31

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

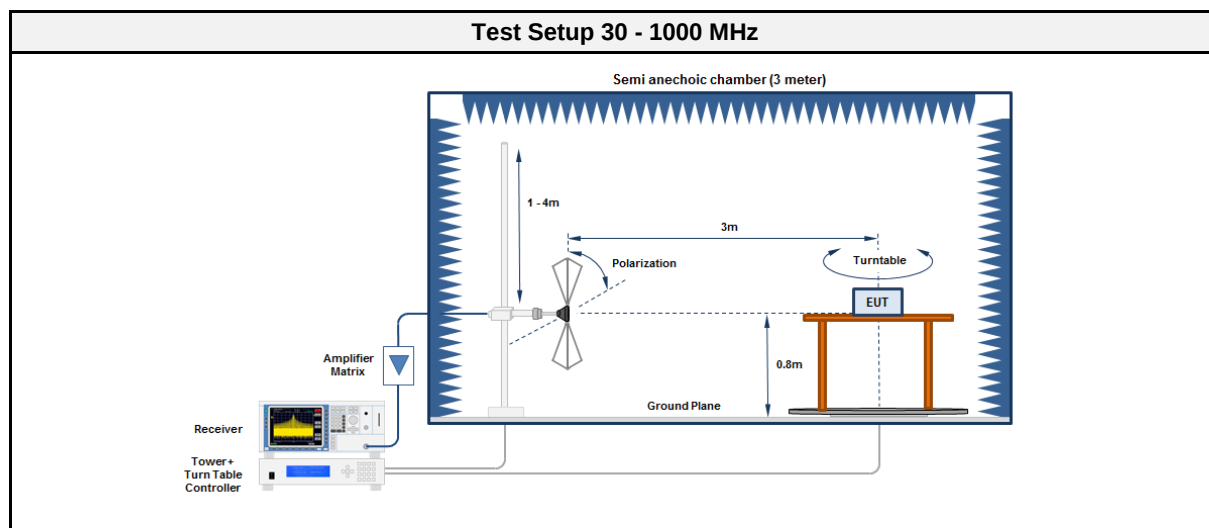

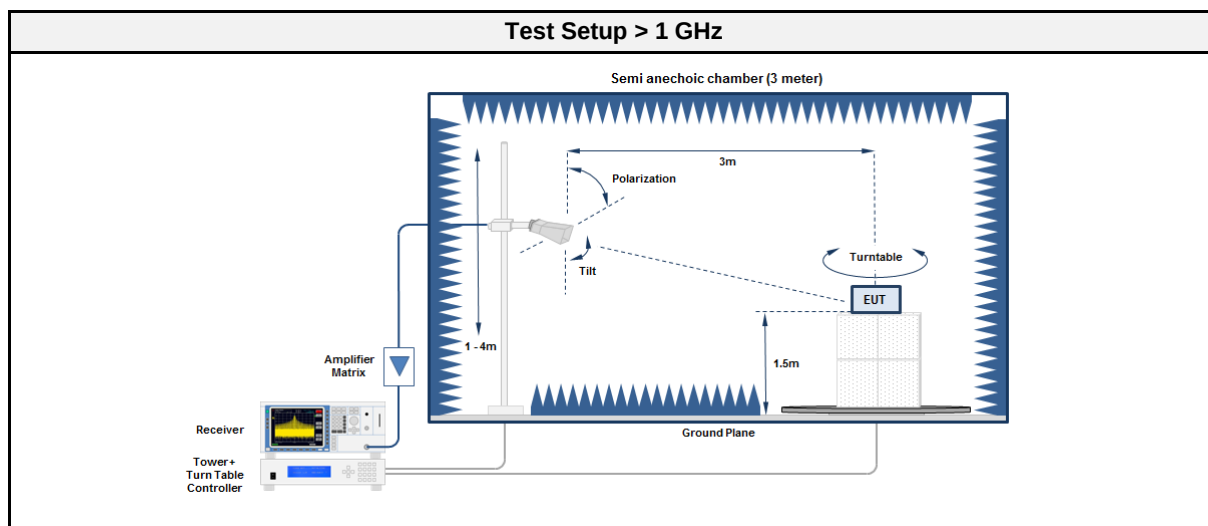

3.8.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00212	2016-04	2019-04

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.8.5 Procedure

Test Procedure < 30 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The EUT is rotated through 360° 4. The emissions are measured with peak detector and max hold 5. All significant emissions are measured again using the corresponding final detector

Test Procedure 30 - 1000 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz						
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground					
2.	EUT set to test mode					
3.	The receiver is set to peak detection with max hold					
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m					
5.	All significant emissions are measured again using the corresponding final detector					

3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	2379.4	52.28	pk	ver	74.00	-21.72
2402	2379.4	38.30	RMS	ver	54.00	-15.70
2402	2386	51.89	pk	hor	74.00	-22.11
2402	2386	38.98	RMS	hor	54.00	-15.02
2402	4800	45.82	pk	hor	74.00	-28.18
2402	4803	48.24	pk	ver	74.00	-25.76
2440	4880	47.42	pk	hor	74.00	-26.58
2440	4881	44.02	pk	ver	74.00	-29.98
2440	4881	39.95	RMS	ver	54.00	-14.05
2480	2483.5	59.66	pk	ver	74.00	-14.34
2480	2483.5	42.83	RMS	ver	54.00	-11.17
2480	4952	47.35	pk	ver	74.00	-26.65
2480	4960	46.29	pk	hor	74.00	-27.71

3.9 Test Conditions and Results - Receiver radiated emissions


3.9.1 Information


Test Information	
Reference	ISED RSS-247 3.1
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2018-05-31

3.9.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.9.3 Setup

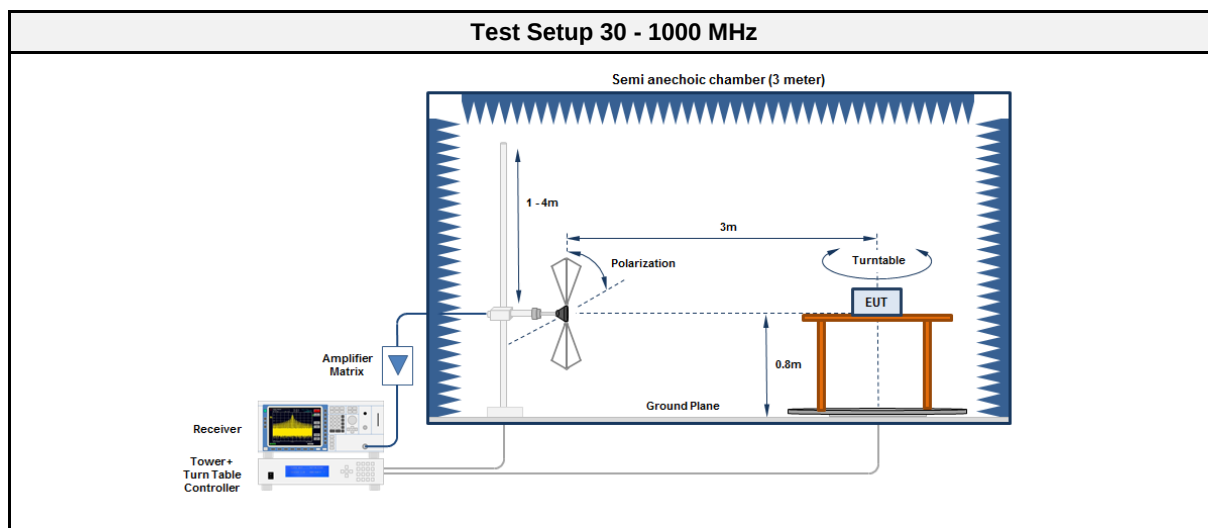

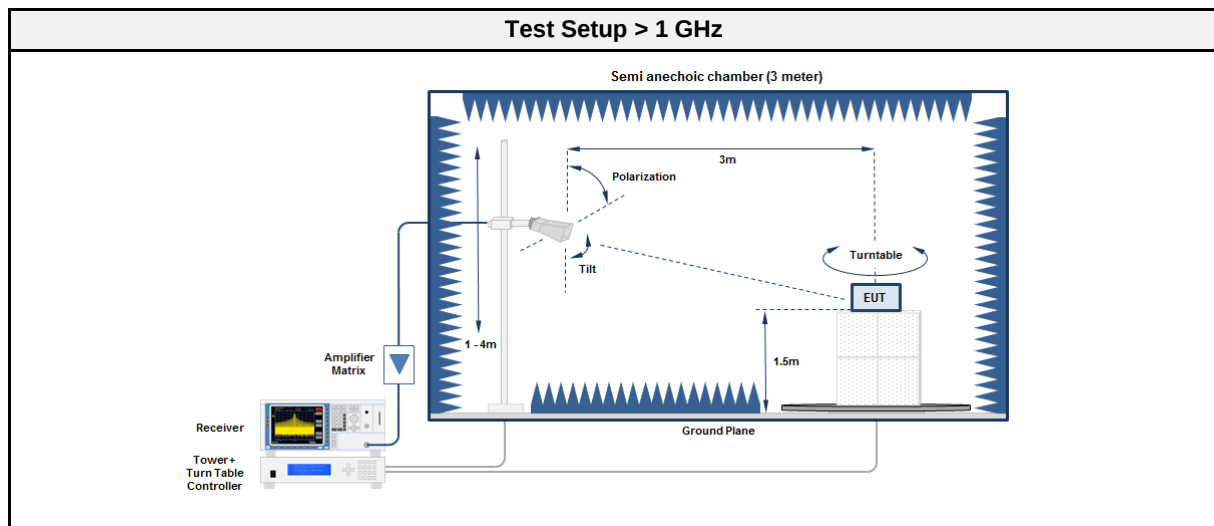

3.9.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00212	2016-04	2019-04

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.9.5 Procedure

Test Procedure 30 - 1000 MHz
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.9.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2440	35.76	29.34	qpk	ver	40.00	-10.66
2440	4872	47.01	pk	ver	53.98	-06.97
2440	12203	45.25	pk	hor	53.98	-08.73


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; BLE; GFSK; 2402 MHz
 Test Date: 2018-05-30
 Note:

Index 37

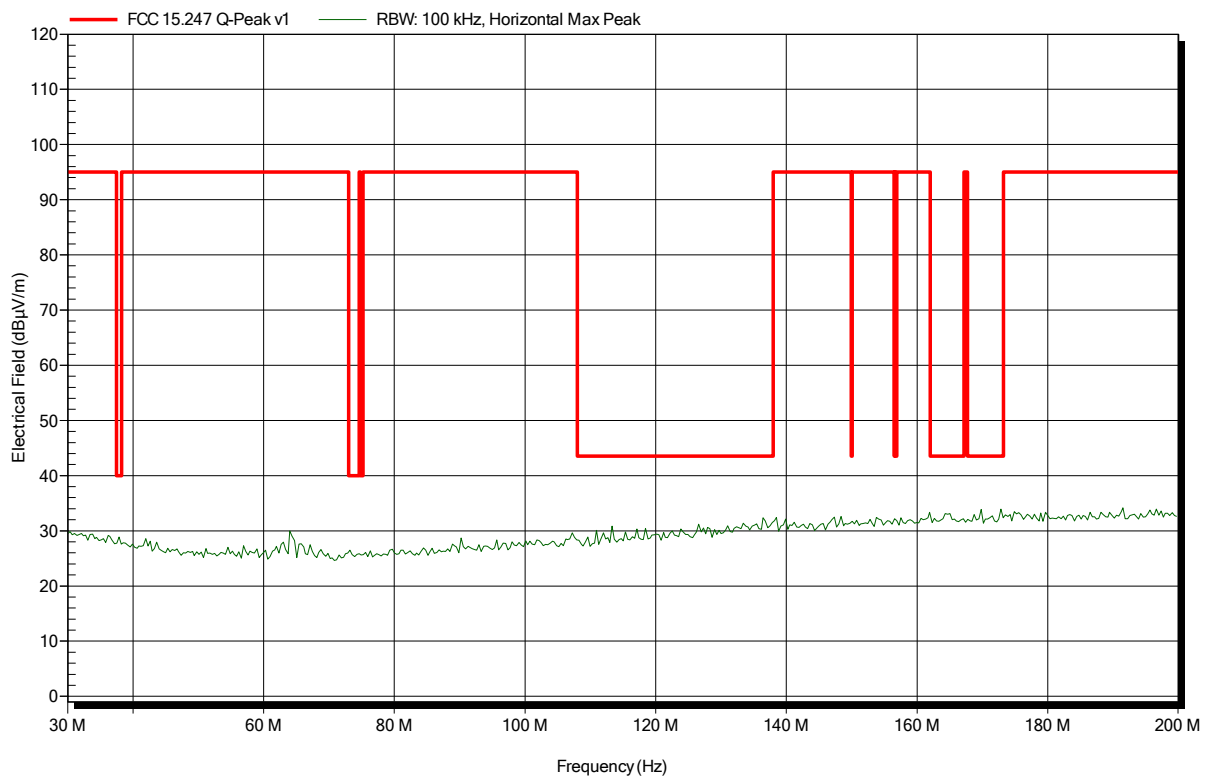


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-30
Note:

Index 38

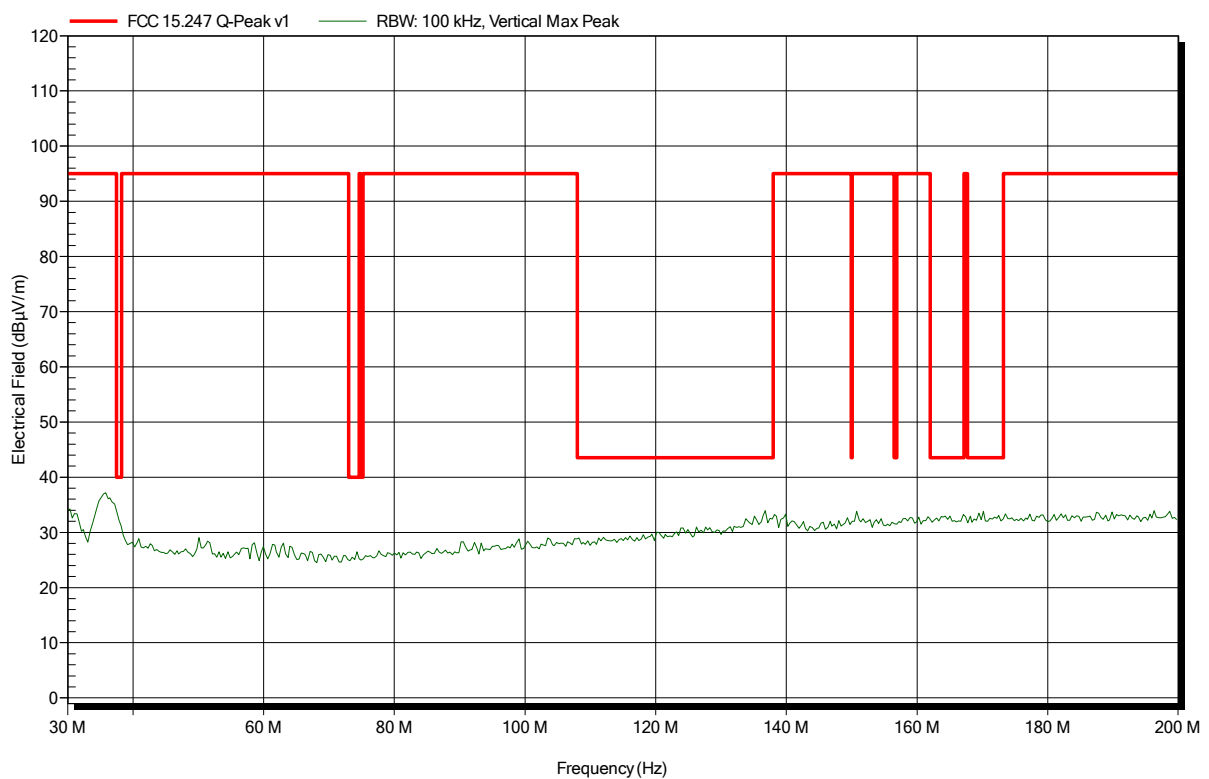


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-30
Note:

Index 36

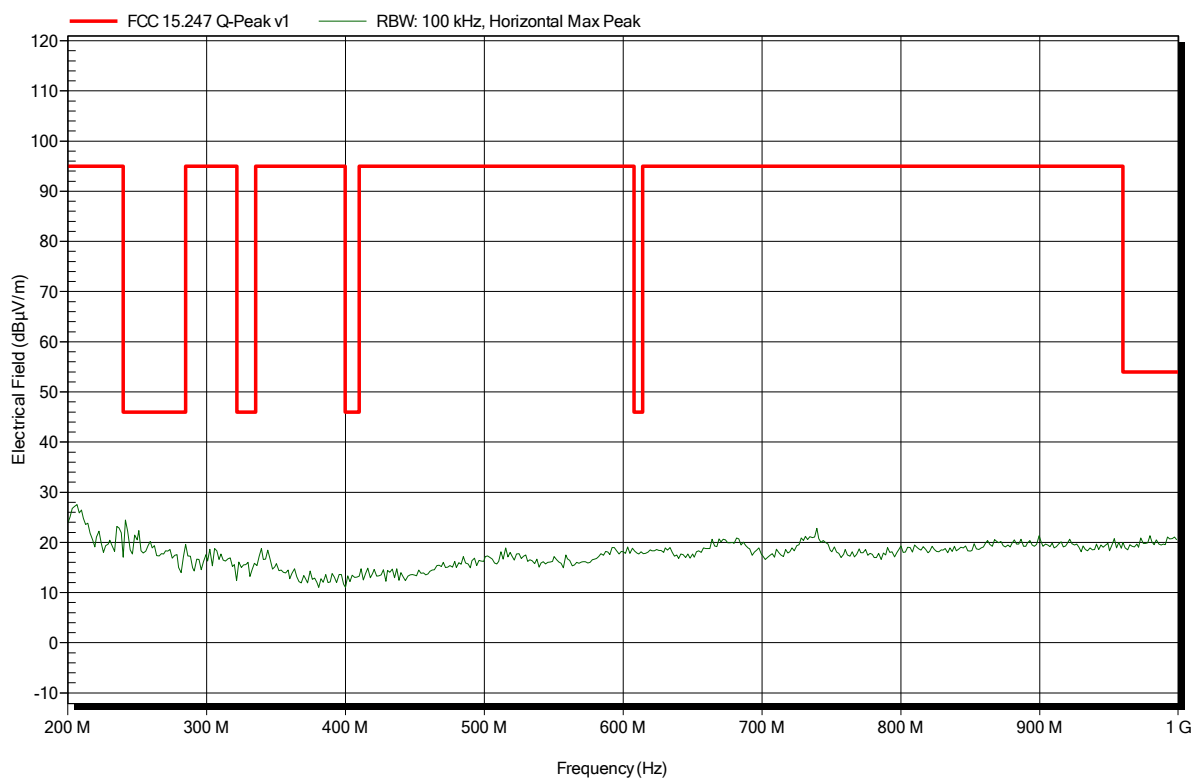


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-30
Note:

Index 35

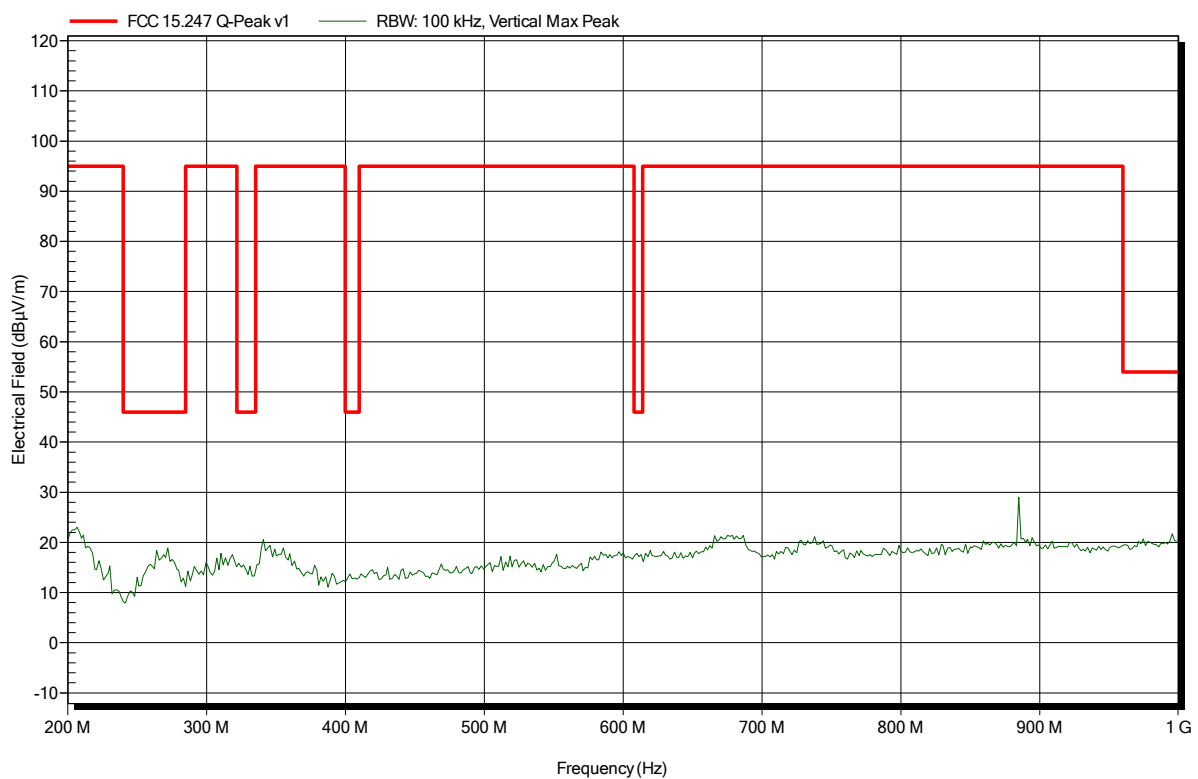


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note:

Index 4

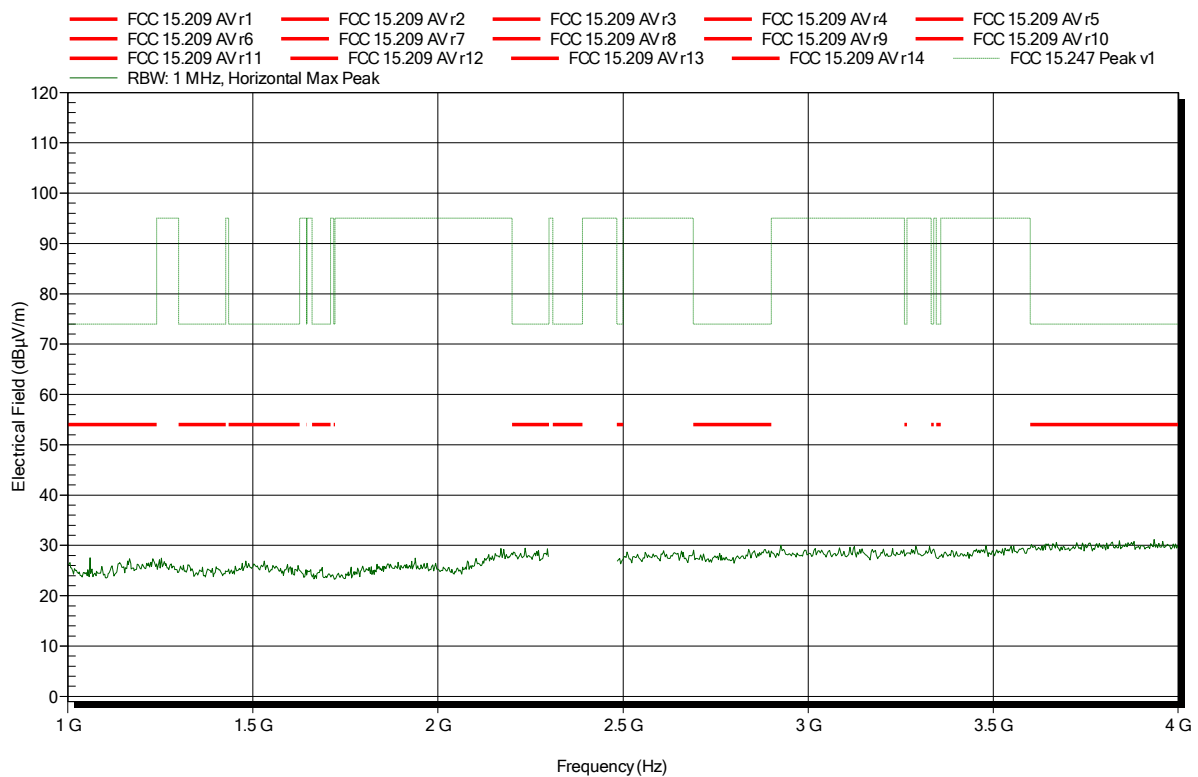


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note:

Index 10

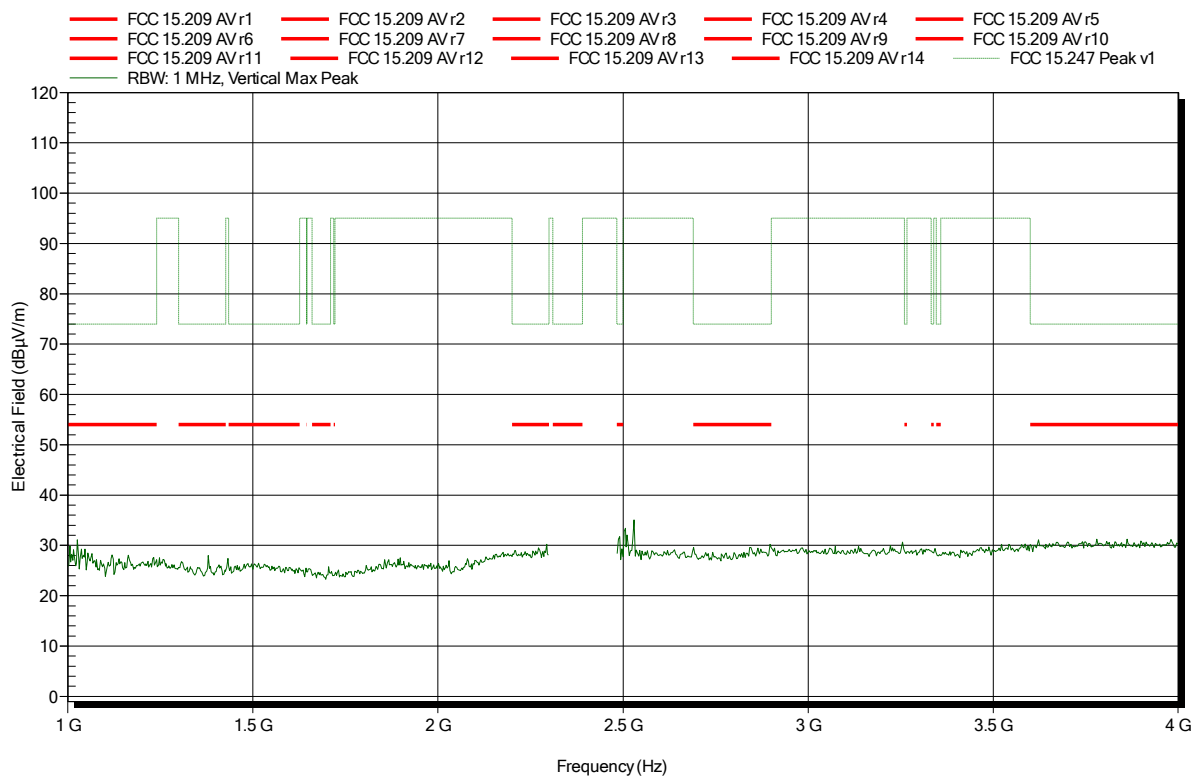


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note: lower bandedge

Index 6

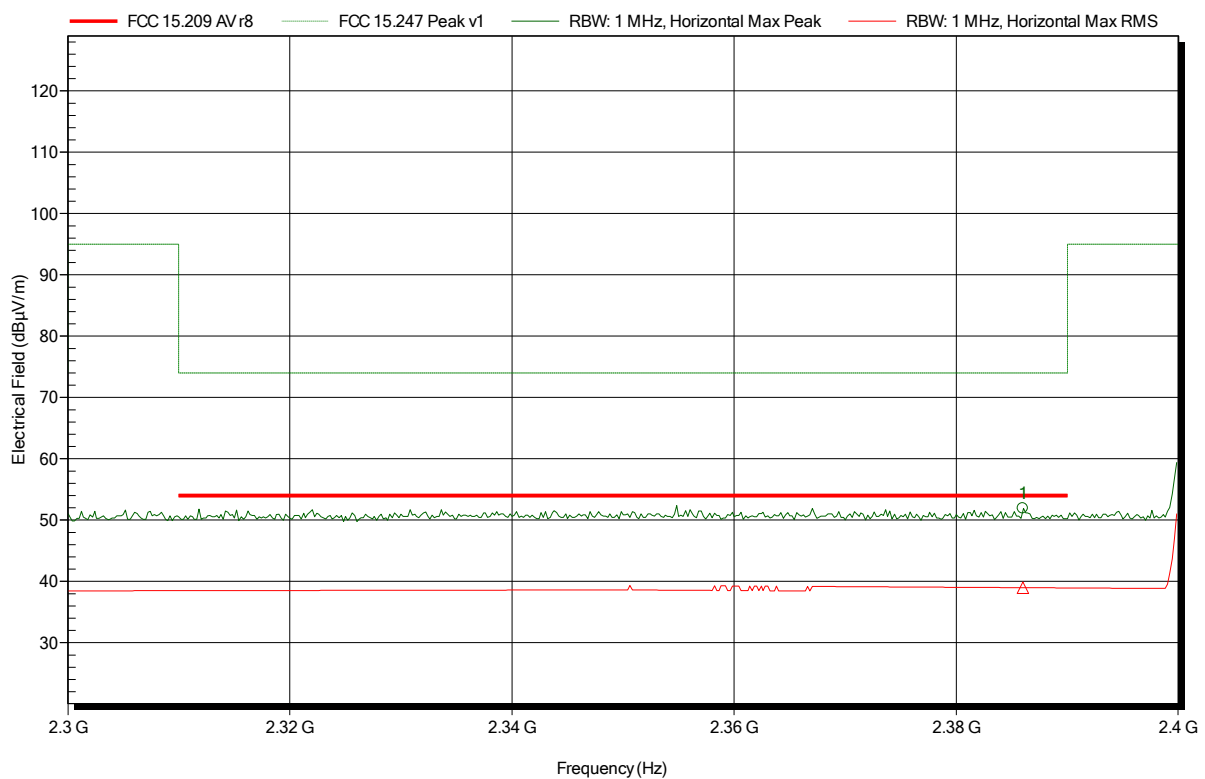


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.386 GHz	51.89 dBµV/m	74 dBµV/m	-22.11 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.386 GHz	38.98 dBµV/m	54 dBµV/m	-15.02 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; GFSK; 2402 MHz
 Test Date: 2018-05-29
 Note: lower bandedge

Index 11

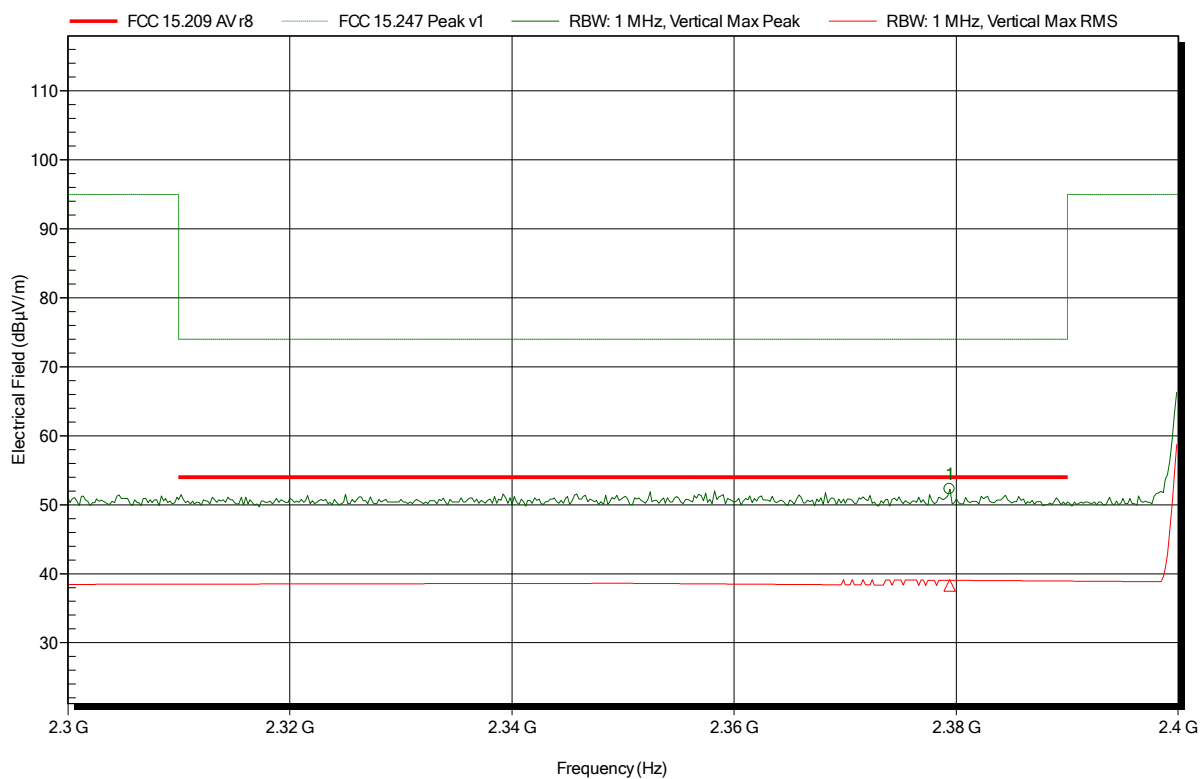


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3794 GHz	52.28 dBµV/m	74 dBµV/m	-21.72 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.3794 GHz	38.3 dBµV/m	54 dBµV/m	-15.7 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; GFSK; 2402 MHz
 Test Date: 2018-05-29
 Note:

Index 5

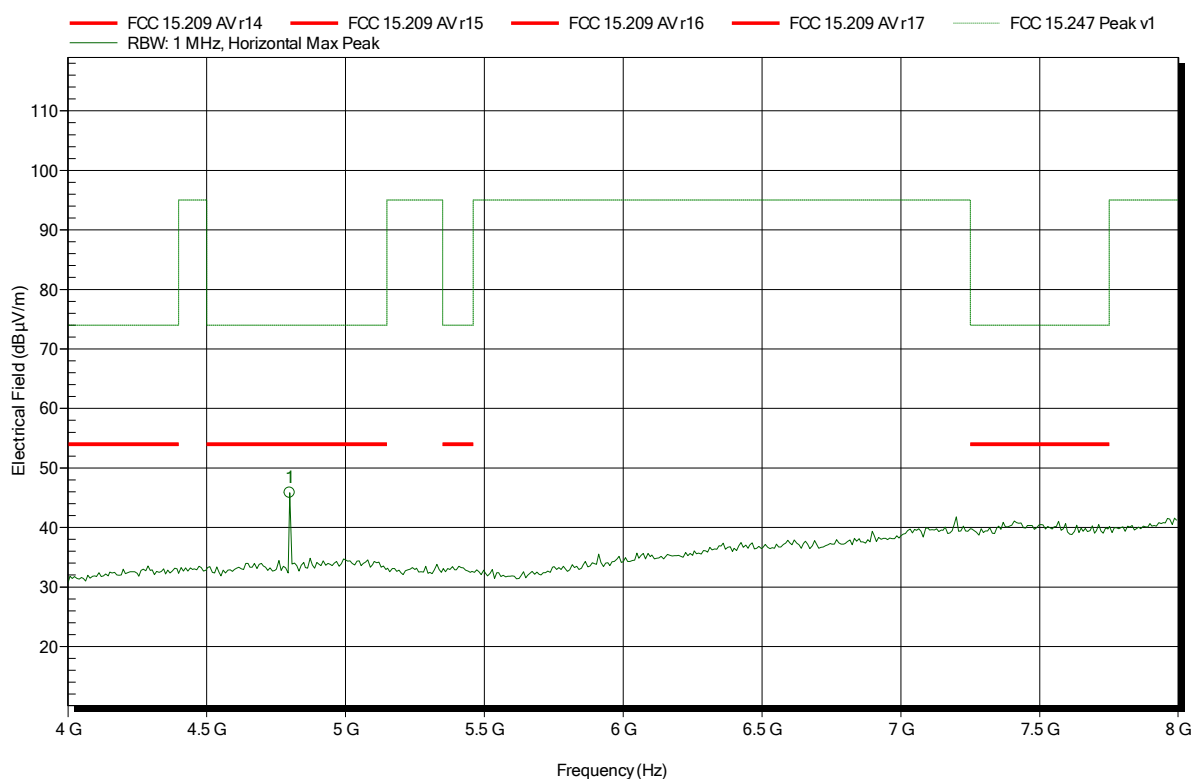


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.8 GHz	45.82 dBµV/m	74 dBµV/m	-28.18 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note:

Index 12

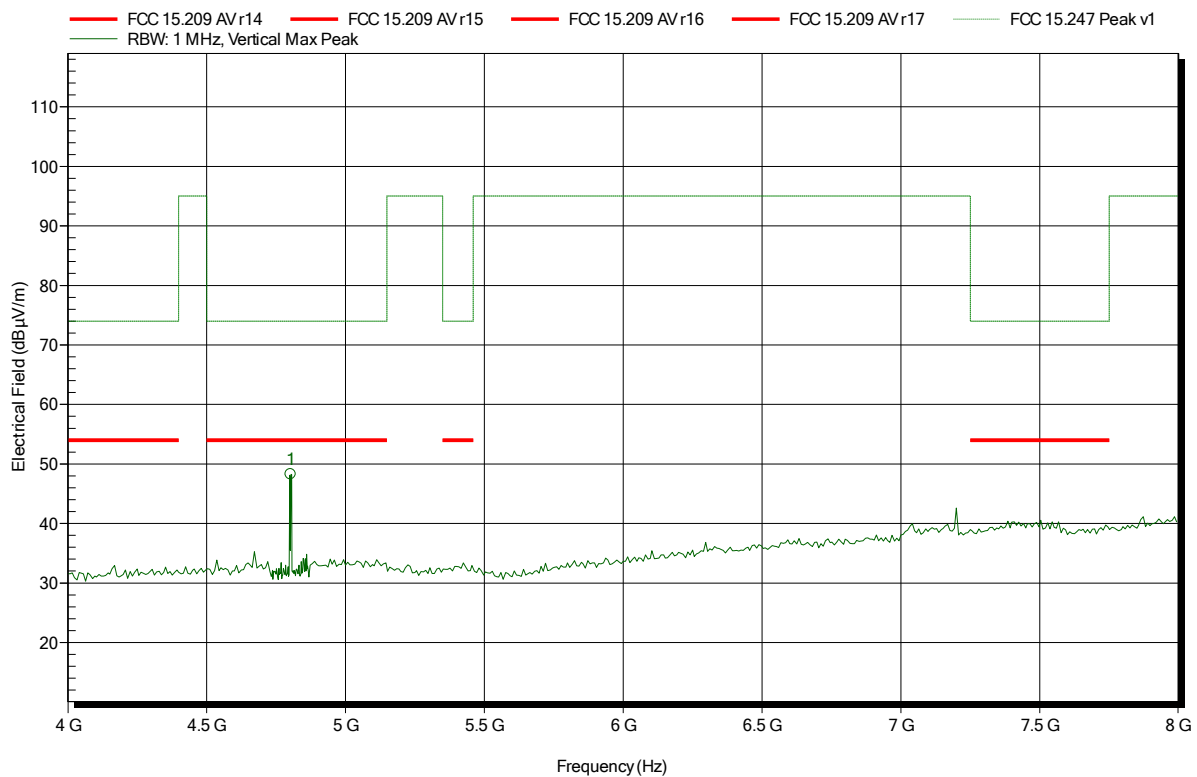


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.803 GHz	48.24 dBµV/m	74 dBµV/m	-25.76 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note:

Index 8

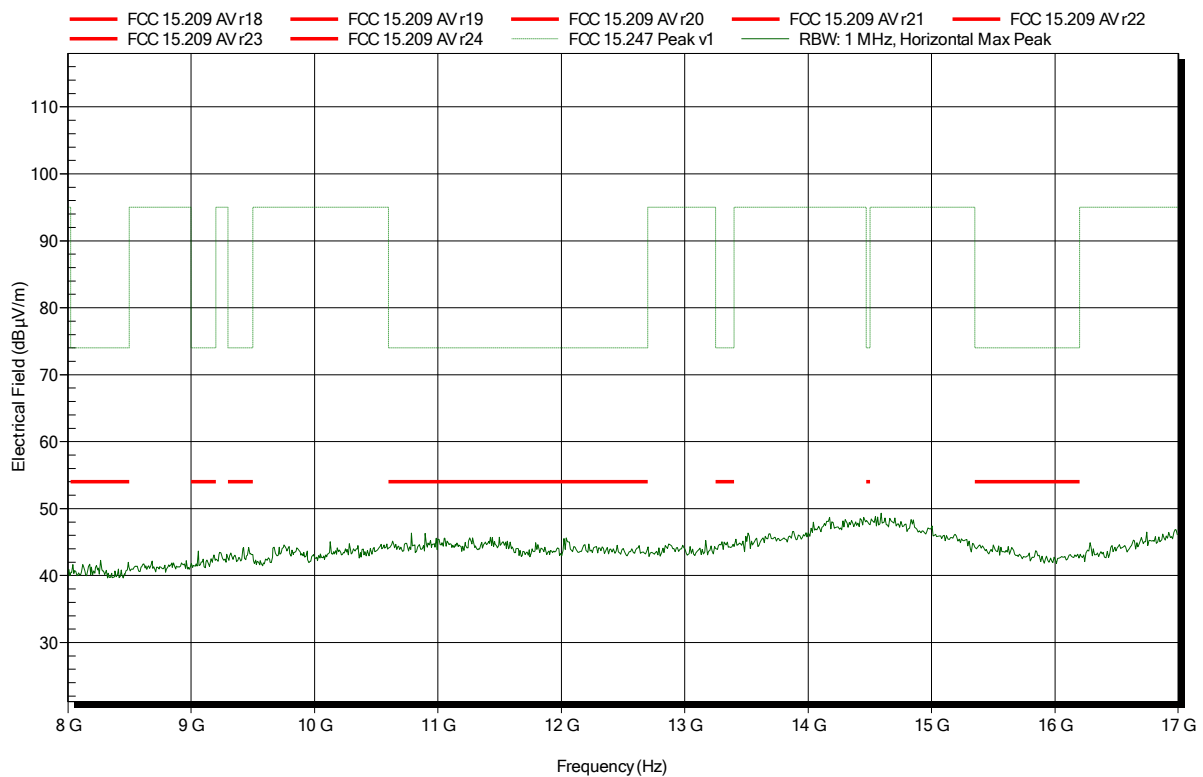


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note:

Index 13

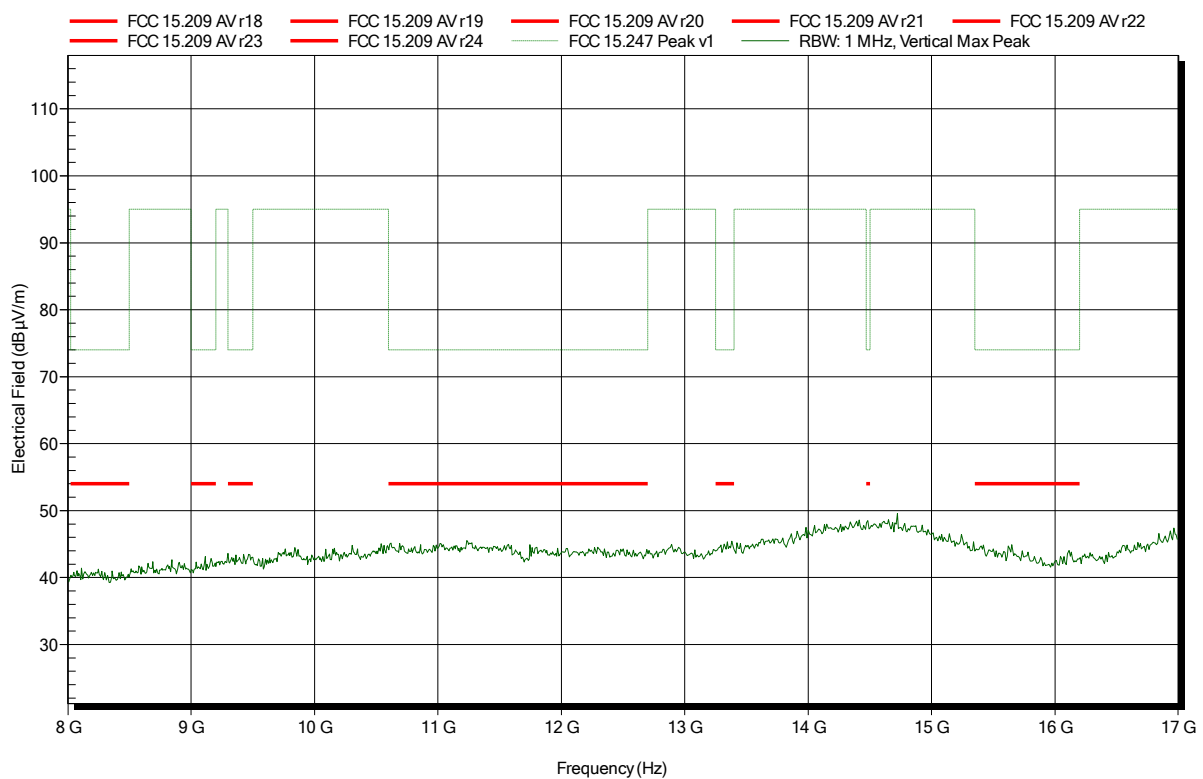


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note:

Index 9

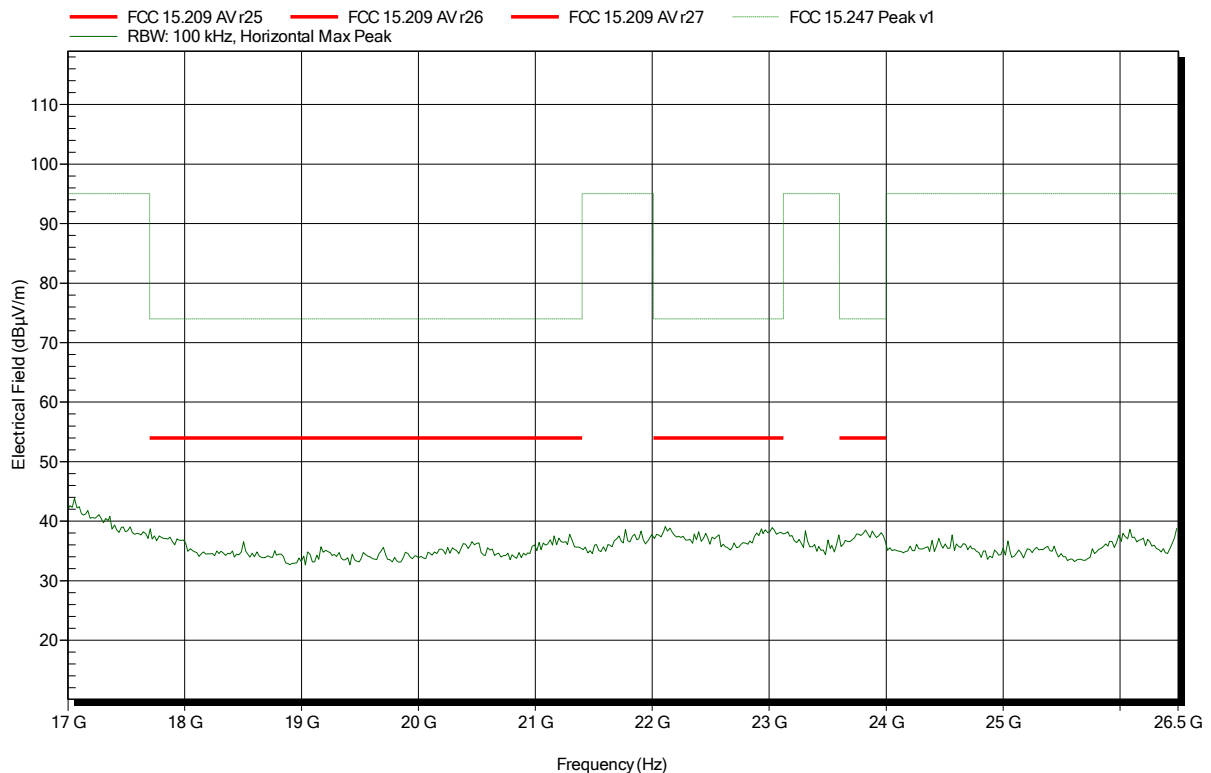


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2402 MHz
Test Date: 2018-05-29
Note:

Index 14

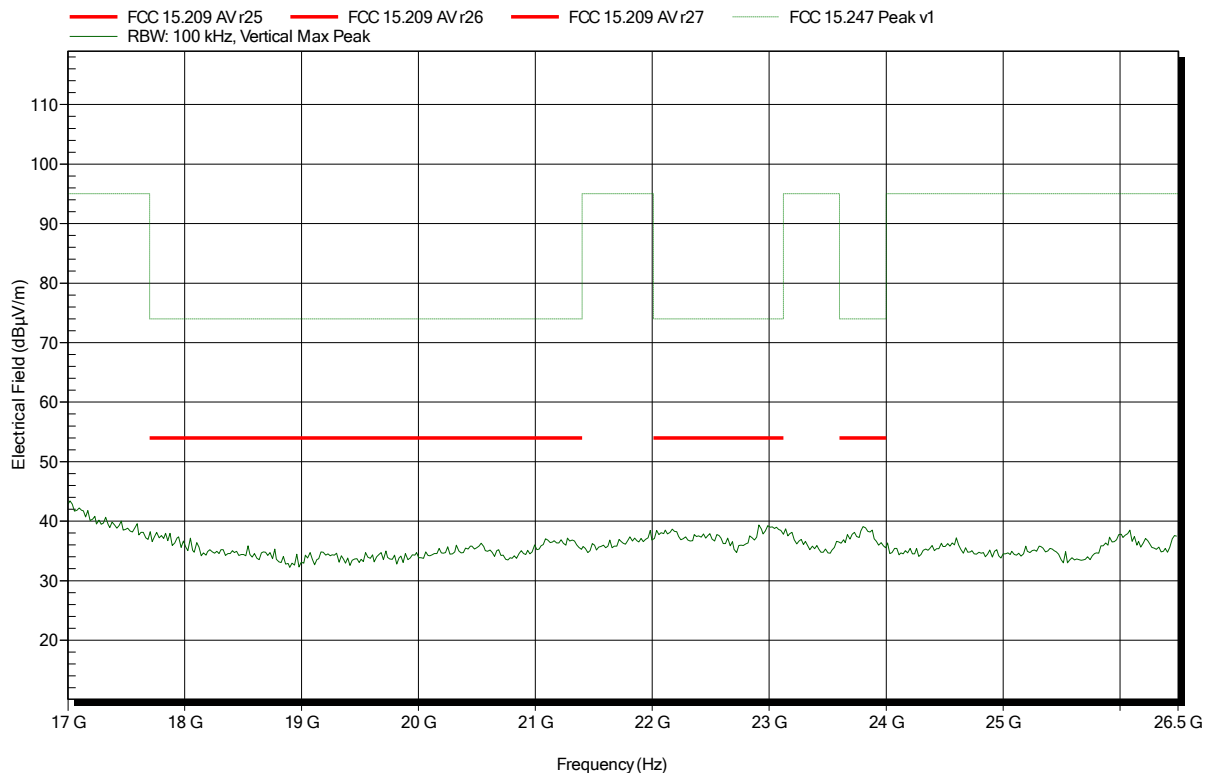


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-29
Note:

Index 15

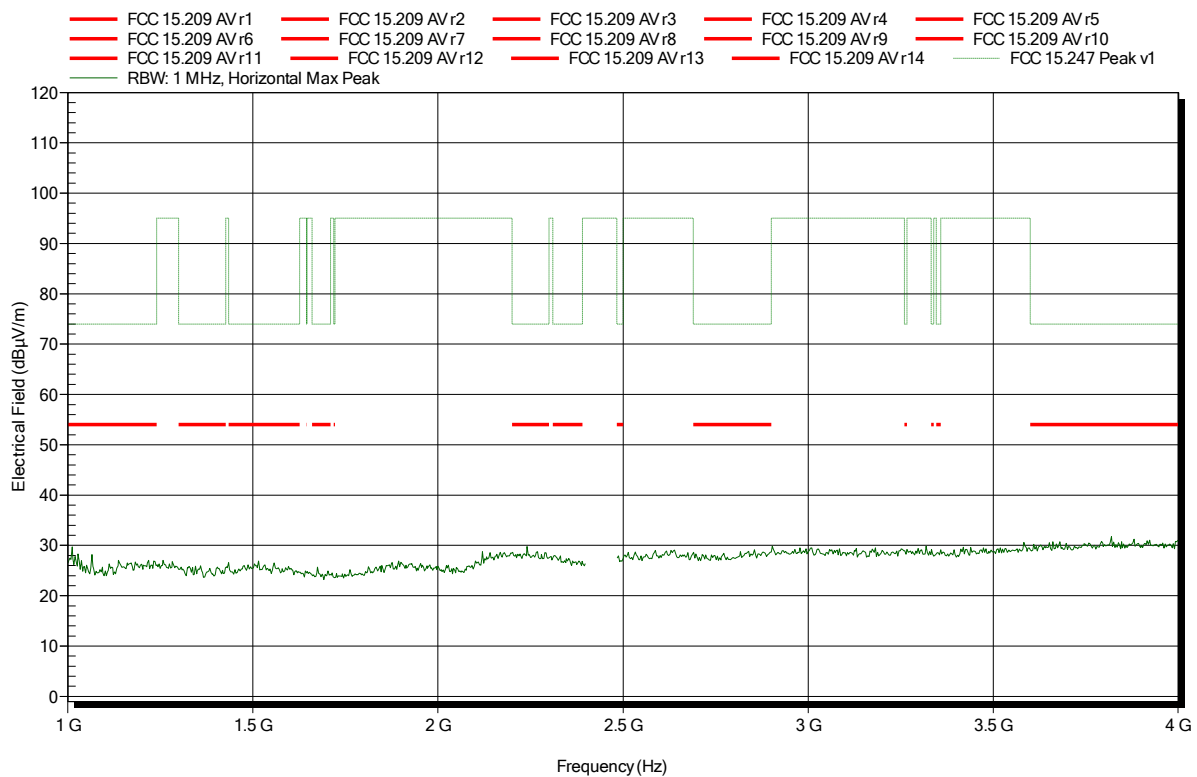


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-30
Note:

Index 20

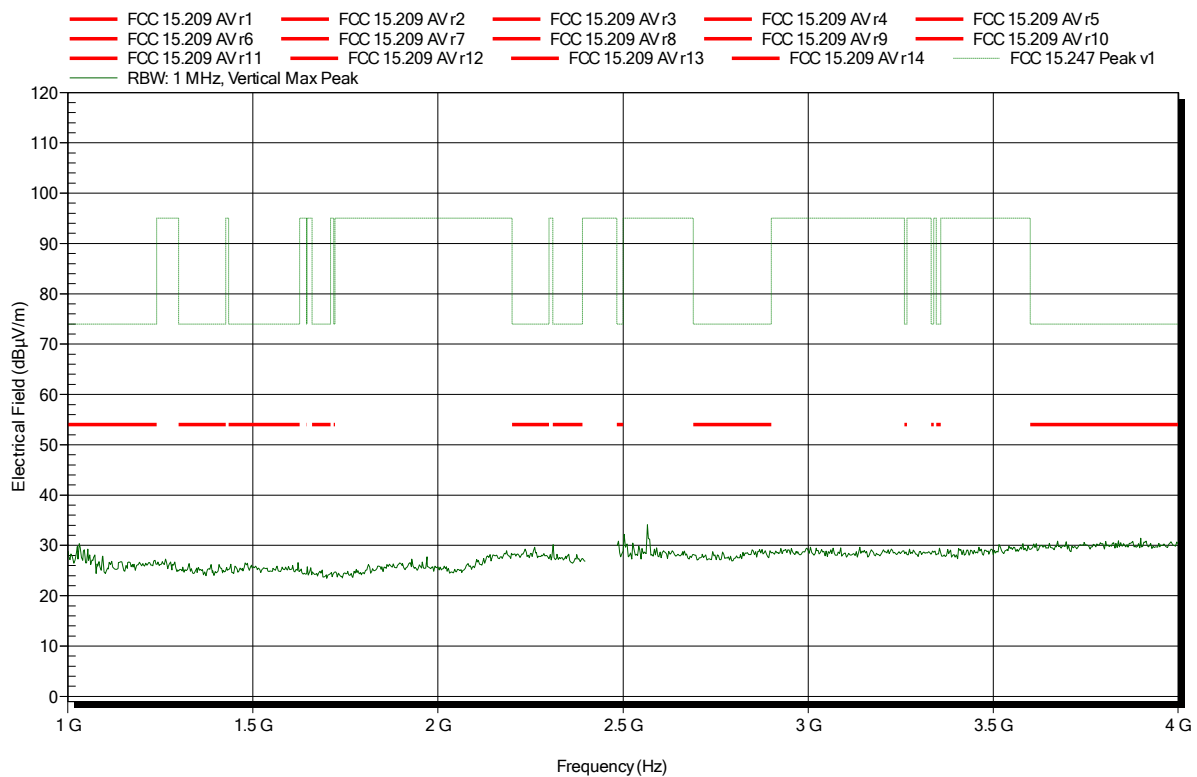


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-29
 Note:

Index 17

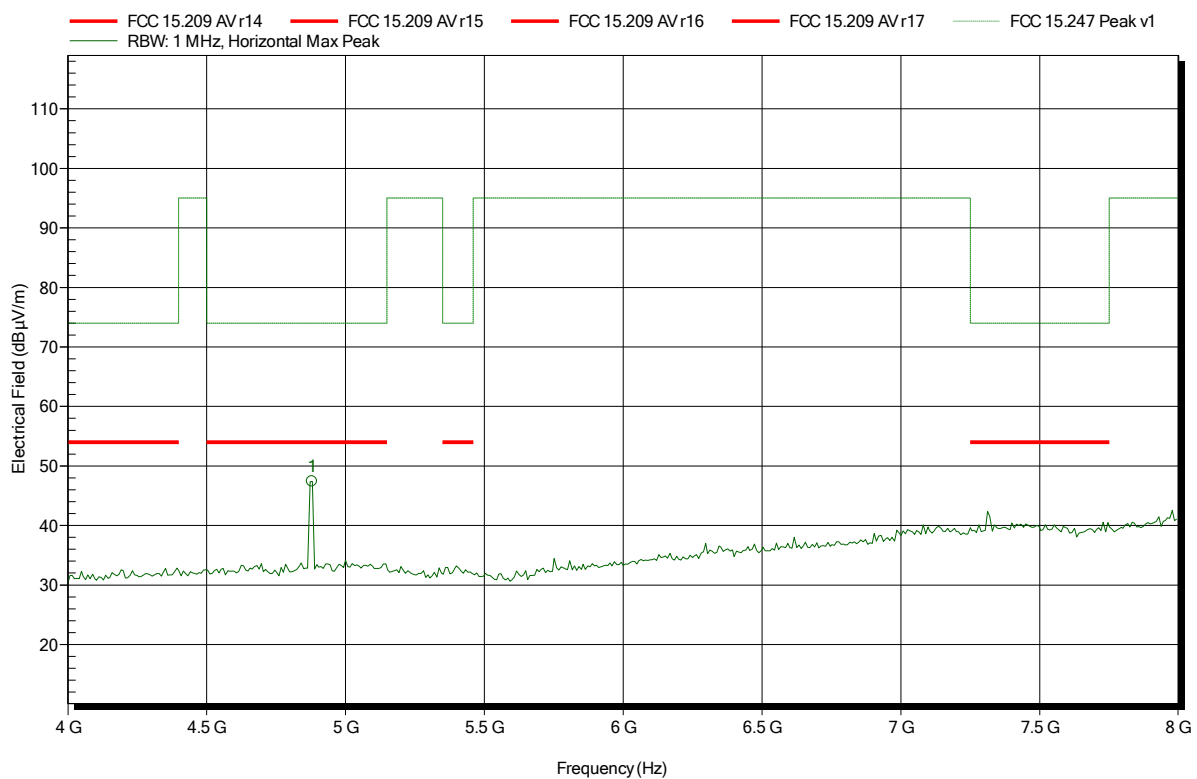


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.88 GHz	47.42 dBµV/m	74 dBµV/m	-26.58 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-30
 Note:

Index 21

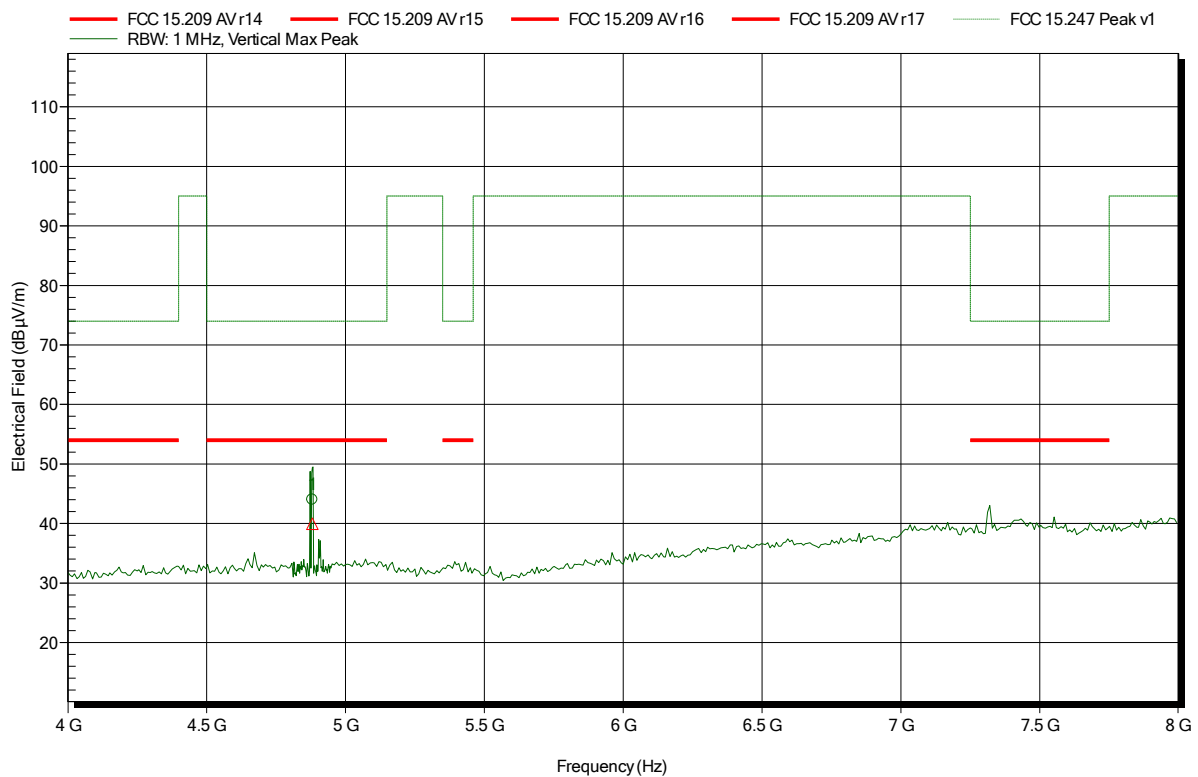


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.881 GHz	44.02 dBµV/m	74 dBµV/m	-29.98 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
4.881 GHz	39.95 dBµV/m	54 dBµV/m	-14.05 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-29
Note:

Index 19

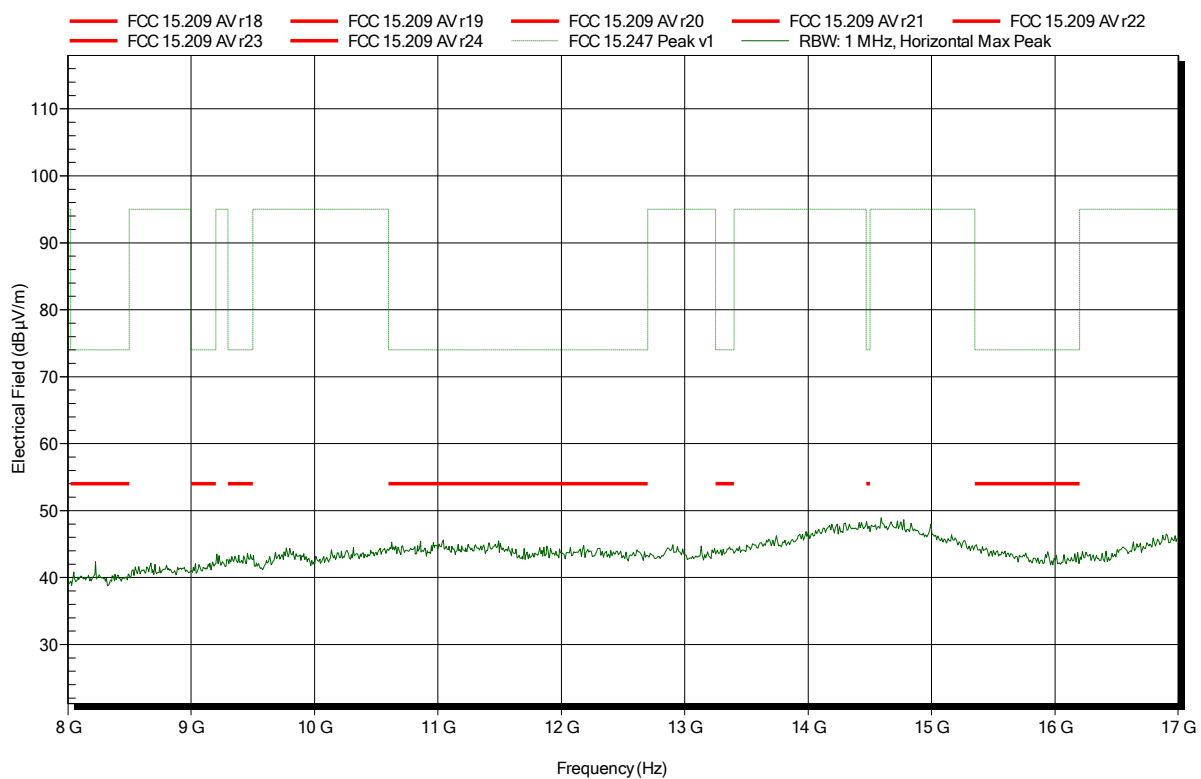


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-30
Note:

Index 22

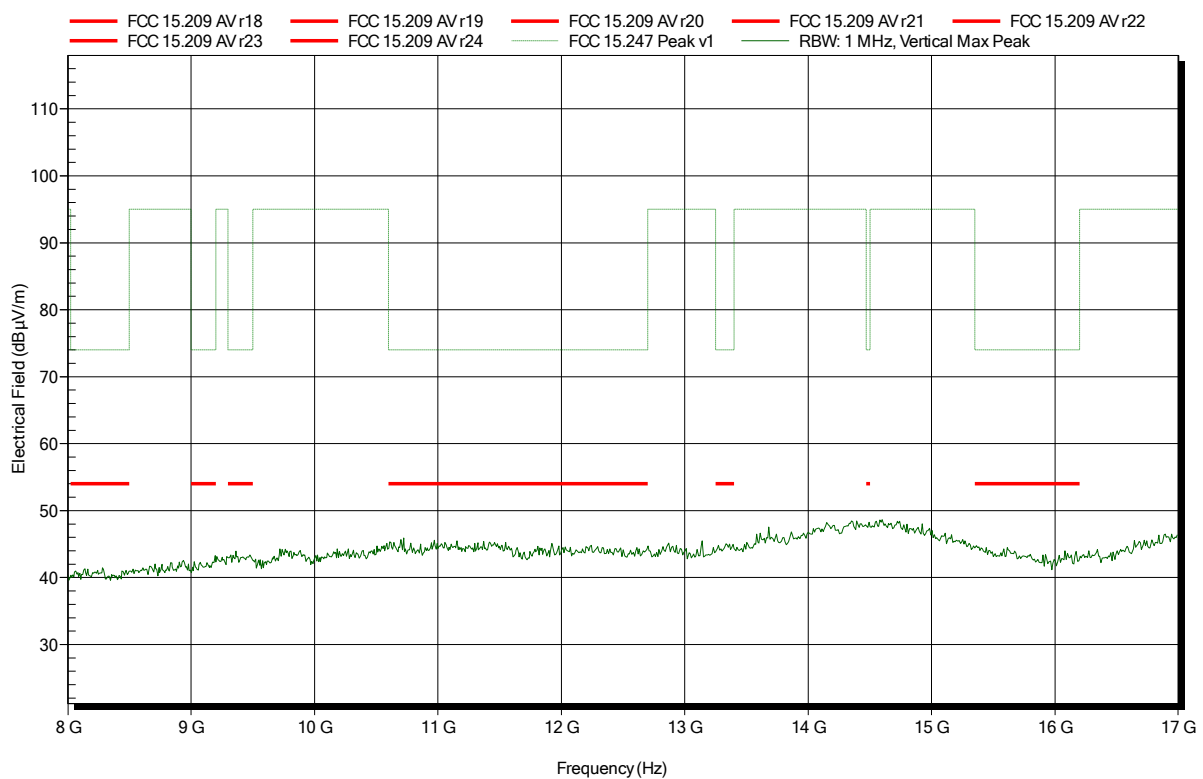


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-29
Note:

Index 18

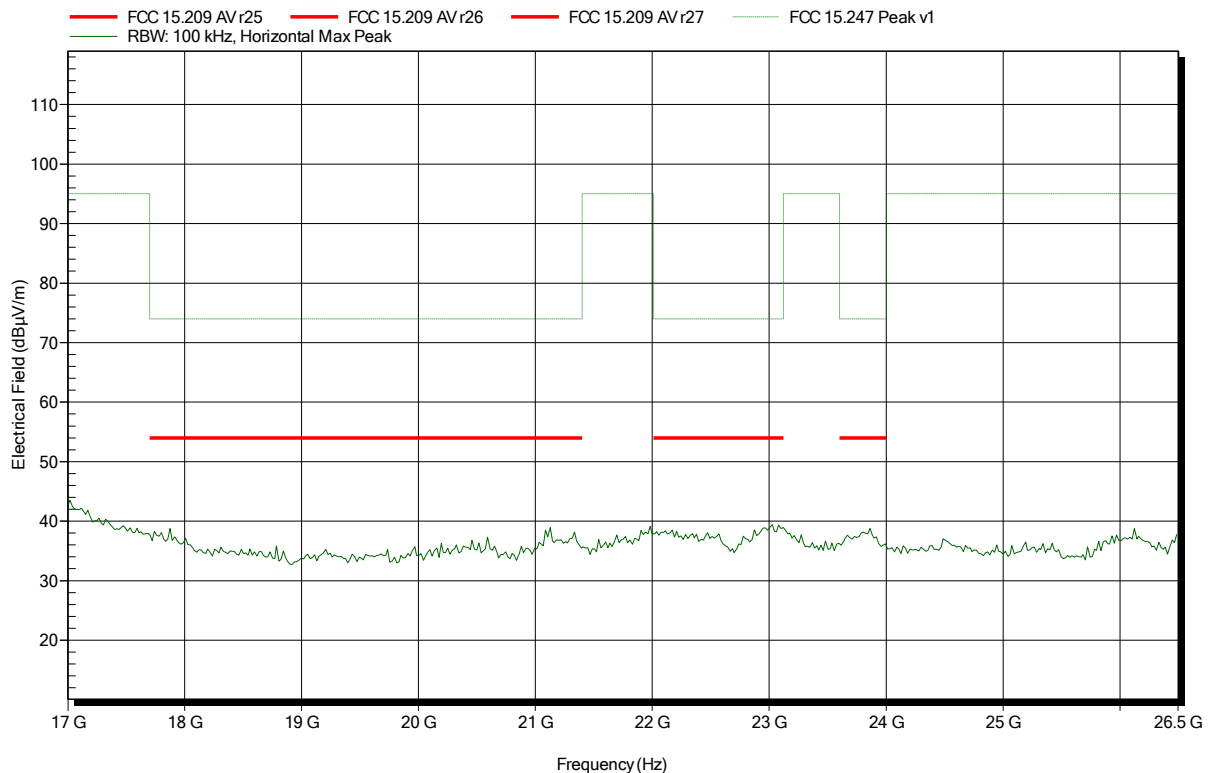


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-30
 Note:

Index 23

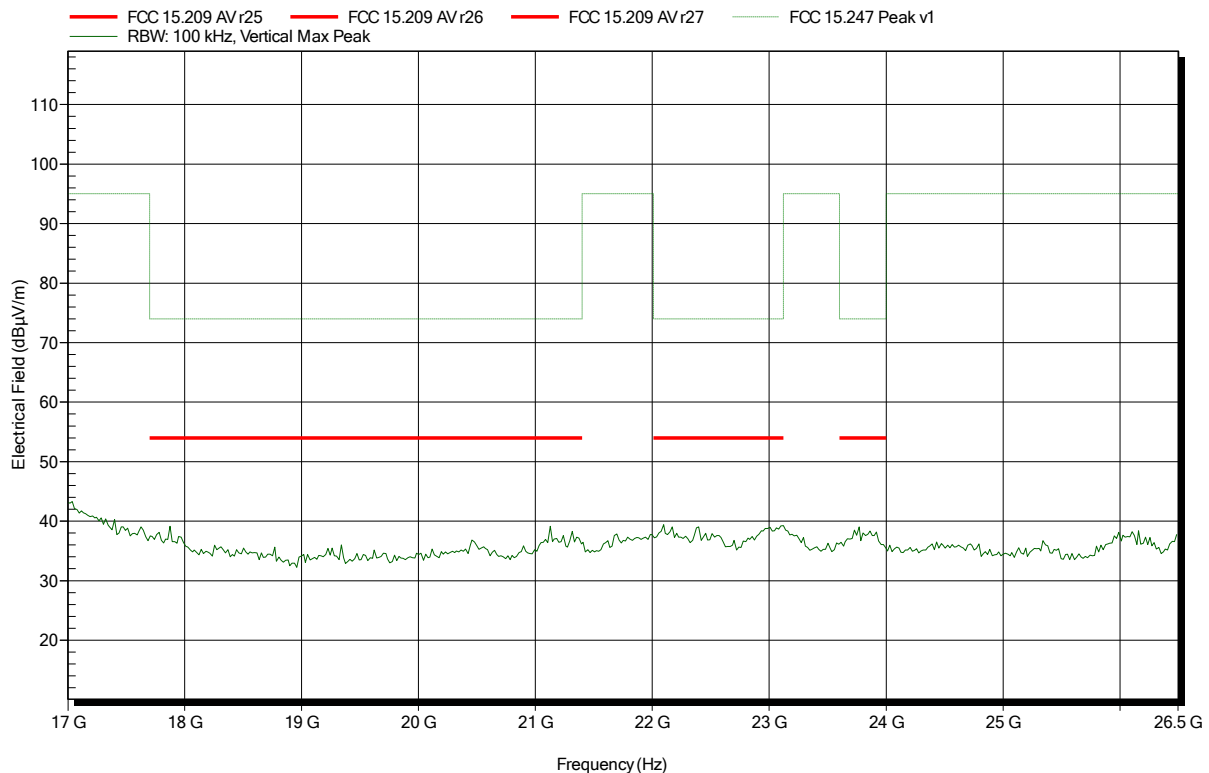


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note:

Index 24

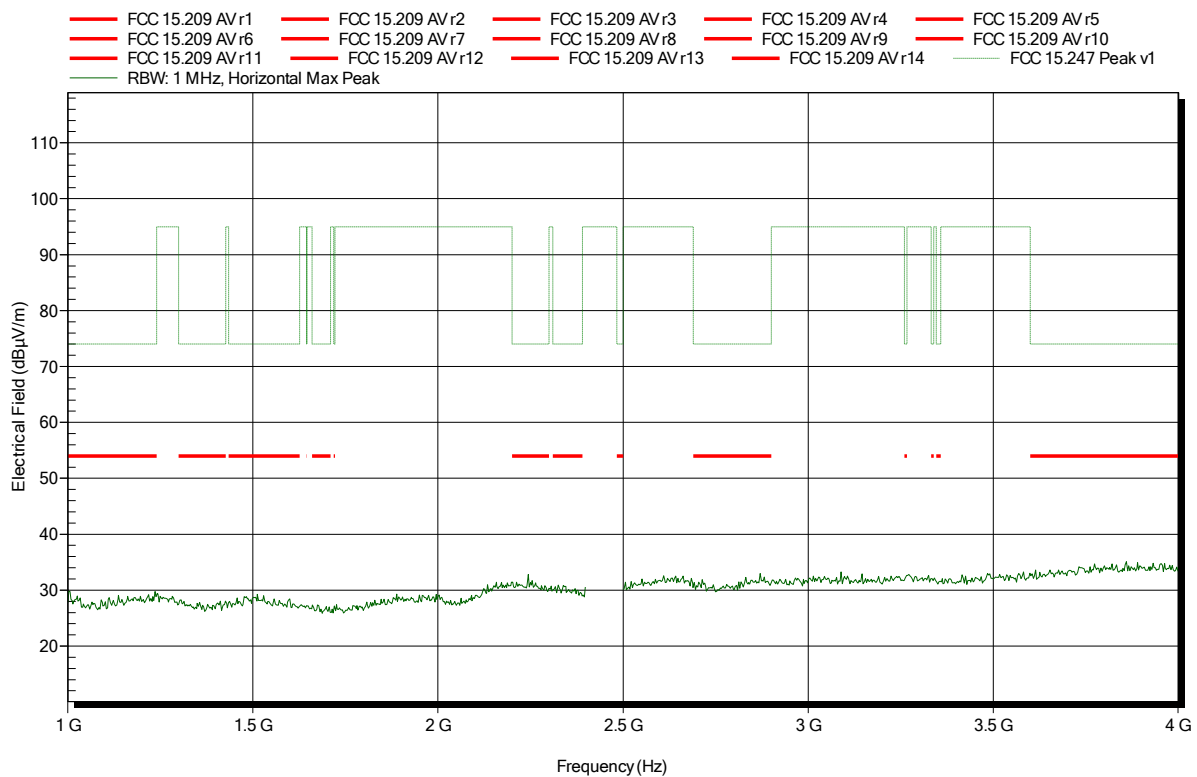


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note:

Index 29

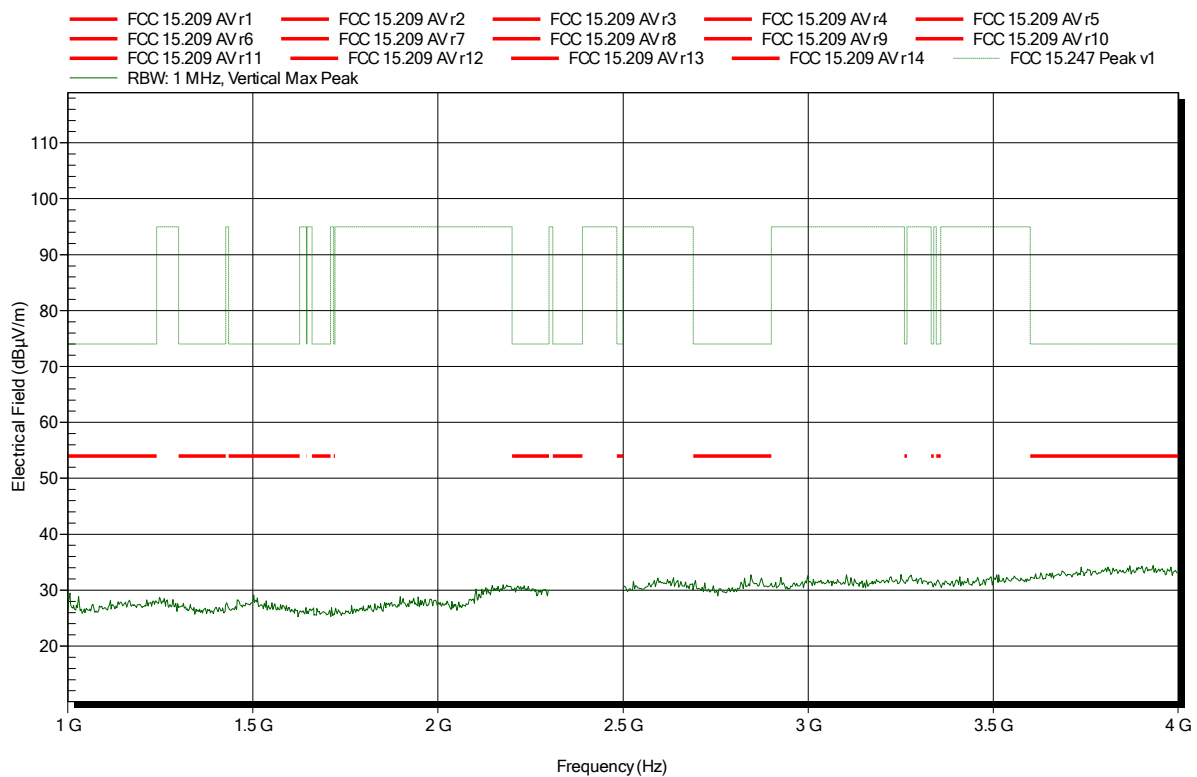

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note: upper band edge

Index 25



Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note: upper band edge

Index 30




Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	59.66 dBµV/m	74 dBµV/m	-14.34 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	42.83 dBµV/m	54 dBµV/m	-11.17 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; GFSK; 2480 MHz
 Test Date: 2018-05-30
 Note:

Index 26

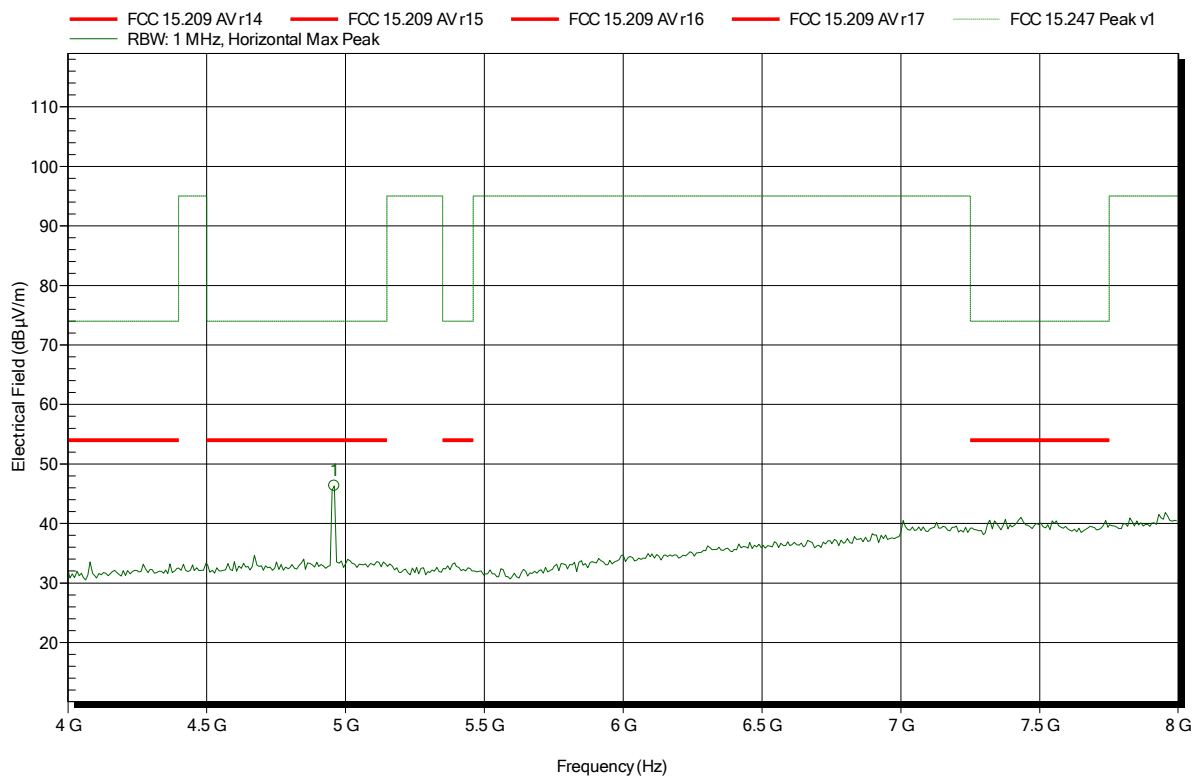


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	46.29 dBµV/m	74 dBµV/m	-27.71 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note:

Index 31

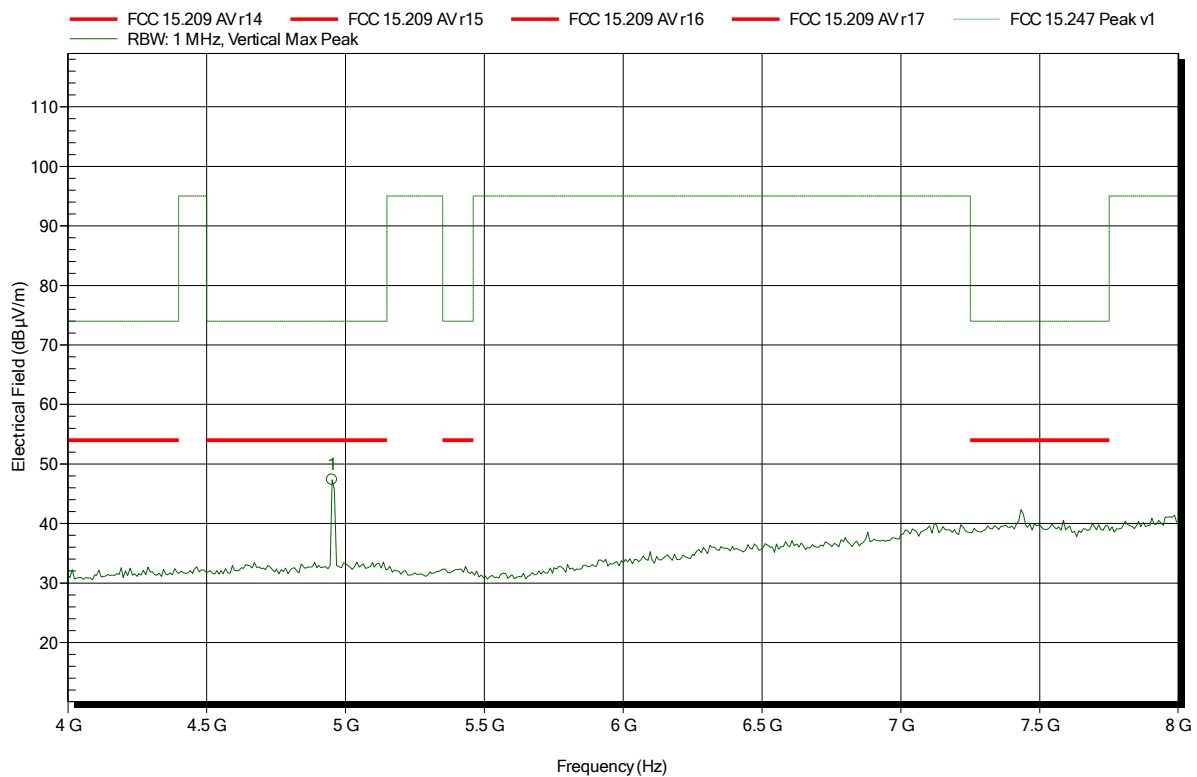


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.952 GHz	47.35 dBµV/m	74 dBµV/m	-26.65 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note:

Index 27

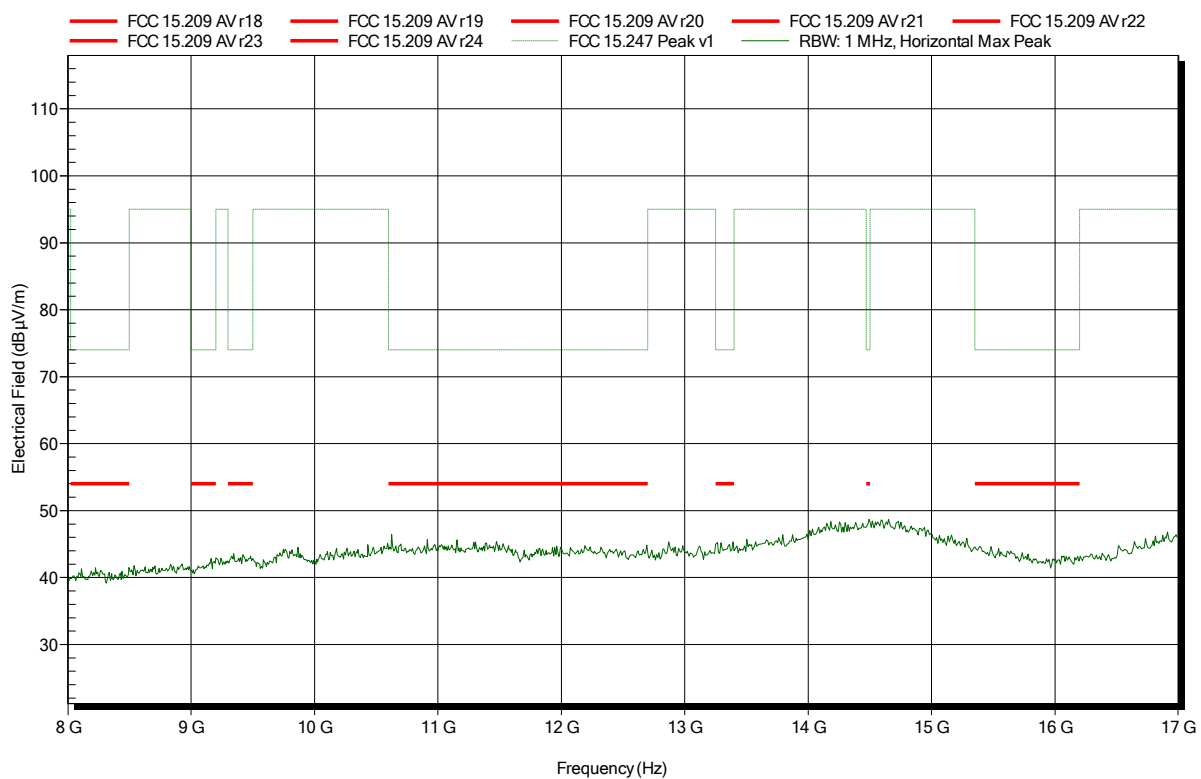


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note:

Index 33

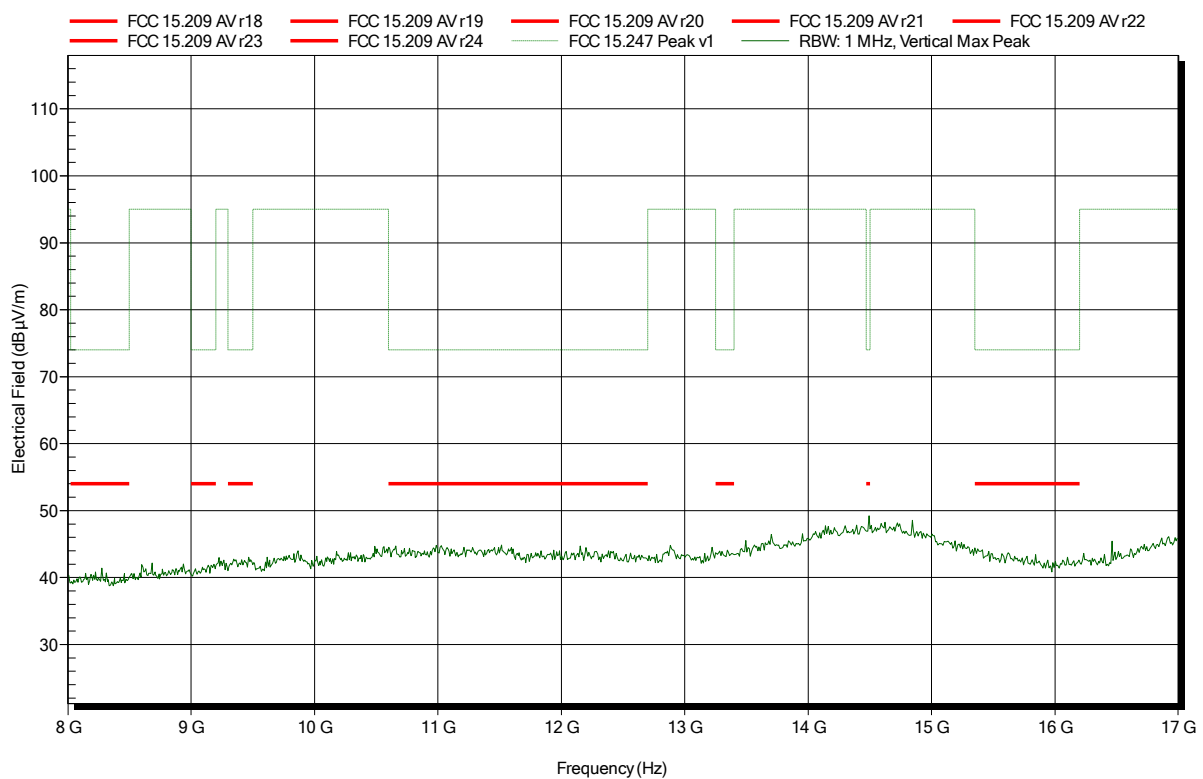


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note:

Index 28

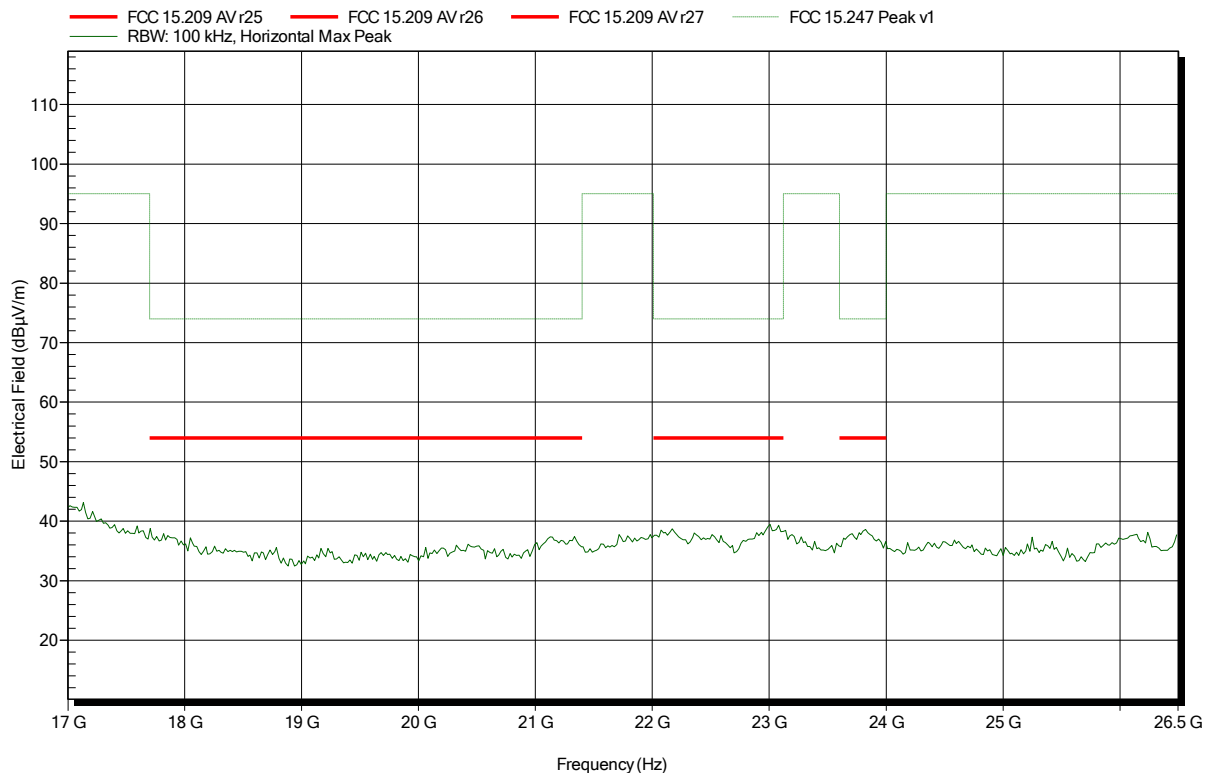


Spurious emissions according to FCC 15.247

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; GFSK; 2480 MHz
Test Date: 2018-05-30
Note:

Index 34

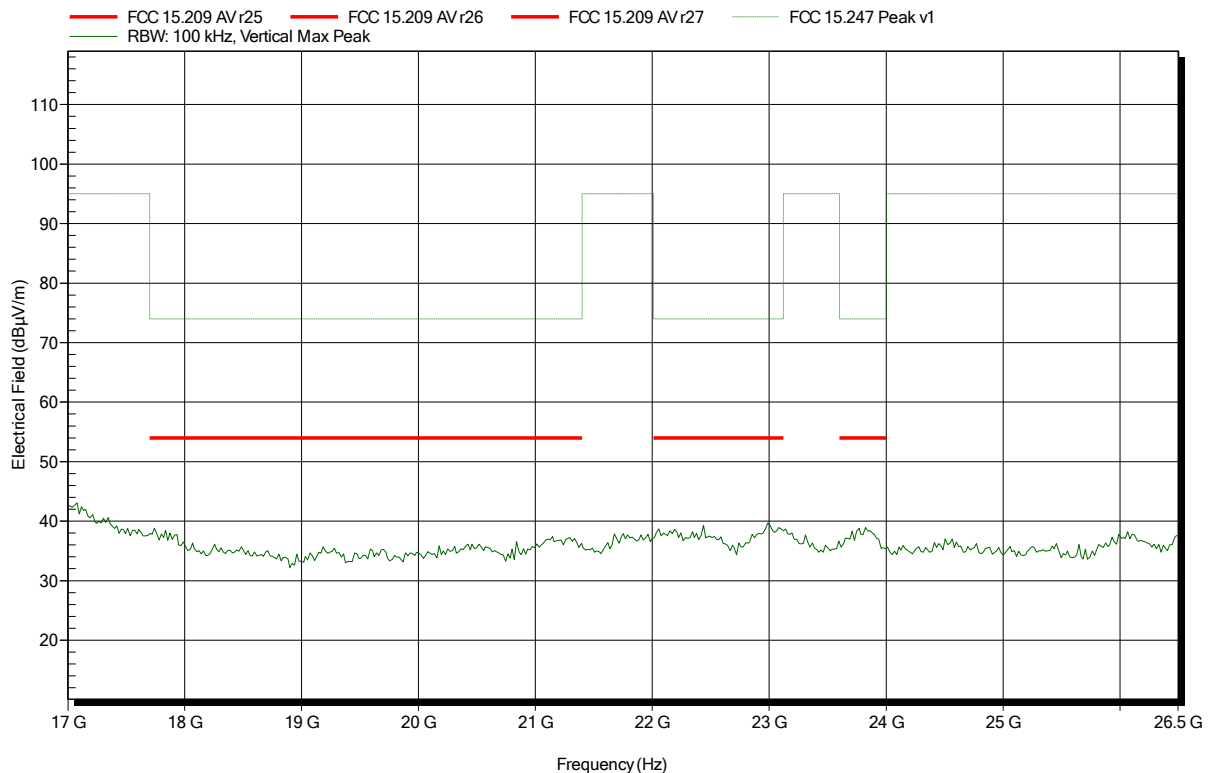


ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: RX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-30
Note:

Index 42

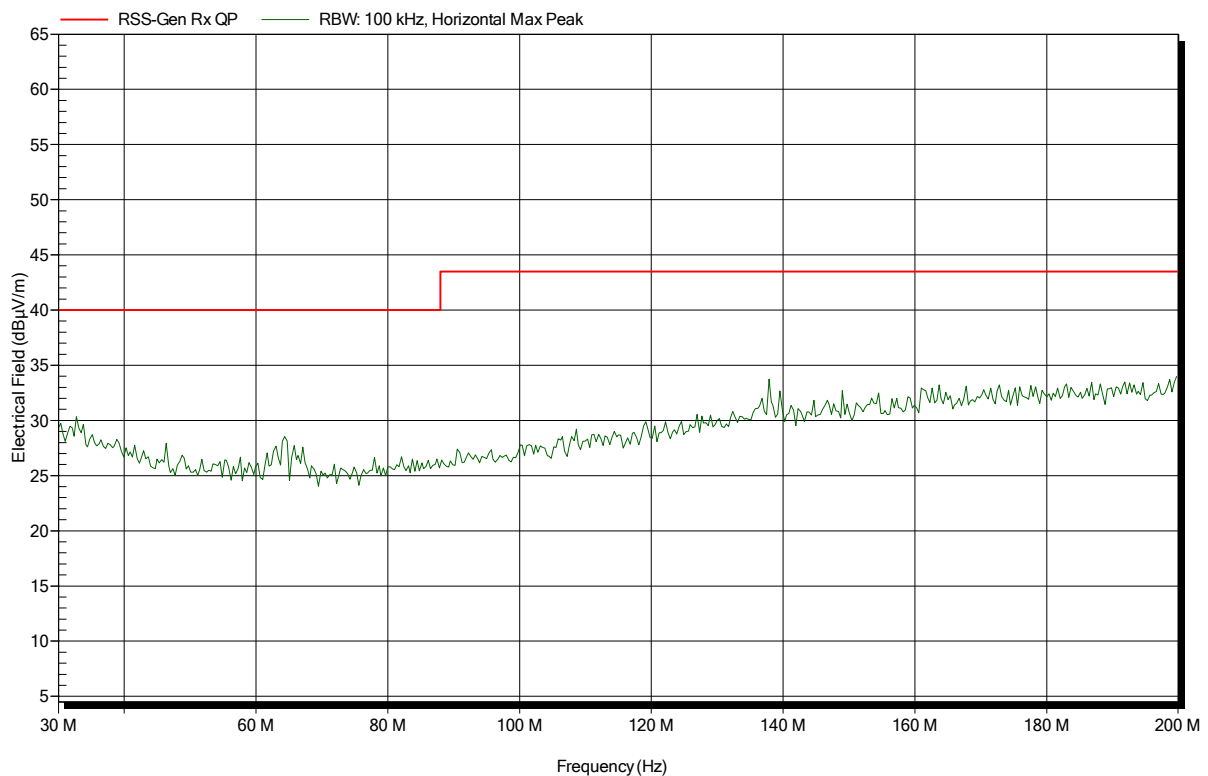


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: RX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-30
Note:

Index 45

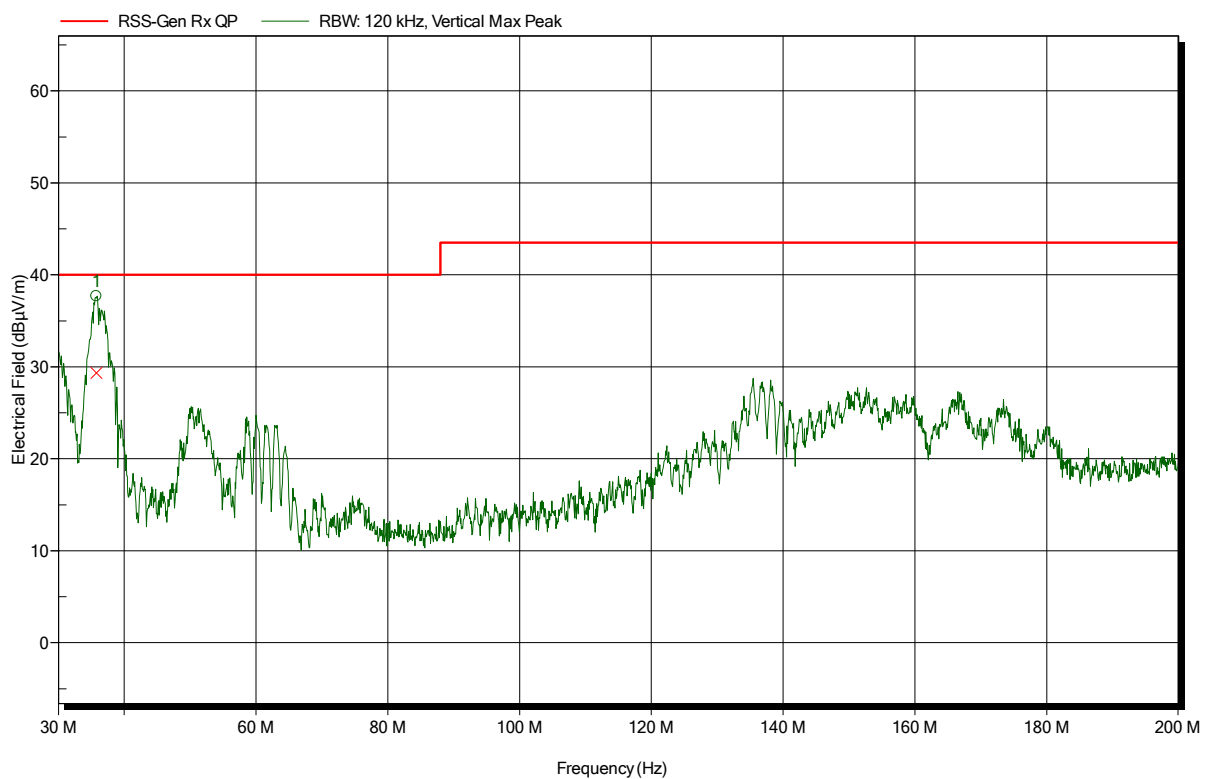


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
35.76 MHz	29.34 dBµV/m	40 dBµV/m	-10.66 dB	Pass

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-30
 Note:

Index 46

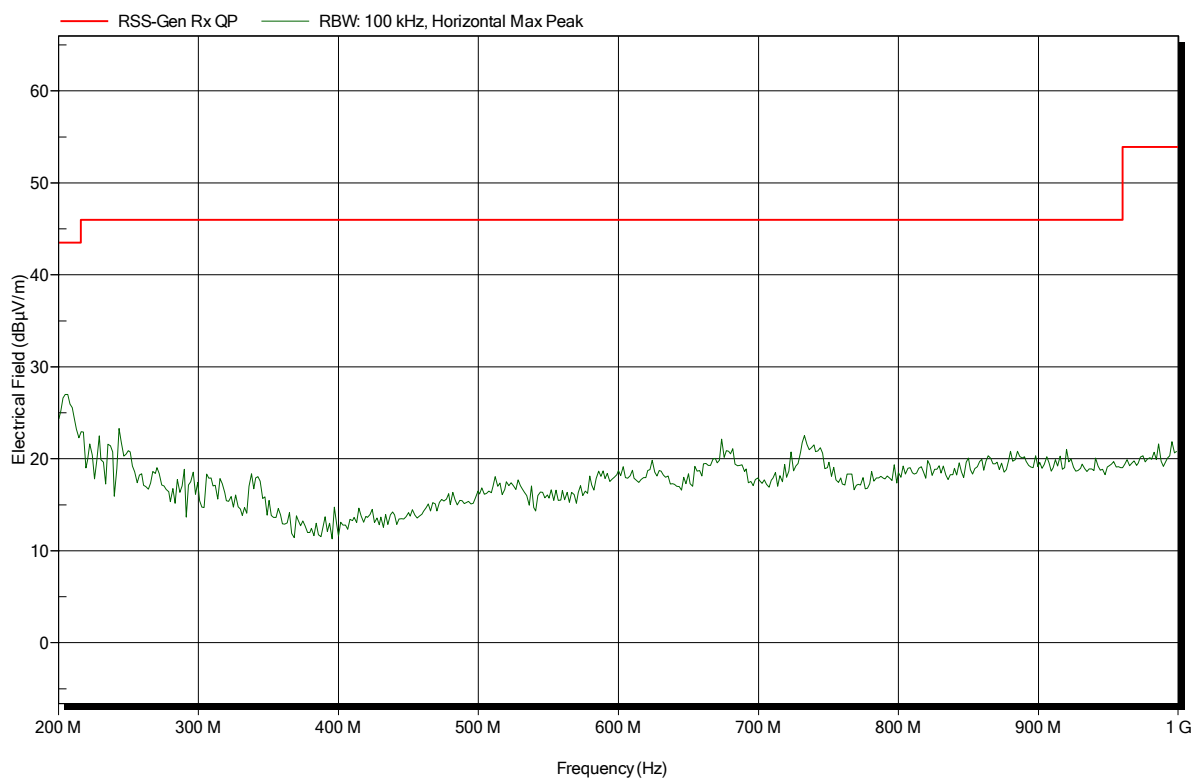


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: RX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-30
Note:

Index 47

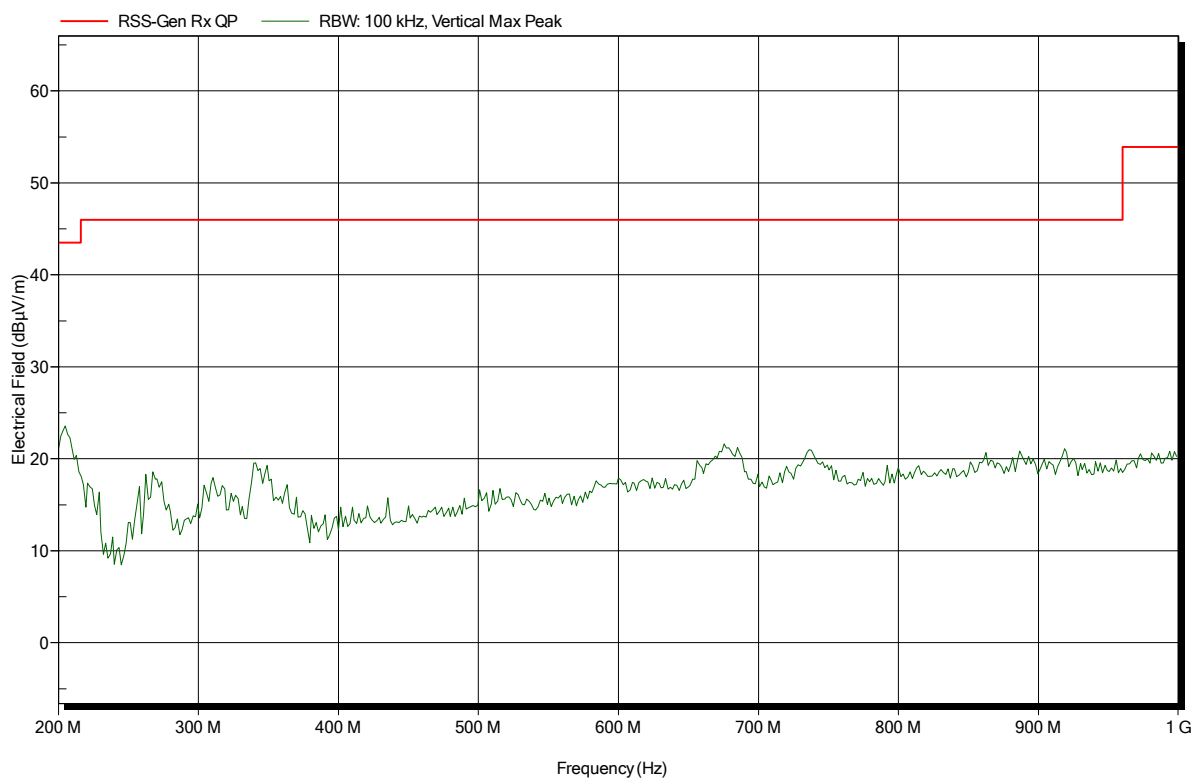


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-30
 Note:

Index 35

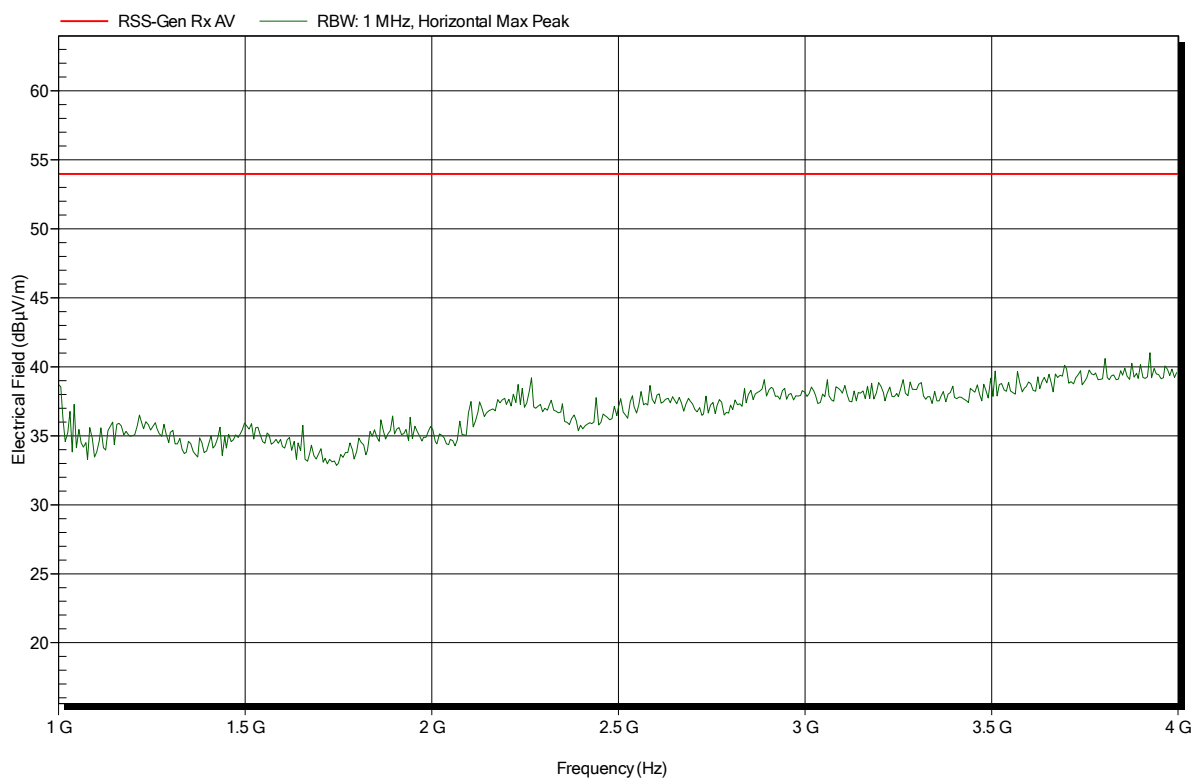


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 3 m
Mode: RX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-30
Note:

Index 39

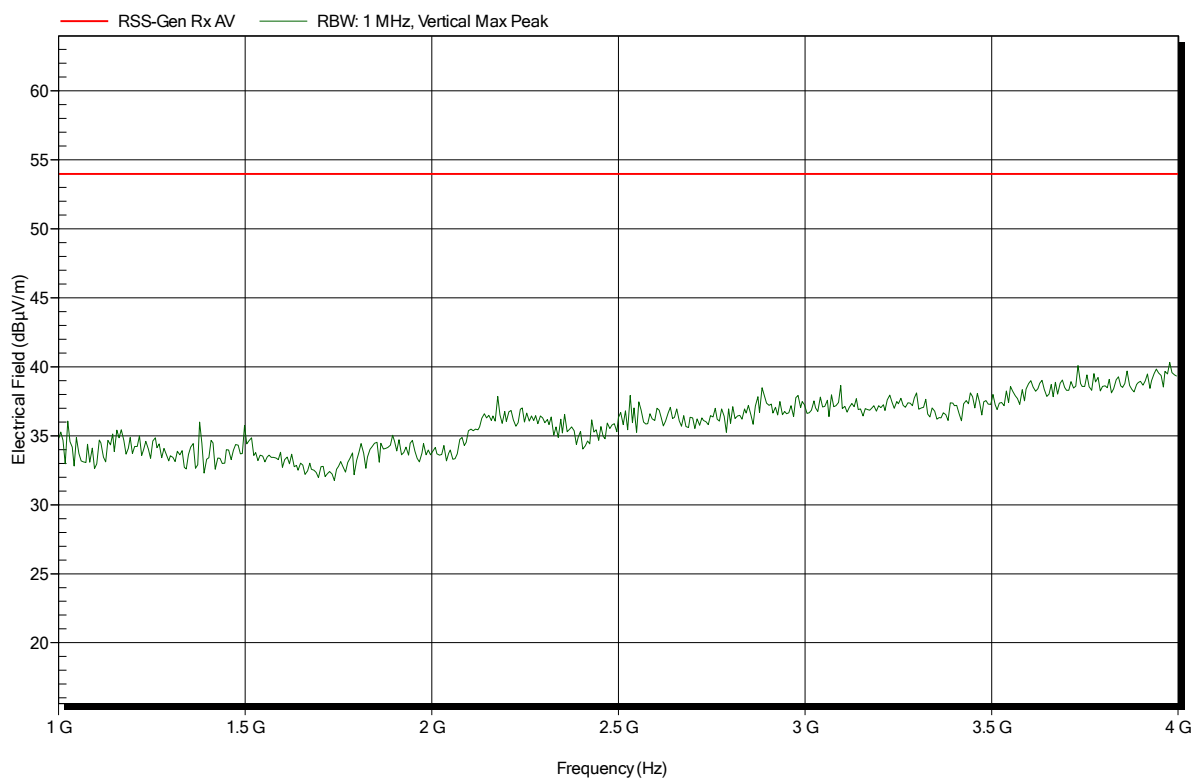


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbek BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-30
 Note:

Index 36

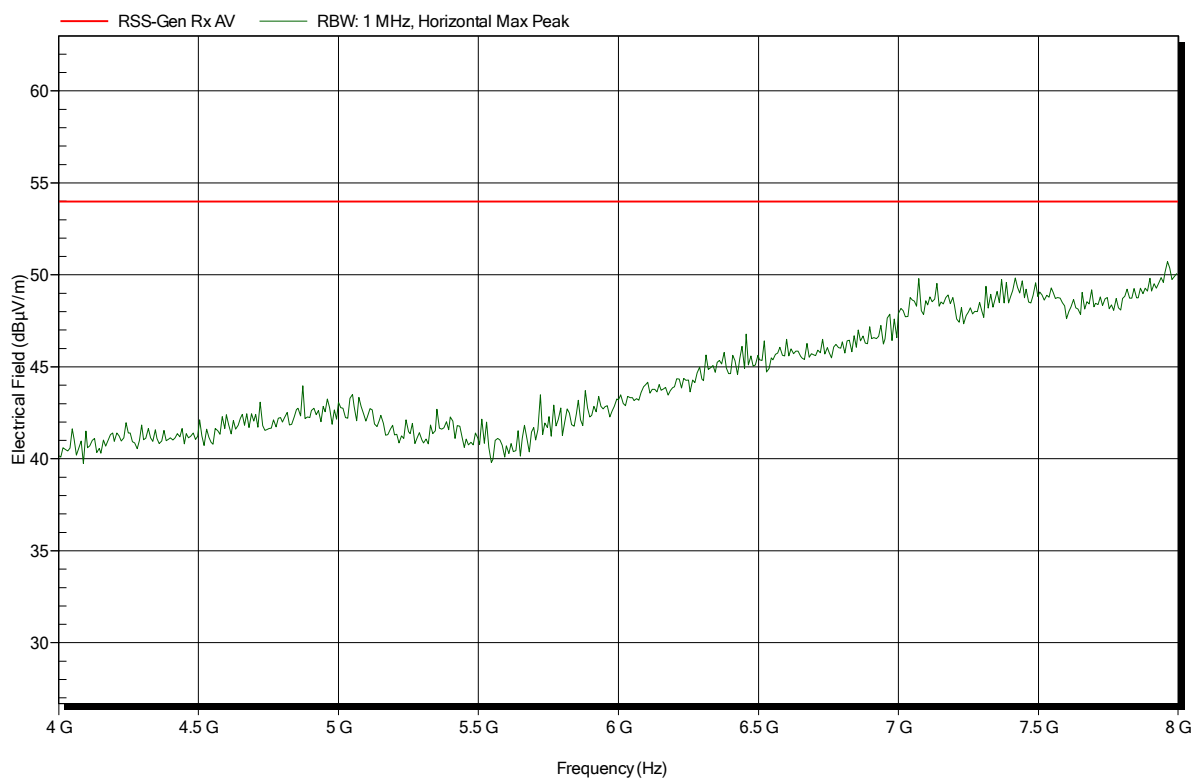


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-30
 Note:

Index 40

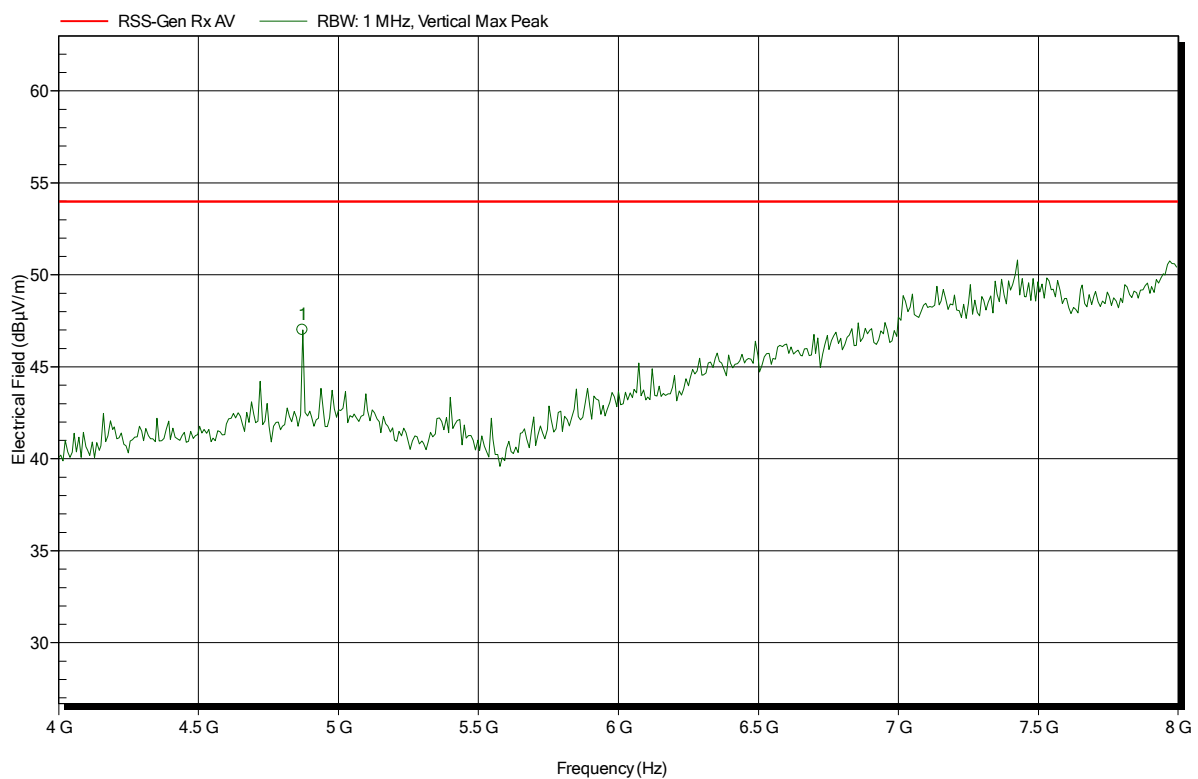


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.872 GHz	47.01 dBµV/m	53.98 dBµV/m	-6.97 dB	Pass

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
Model: LRF
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 24°C, Vnom: 120 VAC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: RX; BLE; GFSK; 2440 MHz
Test Date: 2018-05-30
Note:

Index 38

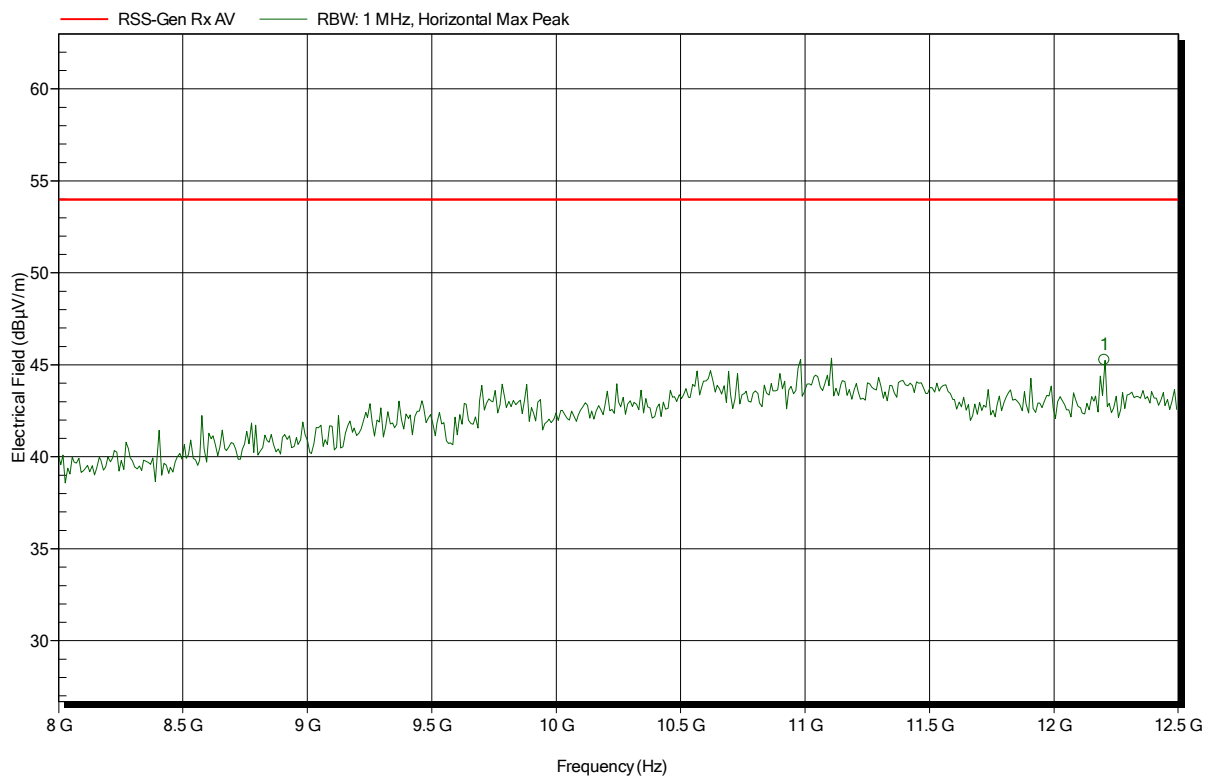

Frequency	Peak	Peak Limit	Peak Difference	Status
12.203 GHz	45.25 dBµV/m	53.98 dBµV/m	-8.73 dB	Pass

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1804-7374

Applicant: Luke Roberts GmbH
 EUT Name: LED Pendant Luminaire with Bluetooth Low Energy Radio
 Model: LRF
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 24°C, Vnom: 120 VAC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; BLE; GFSK; 2440 MHz
 Test Date: 2018-05-30
 Note:

Index 41

