



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM180300241901  
Page: 1 of 17

## TEST REPORT

**Application No.:** SZEM1803002419CR  
**Applicant:** Shenzhen Snapper Technology Co., Ltd.  
**Address of Applicant:** F4,Bldg E,#1 Tengfeng Road, Fenghuang 3rd industrial area,Fuyong, Baoan, Shenzhen, Guangdong, China  
**Manufacturer:** Shenzhen Snapper Technology Co., Ltd.  
**Address of Manufacturer:** F4,Bldg E,#1 Tengfeng Road, Fenghuang 3rd industrial area,Fuyong, Baoan, Shenzhen, Guangdong, China  
**Factory:** Shenzhen Snapper Technology Co., Ltd.  
**Address of Factory:** F4,Bldg E,#1 Tengfeng Road, Fenghuang 3rd industrial area,Fuyong, Baoan, Shenzhen, Guangdong, China  
**Equipment Under Test (EUT):**  
**EUT Name:** Desktop Wireless Mobile Charger  
**Model No.:** Halo, Duo ♣  
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.  
**FCC ID:** 2AP6DPS-H001  
**Standard(s) :** 47 CFR Part 18  
**Date of Receipt:** 2018-06-11  
**Date of Test:** 2018-06-23 to 2018-06-24  
**Date of Issue:** 2018-06-26

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.





Keny Xu  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



<i>Revision Record</i>				
<i>Version</i>	<i>Chapter</i>	<i>Date</i>	<i>Modifier</i>	<i>Remark</i>
01		2018-06-26		Original

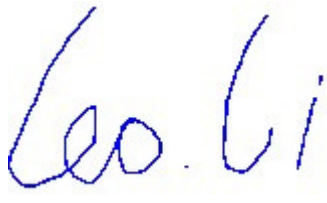Authorized for issue by:			
			
	<hr/>		
	Leo Li /Project Engineer		
			
	<hr/>		
	Eric Fu /Reviewer		

## 2 Test Summary

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 18	FCC OST/MP-5:1986	N/A	Pass
Radiated Emissions (9kHz-30MHz)	47 CFR Part 18	FCC OST/MP-5:1986	N/A	Pass

**Remark:**

Model No.: Halo, Duo

Only the model Halo was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only difference on model NO., color and decorations.



### 3 Contents

	Page
1 COVER PAGE .....	1
2 TEST SUMMARY .....	3
3 CONTENTS .....	4
4 GENERAL INFORMATION .....	5
4.1 DETAILS OF E.U.T. ....	5
4.2 DESCRIPTION OF SUPPORT UNITS .....	5
4.3 MEASUREMENT UNCERTAINTY .....	5
4.4 TEST LOCATION.....	6
4.5 TEST FACILITY.....	6
4.6 DEVIATION FROM STANDARDS.....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
5 EQUIPMENT LIST.....	7
6 RADIO SPECTRUM MATTER TEST RESULTS.....	8
6.1 CONDUCTED DISTURBANCE.....	<b>ERROR! BOOKMARK NOT DEFINED.</b>
6.1.1 E.U.T. Operation .....	8
6.1.2 Test Setup Diagram.....	8
6.1.3 Measurement Procedure and Data.....	8
6.2 RADIATED EMISSION .....	11
6.2.1 E.U.T. Operation .....	12
6.2.2 Test Setup Diagram.....	12
6.2.3 Measurement Procedure and Data.....	12
7 PHOTOGRAPHS.....	16
7.1 CONDUCTED DISTURBANCE TEST SETUP .....	16
7.2 RADIATED EMISSION TEST SETUP.....	16
7.3 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS).....	17

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 5.0V or DC 9.0V from USB port Input: DC 5.0V/1.5A, DC 9.0V/1.6A Output: 5.0W(DC 5V/1A), 7.5W(DC 5V1.5A), 10W(DC 9V/1.1A)
Operation Frequency:	115.2-173.1kHz
Antenna Type:	Loop antenna
Modulation type:	Load modulation
Test voltage:	AC 120V/60Hz (Voltage of the AC/DC adapter)

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC/DC Adapter	SGS	DC 5V	REF. No.SEA0500
iPhone 8	Apple	A1863	F4GVQ656JC6D
Mobile Phone	SAMSUNG	SM-G9500	R28J9140LPB

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 2.84\text{dB}$
6	Conducted Spurious emissions	$\pm 0.75\text{dB}$
7	RF Radiated power	$\pm 4.5\text{dB}$ (below 1GHz)
		$\pm 4.8\text{dB}$ (above 1GHz)
8	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (Below 1GHz)
		$\pm 4.8\text{dB}$ (Above 1GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$



#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None

## 5 Equipment List

<b>Conducted disturbance</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Shielding Room	ChangZhou ZhongYu	GB-88	SEM001-06	2017-05-10	2020-05-09
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2017-07-13	2018-07-12
LISN	Rohde & Schwarz	ENV216	SEM007-01	2017-09-27	2018-09-26
LISN	ETS-LINDGREN	3816/2	SEM007-02	2018-04-02	2019-04-01
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018-04-02	2019-04-01

<b>Radiated emission</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018-03-31	2021-03-30
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2017-07-13	2018-07-12
EMI Test Receiver (9kHz-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2018-04-02	2019-04-01
Trilog-Broadband Antenna (30MHz-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-01-26	2019-01-25
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-04	2018-04-13	2019-04-12
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21

<b>General used equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-09-29	2018-09-28
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	2019-04-07

## 6 Radio Spectrum Matter Test Results

### 6.1 Conducted disturbance

Test Requirement: 47 CFR Part 18  
 Test Method: FCC OST/MP-5:1986  
 Frequency Range: 150kHz to 30MHz  
 Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C      Humidity: 48.8 % RH      Atmospheric Pressure: 1010 mbar

Pretest these a: Normal Working\_5V

modes to find b: Normal Working\_9V


the worst case:

Test were conducted in three load modes and only the worst case (high load) is submitted.

The worst case for final test:

b: Normal Working\_9V


#### 6.1.2 Test Setup Diagram

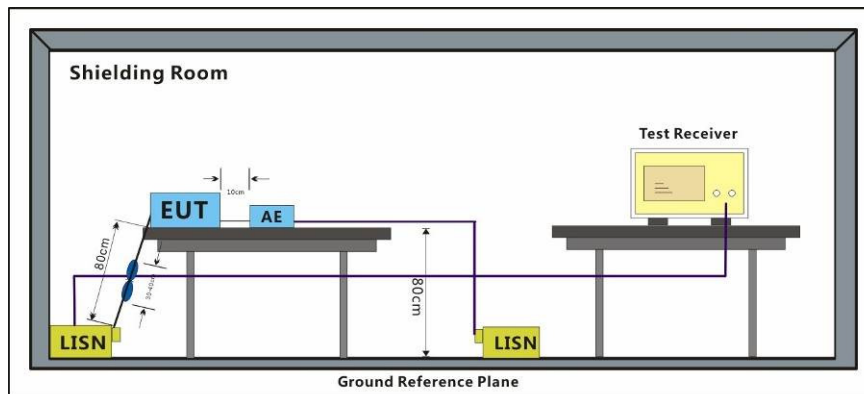

#### 6.1.3 Measurement Procedure and Data




Mode:b; Line:Live Line

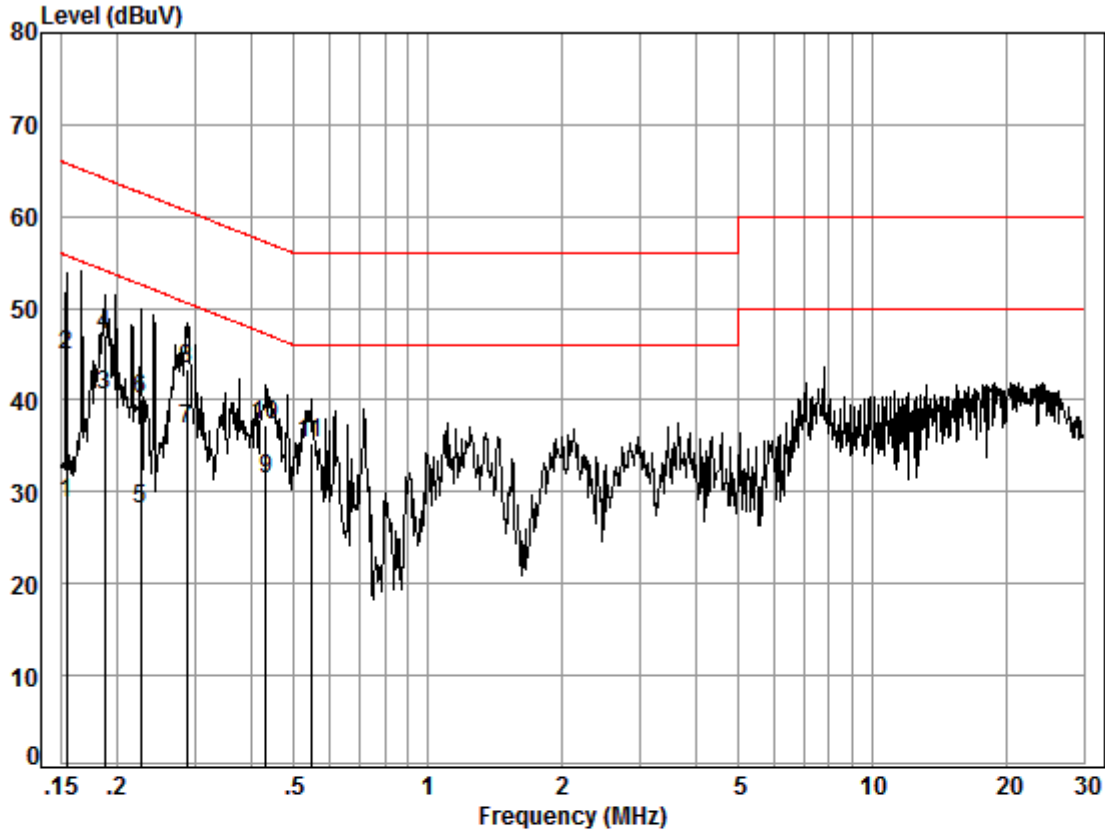

Site : Shielding Room  
 Condition: Line  
 Job No. : 02419CR  
 Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15	0.02	9.51	19.30	28.83	55.78	-26.95	Average
2	0.15	0.02	9.51	35.48	45.01	65.78	-20.77	QP
3	0.19	0.03	9.51	31.02	40.56	54.15	-13.59	Average
4	0.19	0.03	9.51	37.58	47.12	64.15	-17.03	QP
5	0.23	0.03	9.51	18.48	28.02	52.61	-24.59	Average
6	0.23	0.03	9.51	30.59	40.13	62.61	-22.48	QP
7	0.29	0.03	9.51	27.30	36.84	50.63	-13.79	Average
8	0.29	0.03	9.51	33.78	43.32	60.63	-17.31	QP
9	0.43	0.04	9.49	21.88	31.41	47.20	-15.79	Average
10	0.43	0.04	9.49	27.79	37.32	57.20	-19.88	QP
11	0.55	0.05	9.51	25.82	35.38	56.00	-20.62	QP

Mode:b; Line:Neutral Line

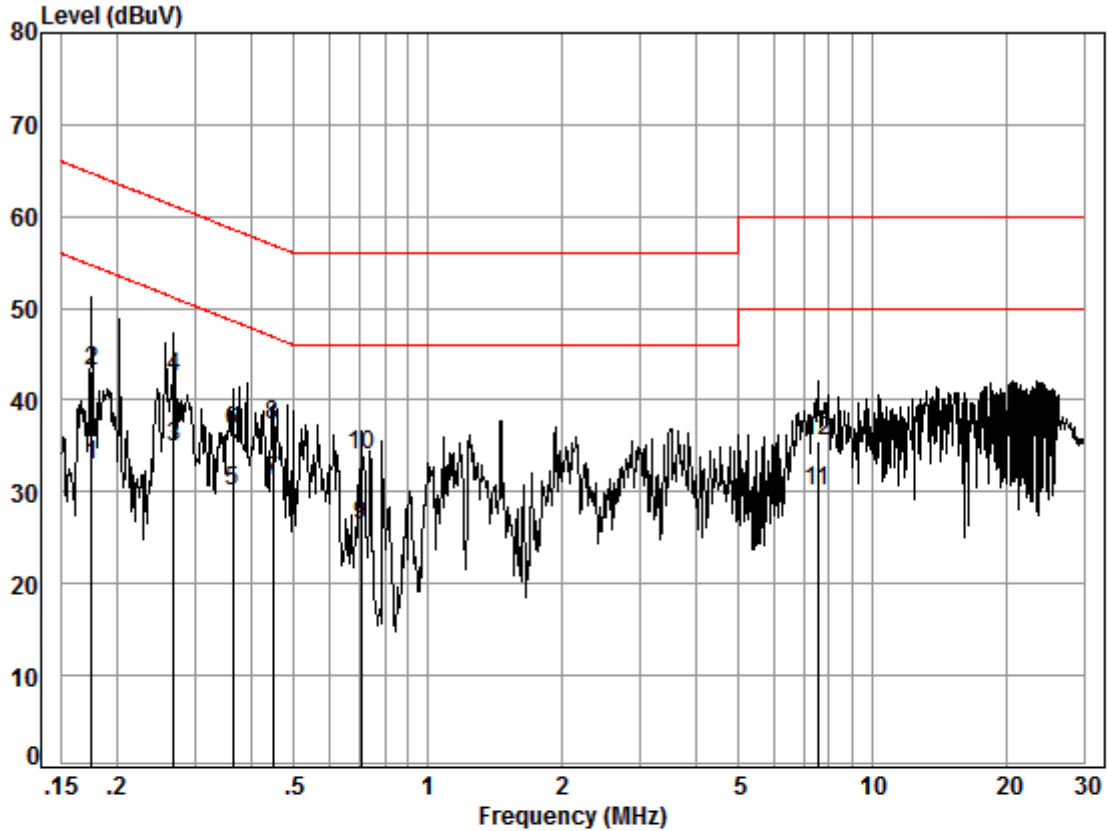

Site : Shielding Room  
 Condition: Neutral  
 Job No. : 02419CR  
 Test mode: b

	Freq	Cable Loss	LISM Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17	0.03	9.59	23.24	32.86	54.72	-21.86	Average
2	0.17	0.03	9.59	33.46	43.08	64.72	-21.64	QP
3	0.27	0.03	9.58	25.26	34.87	51.16	-16.29	Average
4	0.27	0.03	9.58	32.82	42.43	61.16	-18.73	QP
5	0.37	0.03	9.58	20.37	29.98	48.61	-18.63	Average
6	0.37	0.03	9.58	26.98	36.59	58.61	-22.02	QP
7	0.45	0.04	9.60	21.58	31.22	46.89	-15.67	Average
8	0.45	0.04	9.60	27.66	37.30	56.89	-19.59	QP
9	0.71	0.07	9.62	16.65	26.34	46.00	-19.66	Average
10	0.71	0.07	9.62	24.23	33.92	56.00	-22.08	QP
11	7.53	0.18	9.73	20.20	30.11	50.00	-19.89	Average
12	7.53	0.18	9.73	25.70	35.61	60.00	-24.39	QP



**6.2 Radiated emission**

Test Requirement: 47 CFR Part 18  
 Test Method: FCC OST/MP-5:1986  
 Frequency Range: 9kHz-30MHz  
 Limit:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified	Any ISM frequency	Below 500	25	300
(miscellaneous).		500 or more	25 × SQRT(power/500)	300 (1)
	Any non-ISM frequency	Below 500	15	300
		500 or more	15 × SQRT(power/500)	300 (1)
Industrial heaters and RF stabilized arc welders.	On or below 5,725 MHz	Any	10	1,600
	Above 5,725 MHz	Any	(2)	(2)
Medical diathermy	Any ISM frequency	Any	25	300
	Any non-ISM frequency	Any	15	300
Ultrasonic	Below 490 kHz	Below 500	2,400/F(kHz)	300
		500 or more	2,400/F(kHz) × SQRT(power/500).	300 (3)
	490 to 1,600 kHz	Any	24,000/F(kHz)	30
	Above 1,600 kHz	Any	15	30
Induction cooking ranges	Below 90 kHz	Any	1,500	30 (4)
	On or above 90 kHz	Any	300	30 (4)

(1) Field strength may not exceed 10 µV/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.

(2) Reduced to the greatest extent possible.

(3) Field strength may not exceed 10 µV/m at 1600 meters. Consumer equipment is not permitted the increase in field strength

(4) otherwise permitted here for over 500 watts.

Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

**6.2.1 E.U.T. Operation**

Operating Environment:


Temperature: 25 °C Humidity: 51 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case:  
 a: Normal Working\_5V  
 b: Normal Working\_9V

Test were conducted in three load modes and only the worst case (high load) is submitted.

The worst case for final test:  
 b: Normal Working\_9V


**6.2.2 Test Setup Diagram**

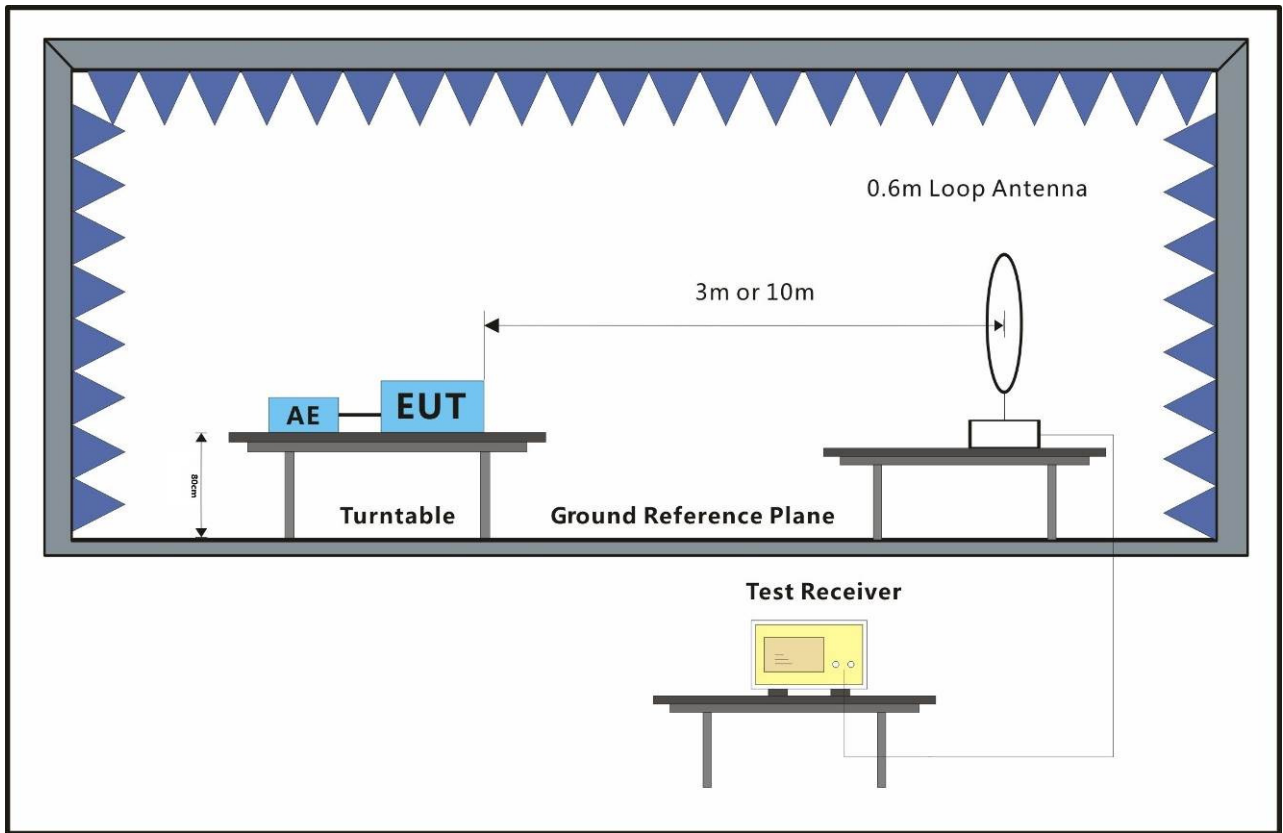

**6.2.3 Measurement Procedure and Data**



Mode b:  
9KHz-15MHz

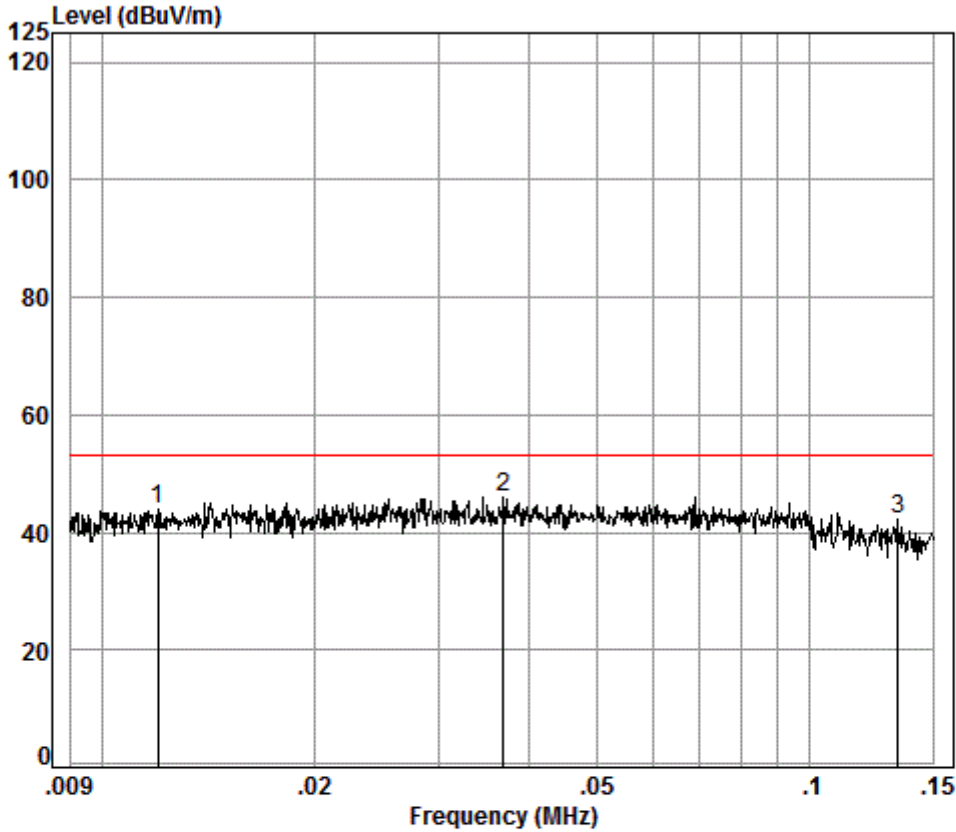


Condition: 10m  
Job No. : 02419CR  
Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0.01	0.27	18.17	0.00	25.38	43.82	53.06	-9.24
2 pp	0.04	0.15	13.26	0.00	32.55	45.96	53.06	-7.10
3	0.13	0.06	11.79	0.00	30.42	42.27	53.06	-10.79



Mode b:  
15MHz-30MHz

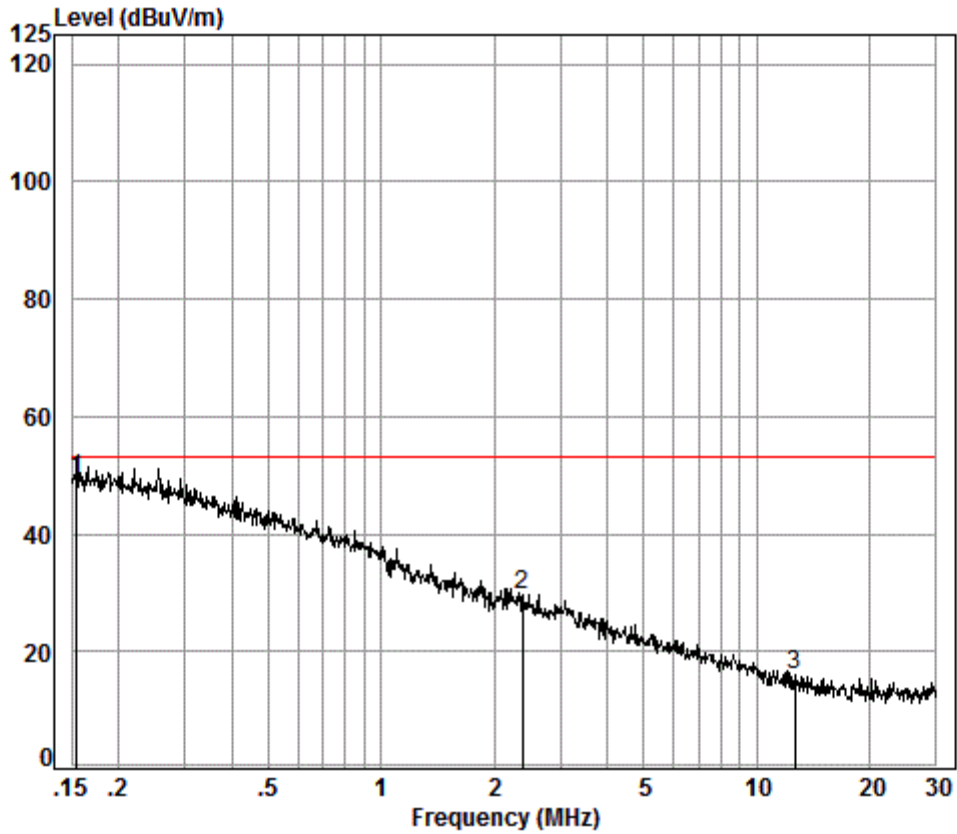

Condition: 10m  
Job No. : 02419CR  
Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	0.15	0.07	11.72	0.00	37.47	49.26	53.06	-3.80
2	2.37	0.36	12.14	0.00	17.25	29.75	53.06	-23.31
3	12.58	0.55	10.53	0.00	5.00	16.08	53.06	-36.98



The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_{300} / L_{10} = D_{10} / D_{300}$$

Note:

L<sub>300</sub>: Level @ 300m distance. Unit: uV/m;

L<sub>10</sub>: Level @ 10m distance. Unit: uV/m;

D<sub>300</sub>: 300m distance. Unit: m

D<sub>10</sub>: 10m distance. Unit: m

The level at 300m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 300m (uV/m)	Level @ 300m (dBuV/m)	Limit @ 300m (dBuV/m)	Margin (dB)
0.01	43.82	155.24	5.17	14.28	23.52	-10.53
0.04	45.96	198.61	6.62	16.42	23.52	-10.52
0.13	42.27	129.87	4.33	12.73	23.52	-8.61
0.19	49.26	290.40	9.68	19.72	23.52	-6.41
1.44	29.75	30.73	1.02	0.21	23.52	-20.06
3.40	16.08	6.37	0.21	-13.46	23.52	-23.7

Remark:

1 This product belong to any non-ISM frequency equipment, the field strength limit is 15uV/m at 300 meter


2 Limit:  $20\log(15\text{uV/m})=23.52\text{dBuV/m}$

## 7 Photographs

### 7.1 Conducted disturbance Test Setup



### 7.2 Radiated emission Test Setup

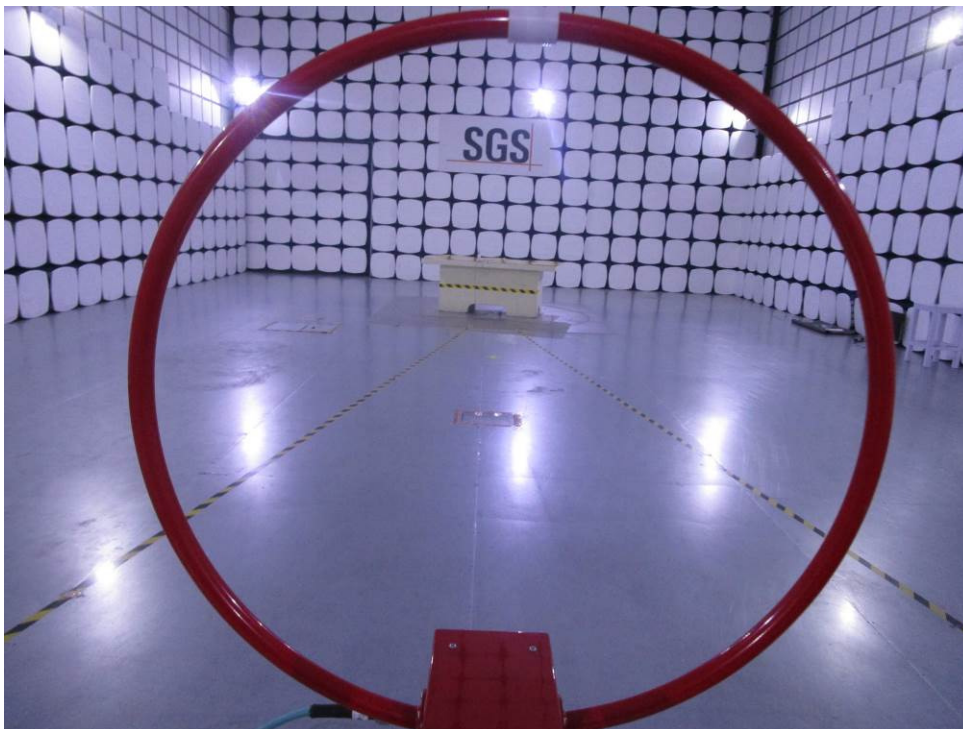





### **7.3 EUT Constructional Details (EUT Photos)**

Please refer to external and internal photos for details.

- End of the Report -