



FCC Part 15 Subpart C

TEST REPORT

FOR

Product Name: WIFI Module

**Model :MWR188FT-U
Trade Name : Taiwan Anjietw**

Issued to

**Taiwan Anjie Electronics Co.,Ltd
1F,No.236,Sec.3,Huanbei Rd.,Jubei City, Hsinchu County,30265,
Taiwan**

Issued by

**Global Certification Corp.
No.146, Sec. 2, Xiangzhang Rd., Xizhi Dist.,New Taipei City 221,
Taiwan (R.O.C.)**



Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of Global Certification Corporation. This document may be altered or revised by Global Certification Corporation. Personnel only, and shall be noted in the revision section of the document.

The decision rule is according to the standard test method and request, that measurement result doesn't consider uncertainty.



Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
1.	051301	FR2-051301	Jun.01,2020	Original Report	Eason



TABLE OF CONTENTS	3
1. GENERAL INFORMATION	5
2. TEST METHODOLOGY	8
3. TEST AND MEASUREMENT EQUIPMENT	12
4. ANTENNA REQUIREMENTS	14
4.1 STANDARD APPLICABLE	14
4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN	14
5. CONDUCTED EMISSIONS	15
5.1 TEST SETUP	15
5.2 LIMIT	15
5.3 TEST PROCEDURE	15
5.4 TEST RESULT	16
5.5 TEST DATA	16
6. PEAK OUTPUT POWER	17
6.1 TEST SETUP	17
6.2 LIMIT	17
6.3 TEST PROCEDURE	17
6.4 TEST RESULT	17
6.5 TEST DATA	18
7. RADIATED BAND EDGE	19
7.1 TEST SETUP	19
7.2 LIMIT	20
7.3 TEST RESULT	20
7.4 TEST DATA	21
8. 6DB BANDWIDTH	37
8.1 TEST SETUP	37
8.2 LIMIT	37
8.3 TEST PROCEDURE	37
8.4 TEST RESULT	37
8.5 TEST DATA	38
9. RADIATED SPURIOUS EMISSIONS	47
9.1 TEST SETUP	47
9.2 LIMIT	48
9.3 TEST PROCEDURE	49
9.4 TEST RESULT	49
9.5 TEST DATA	50



10.	CONDUCTED SPURIOUS EMISSIONS-----	76
10.1	TEST SETUP-----	76
10.2	LIMIT-----	76
10.3	TEST PROCEDURE -----	76
10.4	TEST RESULTS-----	76
10.5	TEST DATA -----	77
11.	POWER SPECTRAL DENSITY -----	89
11.1	TEST SETUP-----	89
11.2	LIMIT-----	89
11.3	TEST PROCEDURE -----	89
11.4	TEST RESULTS-----	89
11.5	TEST DATA -----	90
12.	MEASUREMENT UNCERTAINTY -----	99



1. GENERAL INFORMATION

Applicant : Taiwan Anjie Electronics Co.,Ltd
Address : 1F,No.236,Sec.3,Huanbei Rd.,Jubei City, Hsinchu County,30265,Taiwan
Manufacturer : Taiwan Anjie Electronics Co.,Ltd
Address : 1F,No.236,Sec.3,Huanbei Rd.,Jubei City, Hsinchu County,30265,Taiwan
EUT : WIFI Module
Model No. : MWR188FT-U
Trade Name : Taiwan Anjietw
Model Differences : --

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.10-2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

Test Standard :

FCC Part 15 Subpart C 15.247

Tested By:

Approved by:

Jun.01,2020
Date

Kai Yeh
Kai Yeh, Engineer

Jun.01,2020
Date

Eason Hsu
Eason Hsu, Section Chief
Designation Number: TW1640



1.1 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : WIFI Module
 Model : MWR188FT-U
 Power From : Support Unit PC
 Power Rating : +3.3Vdc (±0.3V)
 FCC ID : 2AP85-MWR188FTU
 Basic Spec : 802.11b / 802.11g / 802.11n HT20 / 802.11n HT40
 Operate Frequency : 2412 MHz ~ 2462 MHz
 RF Output Power : 802.11b : 9.28 dBm / 0.00847227 W (Peak)
 802.11g : 7.88 dBm / 0.00613762 W (Peak)
 802.11n HT20 : 6.26 dBm / 0.00422669 W (Peak)
 802.11n HT40 : 0.99 dBm / 0.00125603 W (Peak)
 Number of Channels : 11
 Step of Channel : N/A 5 MHz
 Modulation Type : CCK + OFDM
 Antenna Quantity : 1 Tx/Rx
 Antenna Type : FPCB Antenna
 Antenna Gain : 2.85 dBi
 EUT Received Date : May.14,2020
 EUT Test Completed Date : May.29,2020
 EUT Channel List :

Channels	Frequencies(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462



1.3 LIST OF MEASUREMENTS AND EXAMINATIONS

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Not applicable* ₁
15.209	Radiated Spurious Emission Radiated Band Edge Measurement	Pass
15.247(a)(2)	6dB Bandwidth Measurement	Pass
15.247(b)(3)	Peak Output Power Measurement	Pass
15.247(d)	Conducted Spurious Emission	Pass
15.247(e)	Power Spectral Density	Pass

*1 EUT is not designed to be connected to the public utility (AC) power line.



2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI C63.10:2013 and FCC CFR 47 Part 15 Subpart C.

2.1 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.10:2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is a placed on a turn table, which is 1.5 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



2.3 DESCRIPTION OF TEST MODES

The EUT was tested under following modes:

Basic Spec	Mode	Remark
802.11b 802.11g 802.11n HT20	Tx Mode 11b Low CH	
	Tx Mode 11b Mid CH	
	Tx Mode 11b High CH	
	Tx Mode 11g Low CH	Low CH :2412 MHz
	Tx Mode 11g Mid CH	Mid CH : 2437 MHz
	Tx Mode 11g High CH	High CH : 2462 MHz
	Tx Mode 11n HT20 Low CH	
	Tx Mode 11n HT20 Mid CH	
	Tx Mode 11n HT20 High CH	


Basic Spec	Mode	Remark
802.11n HT40	Tx Mode 11n HT40 Low CH	Low CH :2422 MHz
	Tx Mode 11n HT40 Mid CH	Mid CH : 2437 MHz
	Tx Mode 11n HT40 High CH	High CH : 2452 MHz

Test Software Power Setting Value	
Tx Mode 11b Low CH	: Default
Tx Mode 11b Mid CH	: Default
Tx Mode 11b High CH	: Default
Tx Mode 11g Low CH	: 45
Tx Mode 11g Mid CH	: 45
Tx Mode 11g High CH	: 45
Tx Mode 11n HT 20 Low CH	: 40
Tx Mode 11n HT 20 Mid CH	: 40
Tx Mode 11n HT 20 High CH	: 40
Tx Mode 11n HT 40 Low CH	: 35
Tx Mode 11n HT 40 Mid CH	: 35
Tx Mode 11n HT 40 High CH	: 35

Test software Setup Information	
Software Name	: MPTool
Version	: --

2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

Setup Diagram

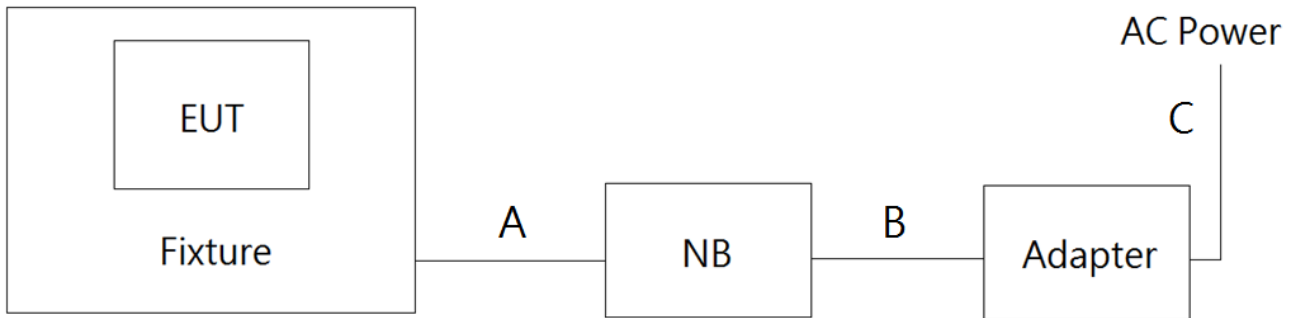

Cable List			
No.	Item	Length	Type
A.	USB Cable	1.0m	Shielded
B.	Power Cable	1.8m	Non-Shielded
C.	Power Cord	1.8m	Non-Shielded

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT					
No.	Equipment	Trade name	Model	Serial No.	FCC ID / BSMI ID
1	Fixture	--	--	--	--
2	NB	MSI	MS-1352	G51-N1COX23	R33008
3	Adapter	LITEON	PA-1400-12	C1143005273	R33275

Note: All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

Grounding: Grounding was in accordance with the manufacturer’s requirement and conditions for the intended use.



3. TEST AND MEASUREMENT EQUIPMENT

3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

TABLE 1 LIST OF TEST AND MEASUREMENT EQUIPMENT

Conducted Emission Measurement (Test Site ID: GCC_CE_01)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Due Date	Note
LISN #1	SCHWARZBECK	NNLK8121	550213	Jan. 09, 2021	For EUT
EMI TEST RECEIVER	ROHDE&SCHWA	ESCI	100438	Jan. 09, 2021	
Digital thermometer and hygrometer	DRTEC	Q-226 WT	DEAC3E-A80408213-000	Oct.15, 2020	
AC POWER SOURCE	APC	AFC-3KB	870311	--	
LISN #2	EMCO	Feb-25	9001-1400	--	For Support Unit
1W 20db Attenuator & Pulse Limiter with Cable	AFJ	PAT20M	PA2005130030	Jan.10, 2021	
Test Software	AUDIX	E3	6.2008-10-2C	--	



966_3m EMC Chamber Radiated Emission Measurement (Test Site ID: GCC_RE_01)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Due Date	Note
Spectrum Analyzer	R&S	FSV40	101088	Apr. 23, 2021	
Bilog Antenna	SUNOL	JB1	A052204	Mar. 18, 2022	
Pre-Amplifier	WIRELESS	FPA-6592G	60028	Oct. 14, 2021	
RF Cable	HUBER + UHNER	RG213/U	Cable-004	Sep. 17, 2020	
Double Ridged Guide HORN ANTENNA	EST.LINDGREN	3117	119028	Apr.16, 2021	
SMA_Cable	HUBER SUHNER	EMC104-SM-SM-1000	170238	Mar. 11, 2021	
RF Cable	Huber Suhenr	SUCOFLEX 104	293864/4	Mar. 11, 2021	
Microwave Preamplifier	EMCINSTRUMENT	EMC051845	980059	Apr. 16, 2021	
TEST SOFTWARE	AUDIX	E3	6.101222	--	
Digital thermometer and hygrometer	DRTEC	Q-226 WT	DEAC3E-A80408213-000	Oct.15, 2020	
AC POWER SOURCE	Turn Power	APW-120N	S007	--	

RF Conducted Measurement (Test Site ID: GCC_RE_01)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Due Date	Note
Spectrum Analyzer	R&S	FSV40	101088	Apr. 23, 2021	
DC Block	Marvelous Microwave Inc.	MVE6411	--	--	
20dBb Attenuator	Marvelous Microwave Inc.	6620-SMA-50-1	--	Sep.17,2020	
Digital thermometer and hygrometer	DRTEC	Q-226 WT	DEAC3E-A80408213-000	Oct.15, 2020	

✧ Calibration interval of instruments listed above is one year

4. ANTENNA REQUIREMENTS

4.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(b), if transmitting antennas of direction gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN

Antenna type : FPCB Antenna
Antenna Gain: 2.85 dBi



5. CONDUCTED EMISSIONS

5.1 TEST SETUP

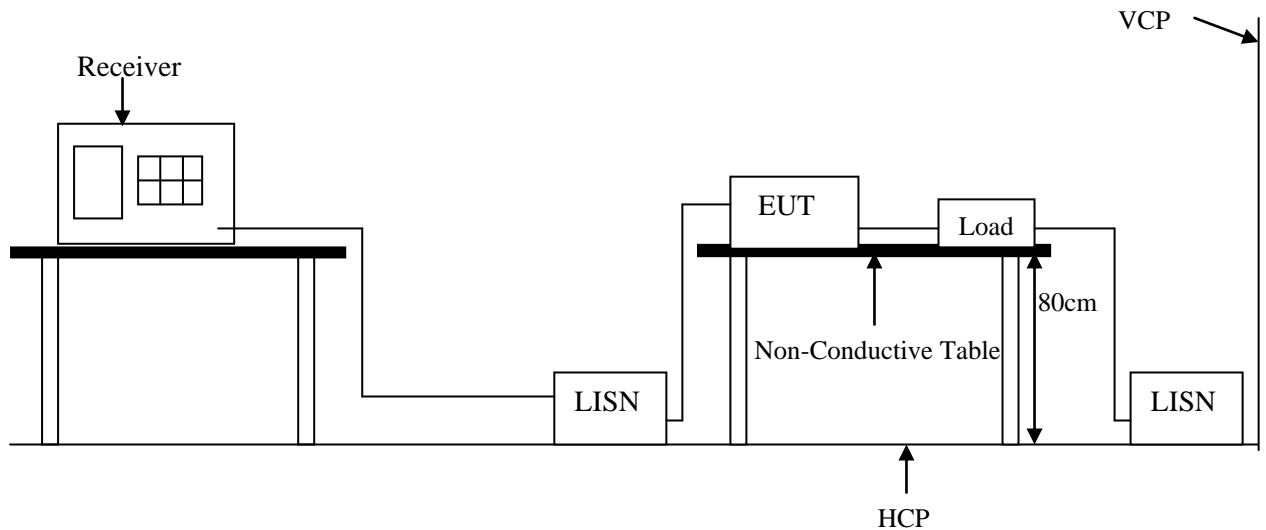

5.2 LIMIT

Frequency range (MHz)	CLASS A		CLASS B	
	QP dB(uV)	Average dB(uV)	QP dB(uV)	Average dB(uV)
0.15-0.5	79 dBuV	66 dBuV	66 - 56 dBuV	56 - 46 dBuV
0.5-5.0	73 dBuV	60 dBuV	56 dBuV	46 dBuV
5.0-30.0	73 dBuV	60 dBuV	60 dBuV	50 dBuV

Remark: In the above table, the tighter limit applies at the band edges.

5.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50 μ H coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to EN 55022 regulations: The measurement procedure on conducted emission interference.

The resolution bandwidth of the field strength meter is set at 9 KHz.



5.4 TEST RESULT

Not applicable, because the EUT is not designed to be connected to the public utility (AC) power line.


5.5 TEST DATA:

--



6. PEAK OUTPUT POWER

6.1 TEST SETUP

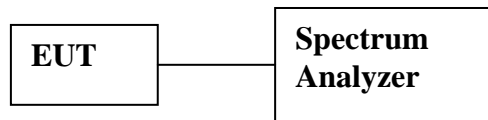

6.2 LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to § 15.247(b)(3) , for systems using digital modulation in the bands of 902 – 928 MHz , 2400 – 2483.5 MHz: 1 Watt.
2. According to § 15.247(b)(4) , the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used , the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) , (b)(2) , and (b)(3) of this section , as appropriate , by the amount in dB that directional gain of the antenna exceeds 6 dBi.

6.3 TEST PROCEDURE

1. Set the RBW = 1 MHz.
2. Set the VBW $\geq [3 \times \text{RBW}]$.
3. Set the span $\geq [1.5 \times 6\text{dB bandwidth}]$.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the instrument's band/channel power measurement function with the band limits set equal to the 6dB bandwidth edges.

6.4 TEST RESULT

PASS




6.5 TEST DATA:

Test Mode	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)
Tx Mode 11b	2412	8.17	0.00656145	30.00	1.00
	2437	9.2	0.00831764	30.00	1.00
	2462	9.28	0.00847227	30.00	1.00
Test Mode	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)
Tx Mode 11g	2412	7.12	0.00515229	30.00	1.00
	2437	7.87	0.00612350	30.00	1.00
	2462	7.88	0.00613762	30.00	1.00
Test Mode	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)
Tx Mode 11n HT20	2412	4.96	0.00313329	30.00	1.00
	2437	6.17	0.00414000	30.00	1.00
	2462	6.26	0.00422669	30.00	1.00
Test Mode	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)
Tx Mode 11n HT40	2422	0.77	0.00119399	30.00	1.00
	2437	0.99	0.00125603	30.00	1.00
	2452	0.83	0.00121060	30.00	1.00


7. RADIATED BAND EDGE

7.1 TEST SETUP

30MHz to 1GHz

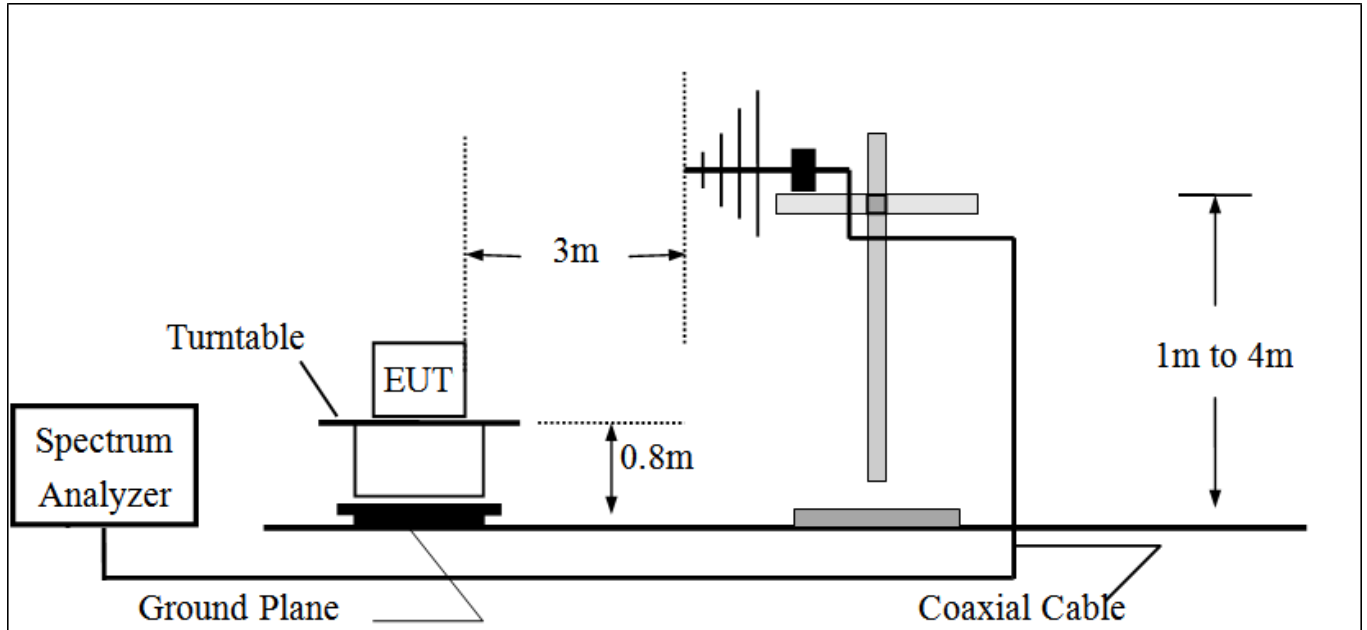

Above 1GHz

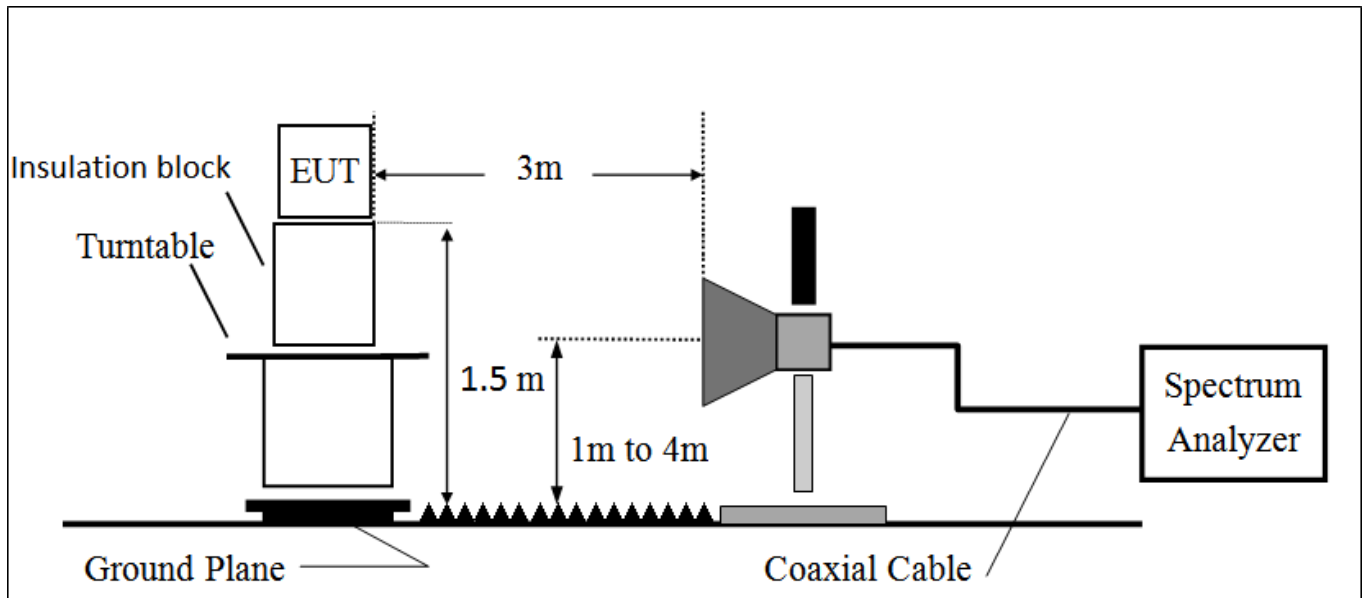



7.2 LIMIT

Restricted Bands:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
0.009-0.490	2400/F(kHz) at 300-meter	--
0.490-1.705	24000/F(kHz) at 30-meter	--
1.705-30	30 at 30-meter	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54

7.3 TEST RESULT


PASS



7.4 TEST DATA:

Date:2020-5-27

Site : GCC_RE_01 Regulations : FCC 15.247 PK
 RBW : 1000 KHz VBW : 1000 KHz Polarity : VERTICAL
 SWT:Auto
 EUT : WIFI Module Model : MWR188FY-U
 Mode : Tx Mode 11b Low CH Temp/Humidity : 24°C / 62%
 Voltage : From PC-USB Memo : Power Set:Def

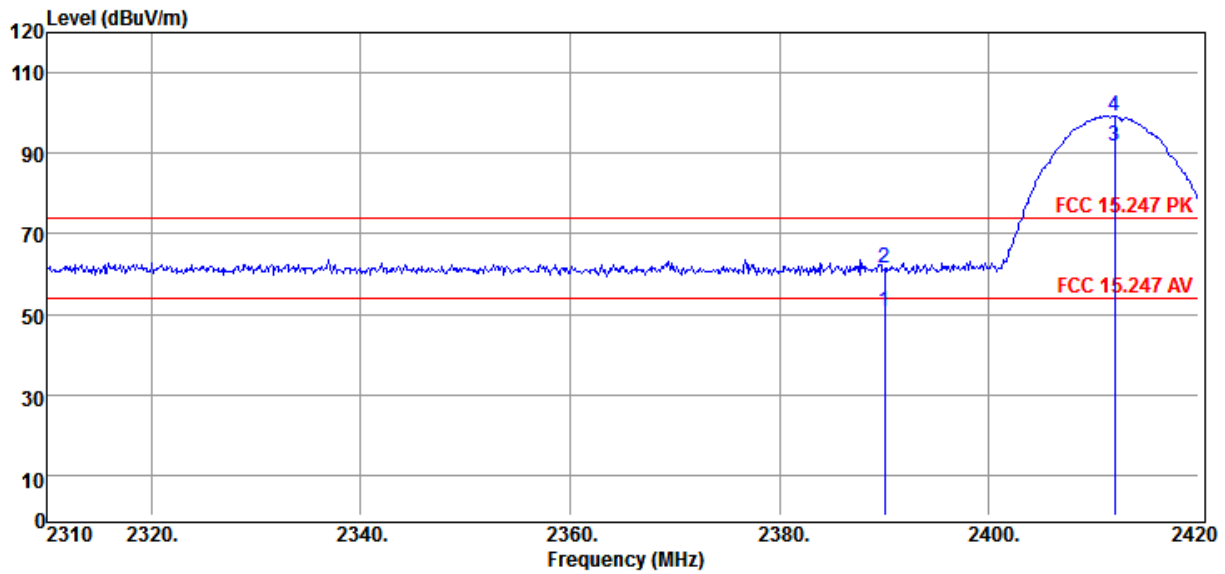


	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	14.19	36.62	4.82	31.80	0.00	50.81	54.00	-3.19	Average
2	2390.00	24.78	36.62	4.82	31.80	0.00	61.40	74.00	-12.60	Peak
3	2412.00	54.79	36.89	4.85	32.04	0.00	91.68	54.00	37.68	Average
4	2412.00	62.37	36.89	4.85	32.04	0.00	99.26	74.00	25.26	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01	Regulations : FCC 15.247 PK
RBW : 1000 KHz VBW : 1000 KHz	Polarity : HORIZONTAL
SWT:Auto	
EUT : WIFI Module	Model : MWR188FY-U
Mode : Tx Mode 11b Low CH	Temp/Humidity : 24°C / 62%
Voltage : From PC-USB	Memo : Power Set:Def

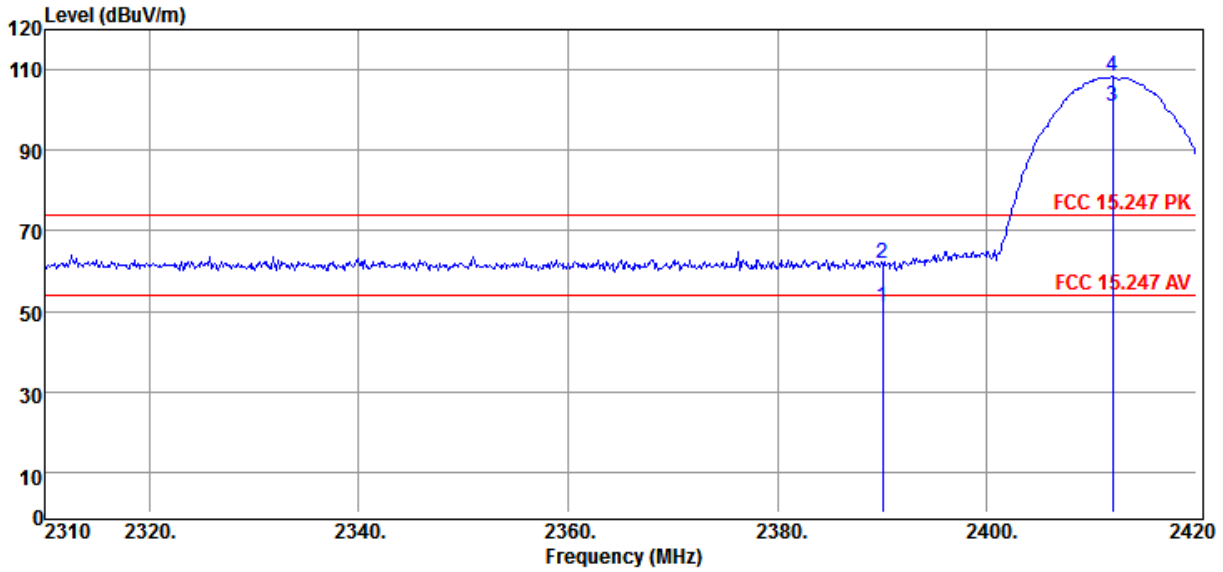

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2390.00	14.40	36.62	4.82	31.80	0.00	51.02	54.00	-2.98	Average
2	2390.00	25.41	36.62	4.82	31.80	0.00	62.03	74.00	-11.97	Peak
3	2412.00	63.89	36.89	4.85	32.04	0.00	100.78	54.00	46.78	Average
4	2412.00	71.44	36.89	4.85	32.04	0.00	108.33	74.00	34.33	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

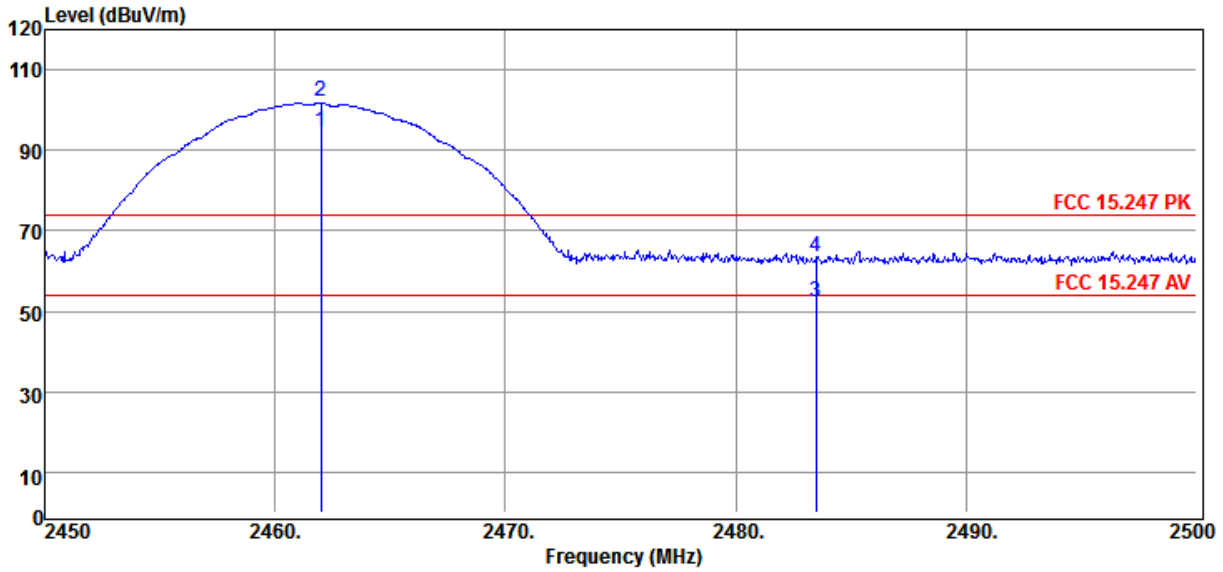

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2462.00	56.91	37.71	4.89	32.82	0.00	94.62	54.00	40.62	Average
2	2462.00	64.25	37.71	4.89	32.82	0.00	101.96	74.00	27.96	Peak
3	2483.50	14.56	37.78	4.91	32.87	0.00	52.34	54.00	-1.66	Average
4	2483.50	25.93	37.78	4.91	32.87	0.00	63.71	74.00	-10.29	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

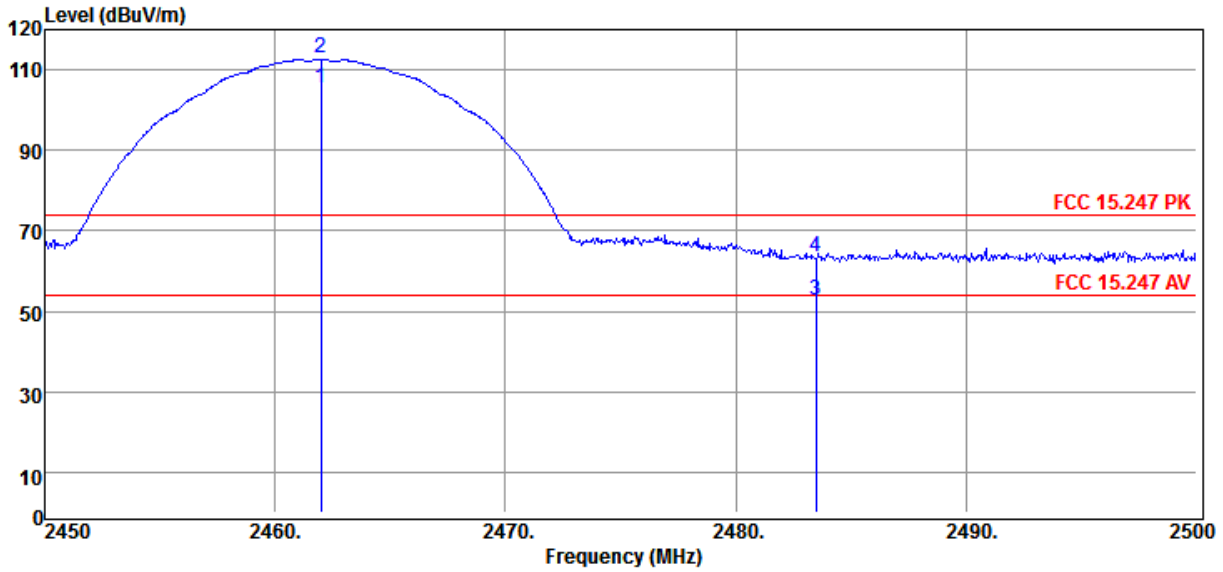

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2462.00	67.78	37.71	4.89	32.82	0.00	105.49	54.00	51.49	Average
2	2462.00	75.20	37.71	4.89	32.82	0.00	112.91	74.00	38.91	Peak
3	2483.50	15.16	37.78	4.91	32.87	0.00	52.94	54.00	-1.06	Average
4	2483.50	25.62	37.78	4.91	32.87	0.00	63.40	74.00	-10.60	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01	Regulations : FCC 15.247 PK
RBW : 1000 KHz VBW : 1000 KHz	Polarity : VERTICAL
SWT:Auto	
EUT : WIFI Module	Model : MWR188FY-U
Mode : Tx Mode 11g Low CH	Temp/Humidity : 24°C / 62%
Voltage : From PC-USB	Memo : Power Set:45

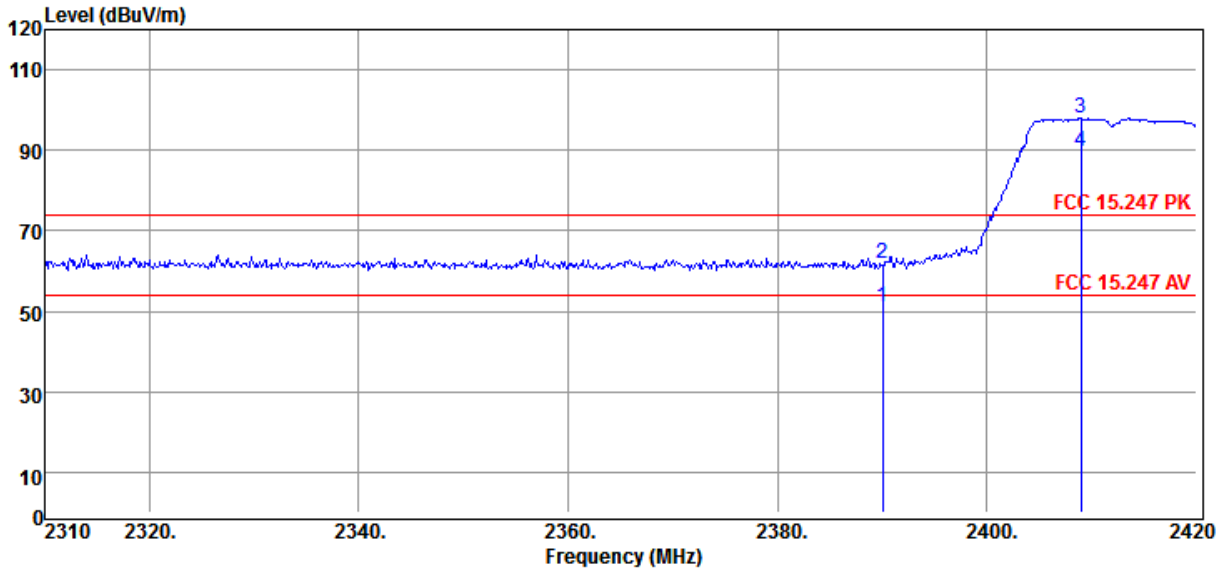

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	14.57	36.62	4.82	31.80	0.00	51.19	54.00	-2.81	Average
2	2390.00	25.10	36.62	4.82	31.80	0.00	61.72	74.00	-12.28	Peak
3	2409.00	61.36	36.82	4.84	31.98	0.00	98.18	74.00	24.18	Peak
4	2409.00	52.89	36.82	4.84	31.98	0.00	89.71	74.00	15.71	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11g Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:45

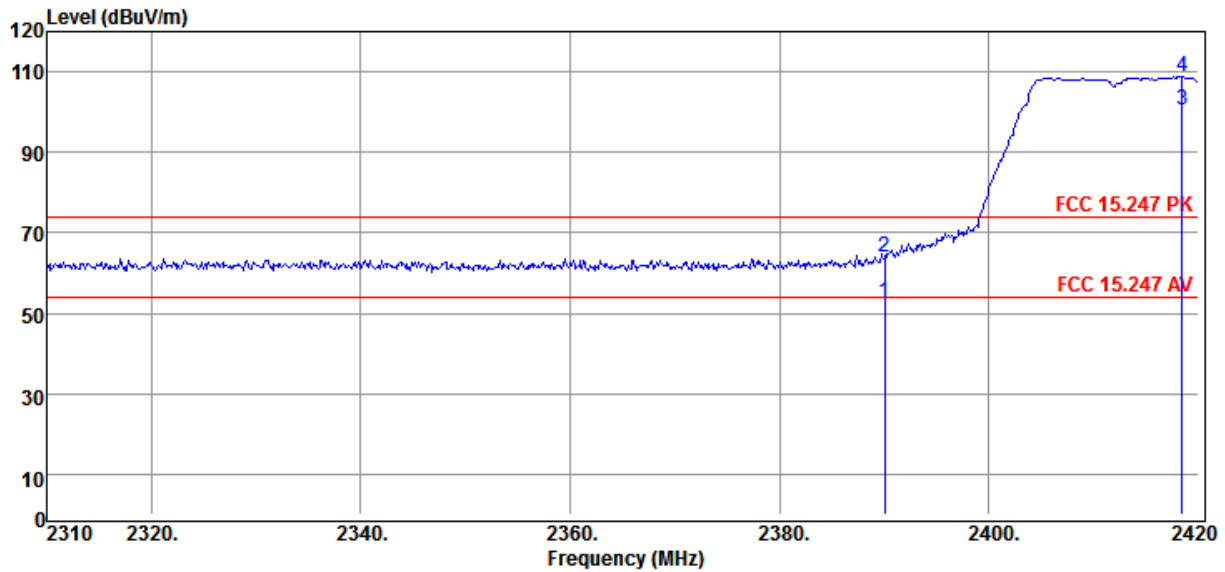

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	16.13	36.62	4.82	31.80	0.00	52.75	54.00	-1.25	Average
2	2390.00	27.52	36.62	4.82	31.80	0.00	64.14	74.00	-9.86	Peak
3	2418.48	63.48	37.02	4.85	32.17	0.00	100.50	54.00	46.50	Average
4	2418.48	71.95	37.02	4.85	32.17	0.00	108.97	74.00	34.97	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11g High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:45

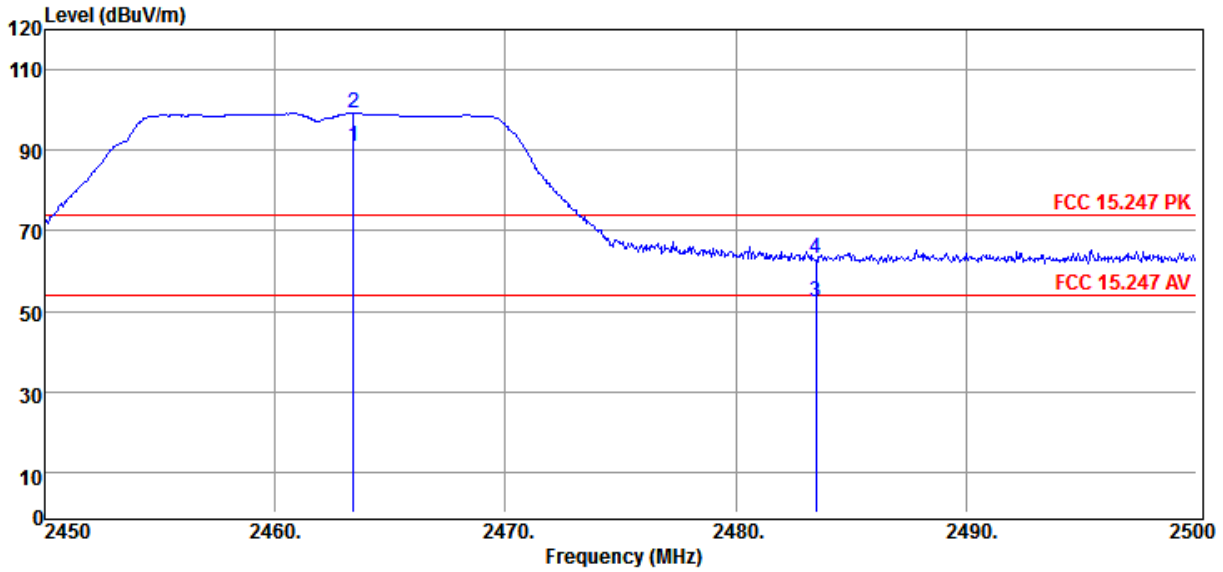

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2463.40	53.20	37.72	4.89	32.83	0.00	90.92	54.00	36.92	Average
2	2463.40	61.70	37.72	4.89	32.83	0.00	99.42	74.00	25.42	Peak
3	2483.50	14.74	37.78	4.91	32.87	0.00	52.52	54.00	-1.48	Average
4	2483.50	25.27	37.78	4.91	32.87	0.00	63.05	74.00	-10.95	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01	Regulations : FCC 15.247 PK
RBW : 1000 KHz VBW : 1000 KHz	Polarity : HORIZONTAL
SWT:Auto	
EUT : WIFI Module	Model : MWR188FY-U
Mode : Tx Mode 11g High CH	Temp/Humidity : 24°C / 62%
Voltage : From PC-USB	Memo : Power Set:45

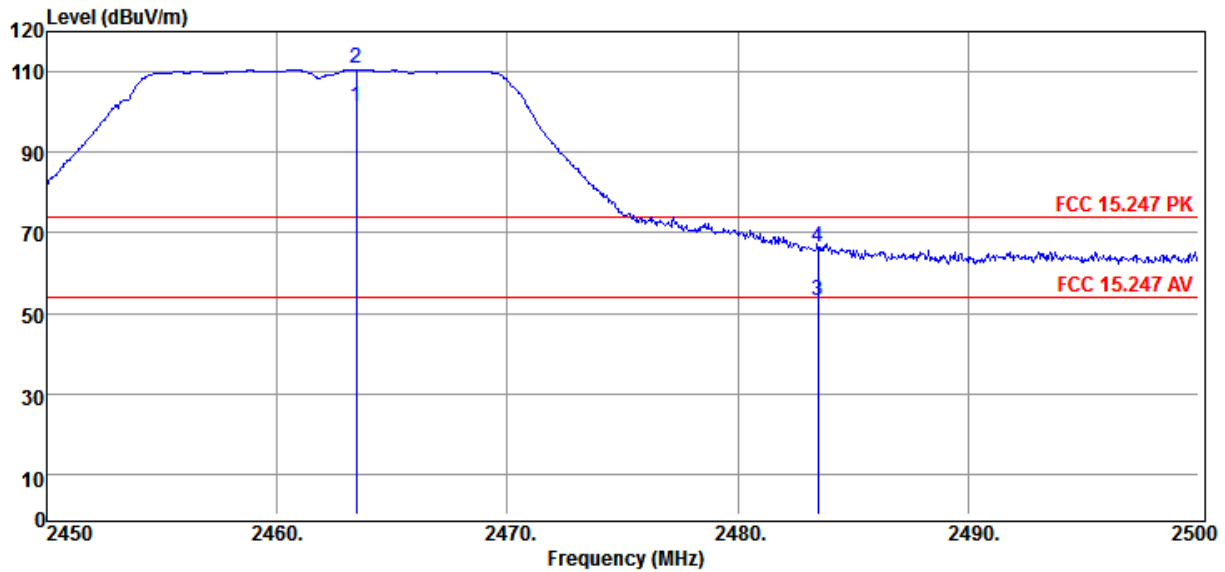

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2463.45	63.68	37.72	4.89	32.83	0.00	101.40	54.00	47.40	Average
2	2463.45	73.07	37.72	4.89	32.83	0.00	110.79	74.00	36.79	Peak
3	2483.50	15.21	37.78	4.91	32.87	0.00	52.99	54.00	-1.01	Average
4	2483.50	28.70	37.78	4.91	32.87	0.00	66.48	74.00	-7.52	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

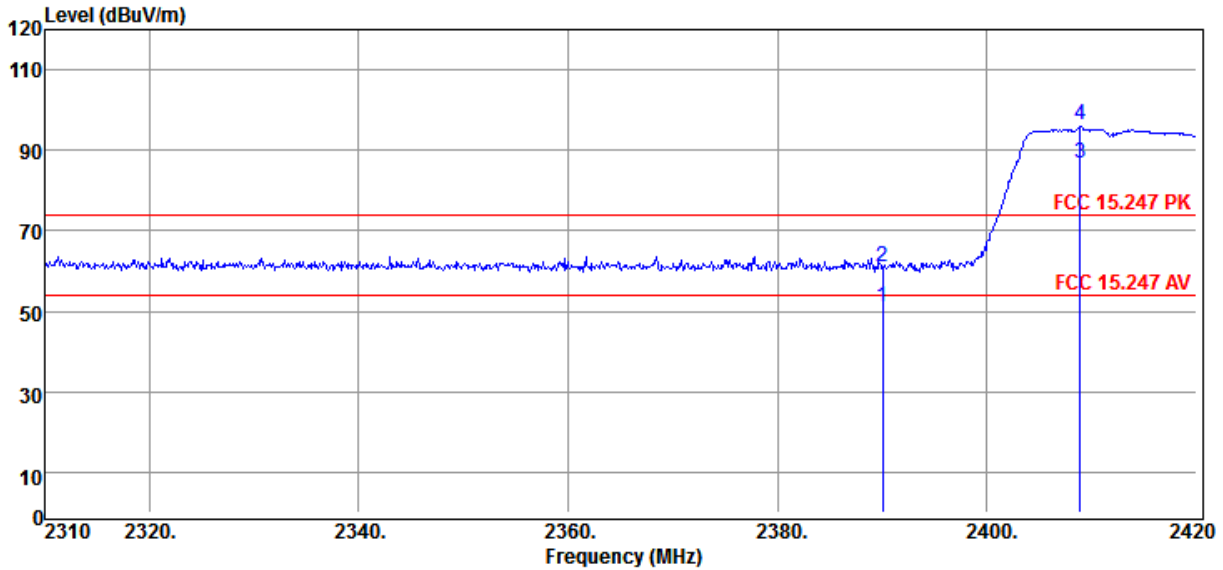

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	14.56	36.62	4.82	31.80	0.00	51.18	54.00	-2.82	Average
2	2390.00	24.23	36.62	4.82	31.80	0.00	60.85	74.00	-13.15	Peak
3	2408.89	50.12	36.82	4.84	31.98	0.00	86.94	54.00	32.94	Average
4	2408.89	59.43	36.82	4.84	31.98	0.00	96.25	74.00	22.25	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

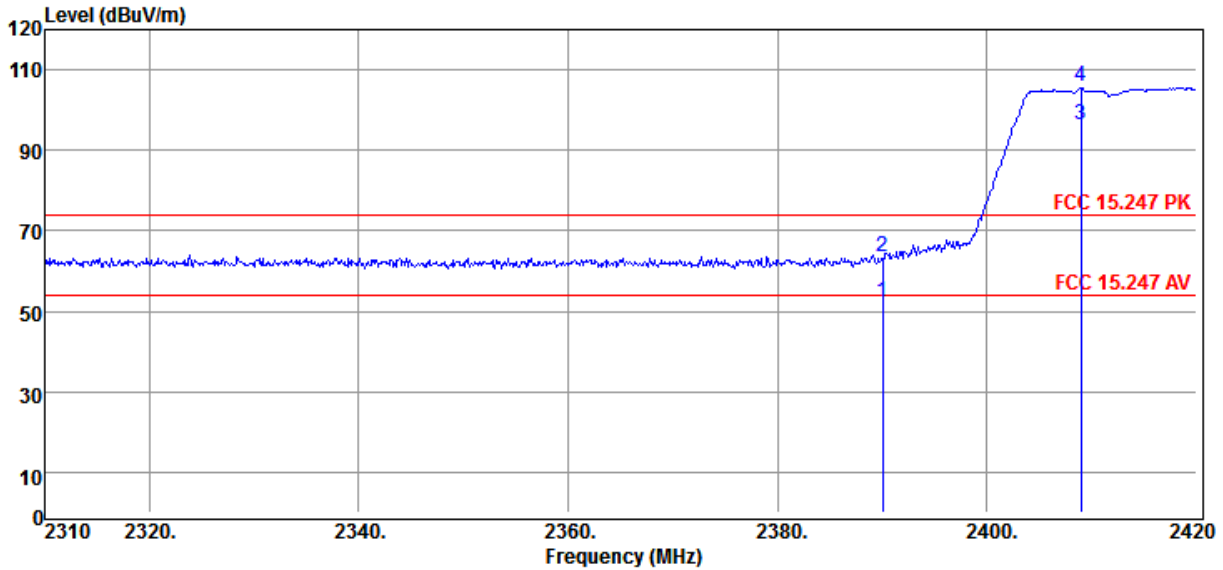

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	15.52	36.62	4.82	31.80	0.00	52.14	54.00	-1.86	Average
2	2390.00	26.80	36.62	4.82	31.80	0.00	63.42	74.00	-10.58	Peak
3	2409.00	59.51	36.82	4.84	31.98	0.00	96.33	54.00	42.33	Average
4	2409.00	69.00	36.82	4.84	31.98	0.00	105.82	74.00	31.82	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

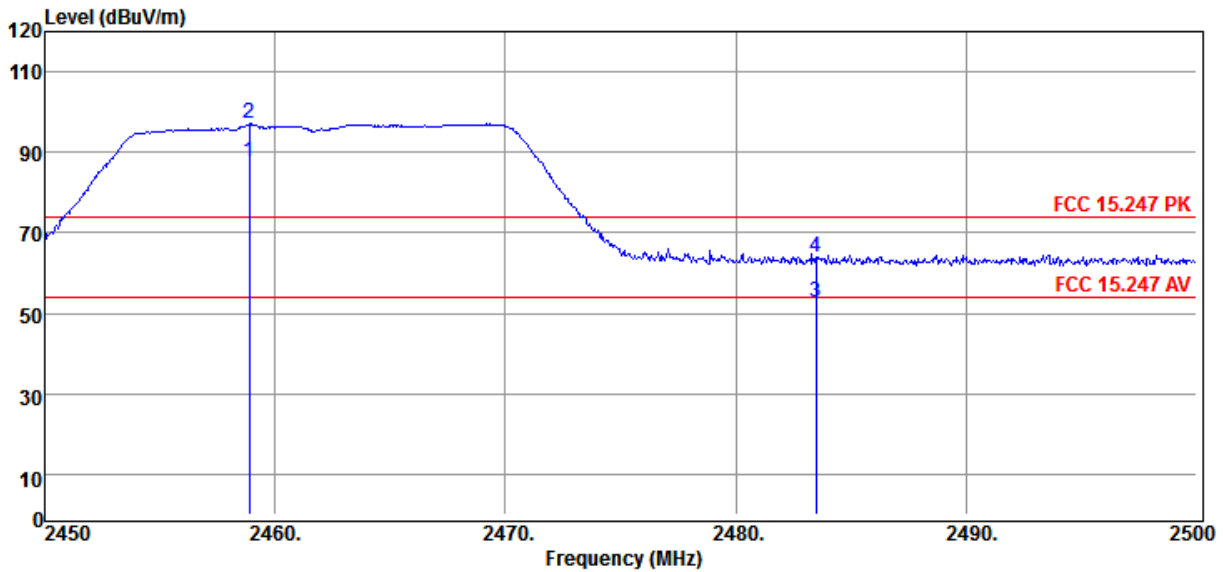

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2458.90	49.81	37.71	4.89	32.82	0.00	87.52	54.00	33.52	Average
2	2458.90	59.30	37.71	4.89	32.82	0.00	97.01	74.00	23.01	Peak
3	2483.50	14.83	37.78	4.91	32.87	0.00	52.61	54.00	-1.39	Average
4	2483.50	26.09	37.78	4.91	32.87	0.00	63.87	74.00	-10.13	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

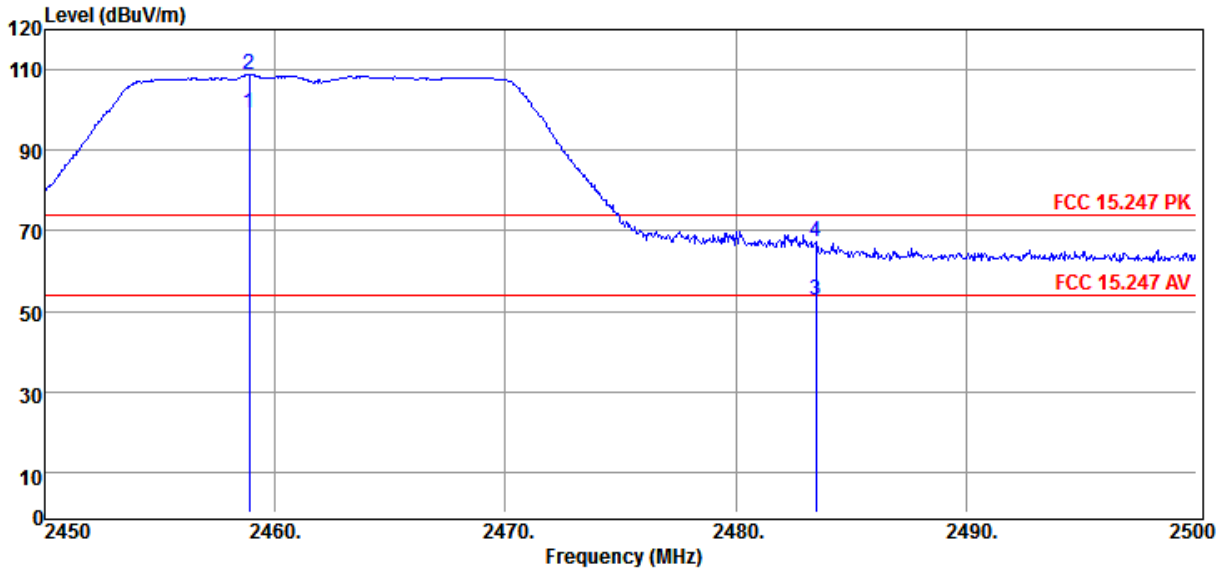

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2458.90	61.67	37.71	4.89	32.82	0.00	99.38	54.00	45.38	Average
2	2458.90	71.22	37.71	4.89	32.82	0.00	108.93	74.00	34.93	Peak
3	2483.50	15.15	37.78	4.91	32.87	0.00	52.93	54.00	-1.07	Average
4	2483.50	29.33	37.78	4.91	32.87	0.00	67.11	74.00	-6.89	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

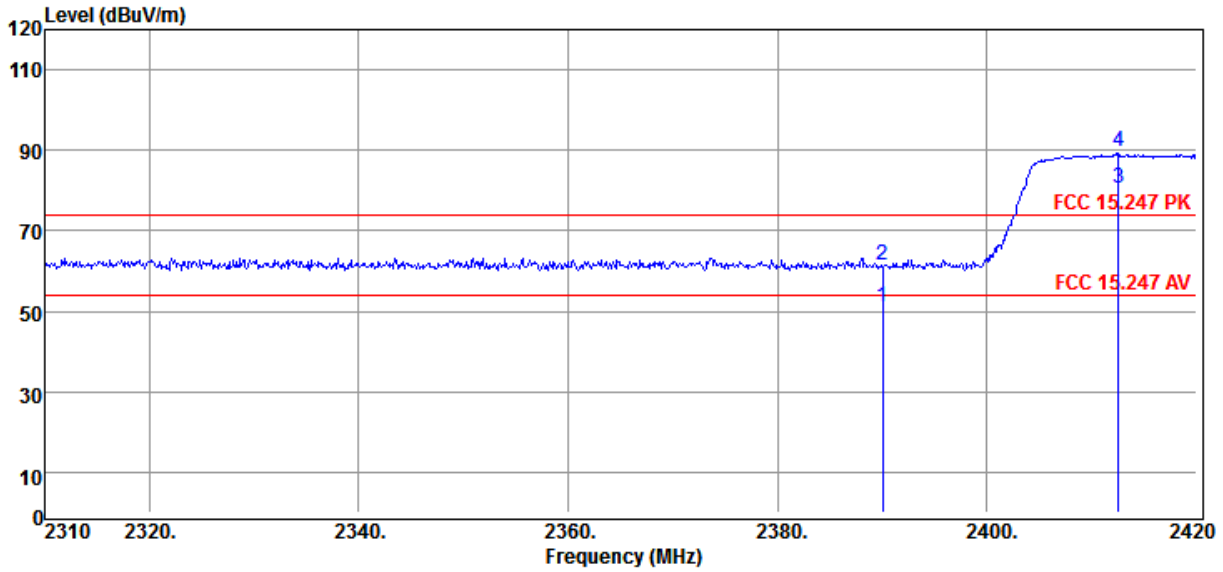

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	14.47	36.62	4.82	31.80	0.00	51.09	54.00	-2.91	Average
2	2390.00	25.02	36.62	4.82	31.80	0.00	61.64	74.00	-12.36	Peak
3	2412.52	43.49	36.90	4.85	32.05	0.00	80.39	54.00	26.39	Average
4	2412.52	52.58	36.90	4.85	32.05	0.00	89.48	74.00	15.48	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

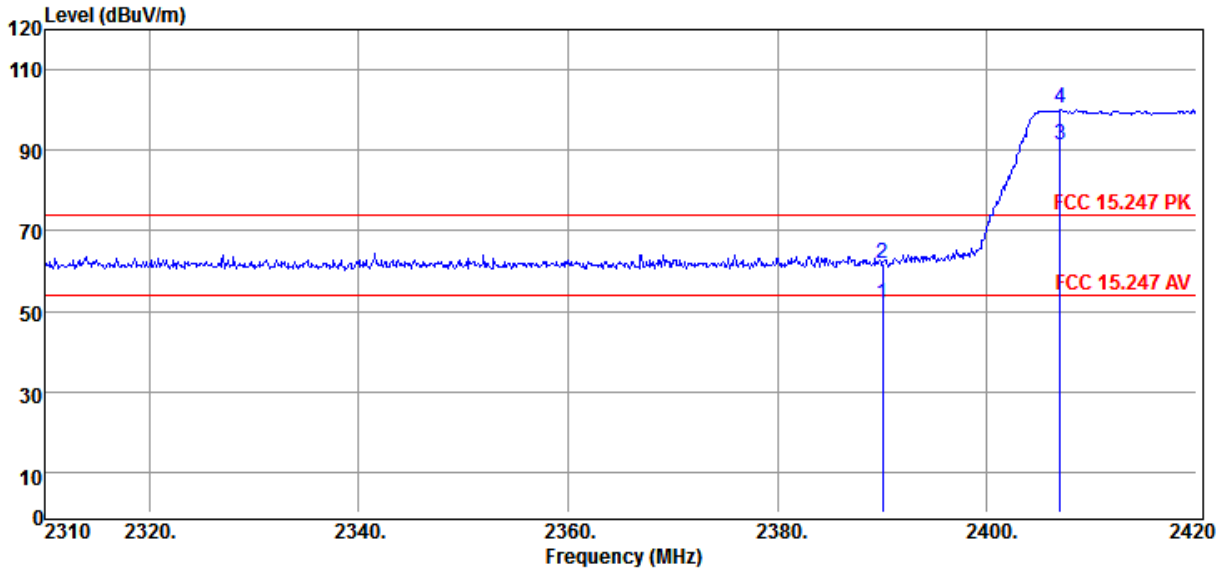

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2390.00	15.42	36.62	4.82	31.80	0.00	52.04	54.00	-1.96	Average
2	2390.00	25.14	36.62	4.82	31.80	0.00	61.76	74.00	-12.24	Peak
3	2407.02	54.72	36.78	4.84	31.94	0.00	91.50	54.00	37.50	Average
4	2407.02	63.60	36.78	4.84	31.94	0.00	100.38	74.00	26.38	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

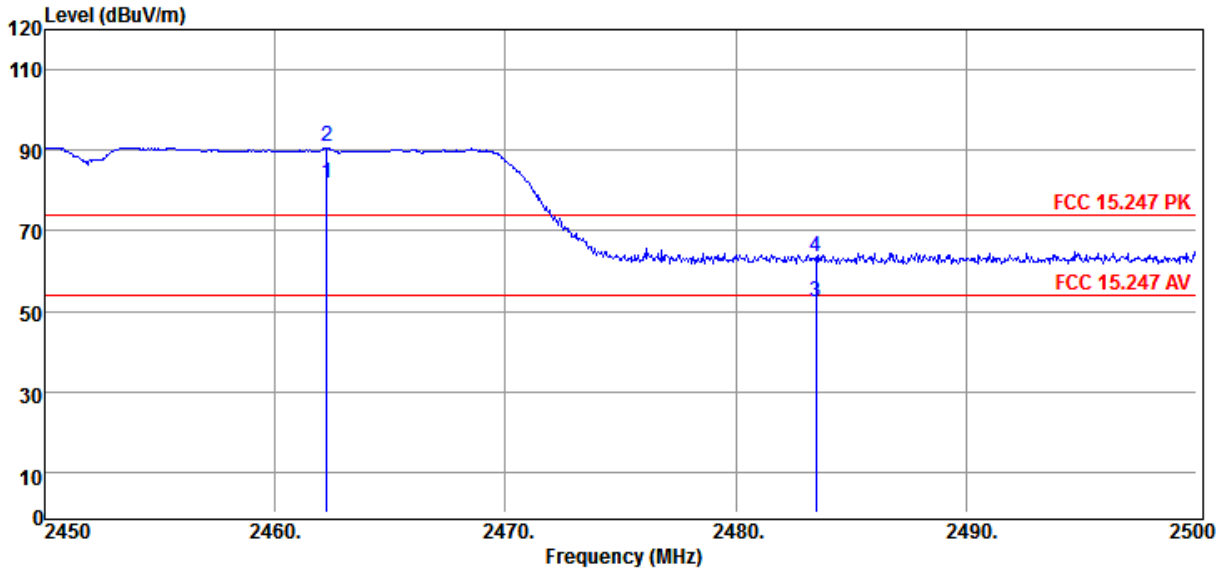

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2462.25	43.90	37.71	4.89	32.82	0.00	81.61	54.00	27.61	Average
2	2462.25	53.15	37.71	4.89	32.82	0.00	90.86	74.00	16.86	Peak
3	2483.50	14.66	37.78	4.91	32.87	0.00	52.44	54.00	-1.56	Average
4	2483.50	25.90	37.78	4.91	32.87	0.00	63.68	74.00	-10.32	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor


Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

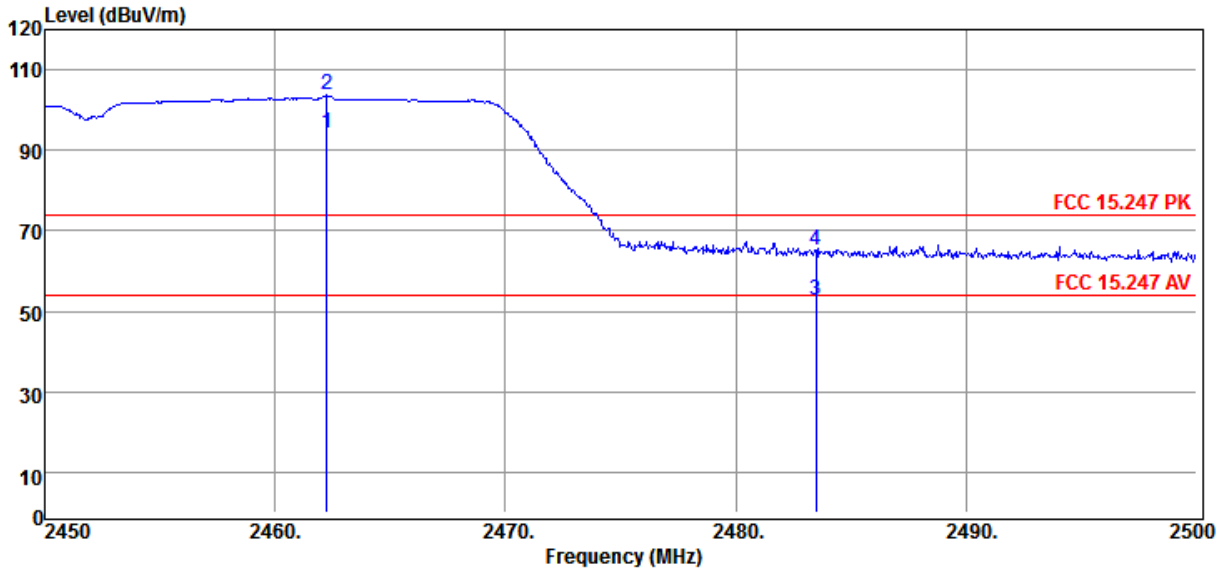

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2462.25	56.56	37.71	4.89	32.82	0.00	94.27	54.00	40.27	Average
2	2462.25	65.90	37.71	4.89	32.82	0.00	103.61	74.00	29.61	Peak
3	2483.50	15.04	37.78	4.91	32.87	0.00	52.82	54.00	-1.18	Average
4	2483.50	27.30	37.78	4.91	32.87	0.00	65.08	74.00	-8.92	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line


Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, with 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.



8. 6DB BANDWIDTH

8.1 TEST SETUP

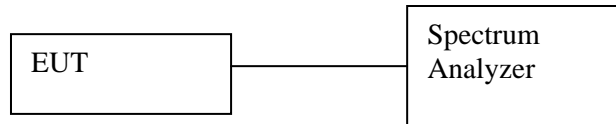

8.2 LIMIT

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.3 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.
- c. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


8.4 TEST RESULT

PASS




8.5 TEST DATA:


Test Mode	Frequency(MHz)	6dB Bandwidth (kHz)	Min. Limit (kHz)
Tx Mode 11b	2412	9077.3	500
	2437	9077.3	500
	2452	9077.3	500
Test Mode	Frequency(MHz)	6dB Bandwidth (kHz)	Min. Limit (kHz)
Tx Mode 11g	2412	16558.60	500
	2437	16558.60	500
	2452	16608.50	500
Test Mode	Frequency(MHz)	6dB Bandwidth (kHz)	Min. Limit (kHz)
Tx Mode 11n HT20	2412	17805.00	500
	2437	17805.50	500
	2452	17855.40	500
Test Mode	Frequency(MHz)	6dB Bandwidth (kHz)	Min. Limit (kHz)
Tx Mode 11n HT40	2412	36350.00	500
	2437	36409.00	500
	2452	36409.00	500

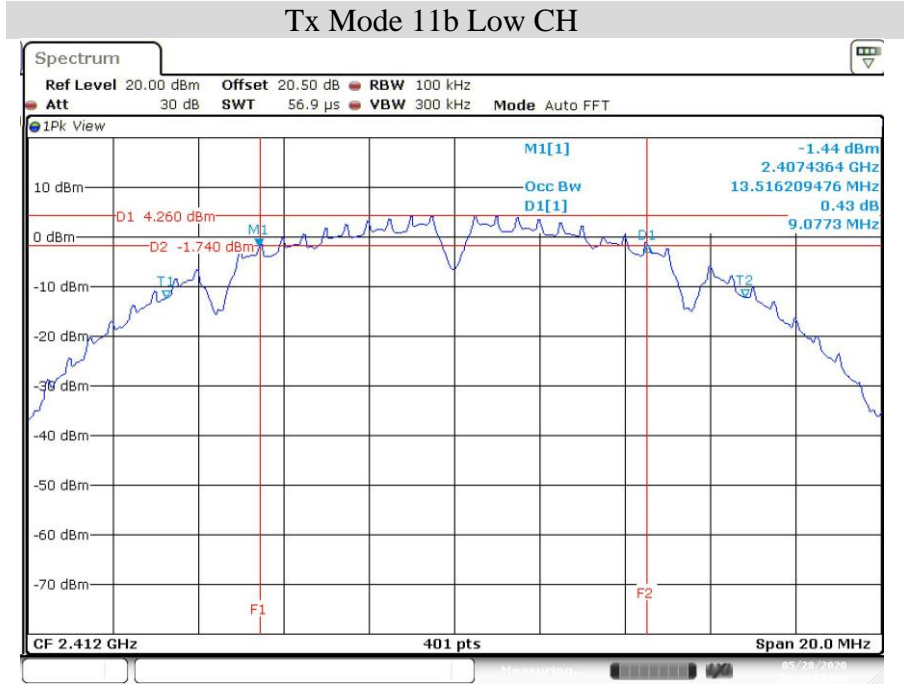


Date: 28.MAY.2020 15:45:56

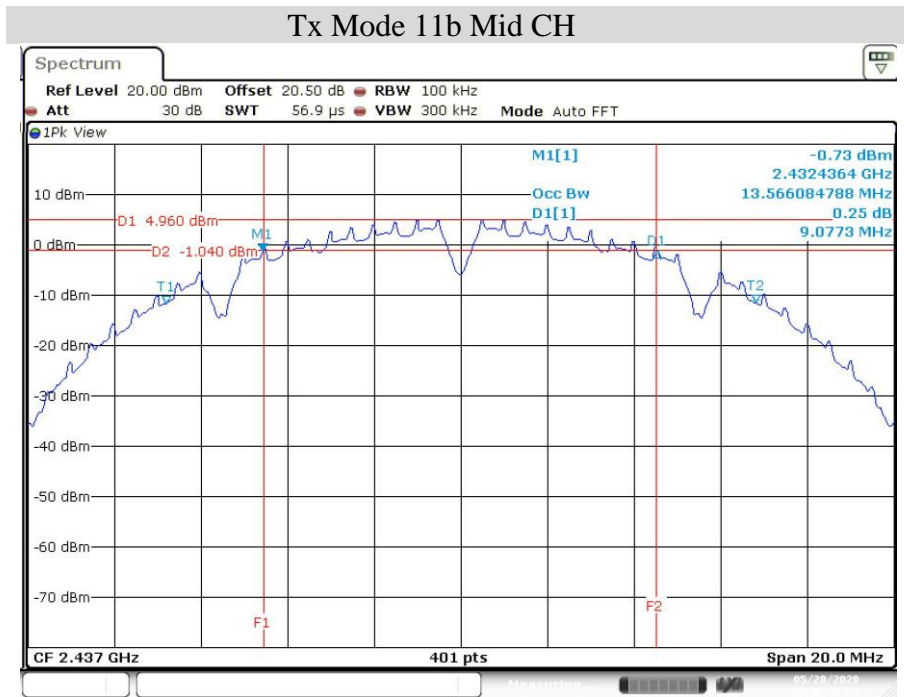


Date: 28.MAY.2020 15:48:18

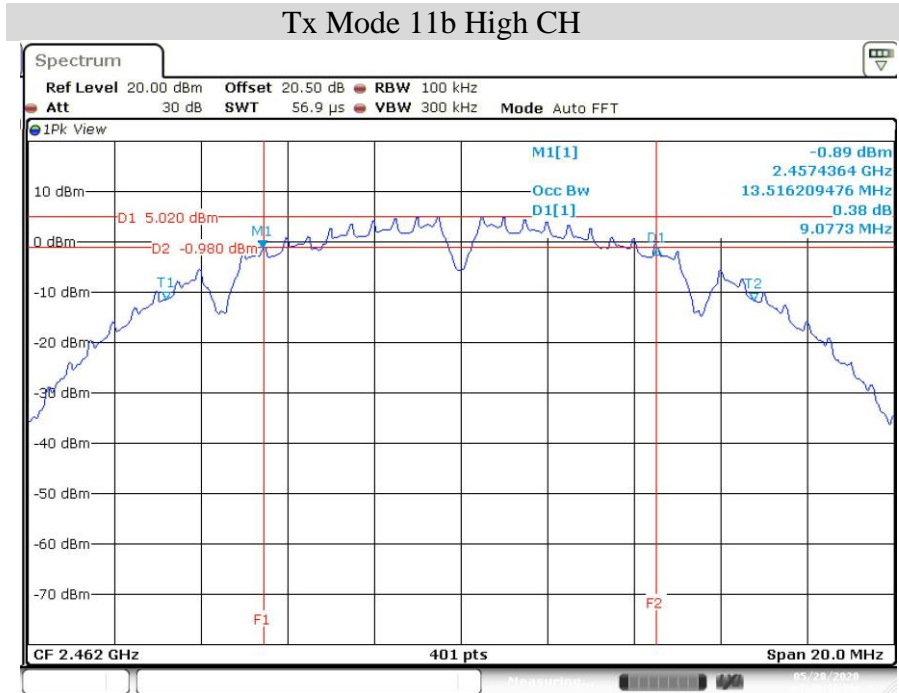


Date: 28.MAY.2020 15:49:17


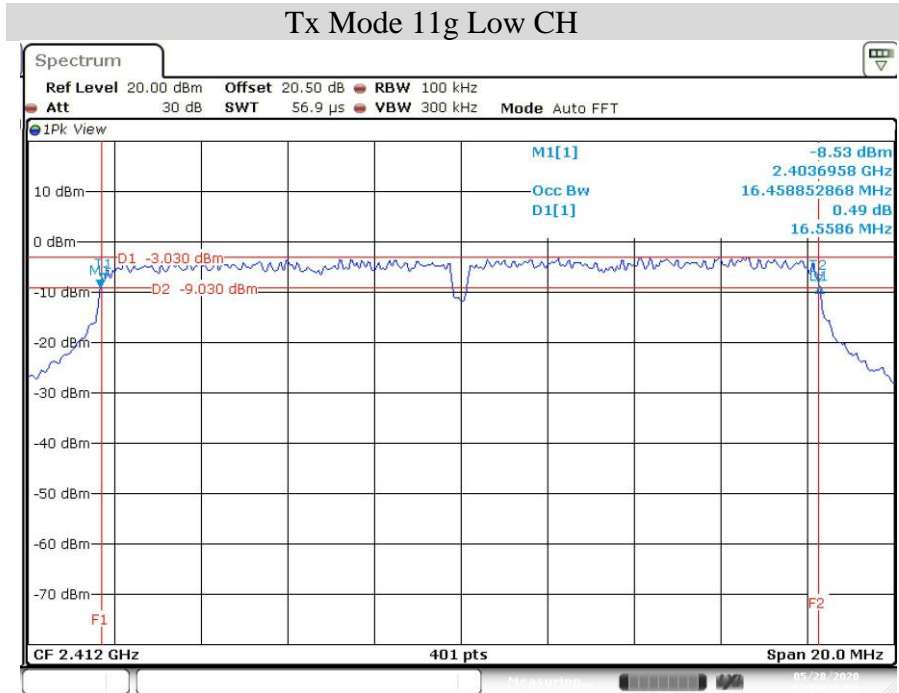



Date: 28.MAY.2020 15:50:48

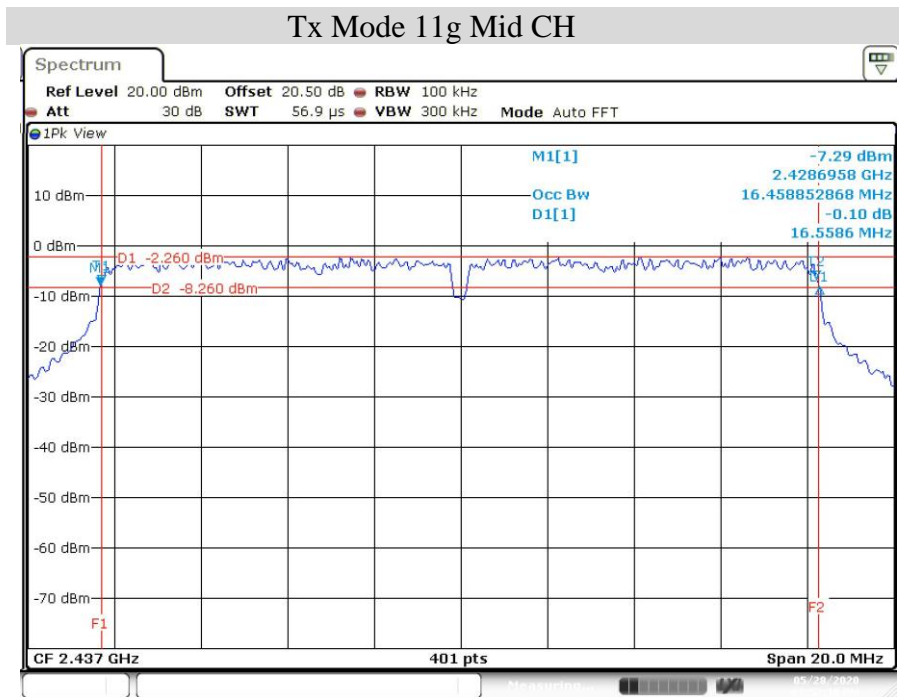


Date: 28.MAY.2020 15:52:20

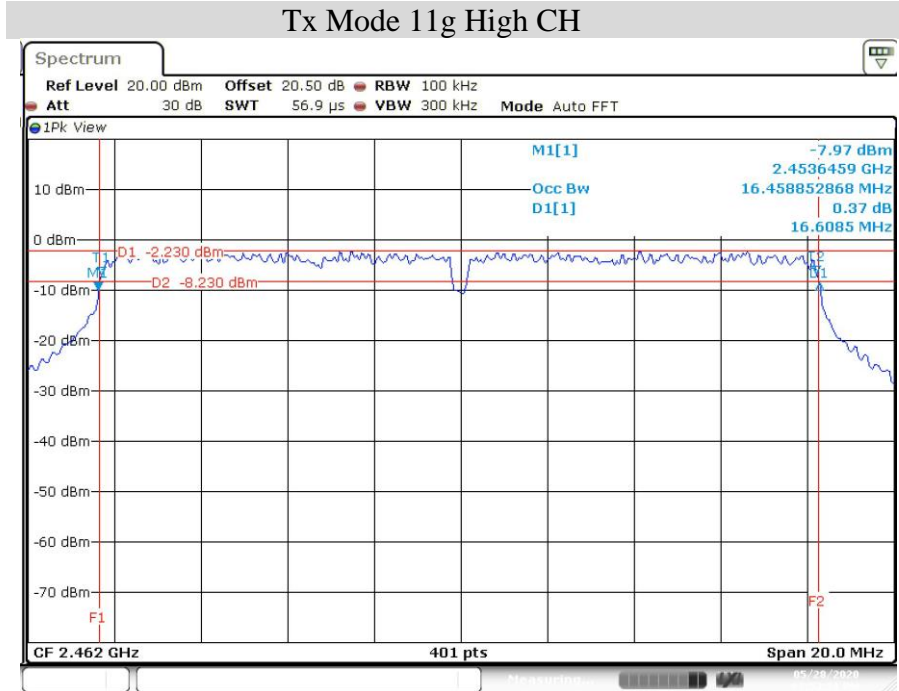


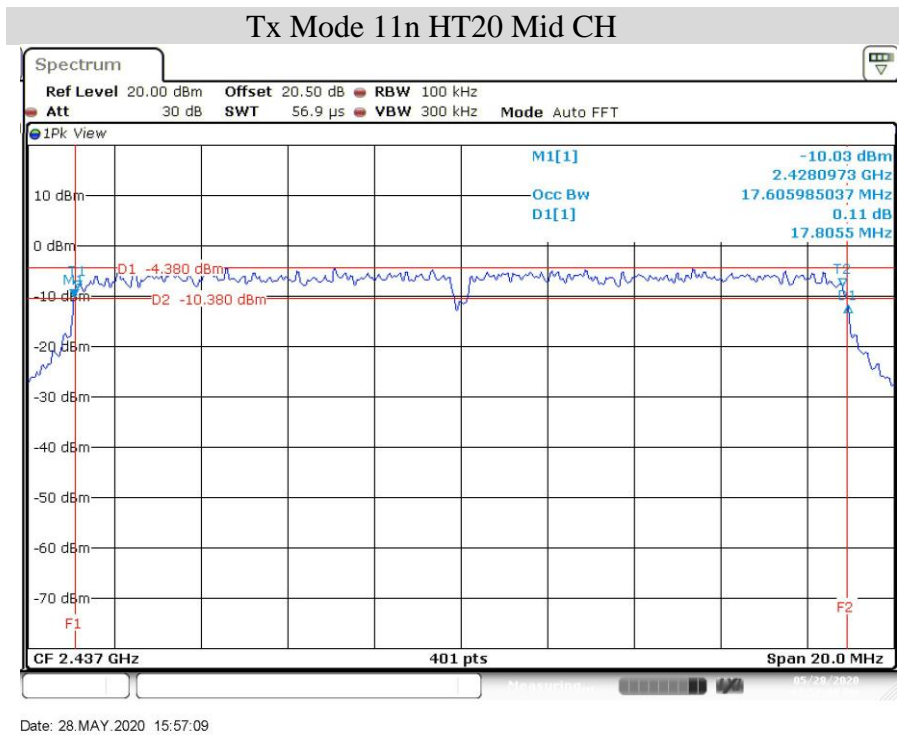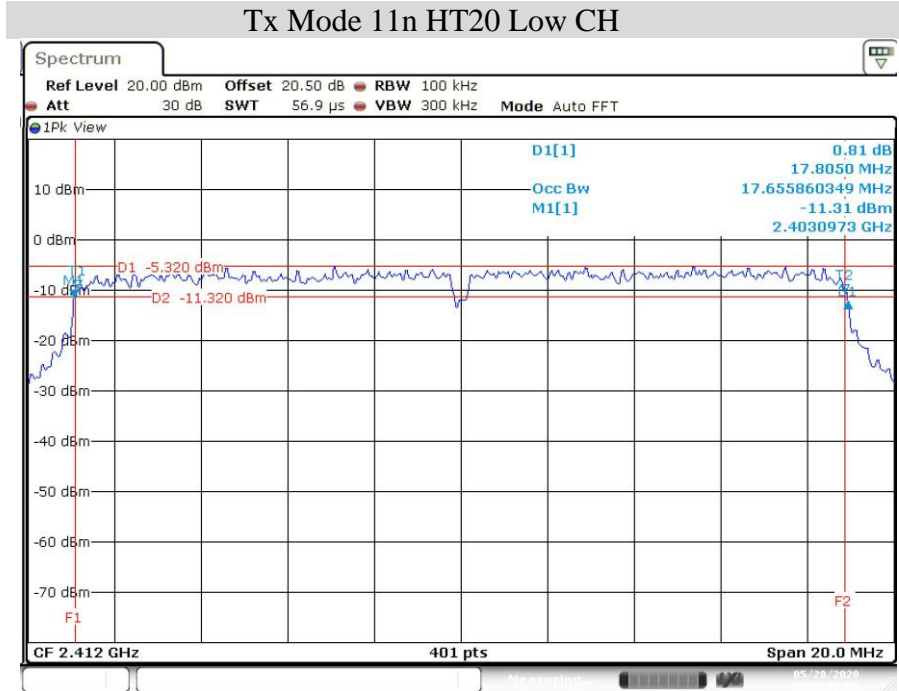

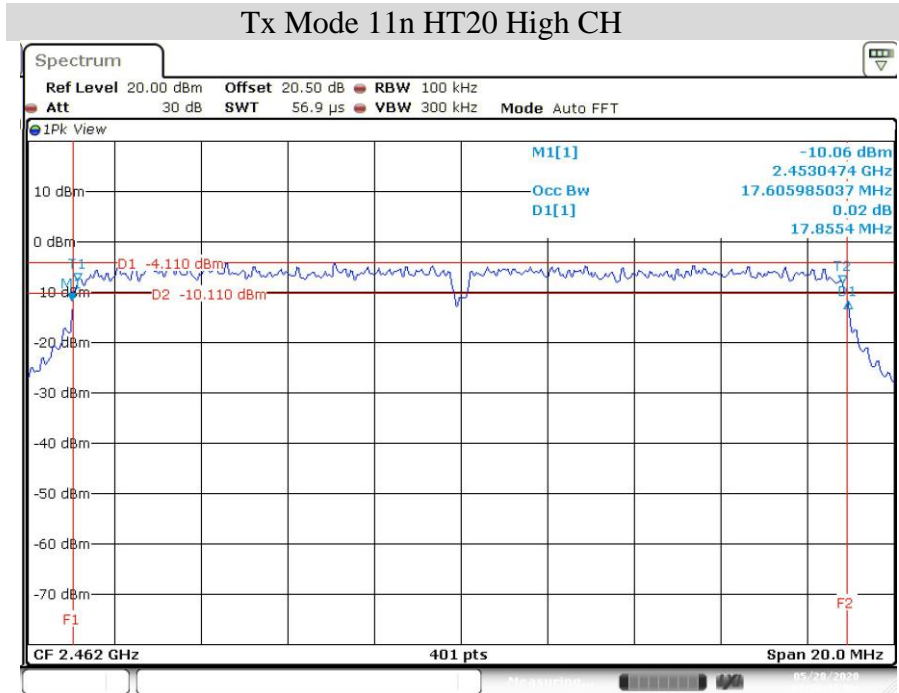


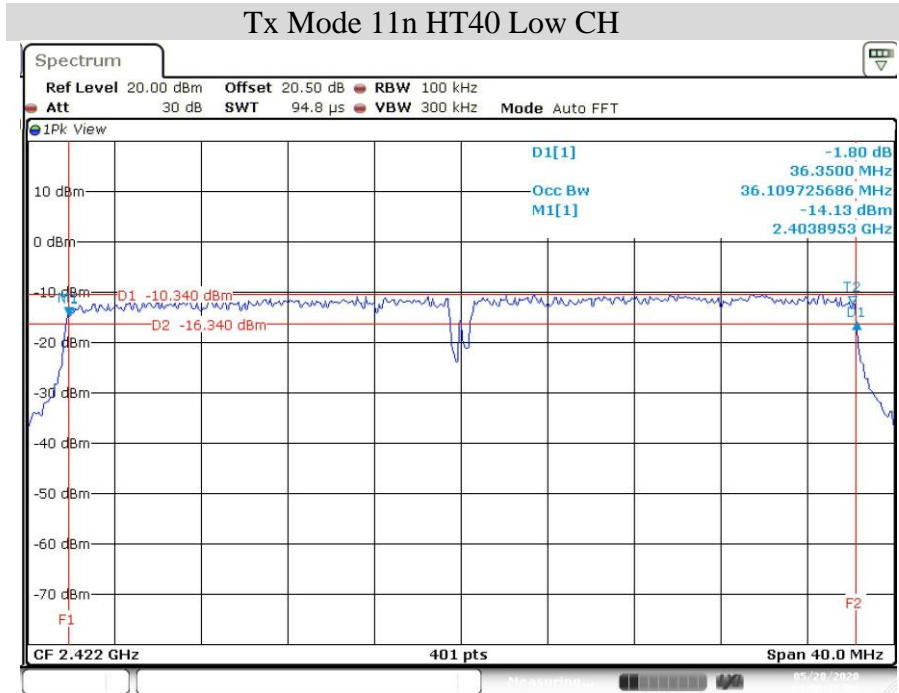

Date: 28.MAY.2020 16:00:57

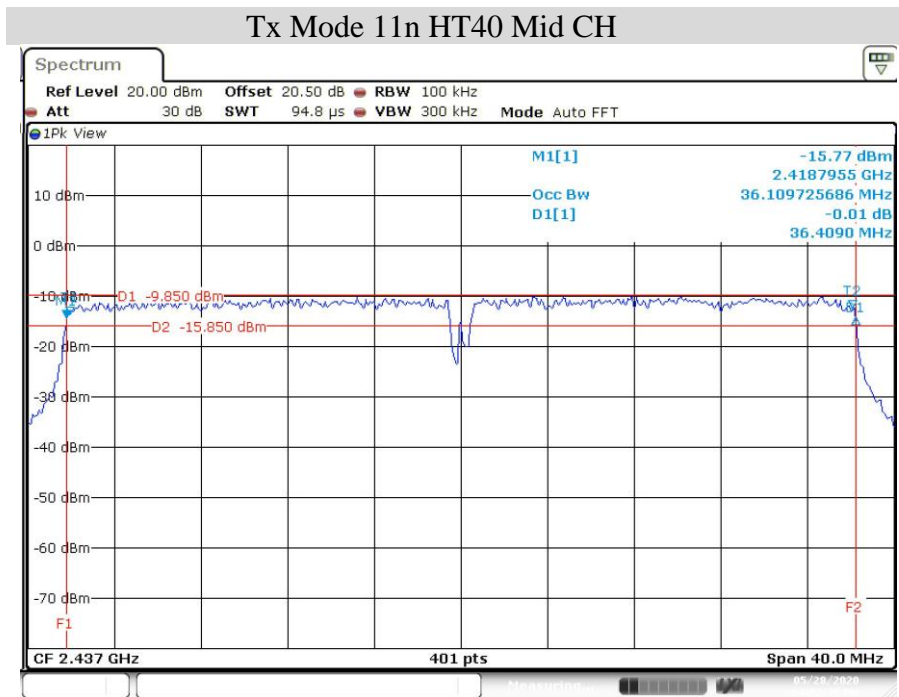

Date: 28.MAY.2020 16:02:45

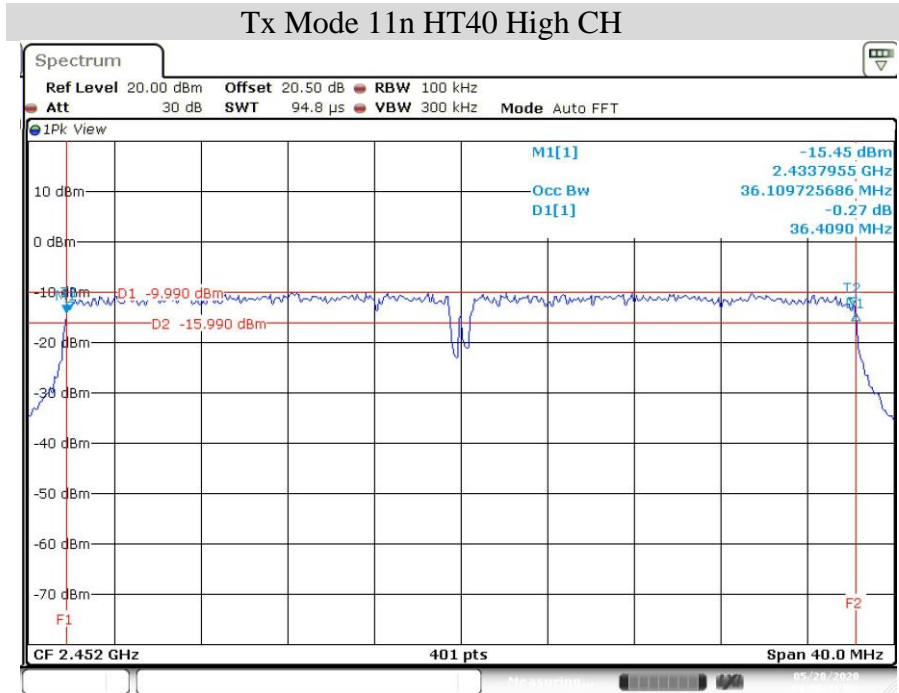


Date: 28.MAY.2020 16:06:40


9. RADIATED SPURIOUS EMISSIONS

9.1 TEST SETUP

30MHz to 1GHz

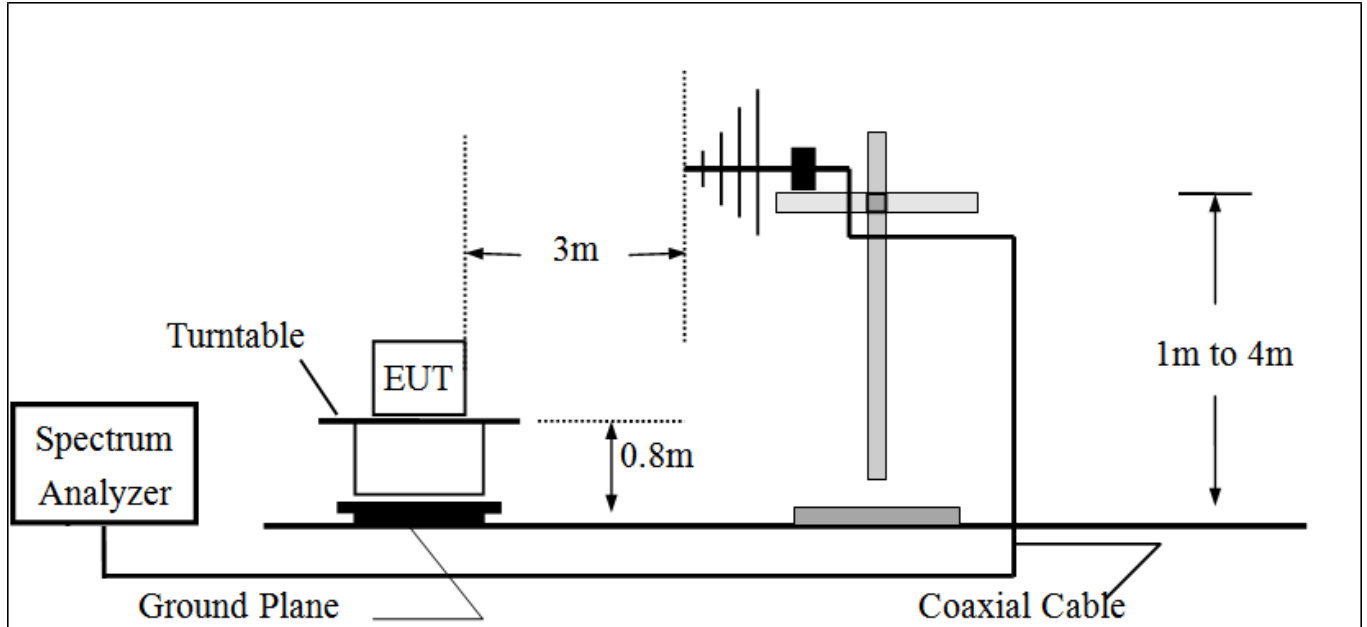

Above 1GHz

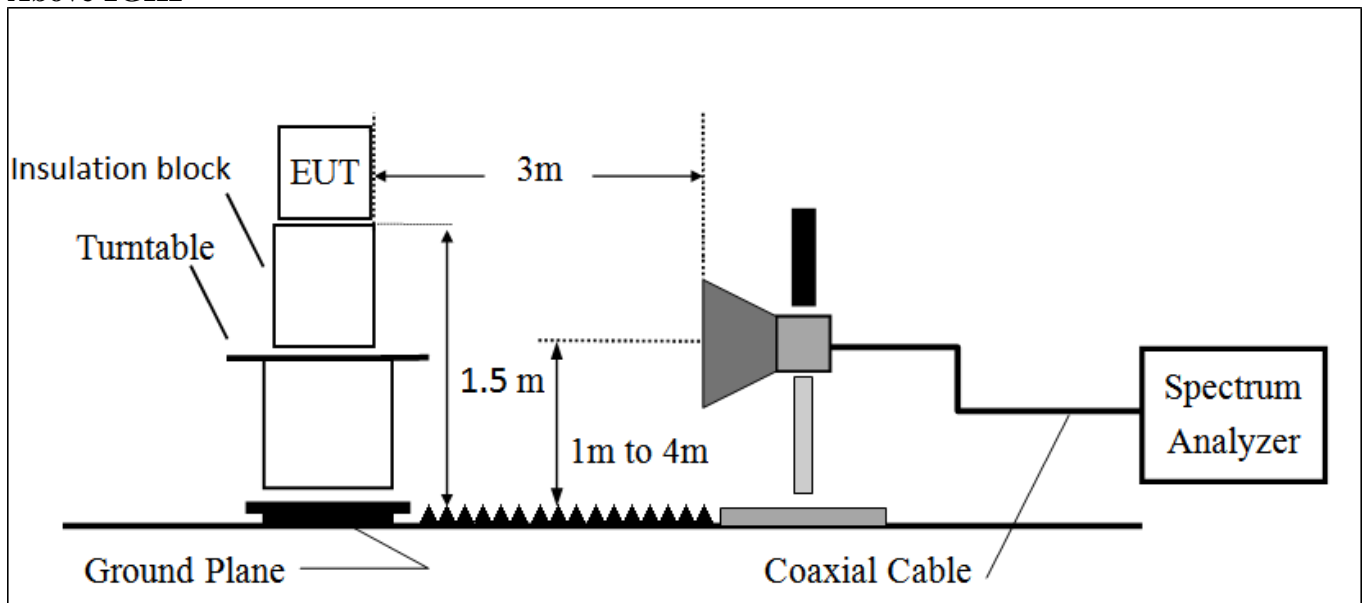



9.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
0.009-0.490	2400/F(kHz) at 300-meter	--
0.490-1.705	24000/F(kHz) at 30-meter	--
1.705-30	30 at 30-meter	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54



9.3 TEST PROCEDURE

1. The EUT was placed on a turntable, which was 0.8m or 1.5m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

9.4 TEST RESULT

PASS



9.5 TEST DATA:

30MHz ~ 1GMz

Date:2020-5-27

Site : GCC_RE_01

Regulations : FCC 15.247 B QP (3M)

RBW : 100 KHz VBW : 300 KHz SWT:Auto

Polarity : VERTICAL

EUT : WIFI Module


Model : MWR188FY-U

Mode : Tx Mode

Temp/Humidity : 24°C / 62%

Voltage : From PC-USB

Memo :

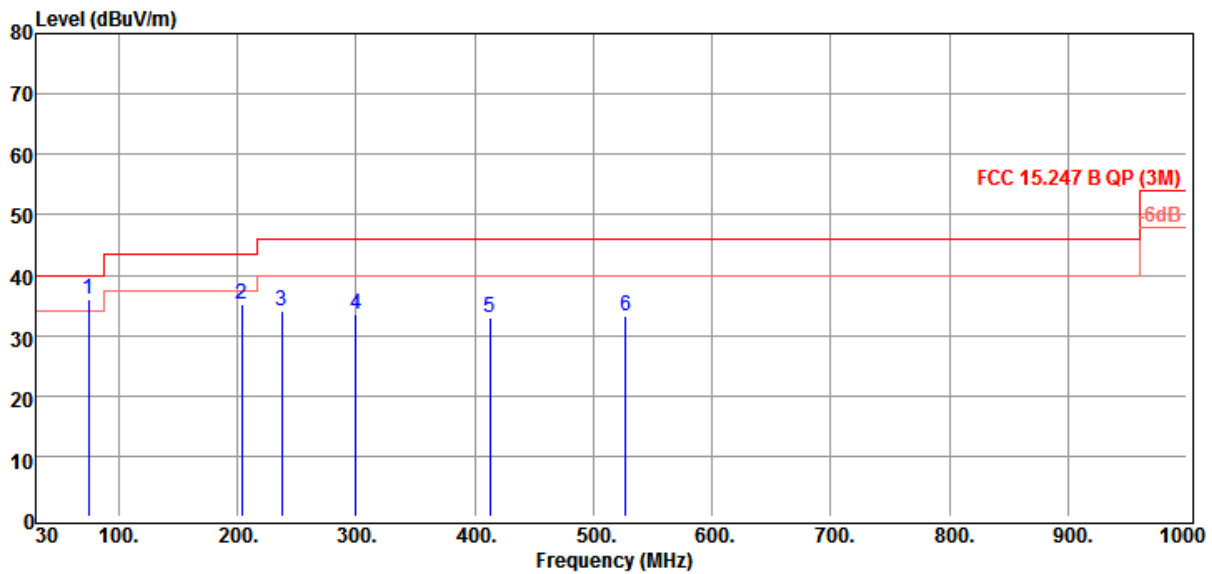

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	74.62	49.99	-13.99	0.75	14.30	29.04	36.00	40.00	-4.00	QP
2	203.63	44.64	-9.42	1.41	18.21	29.04	35.22	43.50	-8.28	QP
3	237.58	43.33	-9.16	1.64	18.15	28.95	34.17	46.00	-11.83	QP
4	299.66	40.00	-6.53	2.36	19.90	28.79	33.47	46.00	-12.53	QP
5	413.15	36.26	-3.39	2.35	22.66	28.40	32.87	46.00	-13.13	QP
6	527.61	34.37	-1.10	2.56	24.40	28.06	33.27	46.00	-12.73	QP

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line

* Since the electric field strength of 9kHz ~ 30MHz is too small and cannot be recorded, the radiation frequency is measured from 30MHz.



Date:2020-5-27

Site : GCC_RE_01

RBW : 100 KHz VBW : 300 KHz SWT:Auto

EUT : WIFI Module

Mode : Tx Mode

Voltage : From PC-USB


Regulations : FCC 15.247 B QP (3M)

Polarity : HORIZONTAL

Model : MWR188FY-U

Temp/Humidity : 24°C / 62%

Memo :

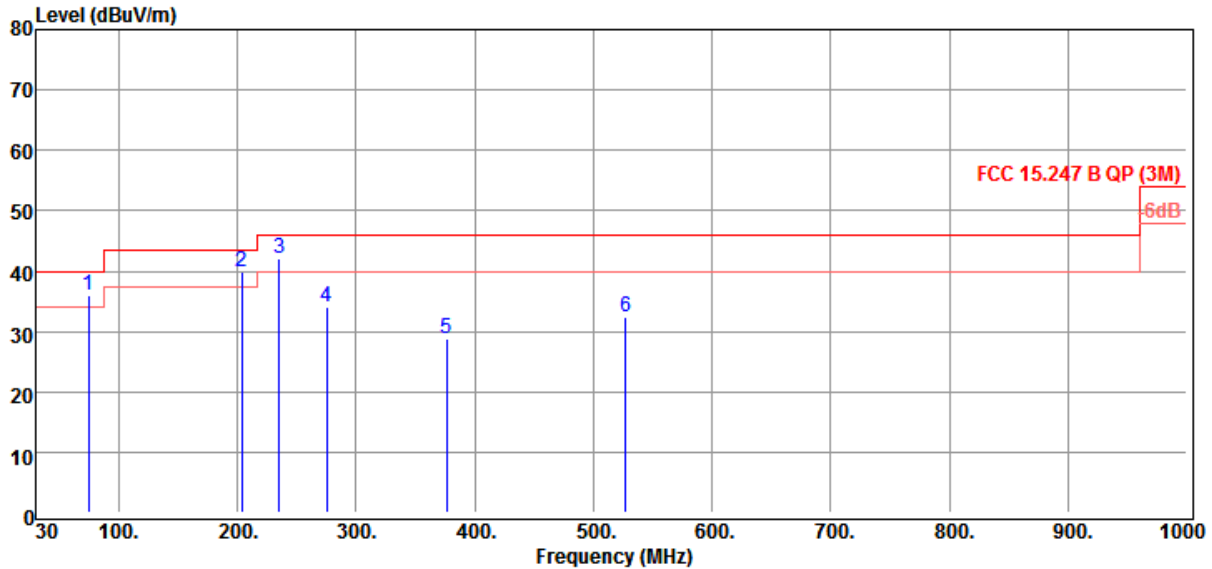

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	74.62	50.05	-13.99	0.75	14.30	29.04	36.06	40.00	-3.94	QP
2	203.63	49.34	-9.42	1.41	18.21	29.04	39.92	43.50	-3.58	QP
3	235.64	51.42	-9.22	1.63	18.11	28.96	42.20	46.00	-3.80	QP
4	275.41	41.00	-7.03	2.01	19.81	28.85	33.97	46.00	-12.03	QP
5	376.29	33.29	-4.43	2.39	21.70	28.52	28.86	46.00	-17.14	QP
6	527.61	33.52	-1.10	2.56	24.40	28.06	32.42	46.00	-13.58	QP

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line

* Since the electric field strength of 9kHz ~ 30MHz is too small and cannot be recorded, the radiation frequency is measured from 30MHz.




1GHz ~ 26.5GHz

Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

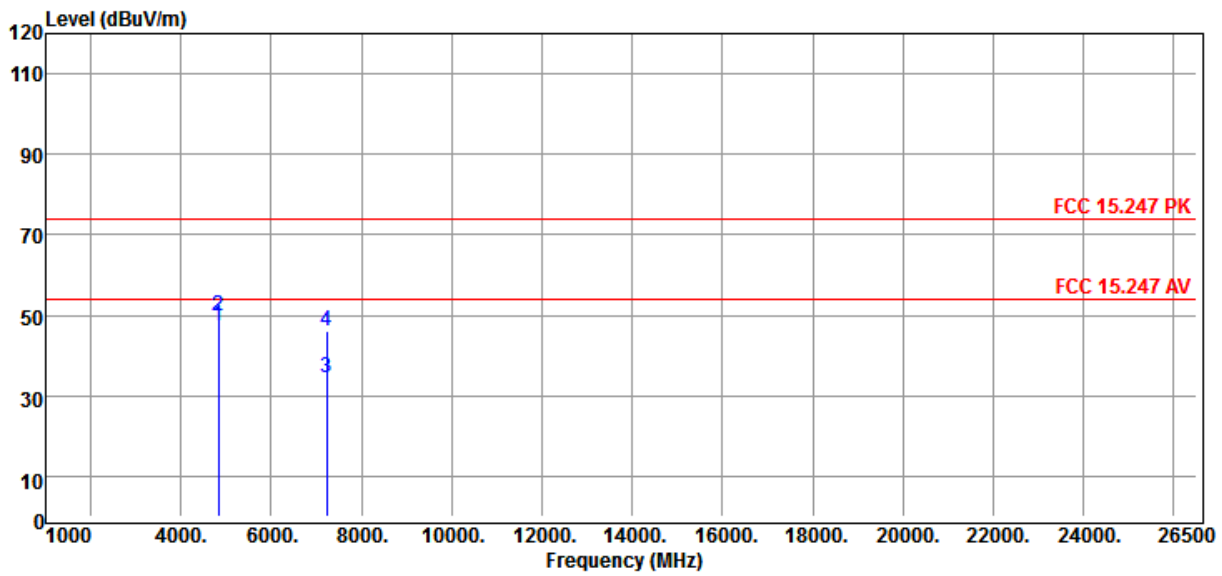

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	4824.00	54.89	-7.67	7.07	34.00	48.74	47.22	54.00	-6.78	Average
2	4824.00	57.70	-7.67	7.07	34.00	48.74	50.03	74.00	-23.97	Peak
3	7236.00	38.21	-3.75	8.96	35.40	48.11	34.46	54.00	-19.54	Average
4	7236.00	49.66	-3.75	8.96	35.40	48.11	45.91	74.00	-28.09	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

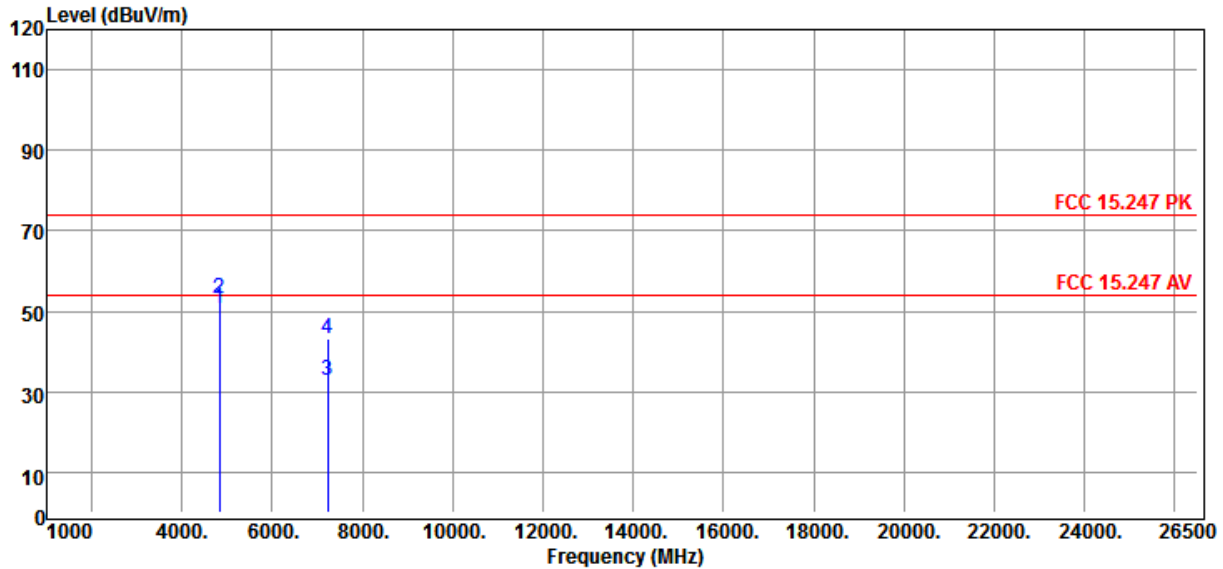

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4824.00	58.36	-7.67	7.07	34.00	48.74	50.69	54.00	-3.31	Average
2	4824.00	60.70	-7.67	7.07	34.00	48.74	53.03	74.00	-20.97	Peak
3	7236.00	36.72	-3.75	8.96	35.40	48.11	32.97	54.00	-21.03	Average
4	7236.00	46.97	-3.75	8.96	35.40	48.11	43.22	74.00	-30.78	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

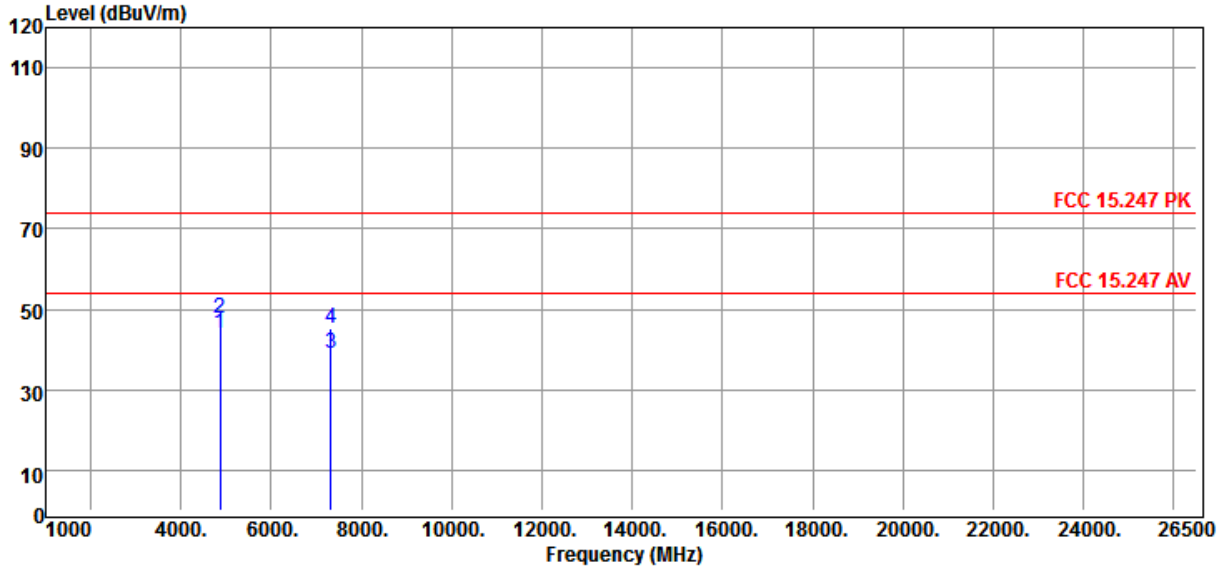

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	51.84	-7.62	7.11	34.00	48.73	44.22	54.00	-9.78	Average
2	4874.00	55.42	-7.62	7.11	34.00	48.73	47.80	74.00	-26.20	Peak
3	7311.00	42.78	-3.61	8.99	35.48	48.08	39.17	54.00	-14.83	Average
4	7311.00	48.94	-3.61	8.99	35.48	48.08	45.33	74.00	-28.67	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

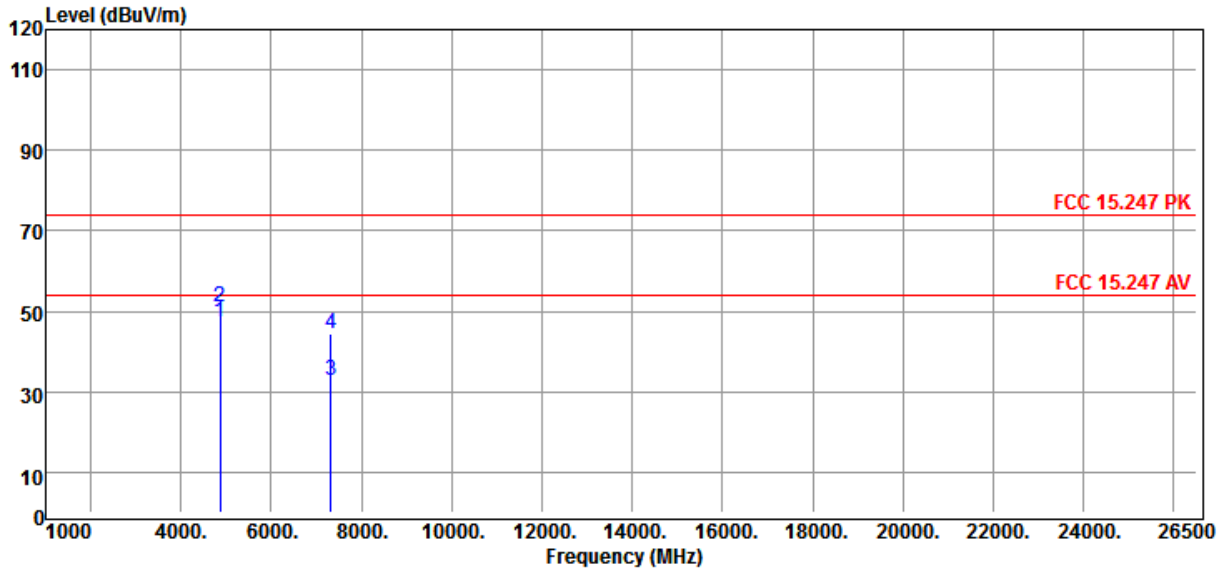

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	54.98	-7.62	7.11	34.00	48.73	47.36	54.00	-6.64	Average
2	4874.00	58.72	-7.62	7.11	34.00	48.73	51.10	74.00	-22.90	Peak
3	7311.00	36.40	-3.61	8.99	35.48	48.08	32.79	54.00	-21.21	Average
4	7311.00	47.97	-3.61	8.99	35.48	48.08	44.36	74.00	-29.64	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

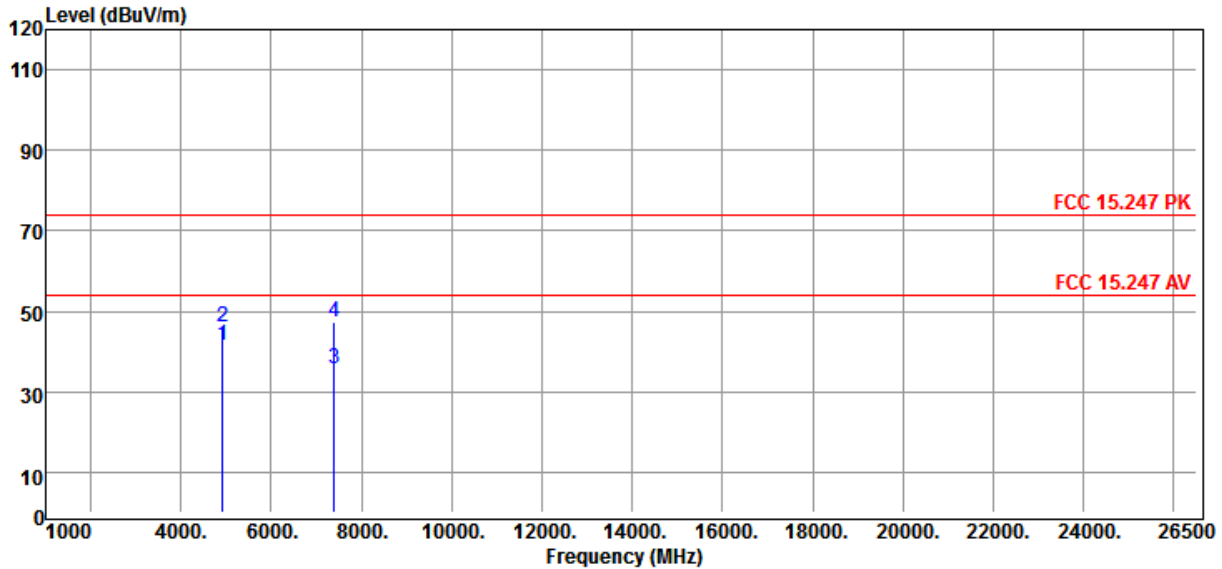

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4924.00	49.22	-7.51	7.16	34.05	48.72	41.71	54.00	-12.29	Average
2	4924.00	53.48	-7.51	7.16	34.05	48.72	45.97	74.00	-28.03	Peak
3	7386.00	39.04	-3.48	9.03	35.54	48.05	35.56	54.00	-18.44	Average
4	7386.00	50.80	-3.48	9.03	35.54	48.05	47.32	74.00	-26.68	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11b High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:Def

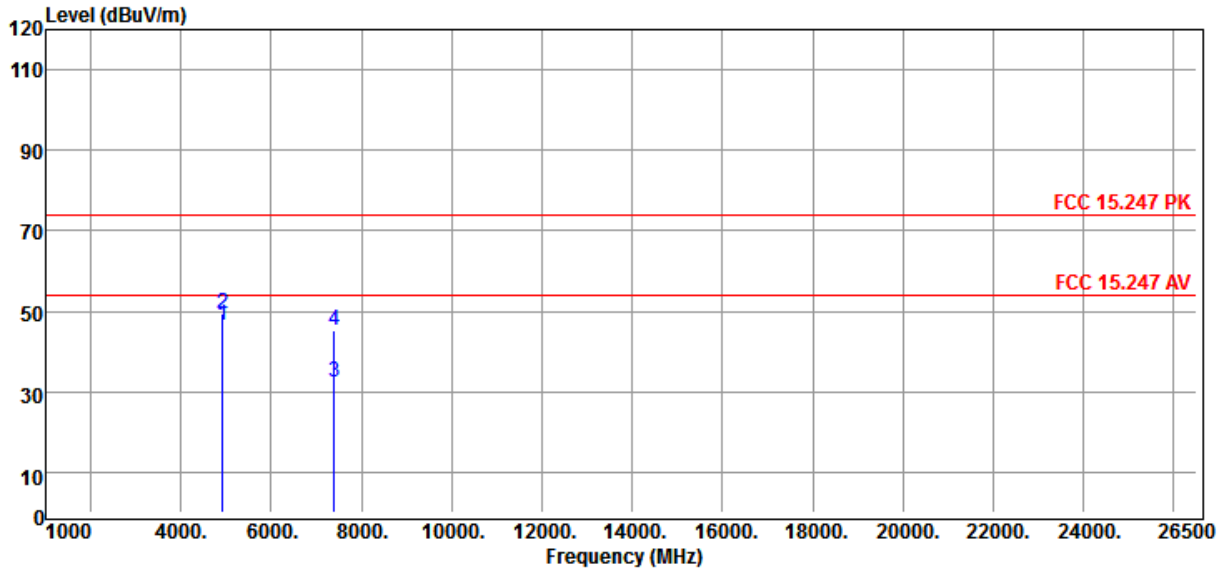

	Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	4924.00	53.96	-7.51	7.16	34.05	48.72	46.45	54.00	-7.55	Average
2	4924.00	57.08	-7.51	7.16	34.05	48.72	49.57	74.00	-24.43	Peak
3	7386.00	35.93	-3.48	9.03	35.54	48.05	32.45	54.00	-21.55	Average
4	7386.00	48.59	-3.48	9.03	35.54	48.05	45.11	74.00	-28.89	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11g Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:45

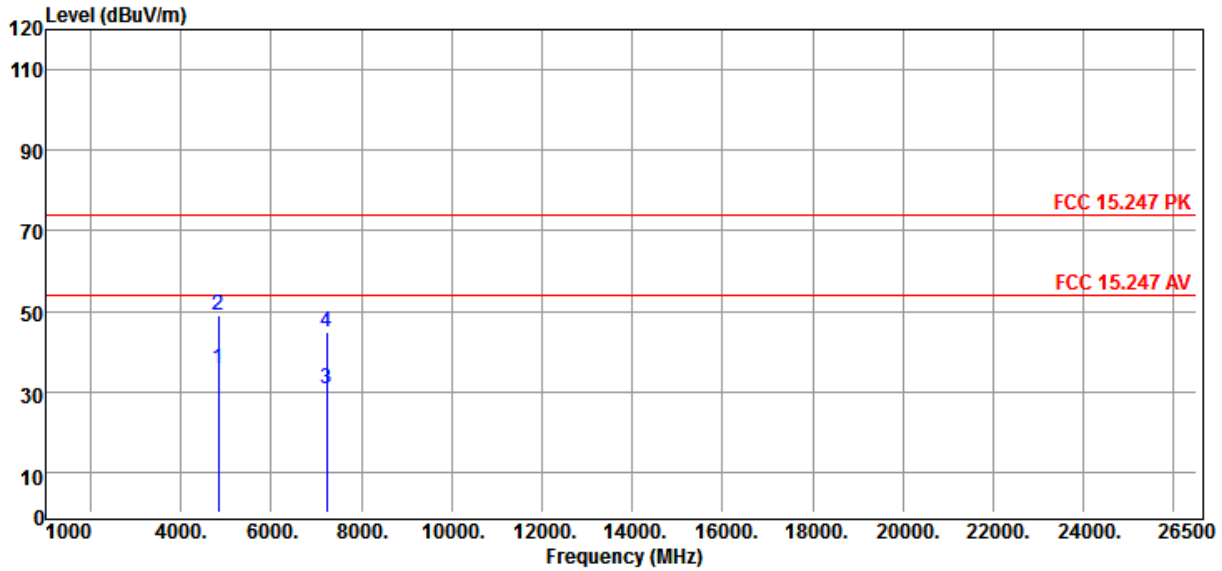


	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4824.00	43.36	-7.67	7.07	34.00	48.74	35.69	54.00	-18.31	Average
2	4824.00	56.47	-7.67	7.07	34.00	48.74	48.80	74.00	-25.20	Peak
3	7236.00	34.52	-3.75	8.96	35.40	48.11	30.77	54.00	-23.23	Average
4	7236.00	48.56	-3.75	8.96	35.40	48.11	44.81	74.00	-29.19	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01	Regulations : FCC 15.247 PK
RBW : 1000 KHz VBW : 1000 KHz	Polarity : HORIZONTAL
SWT:Auto	
EUT : WIFI Module	Model : MWR188FY-U
Mode : Tx Mode 11g Low CH	Temp/Humidity : 24°C / 62%
Voltage : From PC-USB	Memo : Power Set:45

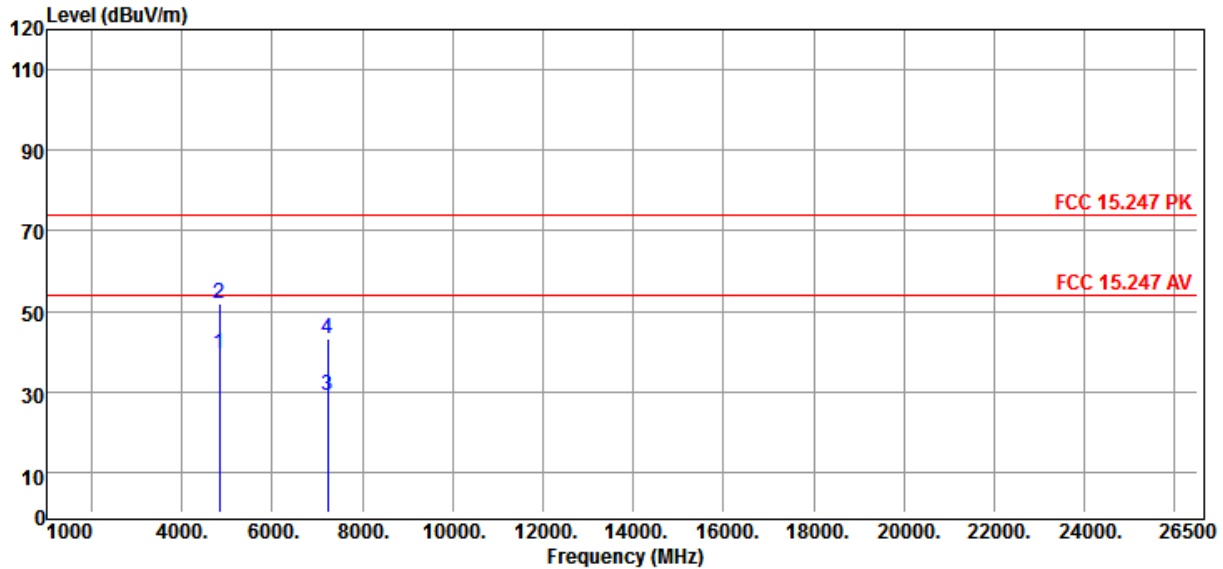

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4824.00	47.02	-7.67	7.07	34.00	48.74	39.35	54.00	-14.65	Average
2	4824.00	59.72	-7.67	7.07	34.00	48.74	52.05	74.00	-21.95	Peak
3	7236.00	32.85	-3.75	8.96	35.40	48.11	29.10	54.00	-24.90	Average
4	7236.00	46.76	-3.75	8.96	35.40	48.11	43.01	74.00	-30.99	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11g Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:45

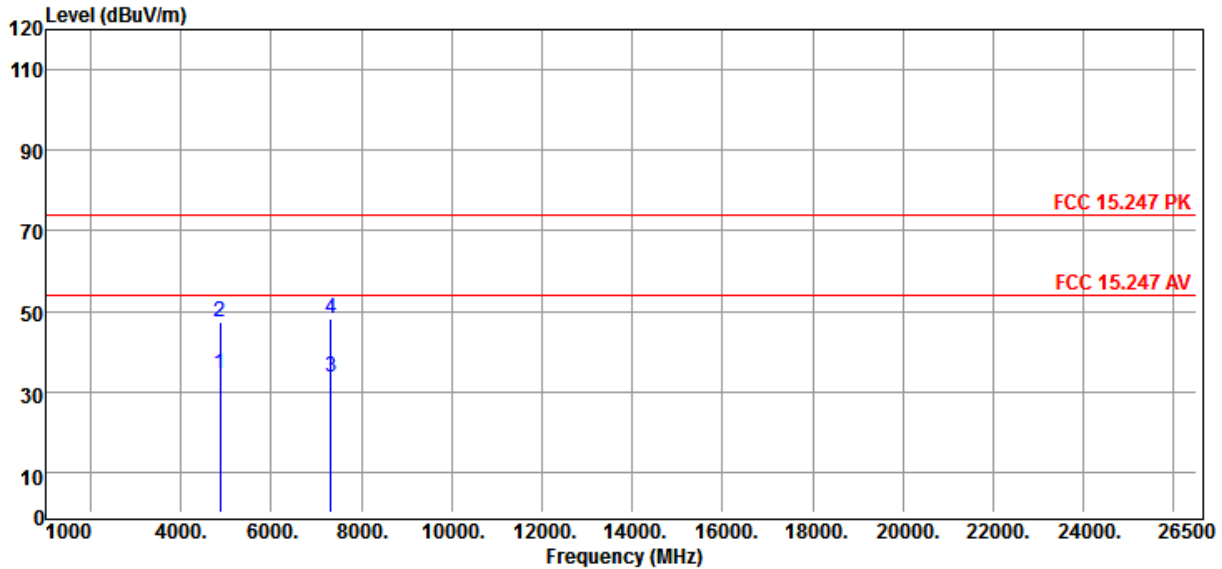

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	42.12	-7.62	7.11	34.00	48.73	34.50	54.00	-19.50	Average
2	4874.00	54.89	-7.62	7.11	34.00	48.73	47.27	74.00	-26.73	Peak
3	7311.00	37.27	-3.61	8.99	35.48	48.08	33.66	54.00	-20.34	Average
4	7311.00	51.72	-3.61	8.99	35.48	48.08	48.11	74.00	-25.89	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11g Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:45

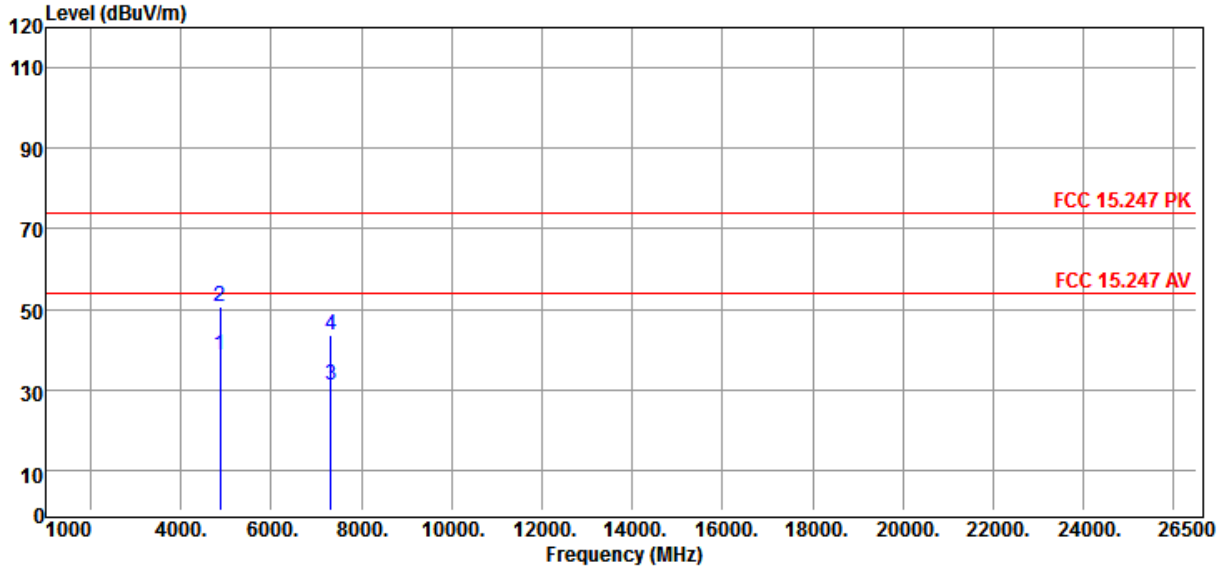

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	46.05	-7.62	7.11	34.00	48.73	38.43	54.00	-15.57	Average
2	4874.00	58.08	-7.62	7.11	34.00	48.73	50.46	74.00	-23.54	Peak
3	7311.00	34.55	-3.61	8.99	35.48	48.08	30.94	54.00	-23.06	Average
4	7311.00	47.34	-3.61	8.99	35.48	48.08	43.73	74.00	-30.27	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11g High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:45

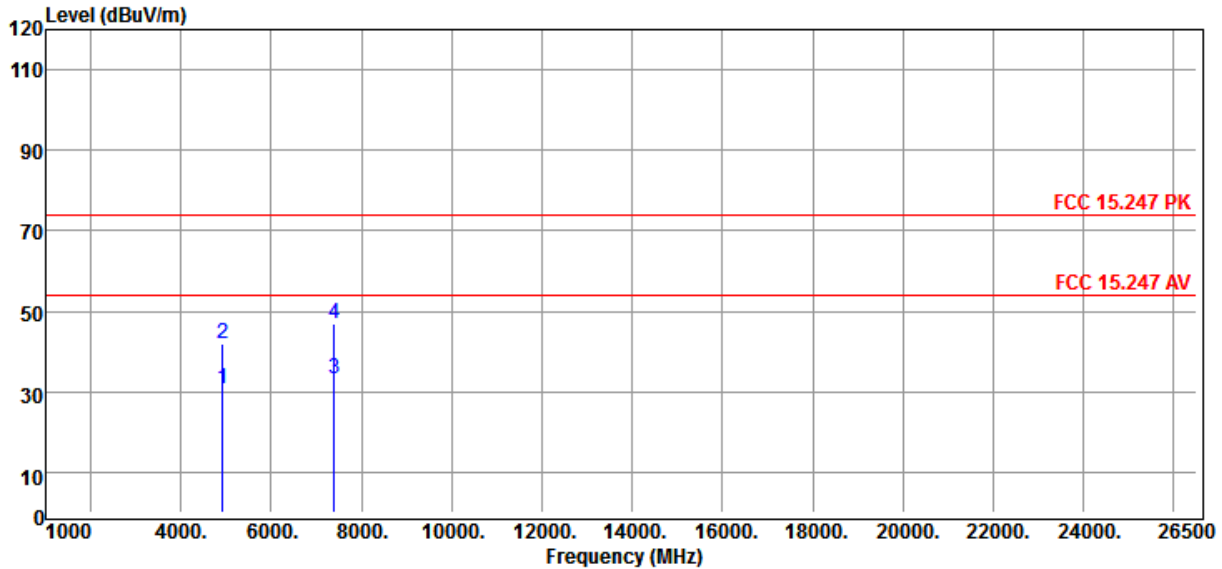

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4924.00	38.20	-7.51	7.16	34.05	48.72	30.69	54.00	-23.31	Average
2	4924.00	49.37	-7.51	7.16	34.05	48.72	41.86	74.00	-32.14	Peak
3	7386.00	36.81	-3.48	9.03	35.54	48.05	33.33	54.00	-20.67	Average
4	7386.00	50.32	-3.48	9.03	35.54	48.05	46.84	74.00	-27.16	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11g High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:45

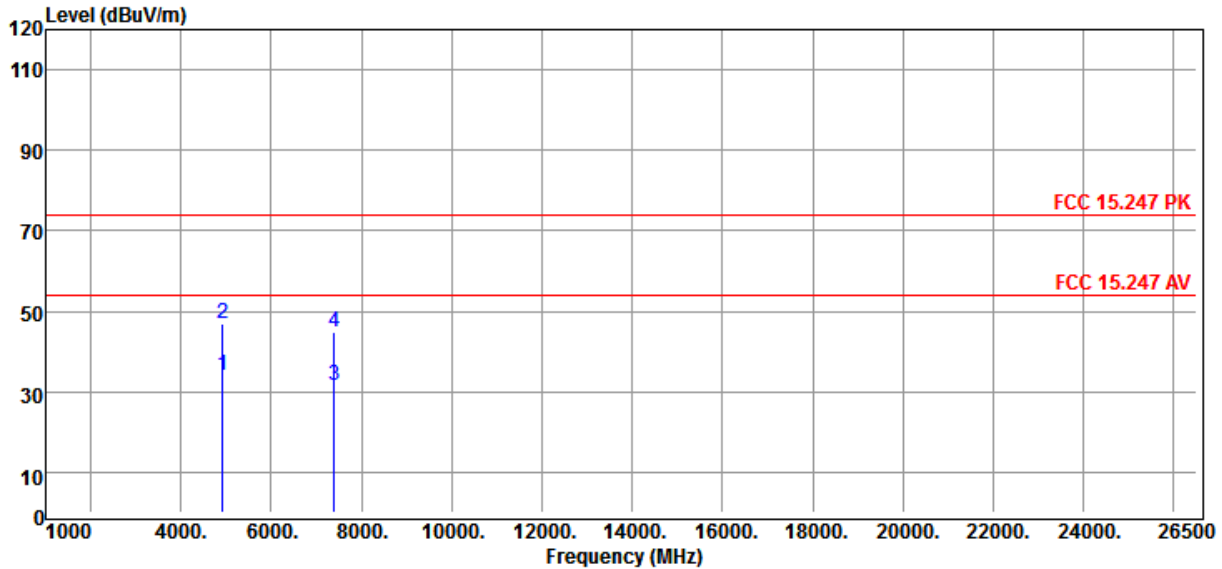

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4924.00	41.53	-7.51	7.16	34.05	48.72	34.02	54.00	-19.98	Average
2	4924.00	54.40	-7.51	7.16	34.05	48.72	46.89	74.00	-27.11	Peak
3	7386.00	34.95	-3.48	9.03	35.54	48.05	31.47	54.00	-22.53	Average
4	7386.00	48.28	-3.48	9.03	35.54	48.05	44.80	74.00	-29.20	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

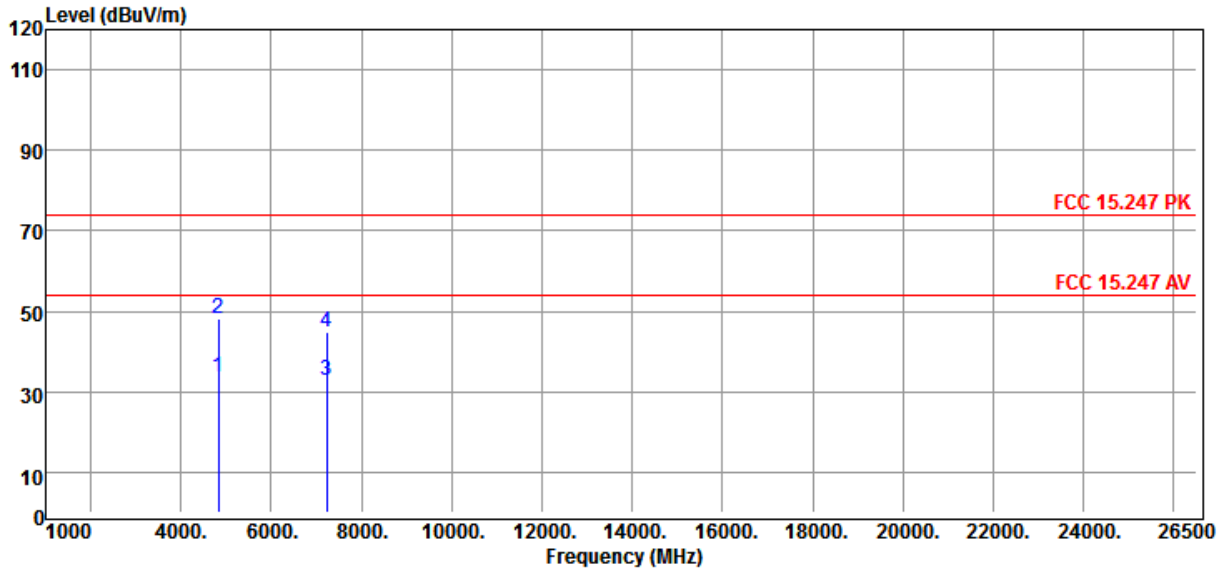

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4824.00	41.37	-7.67	7.07	34.00	48.74	33.70	54.00	-20.30	Average
2	4824.00	55.79	-7.67	7.07	34.00	48.74	48.12	74.00	-25.88	Peak
3	7236.00	36.43	-3.75	8.96	35.40	48.11	32.68	54.00	-21.32	Average
4	7236.00	48.61	-3.75	8.96	35.40	48.11	44.86	74.00	-29.14	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

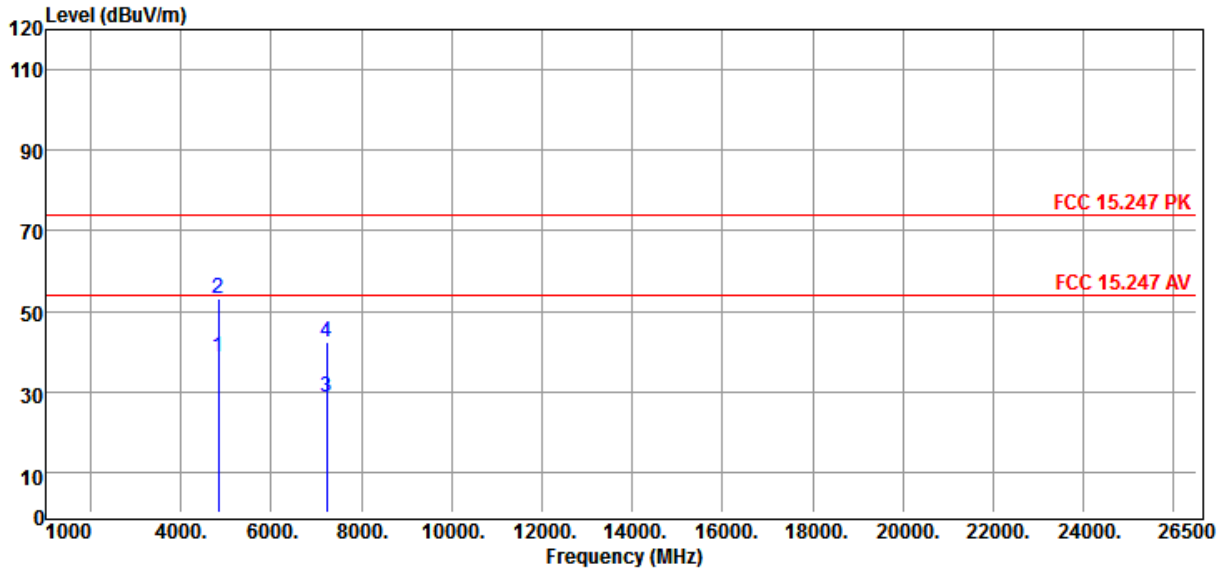

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4824.00	46.21	-7.67	7.07	34.00	48.74	38.54	54.00	-15.46	Average
2	4824.00	60.86	-7.67	7.07	34.00	48.74	53.19	74.00	-20.81	Peak
3	7236.00	32.60	-3.75	8.96	35.40	48.11	28.85	54.00	-25.15	Average
4	7236.00	45.96	-3.75	8.96	35.40	48.11	42.21	74.00	-31.79	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

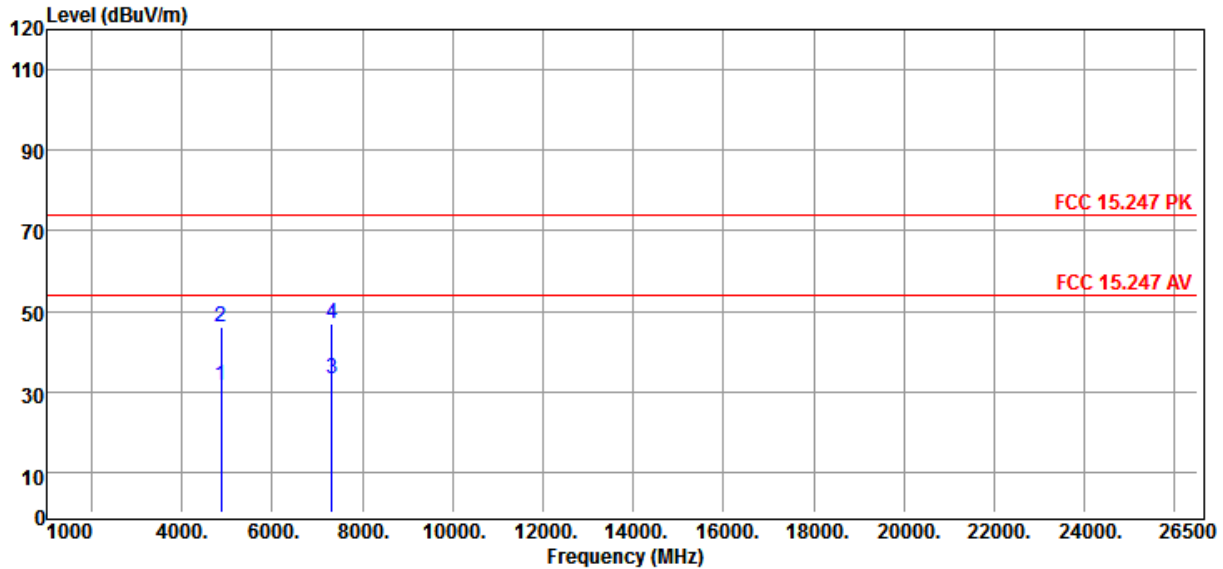

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	39.17	-7.62	7.11	34.00	48.73	31.55	54.00	-22.45	Average
2	4874.00	53.77	-7.62	7.11	34.00	48.73	46.15	74.00	-27.85	Peak
3	7311.00	36.67	-3.61	8.99	35.48	48.08	33.06	54.00	-20.94	Average
4	7311.00	50.71	-3.61	8.99	35.48	48.08	47.10	74.00	-26.90	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

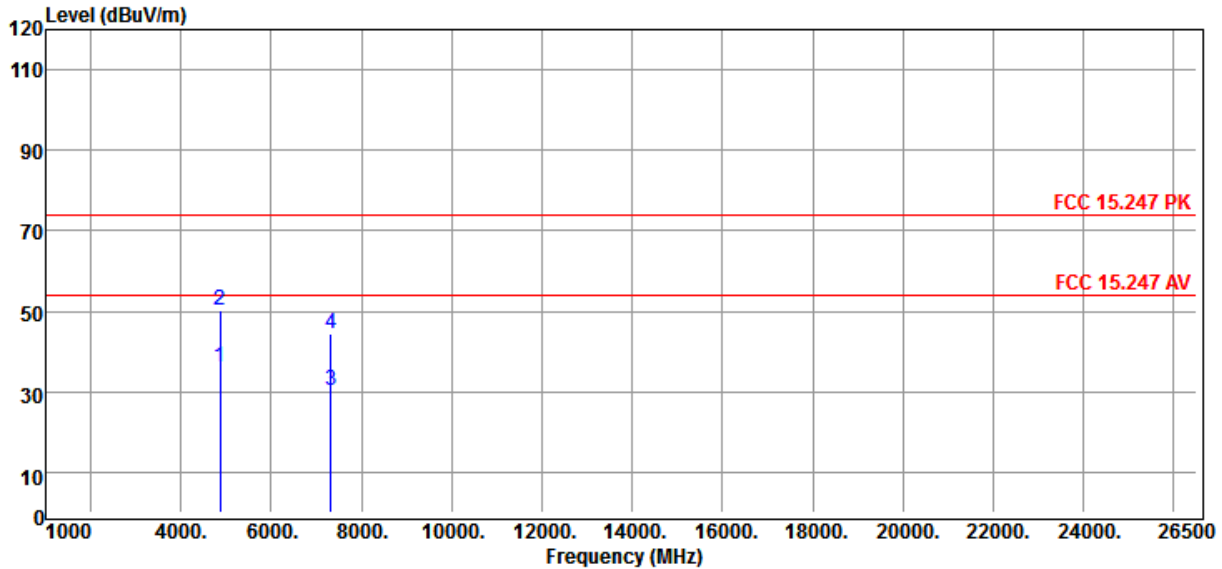

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	43.81	-7.62	7.11	34.00	48.73	36.19	54.00	-17.81	Average
2	4874.00	57.94	-7.62	7.11	34.00	48.73	50.32	74.00	-23.68	Peak
3	7311.00	33.94	-3.61	8.99	35.48	48.08	30.33	54.00	-23.67	Average
4	7311.00	47.84	-3.61	8.99	35.48	48.08	44.23	74.00	-29.77	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

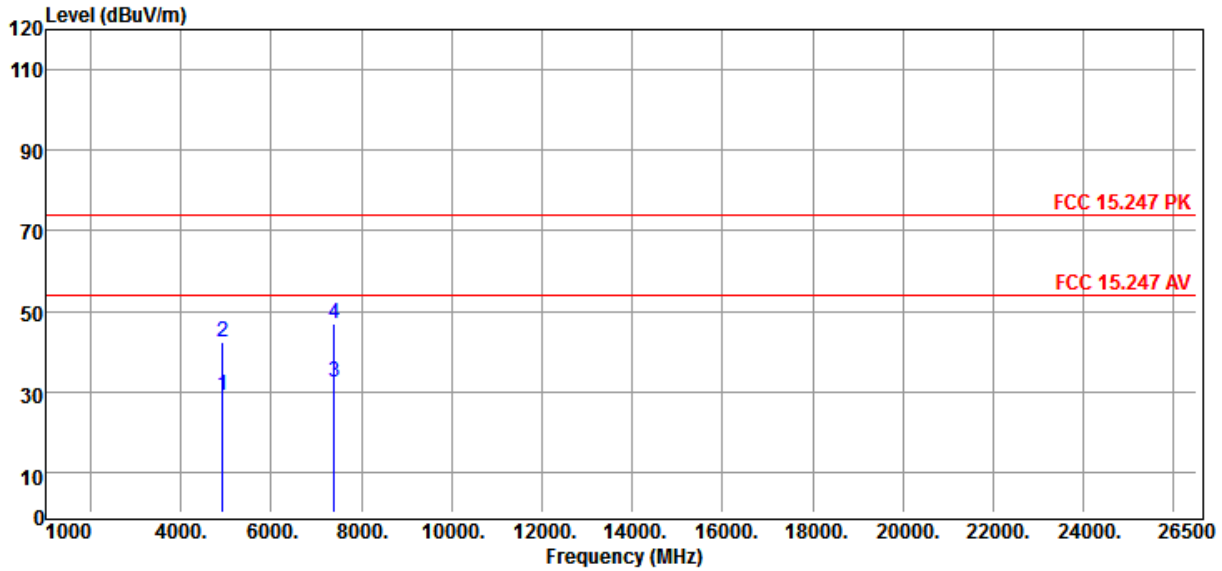

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4924.00	36.49	-7.51	7.16	34.05	48.72	28.98	54.00	-25.02	Average
2	4924.00	49.71	-7.51	7.16	34.05	48.72	42.20	74.00	-31.80	Peak
3	7386.00	35.74	-3.48	9.03	35.54	48.05	32.26	54.00	-21.74	Average
4	7386.00	50.29	-3.48	9.03	35.54	48.05	46.81	74.00	-27.19	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT20 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:40

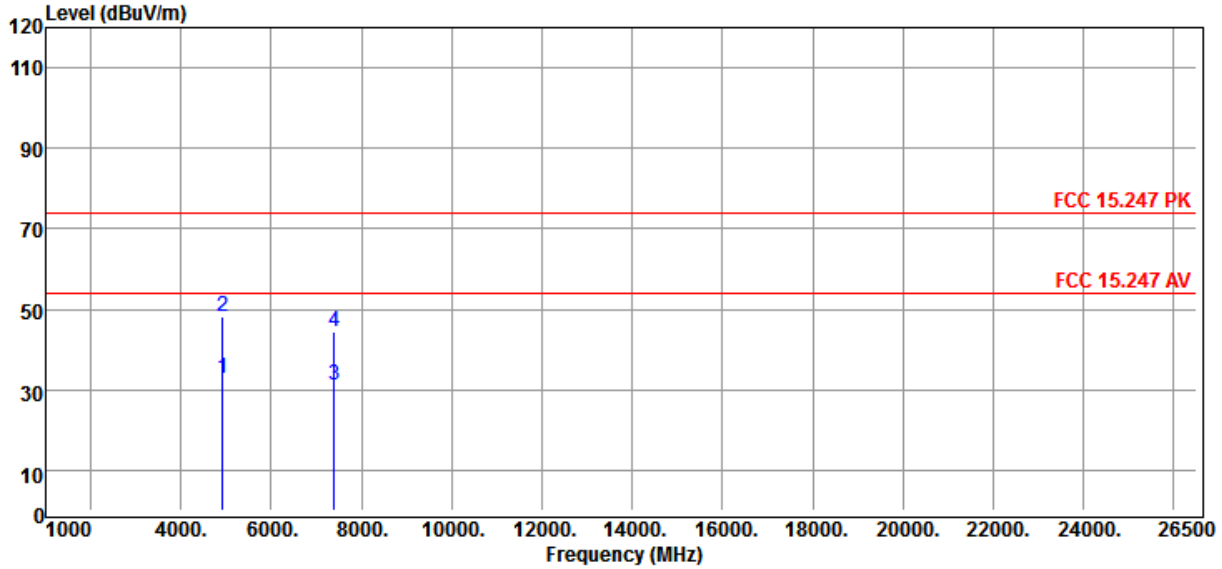

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4924.00	40.36	-7.51	7.16	34.05	48.72	32.85	54.00	-21.15	Average
2	4924.00	55.65	-7.51	7.16	34.05	48.72	48.14	74.00	-25.86	Peak
3	7386.00	34.62	-3.48	9.03	35.54	48.05	31.14	54.00	-22.86	Average
4	7386.00	47.88	-3.48	9.03	35.54	48.05	44.40	74.00	-29.60	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

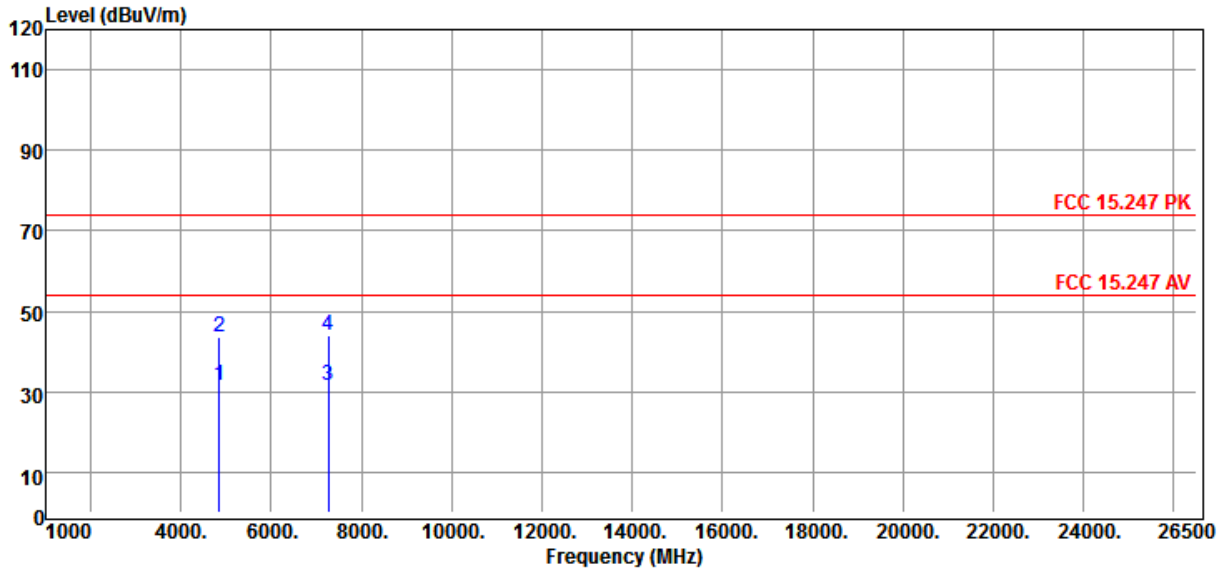

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4844.00	39.33	-7.64	7.09	34.00	48.73	31.69	54.00	-22.31	Average
2	4844.00	51.14	-7.64	7.09	34.00	48.73	43.50	74.00	-30.50	Peak
3	7266.00	35.41	-3.69	8.97	35.43	48.09	31.72	54.00	-22.28	Average
4	7266.00	47.68	-3.69	8.97	35.43	48.09	43.99	74.00	-30.01	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 Low CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

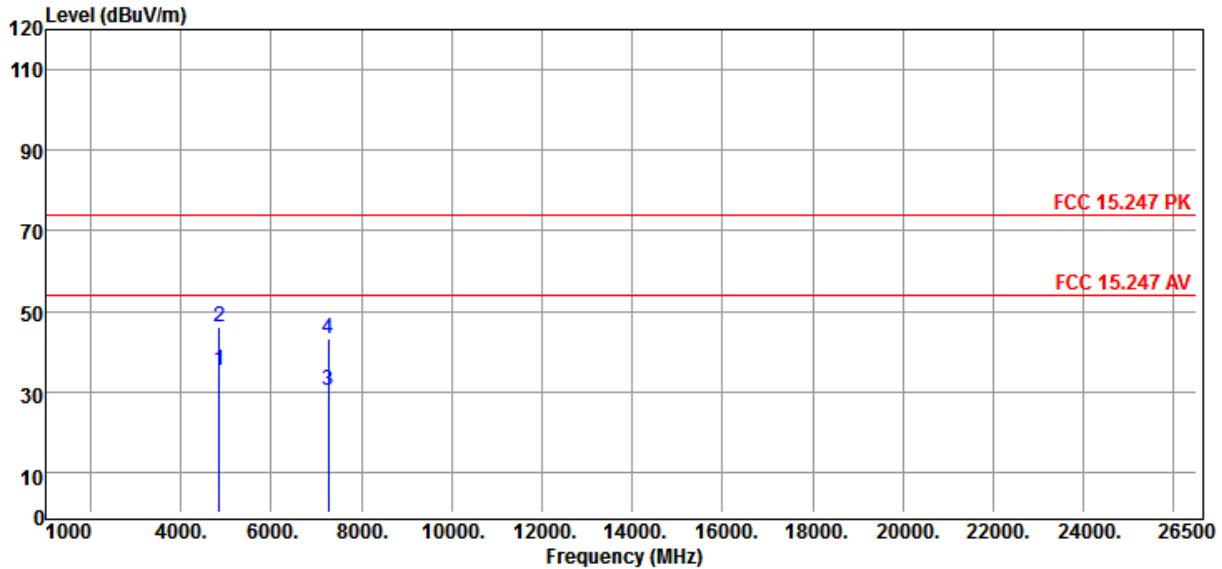

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4844.00	42.78	-7.64	7.09	34.00	48.73	35.14	54.00	-18.86	Average
2	4844.00	53.62	-7.64	7.09	34.00	48.73	45.98	74.00	-28.02	Peak
3	7266.00	34.10	-3.69	8.97	35.43	48.09	30.41	54.00	-23.59	Average
4	7266.00	47.01	-3.69	8.97	35.43	48.09	43.32	74.00	-30.68	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

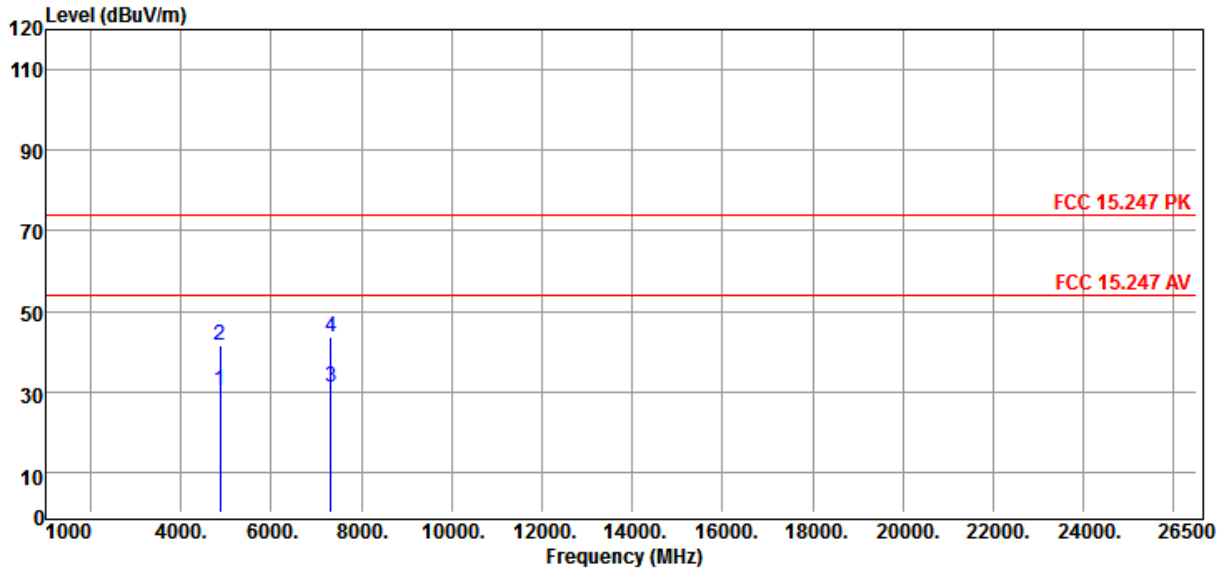

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	37.77	-7.62	7.11	34.00	48.73	30.15	54.00	-23.85	Average
2	4874.00	49.14	-7.62	7.11	34.00	48.73	41.52	74.00	-32.48	Peak
3	7311.00	34.55	-3.61	8.99	35.48	48.08	30.94	54.00	-23.06	Average
4	7311.00	47.24	-3.61	8.99	35.48	48.08	43.63	74.00	-30.37	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 Mid CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

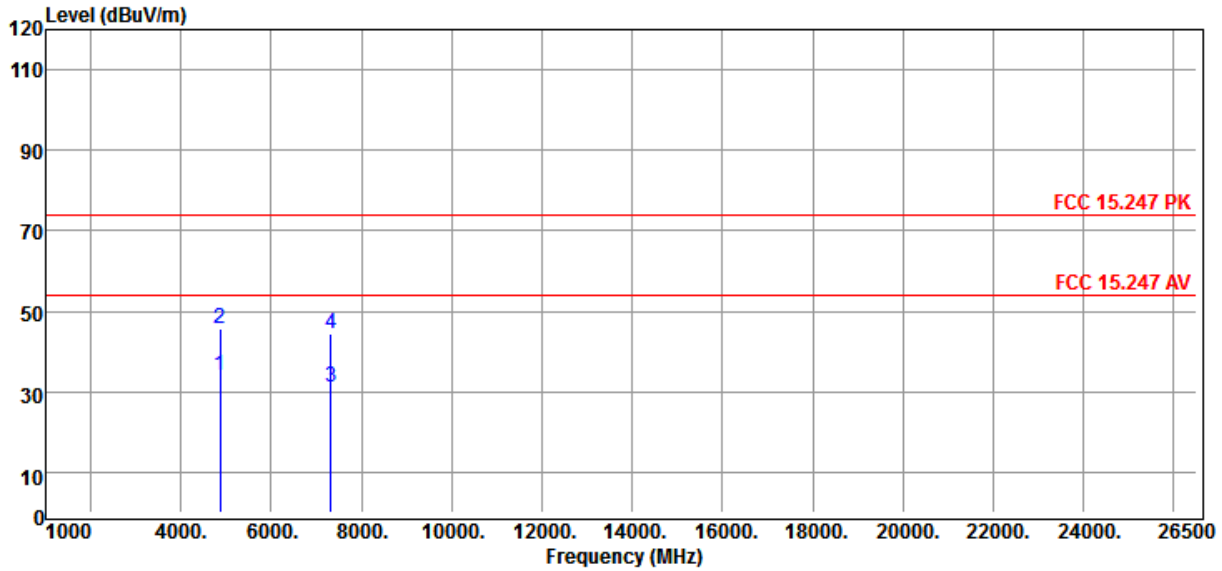

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4874.00	41.61	-7.62	7.11	34.00	48.73	33.99	54.00	-20.01	Average
2	4874.00	53.19	-7.62	7.11	34.00	48.73	45.57	74.00	-28.43	Peak
3	7311.00	34.96	-3.61	8.99	35.48	48.08	31.35	54.00	-22.65	Average
4	7311.00	47.96	-3.61	8.99	35.48	48.08	44.35	74.00	-29.65	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : VERTICAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

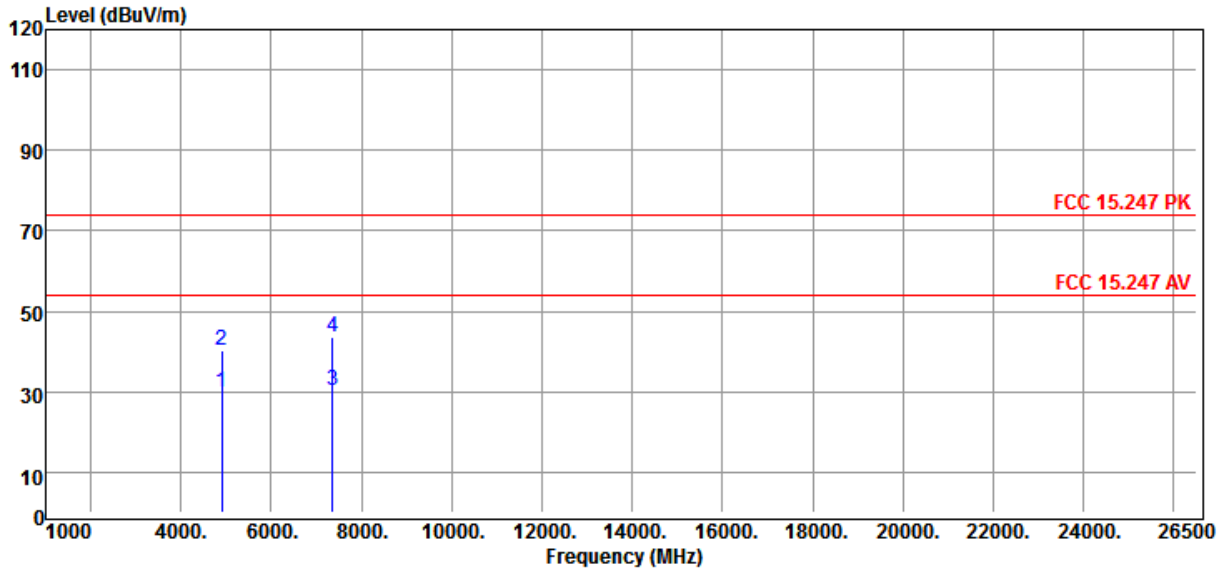

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4904.00	37.52	-7.57	7.14	34.01	48.72	29.95	54.00	-24.05	Average
2	4904.00	47.98	-7.57	7.14	34.01	48.72	40.41	74.00	-33.59	Peak
3	7356.00	34.12	-3.62	9.02	35.42	48.06	30.50	54.00	-23.50	Average
4	7356.00	47.30	-3.62	9.02	35.42	48.06	43.68	74.00	-30.32	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



Date:2020-5-27

Site : GCC_RE_01
 RBW : 1000 KHz VBW : 1000 KHz
 SWT:Auto
 EUT : WIFI Module
 Mode : Tx Mode 11n HT40 High CH
 Voltage : From PC-USB

Regulations : FCC 15.247 PK
 Polarity : HORIZONTAL
 Model : MWR188FY-U
 Temp/Humidity : 24°C / 62%
 Memo : Power Set:35

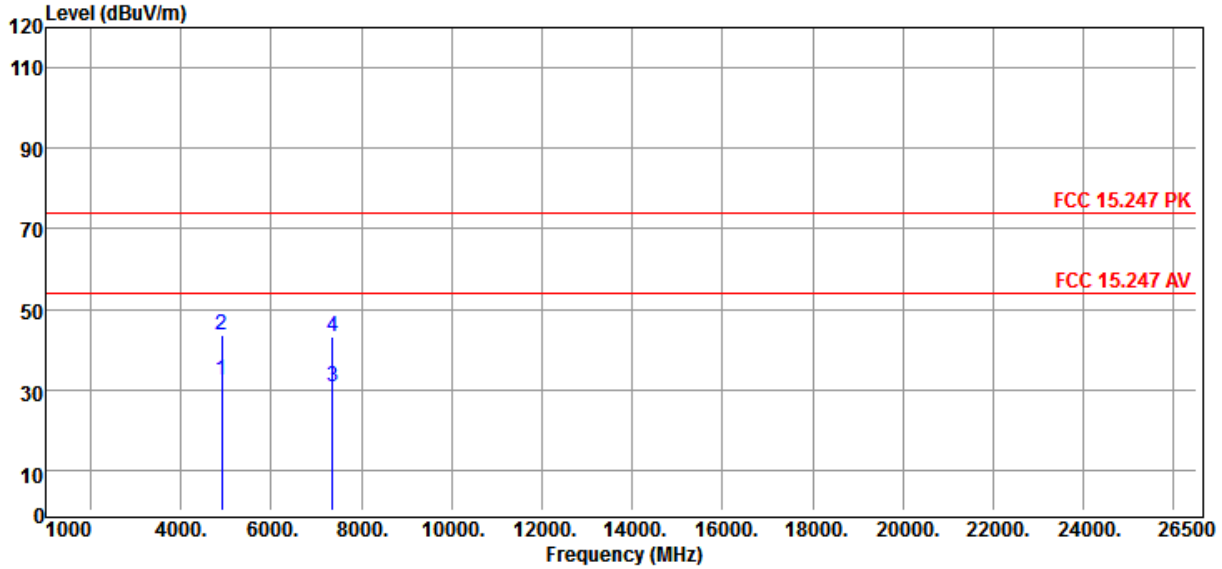

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4904.00	40.04	-7.57	7.14	34.01	48.72	32.47	54.00	-21.53	Average
2	4904.00	51.07	-7.57	7.14	34.01	48.72	43.50	74.00	-30.50	Peak
3	7356.00	34.14	-3.62	9.02	35.42	48.06	30.52	54.00	-23.48	Average
4	7356.00	46.72	-3.62	9.02	35.42	48.06	43.10	74.00	-30.90	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain
 Real Level = Meter Level + System Factor
 Margin = Real Level - Limit Line



10. CONDUCTED SPURIOUS EMISSIONS

10.1 TEST SETUP



10.2 LIMIT

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

10.3 TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


10.4 TEST RESULTS

PASS




10.5 TEST DATA:


Band Edge

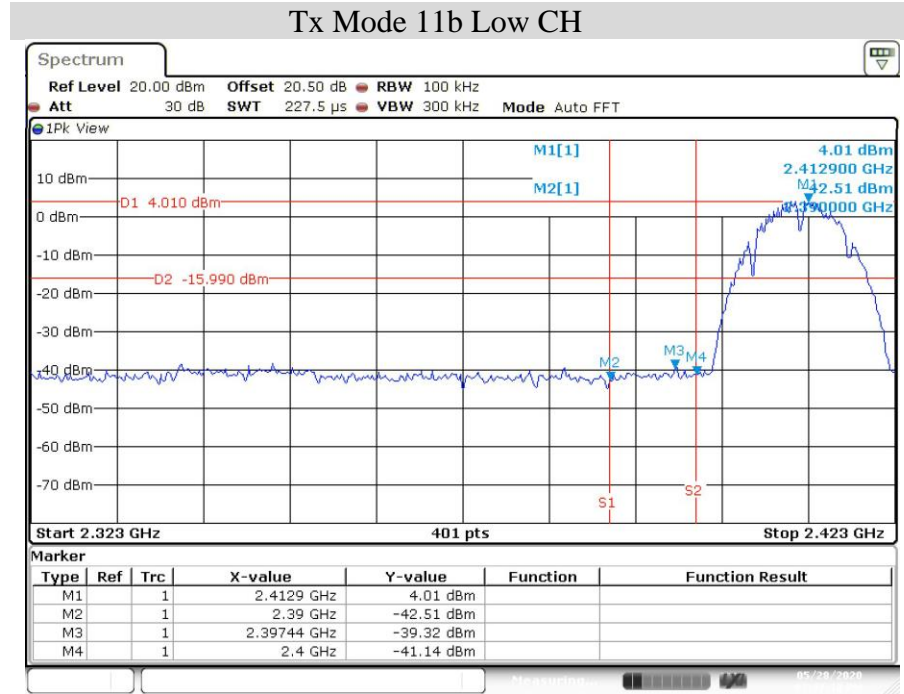


Date: 28.MAY.2020 15:47:10

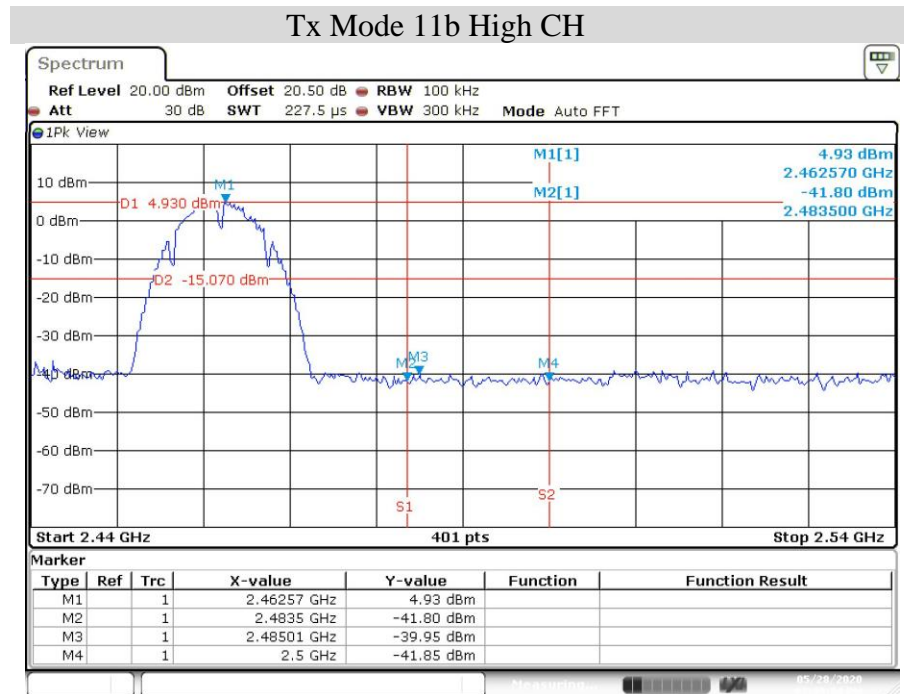

Date: 28.MAY.2020 15:49:34

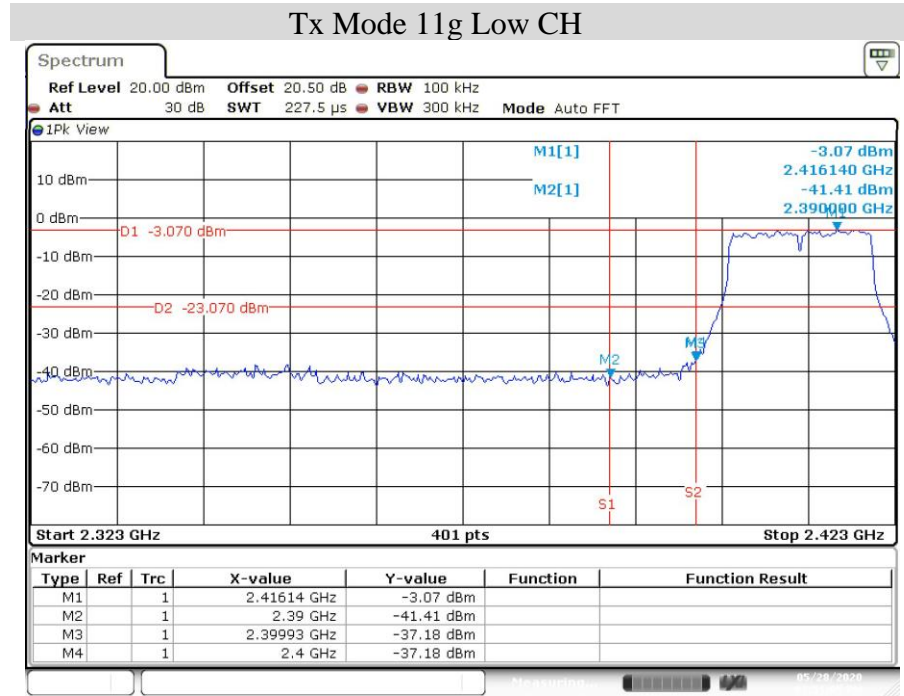


Date: 28.MAY.2020 15:51:05

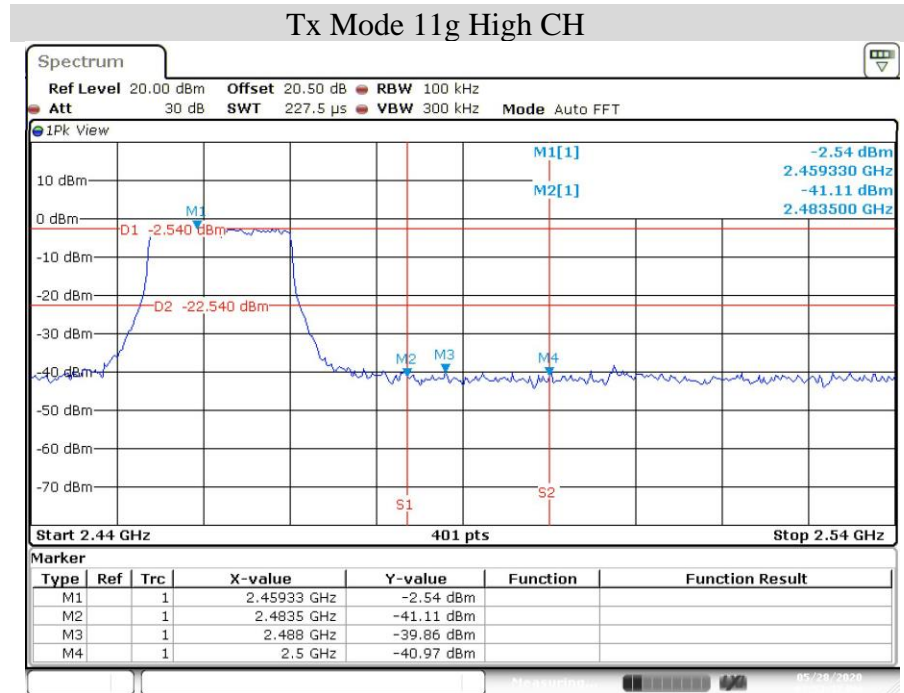

Date: 28.MAY.2020 15:53:37




Tx Mode 11n HT20 Low CH

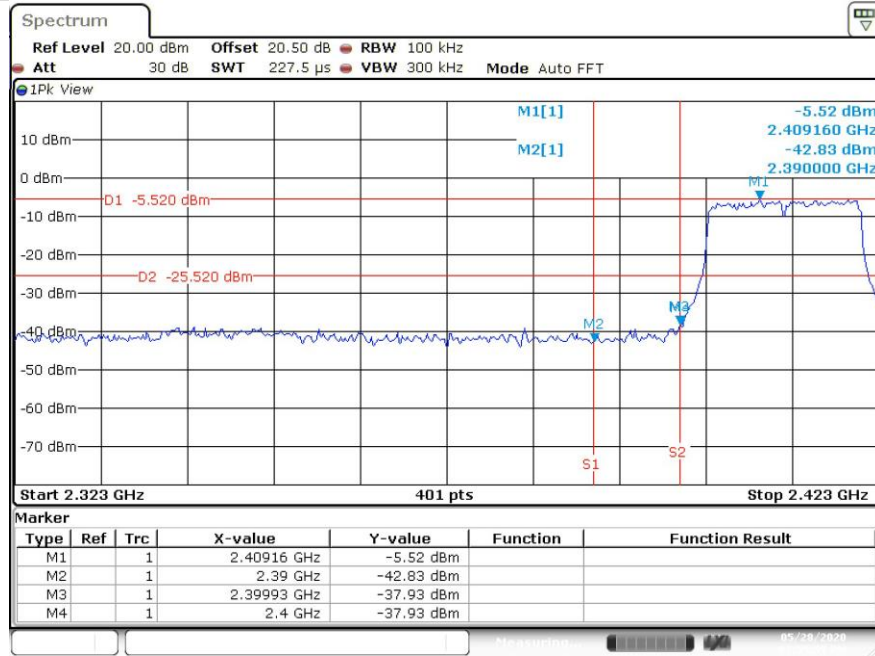

Date: 28.MAY.2020 15:55:59


Tx Mode 11n HT20 High CH

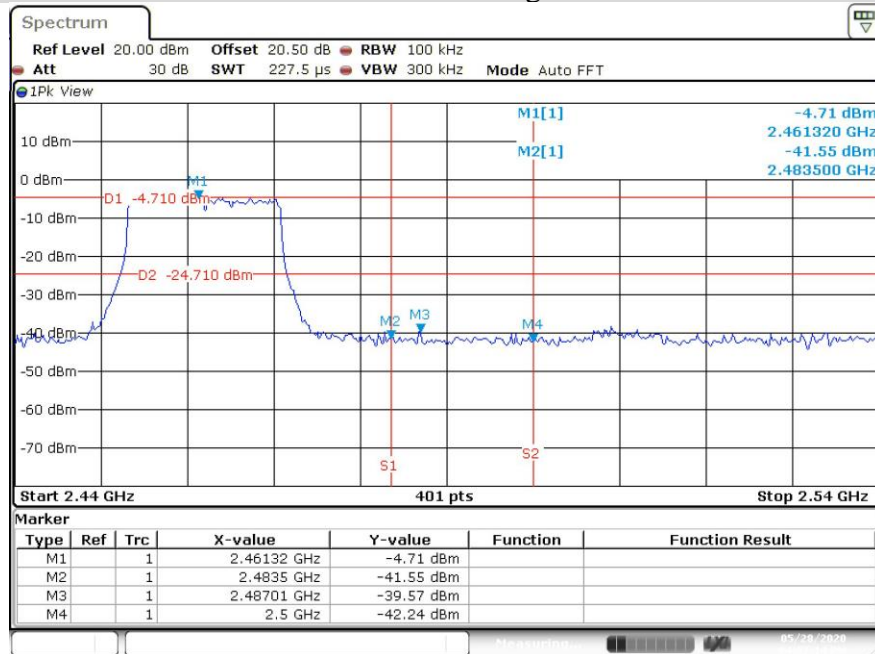

Date: 28.MAY.2020 16:07:14




Tx Mode 11n HT40 Low CH

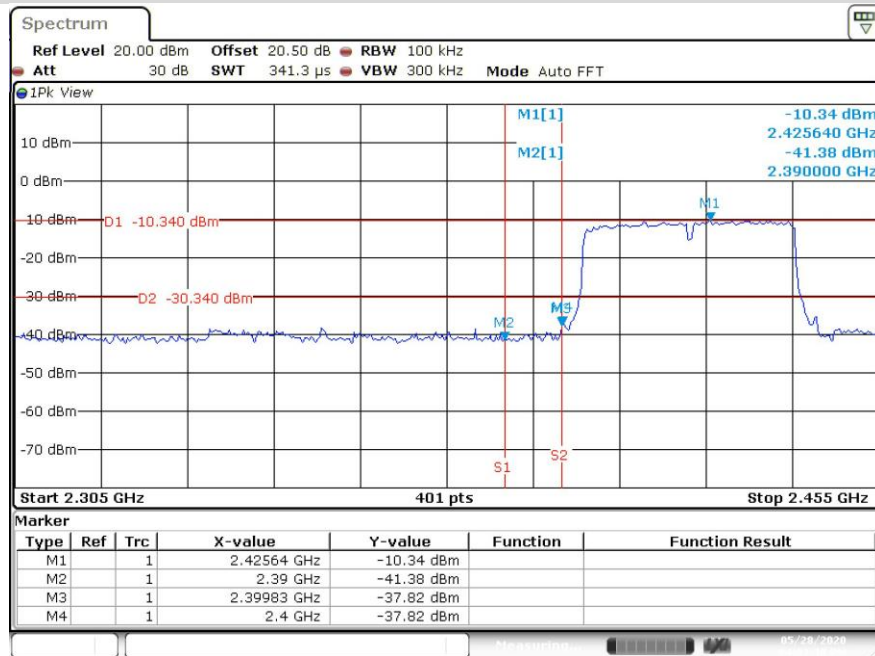

Date: 28.MAY.2020 16:01:38


Tx Mode 11n HT40 High CH

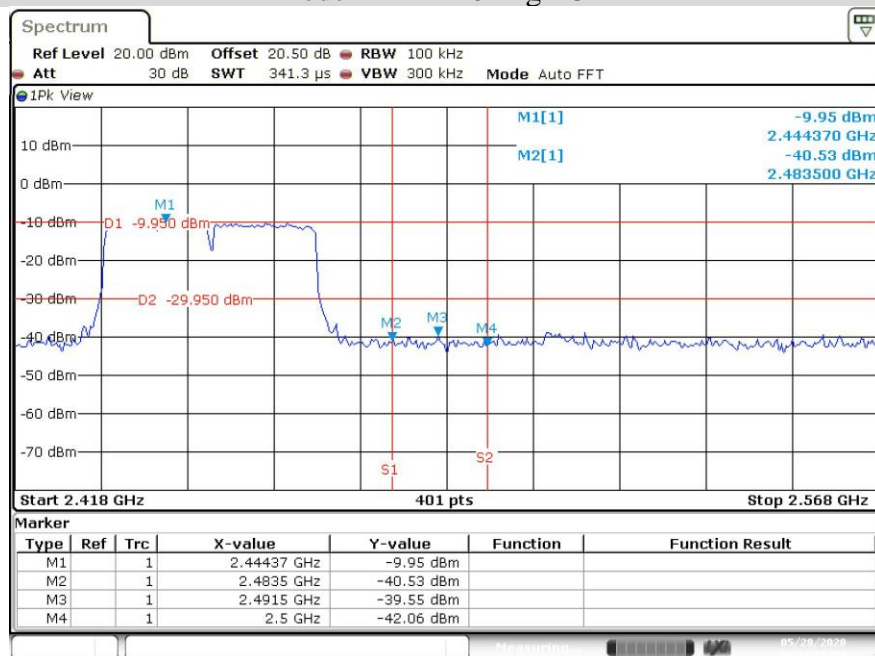


Date: 28.MAY.2020 16:04:36




Spurious Emissions

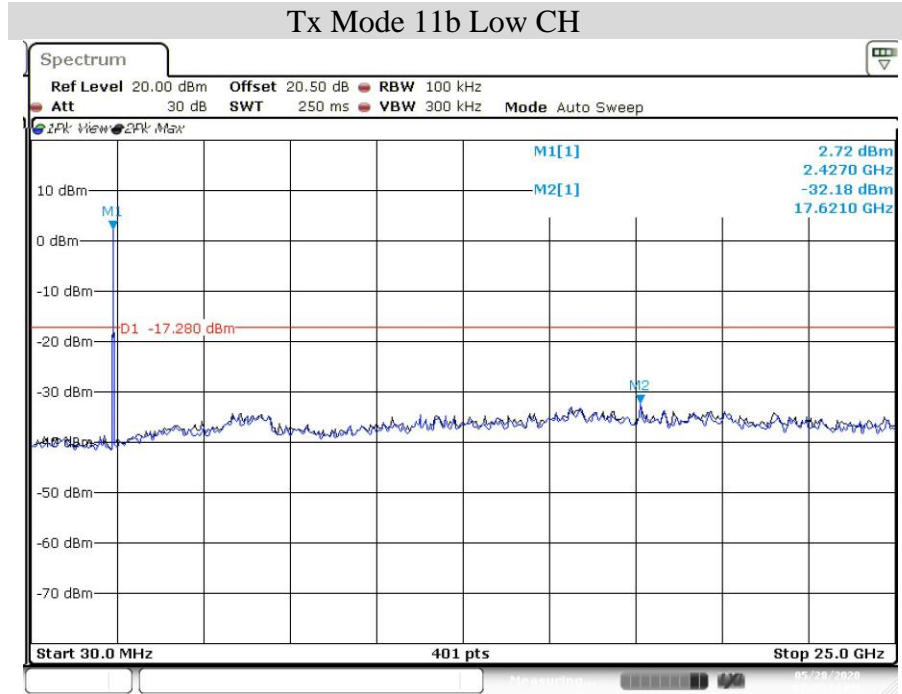



Date: 28.MAY.2020 15:45:14

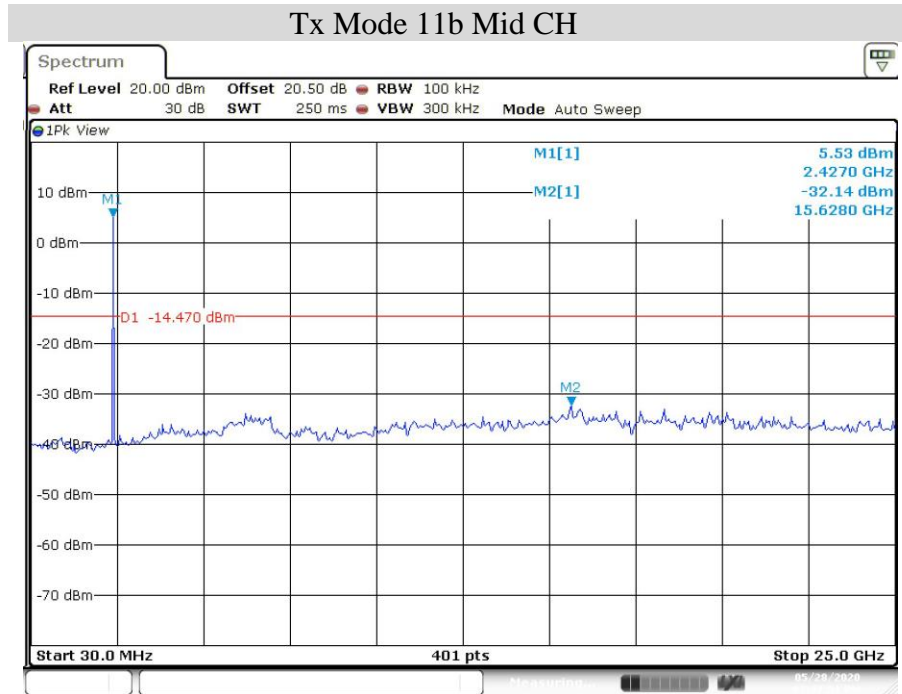


Date: 28.MAY.2020 15:47:51

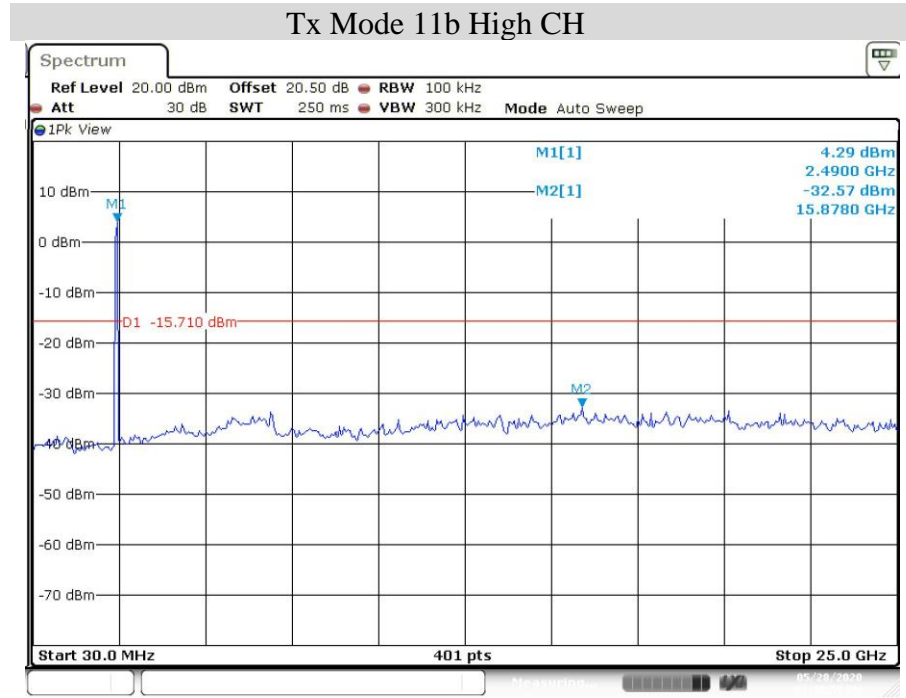

Date: 28.MAY.2020 15:48:59

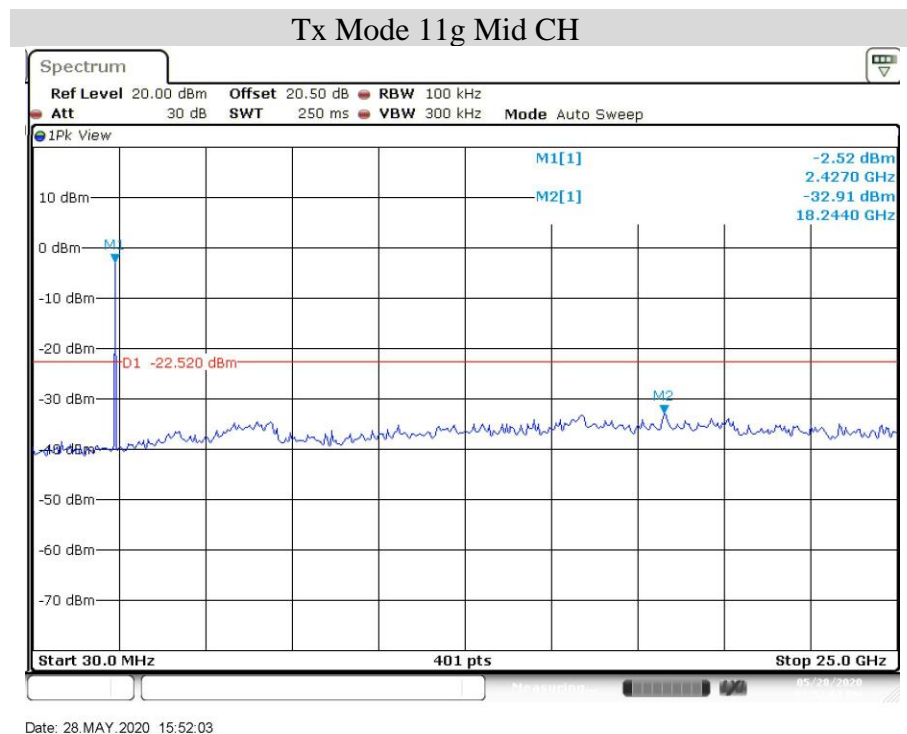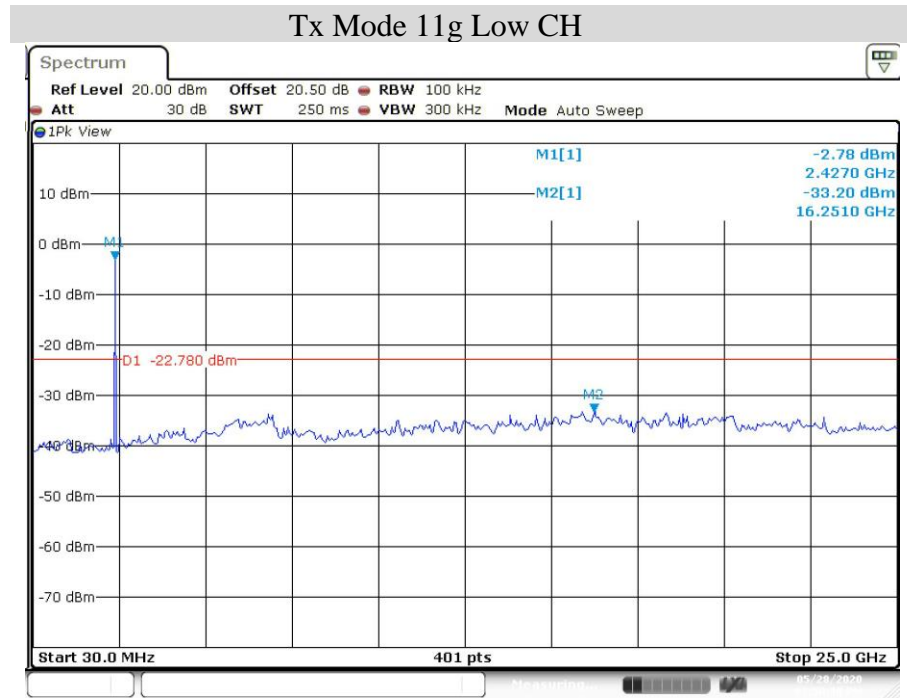


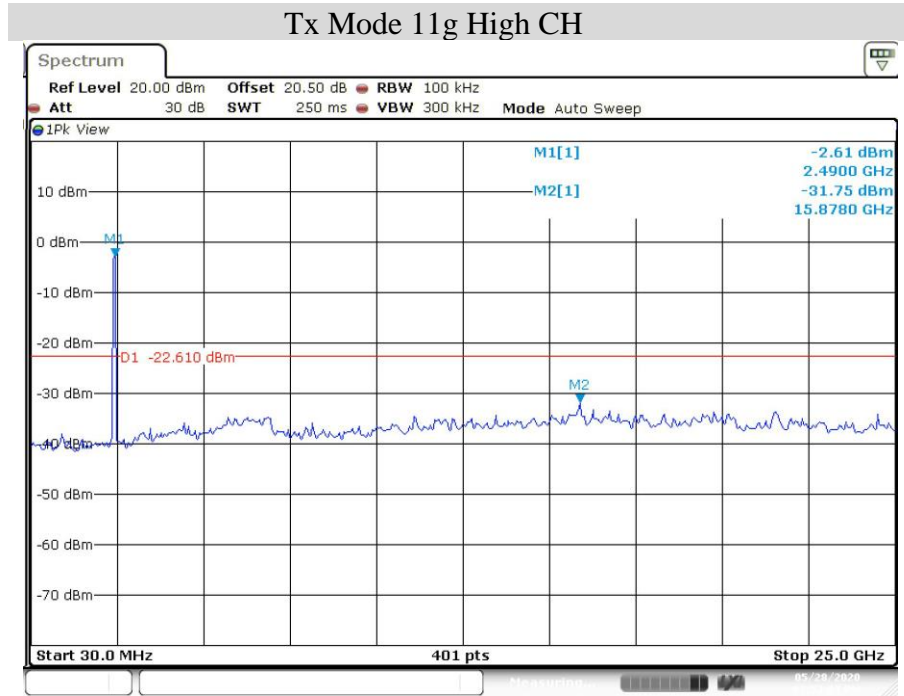

Date: 28.MAY.2020 15:53:04




Tx Mode 11n HT20 Low CH

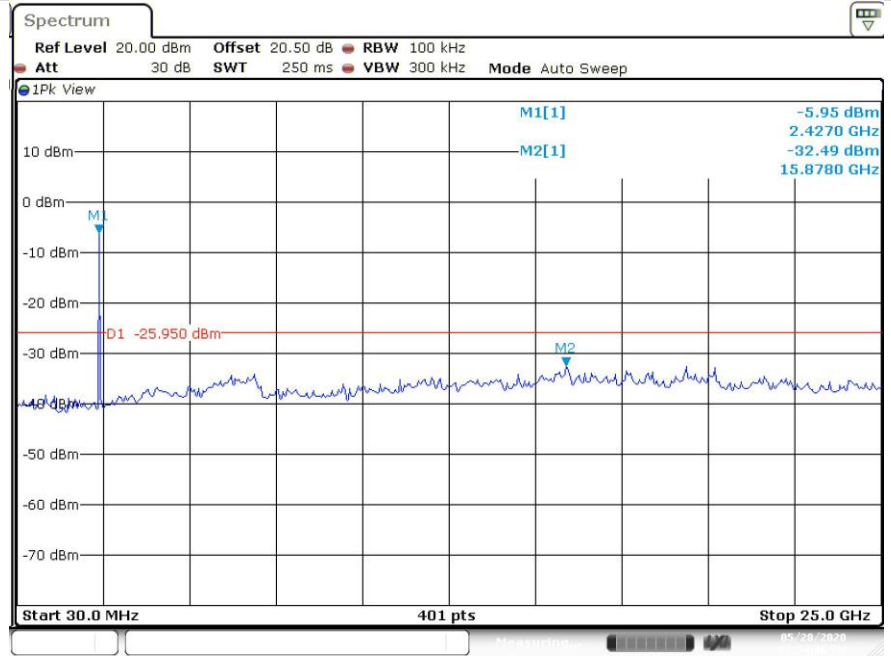


Date: 28.MAY.2020 15:54:45



Tx Mode 11n HT20 Mid CH

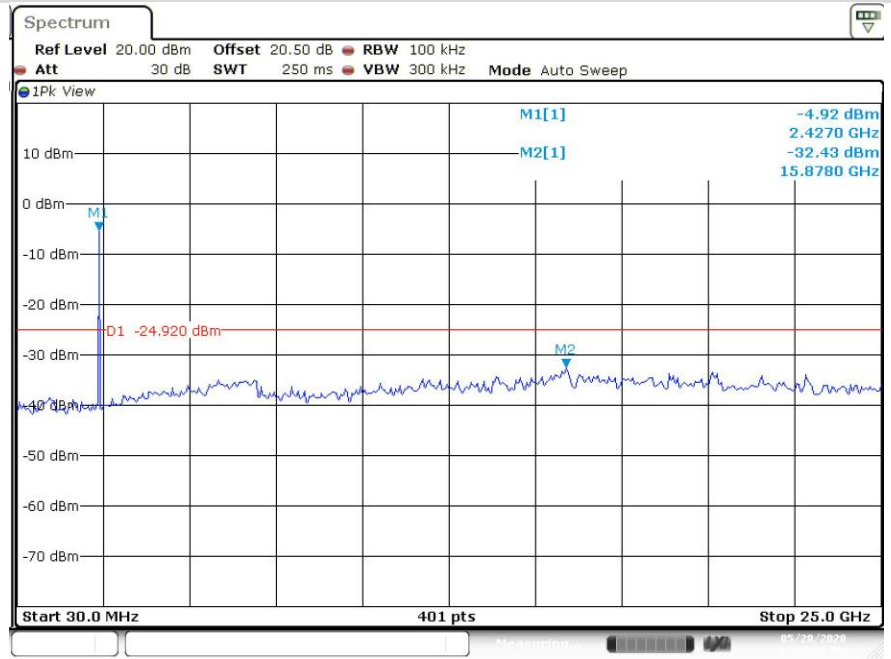


Date: 28.MAY.2020 15:56:52

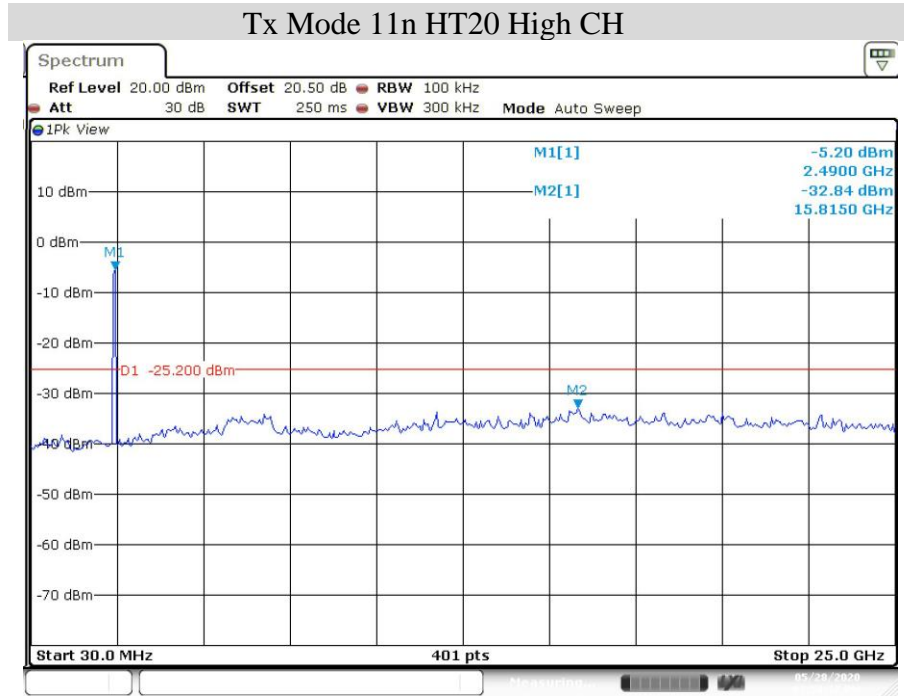

Date: 28.MAY.2020 15:58:17

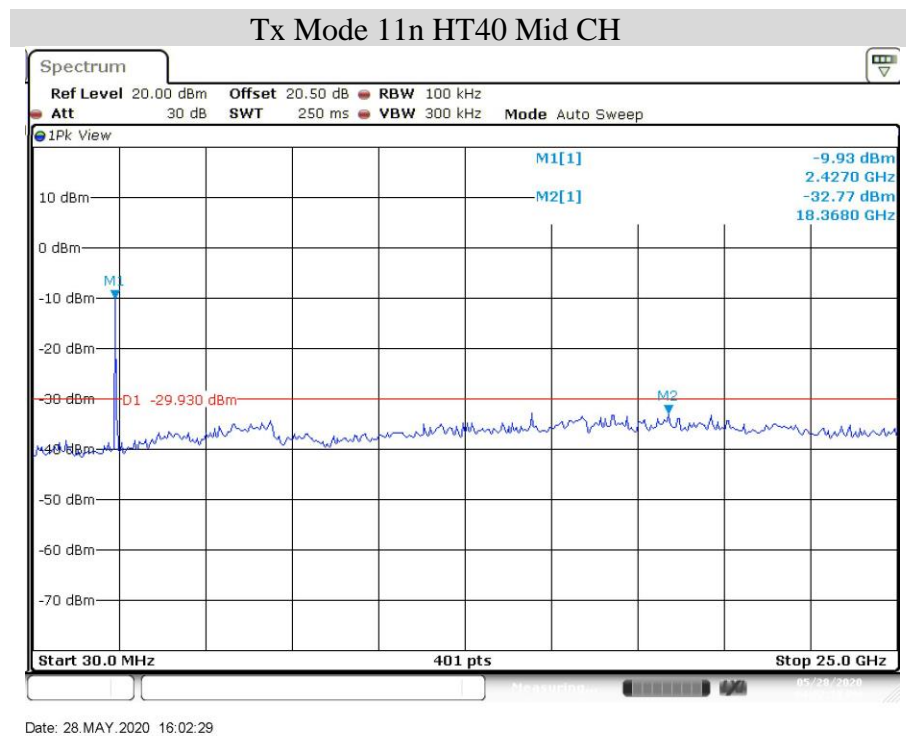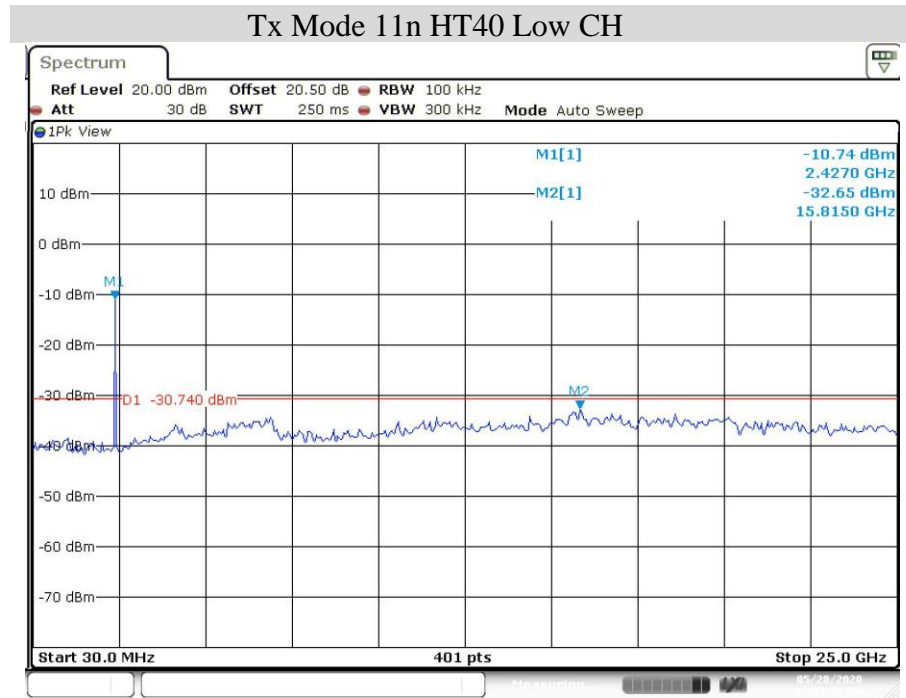

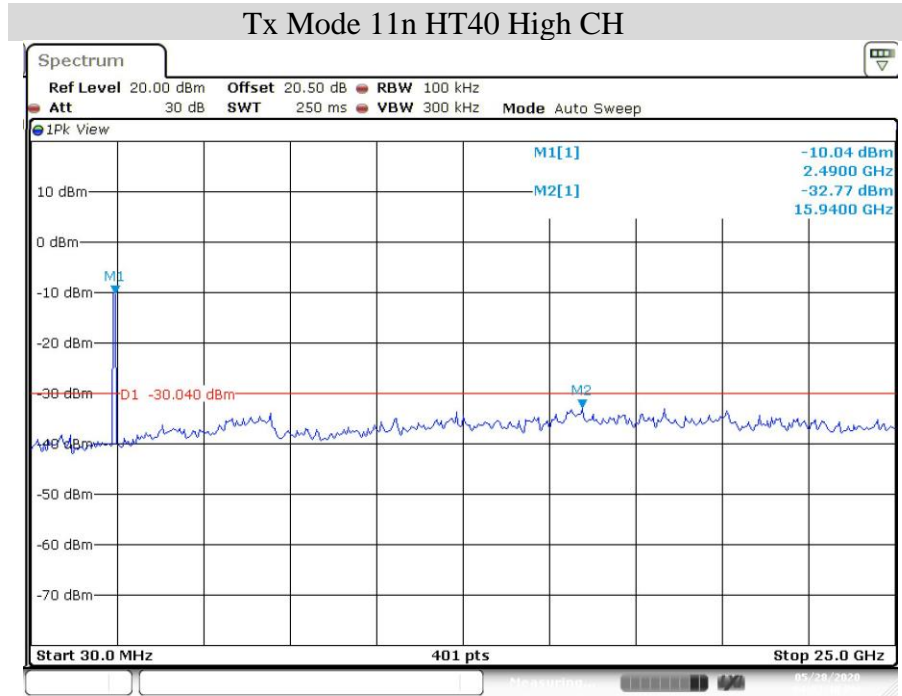

Date: 28.MAY.2020 16:03:41



11. POWER SPECTRAL DENSITY

11.1 TEST SETUP



11.2 LIMIT

According to § 15.247(e) , For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.3 TEST PROCEDURE

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 3 kHz and VBW is set to 10 kHz on spectrum analyzer. Set the span to at least 1.5 times the 6dB channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The peak power spectral density is recorded.



11.4 TEST RESULTS


PASS




11.5 TEST DATA:

Test Mode	Frequency(MHz)	Power Density (dBm)	MAX. Limit (dBm)
Tx Mode 11b	2412	-16.48	8.00
	2437	-15.58	
	2452	-15.62	
Test Mode	Frequency(MHz)	Power Density (dBm)	MAX. Limit (dBm)
Tx Mode 11g	2412	-17.65	8.00
	2437	-16.73	
	2452	-16.64	
Test Mode	Frequency(MHz)	Power Density (dBm)	MAX. Limit (dBm)
Tx Mode 11n HT20	2412	-18.01	8.00
	2437	-17.12	
	2452	-17.05	
Test Mode	Frequency(MHz)	Power Density (dBm)	MAX. Limit (dBm)
Tx Mode 11n HT40	2412	-17.53	8.00
	2437	-17.06	
	2452	-16.96	

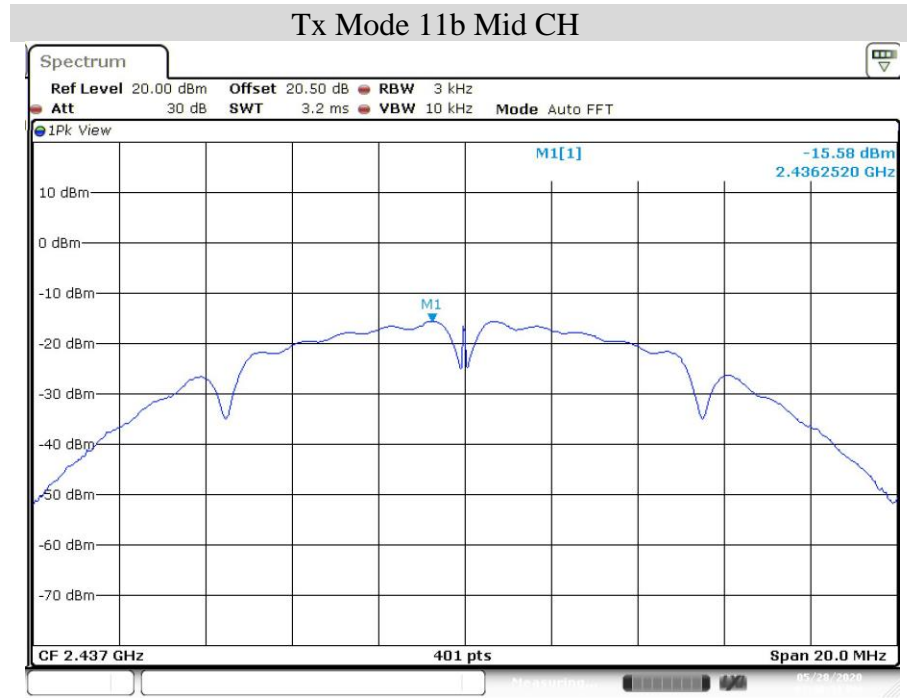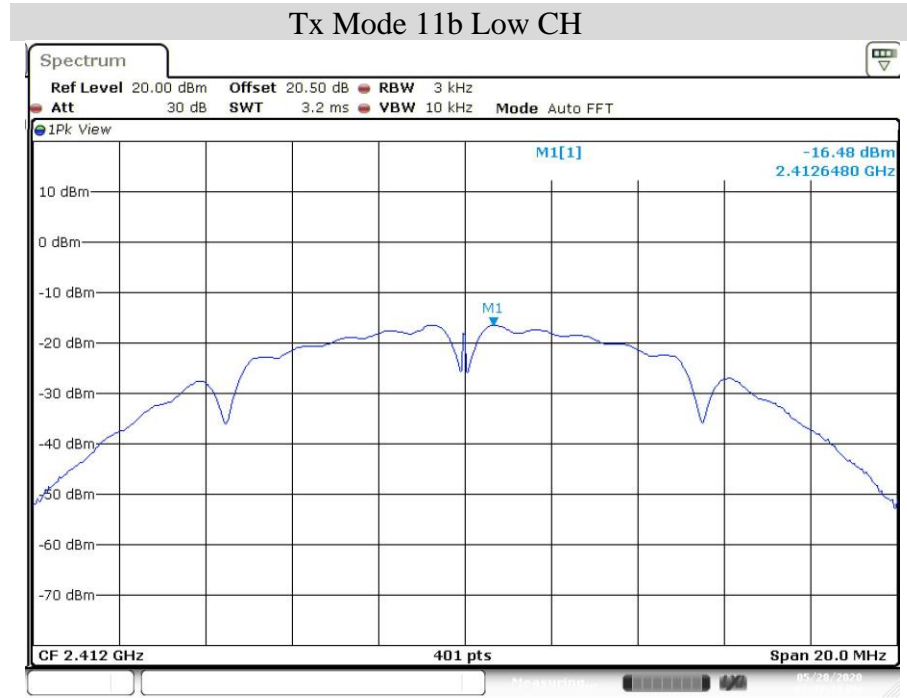


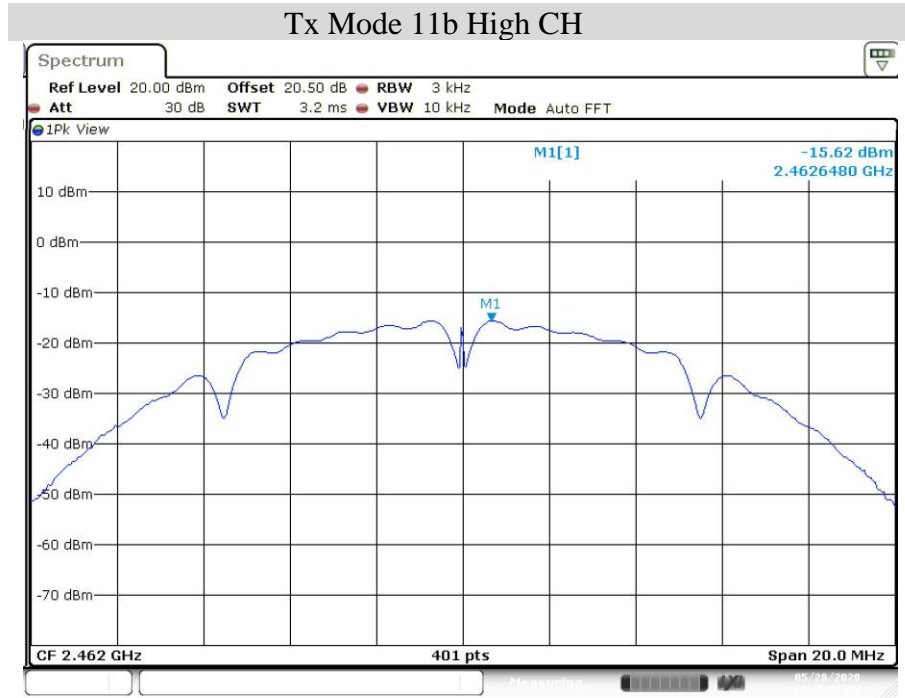


Date: 28.MAY.2020 15:49:49

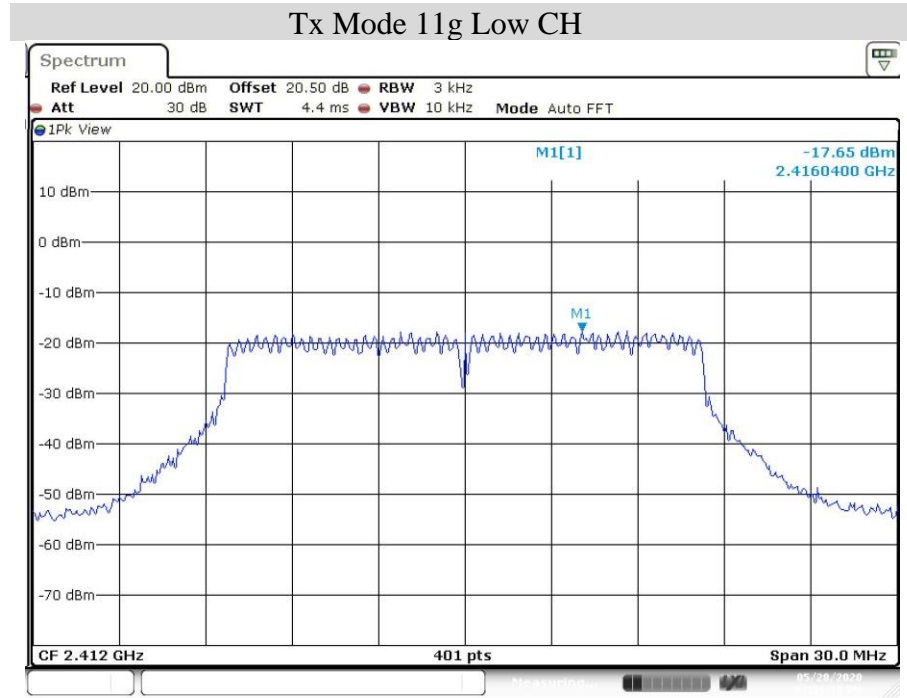

Date: 28.MAY.2020 15:51:19

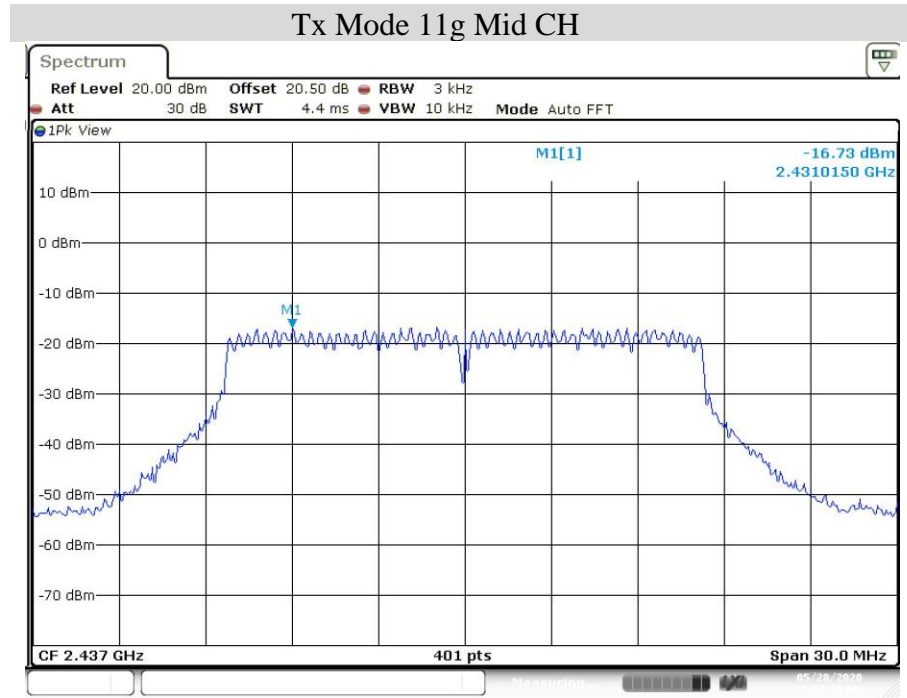


Date: 28.MAY.2020 15:52:33

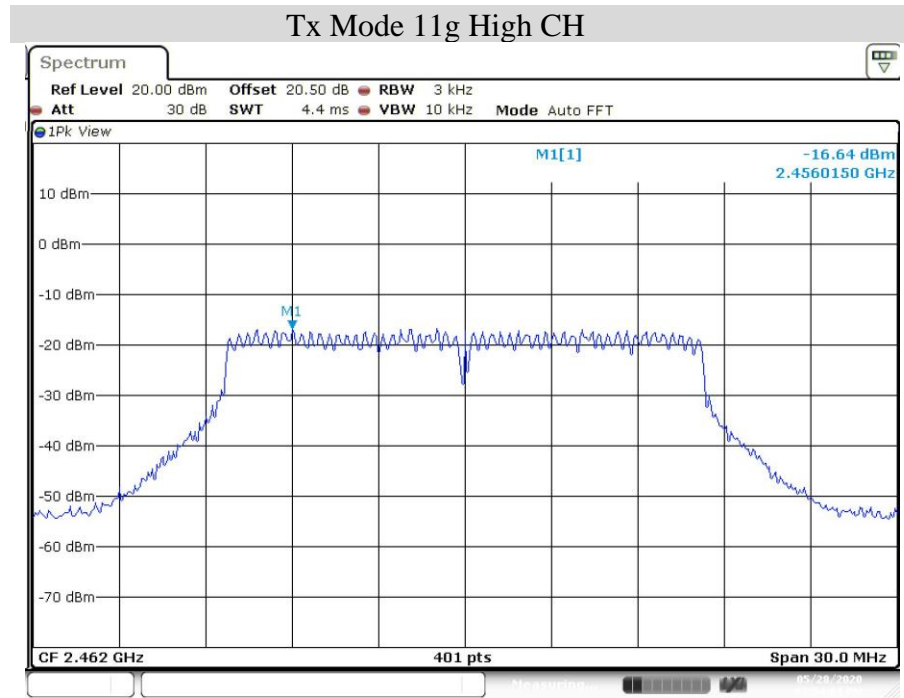

Date: 28.MAY.2020 15:54:03




Tx Mode 11n HT20 Low CH

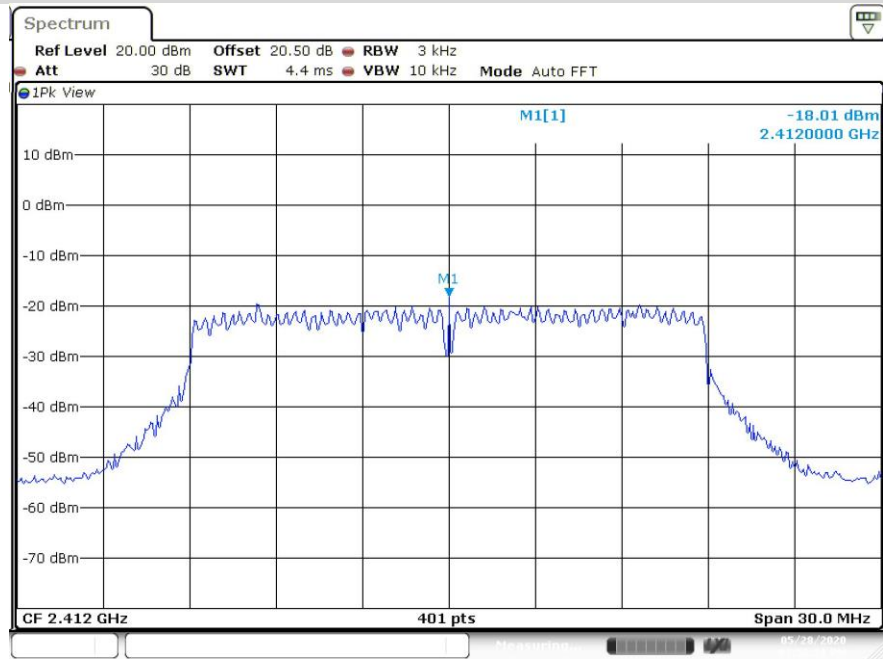


Date: 28.MAY.2020 15:56:21



Tx Mode 11n HT20 Mid CH

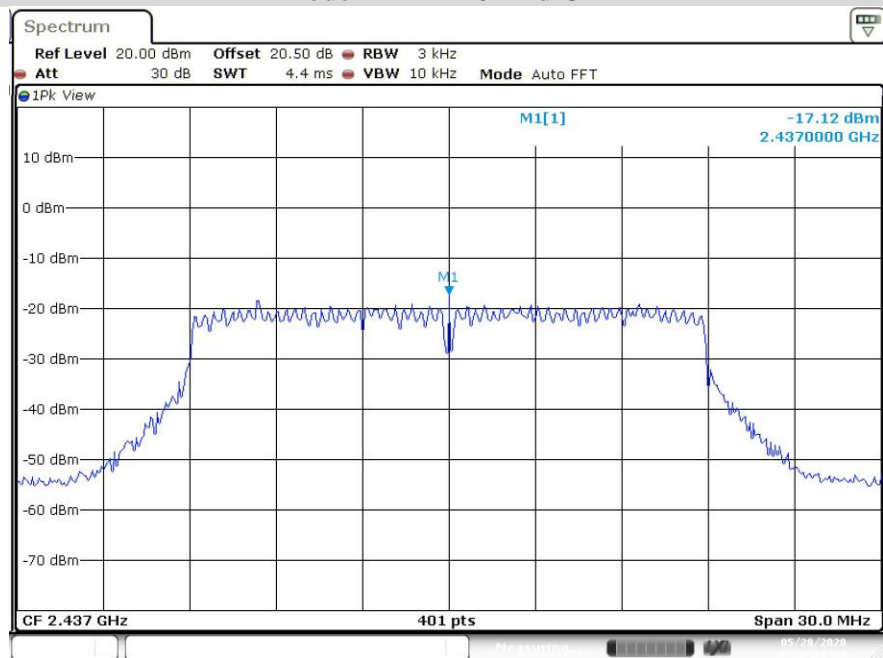


Date: 28.MAY.2020 15:57:26

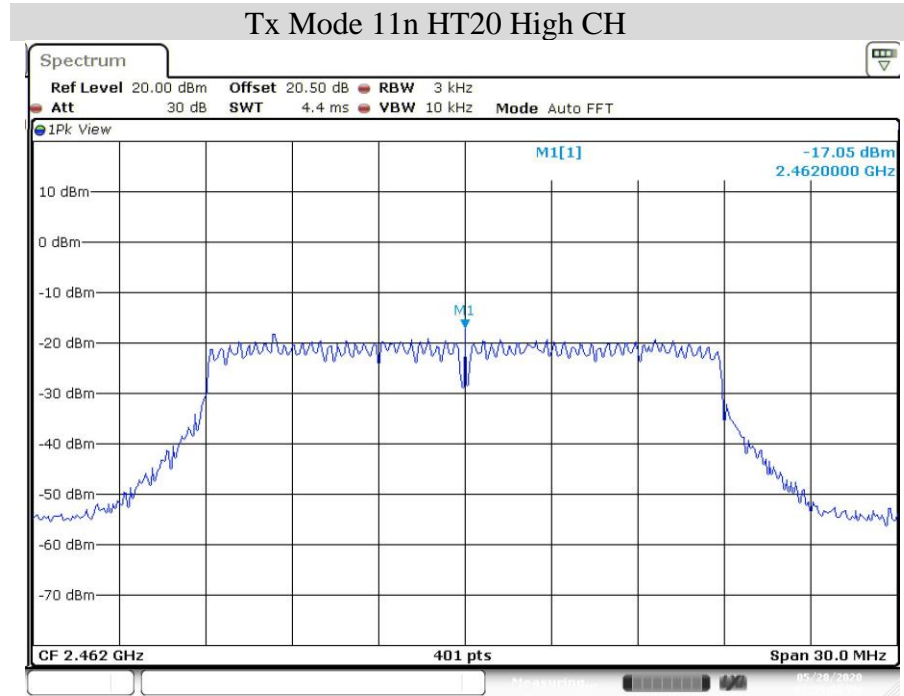

Date: 28.MAY.2020 15:59:06

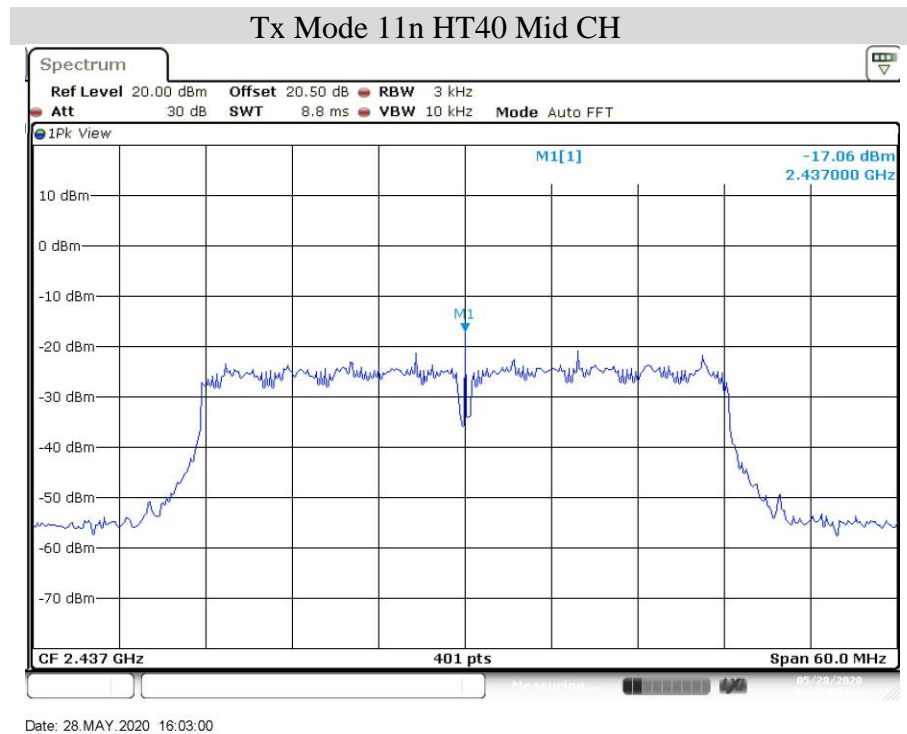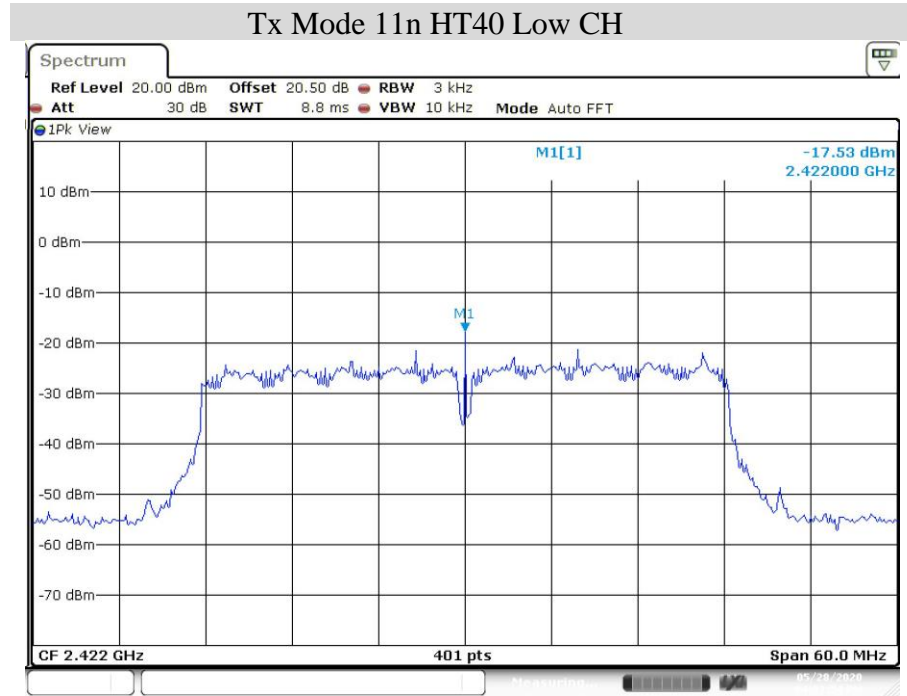

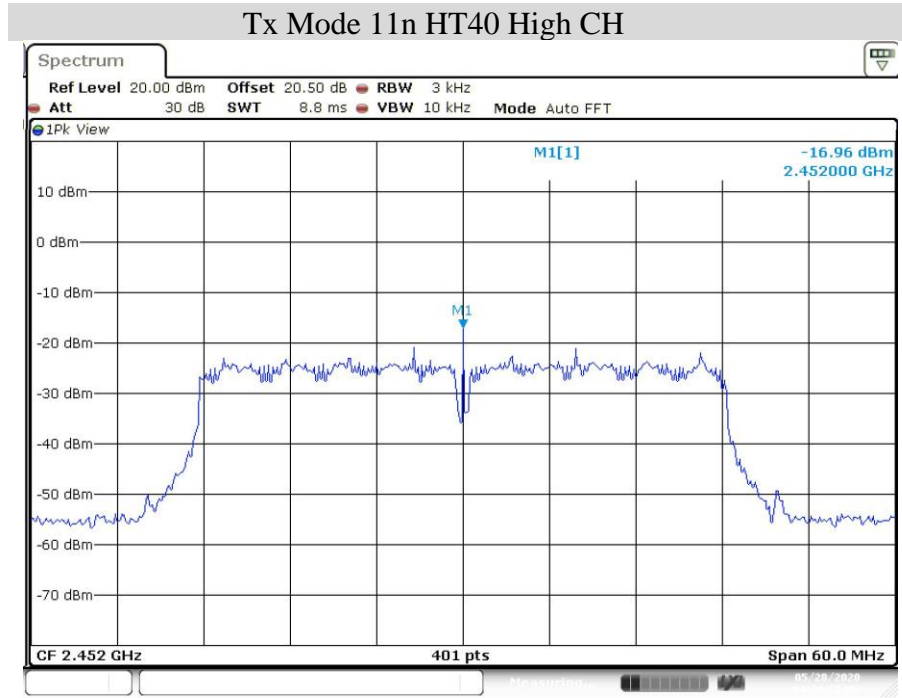

Date: 28.MAY.2020 16:04:50



12. MEASUREMENT UNCERTAINTY

The estimated measurement uncertainty is calculated in accordance with CISPR16-4-2, the total uncertainty for this test is listed as below:

Uncertainty of Measurement (9kHz~30MHz)

Contribution	Probability Distribution	9KHz – 30MHz
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	Normal (k=2)	± 2.1 dB

Uncertainty of Measurement (30MHz~1GHz)

Contribution	Probability Distribution	30MHz~1GHz
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	Normal (k=2)	± 4.18 dB

Uncertainty of Measurement (1GHz~18GHz)

Contribution	Probability Distribution	1GHz~18GHz
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	Normal (k=2)	± 4.41 dB

Uncertainty of Measurement (Above 18GHz)

Contribution	Probability Distribution	Above 18GHz
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	Normal (k=2)	± 4.45 dB

Uncertainty of RF Conducted Measurement (1GHz~18GHz)

Contribution	Probability Distribution	1GHz~18GHz
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	Normal (k=2)	± 1.2 dB

END