



Electromagnetic Compatibility Test Report

Tests Performed on a GTDevice, LLC's,

GTDevice DBA "Antlion Audio"

Wireless Microphone, Model GDL-0700

Radiometrics Document RP-8783A



Product Detail:

FCC ID: 2AP9OMICROPHONE
 IC: 24071-MICROPHONE
 Equipment type: DXX
 Low power transmitter FCC 15.249

Test Standards:

US CFR Title 47, Chapter I, FCC Part 15 Subpart C
 FCC Part 15 CFR Title 47: 2017
 Canada ISED; RSS-210, Issue 9: 2016 as required for Category I Equipment

This report concerns: Original Grant for Certification

Tests Performed For:

GTDevice, LLC
 P.O. Box 86339
 Portland, OR 97286

Test Facility:

Radiometrics Midwest Corporation
 12 Devonwood Avenue
 Romeoville, IL 60446-1349
 (815) 293-0772

Test Date(s): (Month-Day-Year)

June 5 thru July 12, 2018

Document RP-8783A Revisions:

Rev.	Issue Date	Affected Sections	Revised By
0	August 6, 2018		
1	August 22, 2018	2.0, 10.0	Joseph Strzelecki



Table of Contents

1.0 ADMINISTRATIVE DATA.....	3
2.0 TEST SUMMARY AND RESULTS.....	3
2.1 RF Exposure Compliance Requirements.....	3
3.0 EQUIPMENT UNDER TEST (EUT) DETAILS.....	4
3.1 EUT Description.....	4
3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements	4
4.0 TESTED SYSTEM DETAILS.....	4
4.1 Tested System Configuration.....	4
4.2 Special Accessories.....	4
4.3 Equipment Modifications.....	4
5.0 TEST SPECIFICATIONS	5
6.0 TEST PROCEDURE DOCUMENTS	5
7.0 RADIOMETRICS' TEST FACILITIES.....	5
8.0 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS	6
9.0 CERTIFICATION.....	6
10.0 TEST EQUIPMENT TABLE.....	6
11.0 TEST SECTIONS.....	6
11.1 AC Conducted Emissions	6
11.2 Radiated RF Emissions	10
11.2.1 Field Strength Calculation	11
11.2.2 Duty Cycle	11
11.2.3 Radiated Emissions Test Results.....	12
11.3 Occupied Bandwidth Data	17
11.4 Average Output Power.....	19
11.4.1 Measurement Instrumentation Uncertainty	20

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

1.0 ADMINISTRATIVE DATA

<i>Equipment Under Test:</i> A GTDevice, Wireless Microphone GTDevice LLC does business as (DBA) Antlion Audio Model: GDL-0700 Serial Number: none This will be referred to as the EUT in this Report	
<i>Date EUT Received at Radiometrics: (Month-Day-Year)</i> June 5, 2018	<i>Test Date(s): (Month-Day-Year)</i> June 5 thru July 12, 2018
<i>Test Report Written By:</i> Joseph Strzelecki Senior EMC Engineer	<i>Test Witnessed By:</i> The tests were not witnessed by GTDevice, LLC
<i>Radiometrics' Personnel Responsible for Test:</i>  Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE	<i>Test Report Authorized By</i>  Chris W. Carlson Director of Engineering NARTE EMC-000921-NE

2.0 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a Bluetooth Microphone, Model GDL-0700, manufactured by GTDevice, LLC. The detailed test results are presented in a separate section. The following is a summary of the test results.

Emissions Tests Results

Environmental Phenomena	Frequency Range	Basic Standard	Test Result
RF Radiated Emissions	30-25,000 MHz	FCC Part 15.249 RSS-210 & RSS-GEN	Pass
Occupied Bandwidth Test	Fundamental Freq.	FCC Part 15 RSS-210 & RSS-GEN	Pass
AC conducted Emissions	0.15-30 MHz	FCC Part 15.207	Pass

Note: The RSS-210 specification is not currently covered in Radiometrics' Scope of Accreditation. This is technically very similar to FCC, CFR 47 Part 15 which is on Radiometrics scope.

2.1 RF Exposure Compliance Requirements

Since the power output is less than 10 mW, the EUT meets the FCC requirement for RF exposure and it is exempt from RSS-102 SAR and RF exposure evaluations. There are no power level adjustments available to the end user. The antenna is permanently attached.

3.0 EQUIPMENT UNDER TEST (EUT) DETAILS

3.1 EUT Description

The EUT is a Bluetooth Microphone, Model GDL-0700, manufactured by GTDevice, LLC. The EUT was in good working condition during the tests, with no known defects.

3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements

The antenna is permanently attached to the printed circuit board. Therefore, it meets the 15.203 requirements.

4.0 TESTED SYSTEM DETAILS

4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm or 150 cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations.

The EUT was tested as a stand-alone device. Power was supplied with a fully charged battery. The tests were performed while charging the battery since this is considered a worst case.

The identification for all equipment, plus descriptions of all cables used in the tested system, are:

Tested System Configuration List

Item	Description	Type*	Manufacturer	Model Number	Serial Number
1	Bluetooth Microphone	E	GTDevice, LLC	GDL-0700	2574
2	USB Power supply	S	Apple	AT32085	None

* Type: E = EUT, P = Peripheral, S = Support Equipment; H = Host Computer

List of System Cables

QTY	Length (m)	Cable Description	Shielded?
1	1.0	USB Cord to power supply	Yes

4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

4.3 Equipment Modifications

No modifications were made to the EUT at Radiometrics' test facility in order to comply with the standards listed in this report.

5.0 TEST SPECIFICATIONS

Document	Date	Title
FCC CFR Title 47	2017	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices
IC RSS-210 Issue 9	2016	Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands) Category I Equipment
IC RSS-Gen Issue 4	2014	General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen)

6.0 TEST PROCEDURE DOCUMENTS

The tests were performed using the procedures from the following specifications:

Document	Date	Title
ANSI C63.4-2014	2014	Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	2013	American National Standard for Testing Unlicensed Wireless Devices

7.0 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2005 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the test methods listed herein. A copy of the accreditation can be accessed on our web site (www.radiomet.com). Radiometrics accreditation status can be verified at A2LA's web site (www.a2la2.org).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber E: Is a custom made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber. The floor has a 9' x 9' section of microwave absorber for testing above 1 GHz.

Test Station F: Is an area that measures 10' D X 12' W X 10' H. The floor and back wall are metal shielded. This area is used for conducted emissions measurements.

A separate ten-foot long, brass plated, steel ground rod attached via a 6-inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC 3124A-01.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance to ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

8.0 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

9.0 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification and the data contained herein was taken with calibrated test equipment. The results relate only to the EUT listed herein.

10.0 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-05	RMC/Celeritek	Pre-amplifier	MW110G	1001	1.0-12GHz	12 Mo.	01/17/18
AMP-20	Avantek	Pre-amplifier	SF8-0652	15221	8-18GHz	12 Mo	04/05/18
AMP-22	Anritsu	Pre-amplifier	MH648A	M23969	0.1-1200MHz	12 Mo.	01/17/18
AMP-59	Amplitech	Pre-amplifier	APTMP44	AMP-59	18-26 GHz	12 Mo.	01/04/18
ANT-03	Tensor	Biconical Antenna	4104	2231	20-250MHz	24 Mo.	12/06/17
ANT-06	EMCO	Log-Periodic Ant.	3146	1248	200-1000MHz	24 Mo.	12/05/17
ANT-13	EMCO	Horn Antenna	3115	2502	1.0-18GHz	24 Mo.	12/28/16
ANT-48	RMC	Std Gain Horn	HW2020	1001	18-26 GHz	36 Mo.	12/15/15
ANT-66	ETS-Lindgren	Horn Antenna	3115	62580	1.0-18GHz	24 Mo.	02/15/17
CAB-106A	Teledyne	Coaxial Cable	N/A	1090	DC-2 GHz	24 Mo.	05/07/18
CAB-1090	Teledyne	Coaxial Cable	N/A	1090	DC-18 GHz	24 Mo.	05/16/18
CAB-160B	Teledyne	Coaxial Cable	N/A	1090	DC-18 GHz	24 Mo.	05/09/18
HPF-01	Solar	High Pass Filter	7930-100	HPF-1	0.15-30MHz	24 Mo.	03/04/18
HPF-06	Mini-Circuits	High Pass Filter	VHF-3800+	31035	3-11 GHz	24 Mo.	04/04/18
LSN-01	Electrometrics	50 uH LISN	FCC/VDE 50/2	1001	0.01-30MHz	24 Mo.	06/30/17
REC-20	HP / Agilent	Spectrum Analyzer	85460A/84562A	33330A00135 3410A00178	30Hz-6GHz	24 Mo.	07/13/16
REC-21	Agilent	Spectrum Analyzer	E7405A	MY45118341	9Hz-26.5 GHz	24 Mo.	01/06/18
REC-43	Adventest	Spectrum Analyzer	U3772	150800305	9Hz-43GHz	24 Mo.	04/19/17
THM-02	Fluke	Temp/Humid Meter	971	93490471	N/A	24 Mo.	10/17/17

Note: All calibrated equipment is subject to periodic checks.

All tests were performed with equipment that was in its valid calibration period.

Software Company	Test Software Name	Version	Applicable Tests
Radiometrics	REREC11D	01.05.16	RF Radiated Emissions (FCC Part 15 & EN 55011/22)
Agilent	PSA/ESA-E/L/EMC	2.4.0.42	Bandwidth and screen shots

11.0 TEST SECTIONS**11.1 AC Conducted Emissions**

The tests and limits are in accordance with FCC section 15.207.

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on a semi-log graph generated by the computer. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dBuV)	
	Quasi-Peak	Average
0.150 - 0.50*	66 - 56	56 - 46
0.5 – 5.0	56	46
5.0 - 30	60	50
* The limit decreases linearly with the logarithm of the frequency in this range.		


The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from the power cord, after testing all modes of operation. QP readings are quasi-peak with a 9 kHz bandwidth and no video filter.

Test Date : June 13, 2018

Tested by: Richard Tichelaar


The Amplitude is the final corrected value with cable and LISN Loss.

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

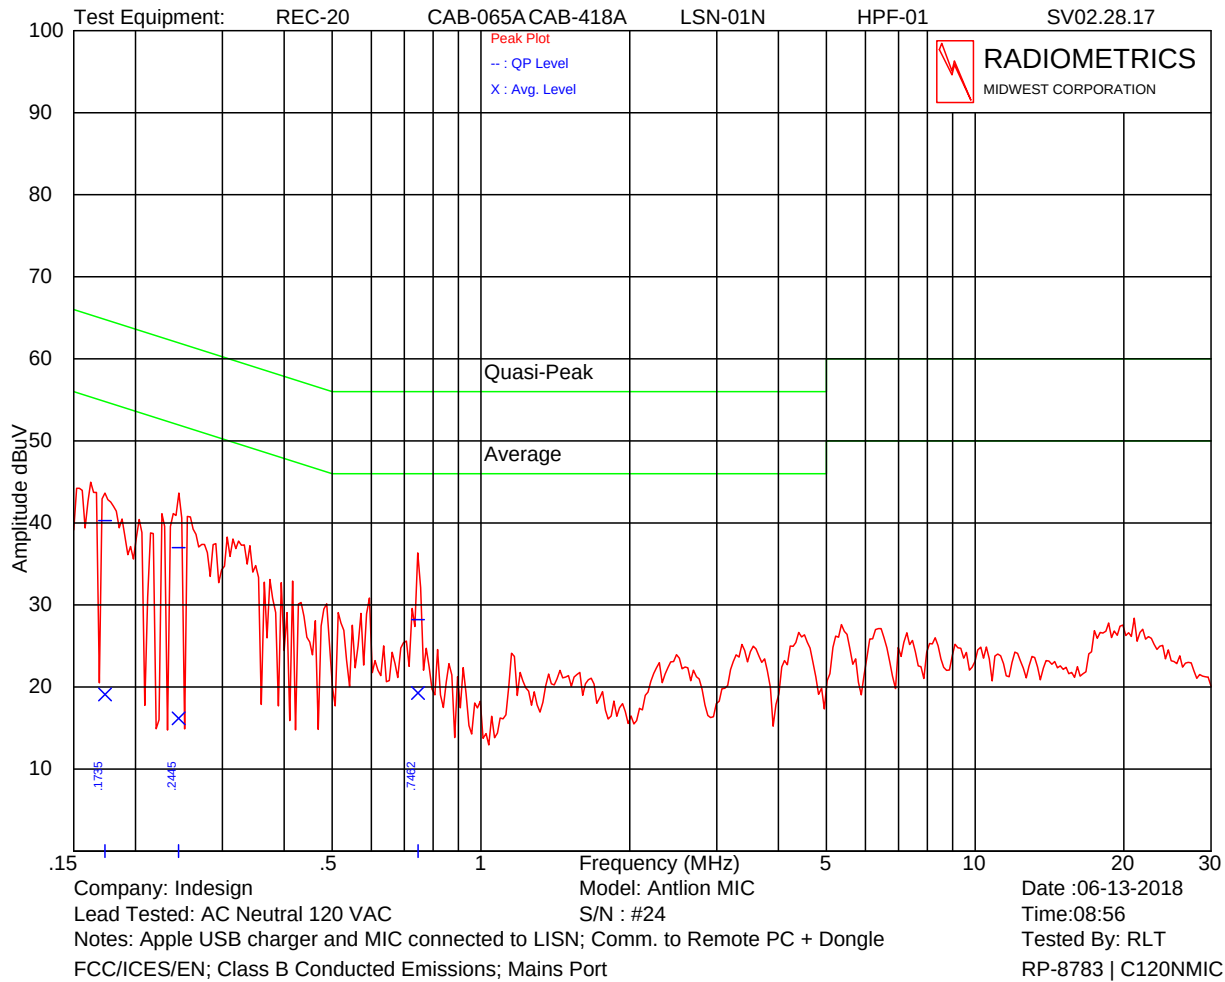


Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.174	40.3	64.8	19.1	54.8	24.5
0.245	37.0	61.9	16.2	51.9	25.0
0.746	28.2	56.0	19.3	46.0	26.7

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

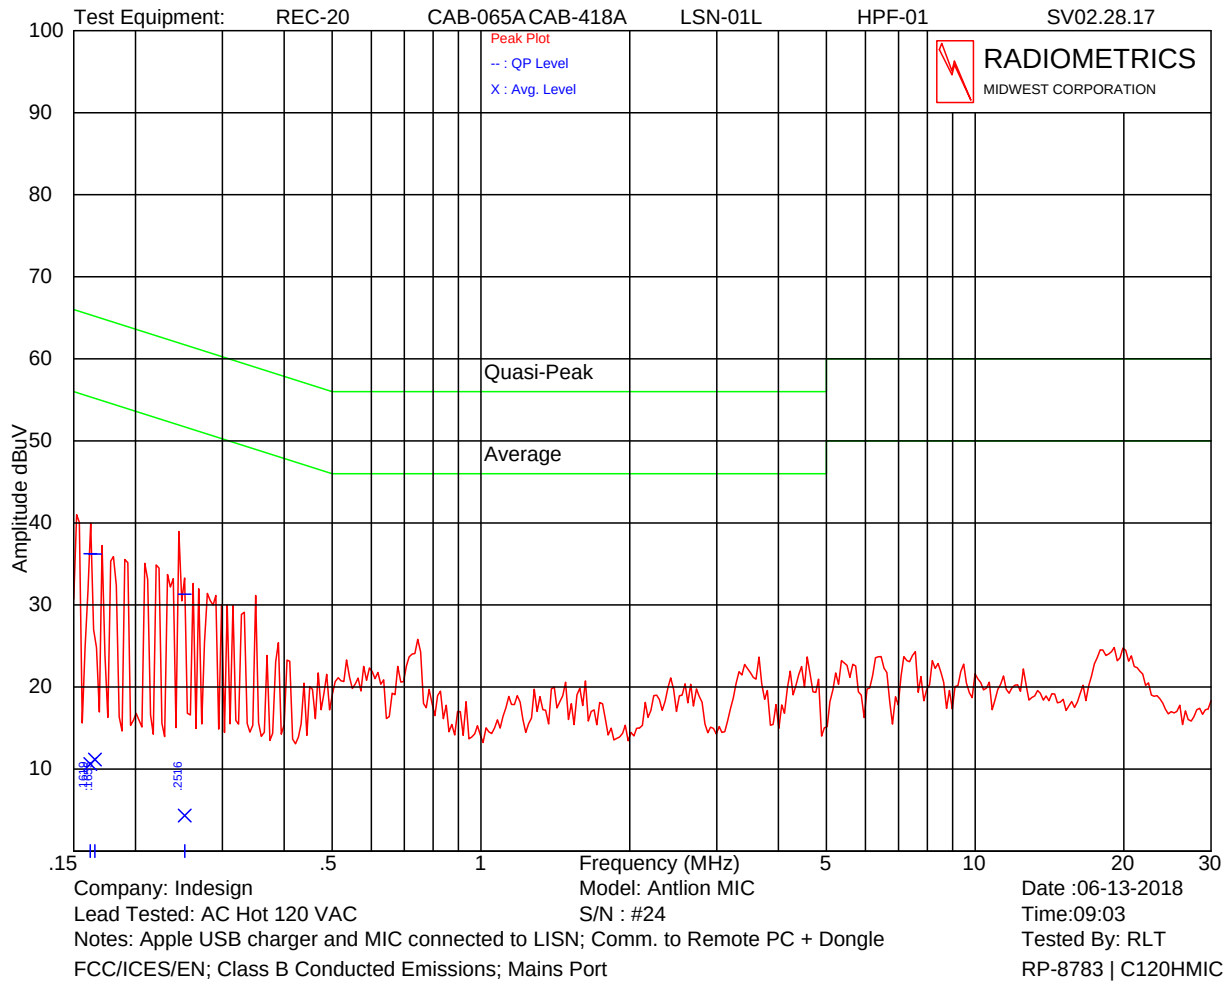

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.162	36.2	65.4	10.6	55.4	29.1
0.166	36.2	65.2	11.1	55.2	29.0
0.252	31.3	61.7	4.3	51.7	30.4

Judgement: Passed by at least 24.5 dB.

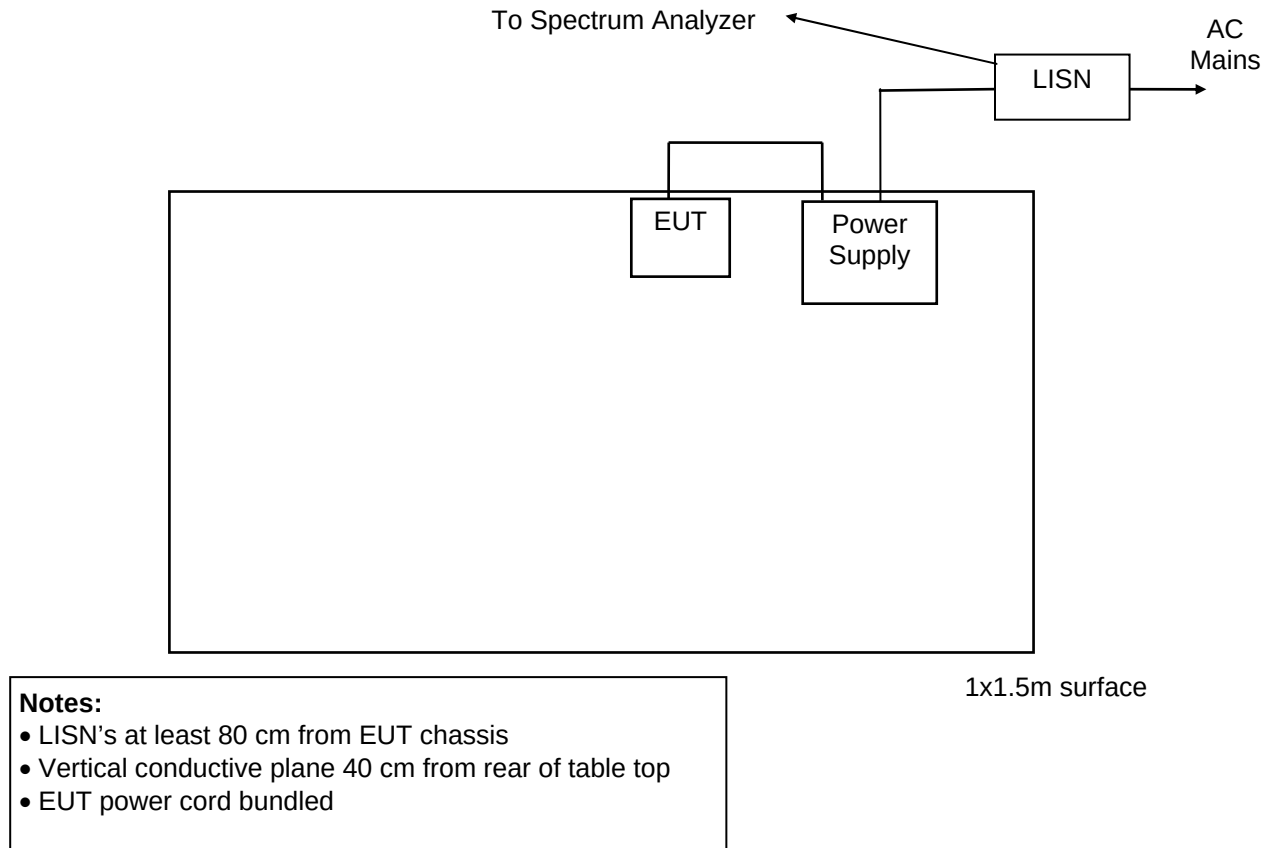Figure 1. Conducted Emissions Test Setup

11.2 Radiated RF Emissions

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 150 kHz to 30 MHz is 9 or 10 kHz and the bandwidth from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists. A harmonic mixer was used from 18 to 25 GHz. Figure 4 herein lists the details of the test equipment used during radiated emissions tests.

In addition, a high pass filter was used to reduce the fundamental emission. High pass filters were not needed above 10 GHz, since the preamplifiers attenuated the fundamental emission.

The EUT was rotated through three orthogonal axis as per 5.10.1 of ANSI C63.10 during the radiated tests.

Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

The entire frequency range from 30 to 25,000 MHz was slowly scanned with particular attention paid to those frequency ranges which appeared high. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

11.2.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG + HPF + PKA$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

HPF = High pass Filter Loss

PKA = Peak to Average Factor (This is only used for average measurements above 1 GHz)

The Peak to average factor is used when average measurements are required. It is calculated by the highest duty cycle in percent over any 100mS transmission.

Note: The actual FCC limits are in uV/m. The data in the results table converted the limits to dBuV/m.

100 uV/m = 40.0 dBuV/m

150 uV/m = 43.5 dBuV/m

200 uV/m = 46.0 dBuV/m

500 uV/m = 54.0 dBuV/m

11.2.2 Duty Cycle

In accordance to 7.5 of ANSI C63.10 the following procedures were used.


- a) The EUT was set to the "worst-case" pulse ON time.
- b) The RF output was connected to the input of a spectrum analyzer. The signal received was sufficient level to trigger adequately the spectrum analyzer sweep display.
- c) The center frequency of the spectrum analyzer was set to the center of the RF signal.
- d) The spectrum analyzer was set for ZERO SPAN.
- e) The sweep time of the analyzer was set to 100 ms and other times to show the duty cycle.
- f) Since the pulse train has a period that exceeds 100 ms, or as an alternative to step f), then:
 - 1) The trigger on the spectrum analyzer was set to capture the greatest amount of pulse "ON time" over 100 ms.
 - 2) The 100 ms period that contains the maximum "on time" was found.
 - 3) The duty cycle was determined by dividing the total maximum "ON time" by 100 ms (tON/100 ms).
- h) The duty cycle correction factor was used applying Equation (10) of ANSI C63.10 to the duty cycle determined in the preceding steps.

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

The Peak to Average factor is calculated by the highest duty cycle in percent over any 100mS transmission. The transmitter sends the data in 390 microsecond pulses. At most, there are 16 of these transmissions in any 100 mSec. $0.390 \text{ milliseconds} \times 16 = 6.24 \text{ milliseconds}$. The transmitter operates for a maximum duration of 6.24 ms in any 100 ms interval for a 6.24% maximum duty cycle.

$20 \text{ Log}^*(6.24 \text{ mSec}/100\text{mSec}) = -24.1 \text{ dB}$ Peak to Average correction factor.

Since the difference between the peak and the average limits are 20 dB, there is no need to use a correction factor more than 20 dB. Therefore, a 20 dB factor was used.

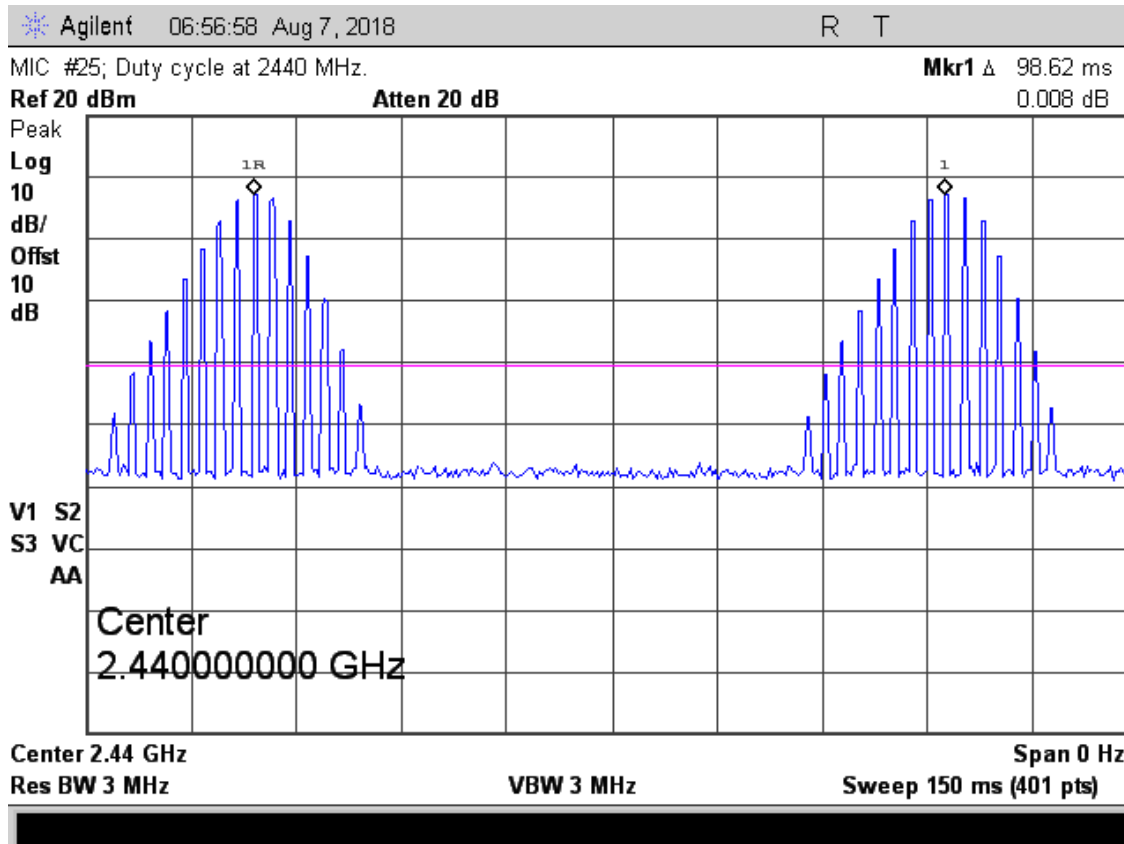

11.2.3 Radiated Emissions Test Results

Test Date	06/05/2018
Test Distance	3 Meters
Specification	FCC Part 15 Subpart C & RSS-210 Section B.10
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal; P = peak; Q = QP

All emissions except Fundamental and Harmonics; Emissions in Transmit Mode

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist. Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
56.7	7.9	P	H	12.2	0.6	0.0	20.7	40.0	19.3	
128.0	14.9	P	H	14.4	0.9	0.0	30.2	43.5	13.3	
152.1	13.6	P	H	13.5	1.0	0.0	28.1	43.5	15.4	
186.9	9.7	P	H	19.0	1.1	0.0	29.8	43.5	13.7	

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone


Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist. Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
209.1	14.4	P	H	10.9	1.2	0.0	26.5	43.5	17.0	
317.0	12.0	P	H	14.7	1.5	0.0	28.2	46.0	17.8	
365.3	13.7	P	H	14.4	1.6	0.0	29.7	46.0	16.3	
401.6	19.4	P	H	15.2	1.7	0.0	36.3	46.0	9.7	
414.4	15.8	P	H	15.6	1.7	0.0	33.1	46.0	12.9	
447.6	22.2	P	H	16.0	1.8	0.0	40.0	46.0	6.0	
452.2	16.2	P	H	15.9	1.8	0.0	33.9	46.0	12.1	
506.3	13.6	P	H	17.6	1.9	0.0	33.1	46.0	12.9	
541.3	14.6	P	H	17.3	1.9	0.0	33.8	46.0	12.2	
588.8	13.3	P	H	18.5	2.0	0.0	33.8	46.0	12.2	
757.5	9.3	P	H	21.0	2.3	0.0	32.6	46.0	13.4	
966.3	10.2	P	H	23.5	2.7	0.0	36.4	54.0	17.6	
1152.5	39.4	P	H	24.6	-32.6	0.0	31.4	74.0	42.6	1
1507.5	39.4	P	H	25.1	-32.5	0.0	32.0	74.0	42.0	1
1937.5	40.0	P	H	27.2	-31.9	0.0	35.3	74.0	38.7	1
2117.5	40.6	P	H	27.6	-31.6	0.0	36.6	74.0	37.4	1
2285.0	47.4	P	H	27.8	-31.6	0.0	43.6	74.0	30.4	1
2597.5	46.9	P	H	28.7	-30.9	0.0	44.7	74.0	29.3	1
2845.0	41.5	P	H	29.2	-30.7	0.0	40.0	74.0	34.0	1
3160.0	39.9	P	H	30.9	-29.9	0.0	40.9	74.0	33.1	1
3515.0	40.3	P	H	31.3	-29.5	0.0	42.1	74.0	31.9	1
3907.5	40.3	P	H	32.8	-29.1	0.0	44.0	74.0	30.0	1
4142.5	39.2	P	H	32.5	-28.6	0.0	43.1	74.0	30.9	1
4525.0	39.3	P	H	33.0	-27.9	0.0	44.4	74.0	29.6	1
4935.0	39.6	P	H	33.3	-27.3	0.0	45.6	74.0	28.4	1
37.7	10.6	P	V	11.9	0.5	0.0	23.0	40.0	17.0	
61.4	13.5	P	V	11.3	0.6	0.0	25.4	40.0	14.6	
88.1	16.0	P	V	10.2	0.8	0.0	27.0	43.5	16.5	
97.9	14.3	P	V	11.8	0.8	0.0	26.9	43.5	16.6	
102.7	17.3	P	V	12.4	0.8	0.0	30.5	43.5	13.0	
108.3	14.3	P	V	13.2	0.8	0.0	28.3	43.5	15.2	
121.2	14.4	P	V	14.7	0.9	0.0	30.0	43.5	13.5	
168.5	11.7	P	V	16.9	1.1	0.0	29.7	43.5	13.8	
223.4	13.4	P	V	10.5	1.2	0.0	25.1	46.0	20.9	
236.2	13.5	P	V	10.8	1.3	0.0	25.6	46.0	20.4	
255.9	11.2	P	V	12.1	1.3	0.0	24.6	46.0	21.4	
271.7	12.1	P	V	12.6	1.4	0.0	26.1	46.0	19.9	
354.0	11.2	P	V	14.8	1.6	0.0	27.6	46.0	18.4	
481.6	11.1	P	V	16.9	1.9	0.0	29.9	46.0	16.1	
567.5	9.1	P	V	18.7	2.0	0.0	29.8	46.0	16.2	
757.5	9.1	P	V	21.0	2.3	0.0	32.4	46.0	13.6	
956.3	9.2	P	V	23.7	2.6	0.0	35.5	46.0	10.5	
1230.0	41.4	P	V	24.9	-32.7	0.0	33.6	74.0	40.4	1
1512.5	43.1	P	V	25.1	-32.5	0.0	35.7	74.0	38.3	1
1662.5	44.3	P	V	25.7	-32.3	0.0	37.7	74.0	36.3	1
2142.5	40.6	P	V	27.6	-31.7	0.0	36.5	74.0	37.5	1
2335.0	41.0	P	V	28.0	-31.4	0.0	37.6	74.0	36.4	1
2597.5	44.9	P	V	28.7	-30.9	0.0	42.7	74.0	31.3	1
2900.0	43.0	P	V	29.5	-30.4	0.0	42.1	74.0	31.9	1
3145.0	39.4	P	V	30.8	-29.9	0.0	40.3	74.0	33.7	1
3495.0	40.0	P	V	31.3	-29.7	0.0	41.6	74.0	32.4	1
3930.0	39.8	P	V	32.8	-29.0	0.0	43.6	74.0	30.4	1
4160.0	40.5	P	V	32.5	-28.6	0.0	44.4	74.0	29.6	1

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist. Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
4492.5	40.2	P	V	33.0	-28.0	0.0	45.2	74.0	28.8	1
4952.5	40.1	P	V	33.3	-27.2	0.0	46.2	74.0	27.8	1

Note 1: Peak Reading under the Average limit, therefore no Average reading is required.

Judgment: Passed by at least 6.0 dB

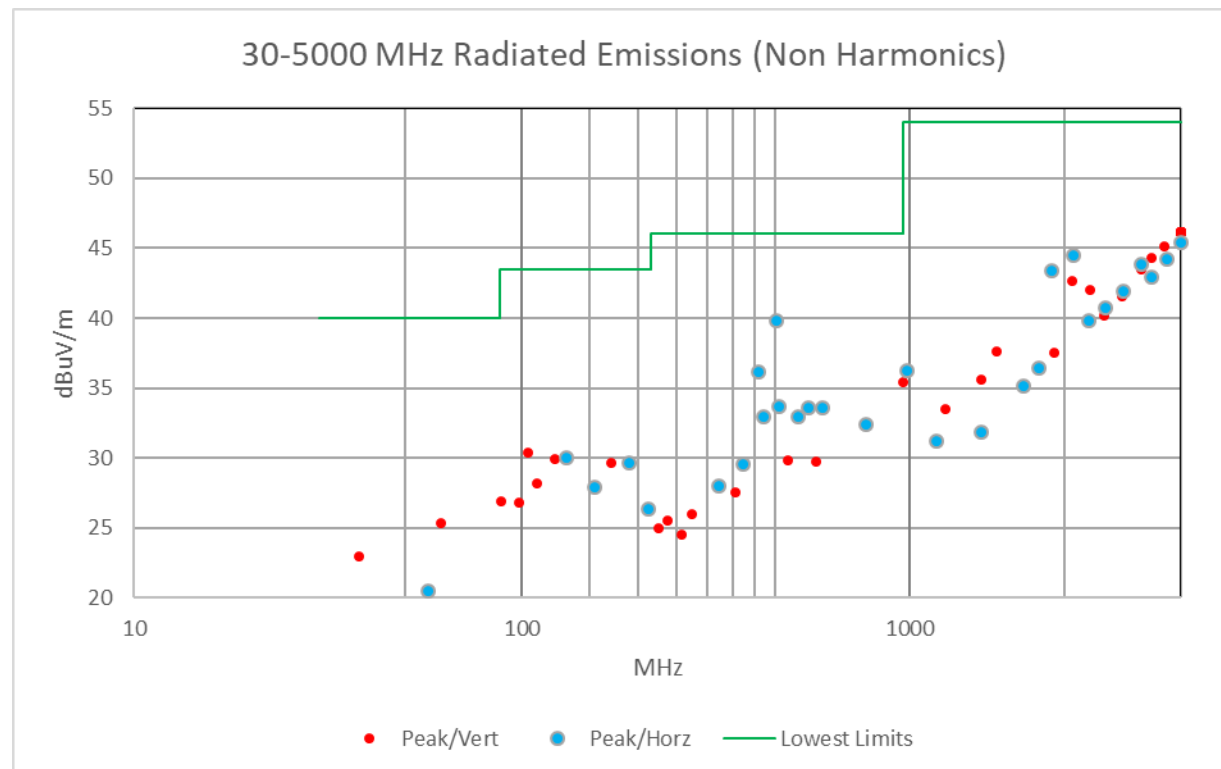

Radiated emissions in a graphical format. The above chart is the same data as the previous table.

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

Fundamental and Harmonic Emissions FCC 15.249; Three axis tested

		Spectrum Analyzer Readings									EUT	Peak	Ave	Peak	Ave	Margin		
hrm	Tx	Peak				Ave	Peak				Ave	Corr.	Emission	Tot. FS		Limit		Under
#	Freq	Vertical Polarization				Horizontal Polarization				Fact.	Freq MHz	dBuV/m	dBuV/m	Limit				
		X	Y	Z	Max	X	Y	Z	Max									
1	2402	66.8	69.0	71.1	51.1	68.5	69.7	70.6	50.6	32.3	2402.0	103.4	83.4	114	94	10.6		
BE	2402	20.9	23.1	25.2	5.2	22.6	23.8	24.7	4.7	32.3	2400.0	57.5	37.5	74	54	16.5		
2	2402	53.8	51.8	51.3	33.8	50.4	56.4	51.3	36.4	6.7	4804.0	63.1	43.1	74	54	10.9		
3	2402	38.9	40.1	37.8	20.1	38.4	37.6	42.2	22.2	13.0	7206.0	55.2	35.2	74	54	18.8		
4	2402	37.2	37.6	36.4	17.6	36.8	36.6	36.6	16.8	18.2	9608.0	55.8	35.8	74	54	18.2		
1	2440	65.3	69.4	70.5	50.5	73.1	71.4	70.5	53.1	32.3	2441.0	105.4	85.4	114	94	8.6		
2	2440	54.9	53.9	52.4	34.9	54.4	55.4	52.0	35.4	6.7	4882.0	62.1	42.1	74	54	11.9		
3	2440	41.0	41.3	41.5	21.5	42.4	40.5	41.0	22.4	13.0	7323.0	55.4	35.4	74	54	18.6		
4	2440	40.5	41.4	41.1	21.4	41.2	41.3	41.1	21.3	18.2	9764.0	59.6	39.6	74	54	14.4		
1	2480	68.2	68.5	70.1	50.1	71.0	69.3	70.1	51.0	32.4	2480.0	103.4	83.4	114	94	10.6		
BE	2480	15.5	15.8	17.4	-2.6	18.3	16.6	17.4	-1.7	32.4	2483.5	50.7	30.7	74	54	23.3		
2	2480	52.2	52.3	52.3	32.3	54.8	53.5	54.5	34.8	6.7	4960.0	61.5	41.5	74	54	12.5		
3	2480	41.8	41.8	42.0	22.0	42.0	43.5	41.8	23.5	13.0	7440.0	56.5	36.5	74	54	17.5		
4	2480	42.0	41.6	41.8	22.0	42.0	41.9	42.3	22.3	18.2	9920.0	60.5	40.5	74	54	13.5		
Column numbers (see below for explanations)																		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17		

Column #1. hrm = Harmonic; BE = Band Edge emissions

Column #2. Frequency of Transmitter.

Column #3. Uncorrected readings from the spectrum analyzer with First Axis Rotation.

Column #4. Uncorrected readings from the spectrum analyzer with Second Axis Rotation.

Column #5. Uncorrected readings from the spectrum analyzer with Third Axis Rotation.

Column #6. Average Reading based on peak reading reduced by the Duty cycle correction

Column #7. Uncorrected readings from the spectrum analyzer with First Axis Rotation.

Column #8. Uncorrected readings from the spectrum analyzer with Second Axis Rotation.

Column #9. Uncorrected readings from the spectrum analyzer with Third Axis Rotation.

Column #10. Average Reading based on peak reading reduced by the Duty cycle correction

Column #11. Corr. Factors = Cable Loss – Preamp Gain + Antenna Factor

Column #12. Frequency of Tested Emission

Column #13. Highest peak field strength at listed frequency.

Column #14. Highest Average field strength at listed frequency.

Column #15. Peak Limit. (Fundamental limit is 15.249, Harmonics are 15.209)



Column #16. Average Limit. (Fundamental limit is 15.249, Harmonics are 15.209)

Column #17. The margin (last column) is the worst case margin under the peak or average limits for that row.

Overall Judgment: Passed by 8.6 dB

No other Emissions were detected from 30 to 25,000 MHz within 10 dB of the limits.


Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

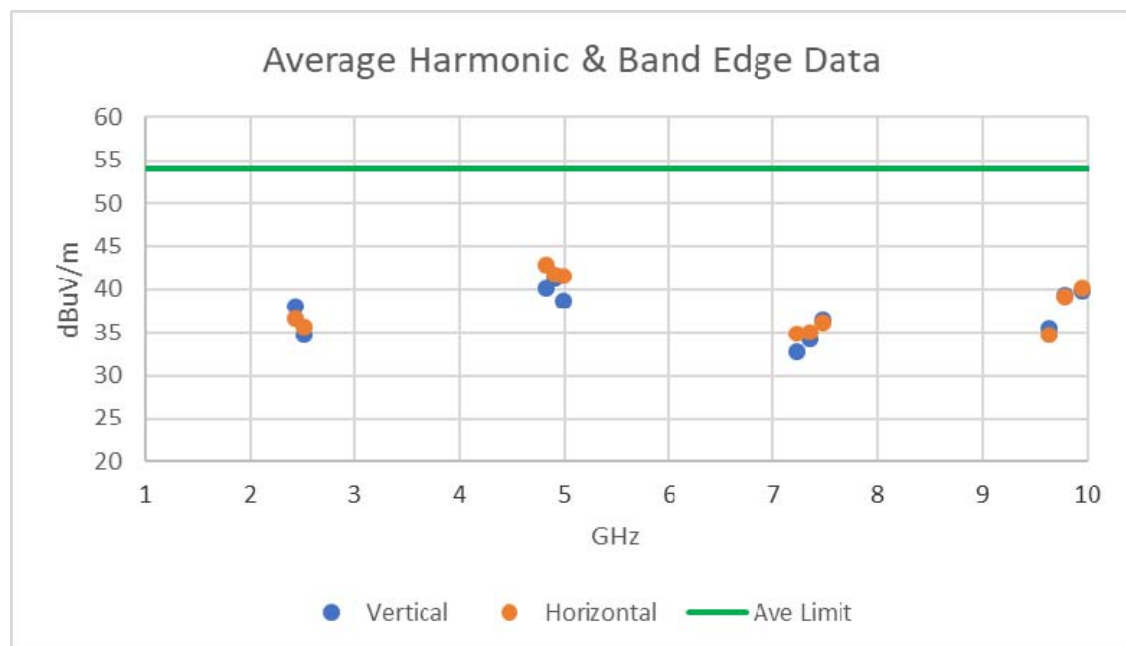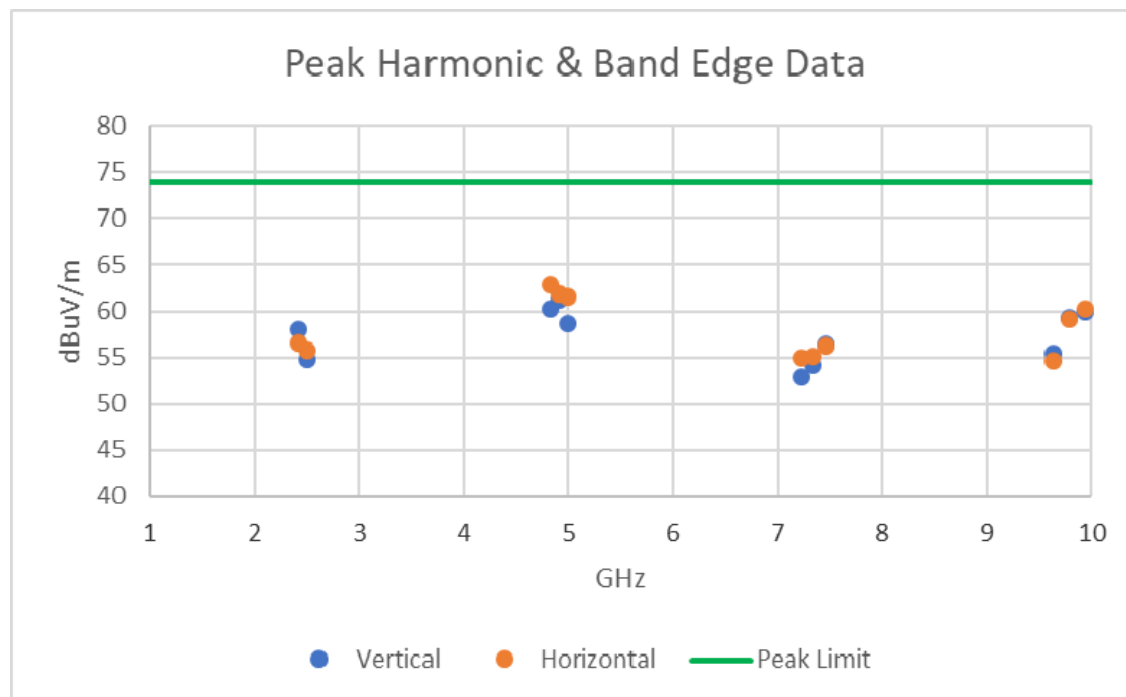

Radiated emissions in a graphical format. The above charts are the same data as the previous table.

Figure 2. Drawing of Radiated Emissions Setup

Chamber E, anechoic

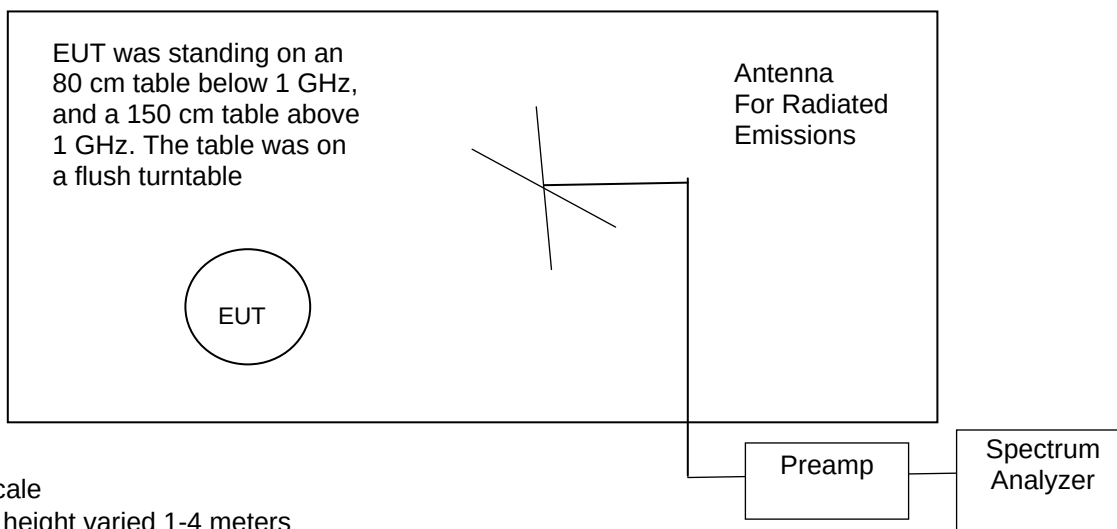**Notes:**

- Not to Scale
- Antenna height varied 1-4 meters
- Distance from antenna to tested system is 3 meters

Frequency Range	Receive Antenna	Pre-Amplifier	Spectrum Analyzer	High Pass Filter
30 to 200 MHz	ANT-03	Internal	REC-21	None*
200 to 1000 MHz	ANT-06	Internal	REC-21	None*
1 to 10 GHz	ANT-66	AMP-05	REC-21	HPF-06
10 to 18 GHz	ANT-66	AMP-20	REC-21	None*
18 to 25 GHz	ANT-48	AMP-59	REC-21	None*

* A high pass filter was not needed since the fundamental frequency was outside of the amplifier's pass band.

11.3 Occupied Bandwidth Data


The occupied bandwidth of the RF output was measured using a spectrum analyzer. The bandwidth was measured using the peak detector function and a narrow resolution bandwidth.

A broadband antenna was used to receive the modulated signal. The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The spectrum analyzer display was digitized and plotted. A limit was drawn on the plots based on the level of the modulated carrier. The plots of the occupied bandwidth for the EUT are supplied on the following page.

Channel MHz	99% EBW kHz
2402	864
2440	844
2480	848

Judgement: Pass

Figure 3. Occupied Bandwidth Plots

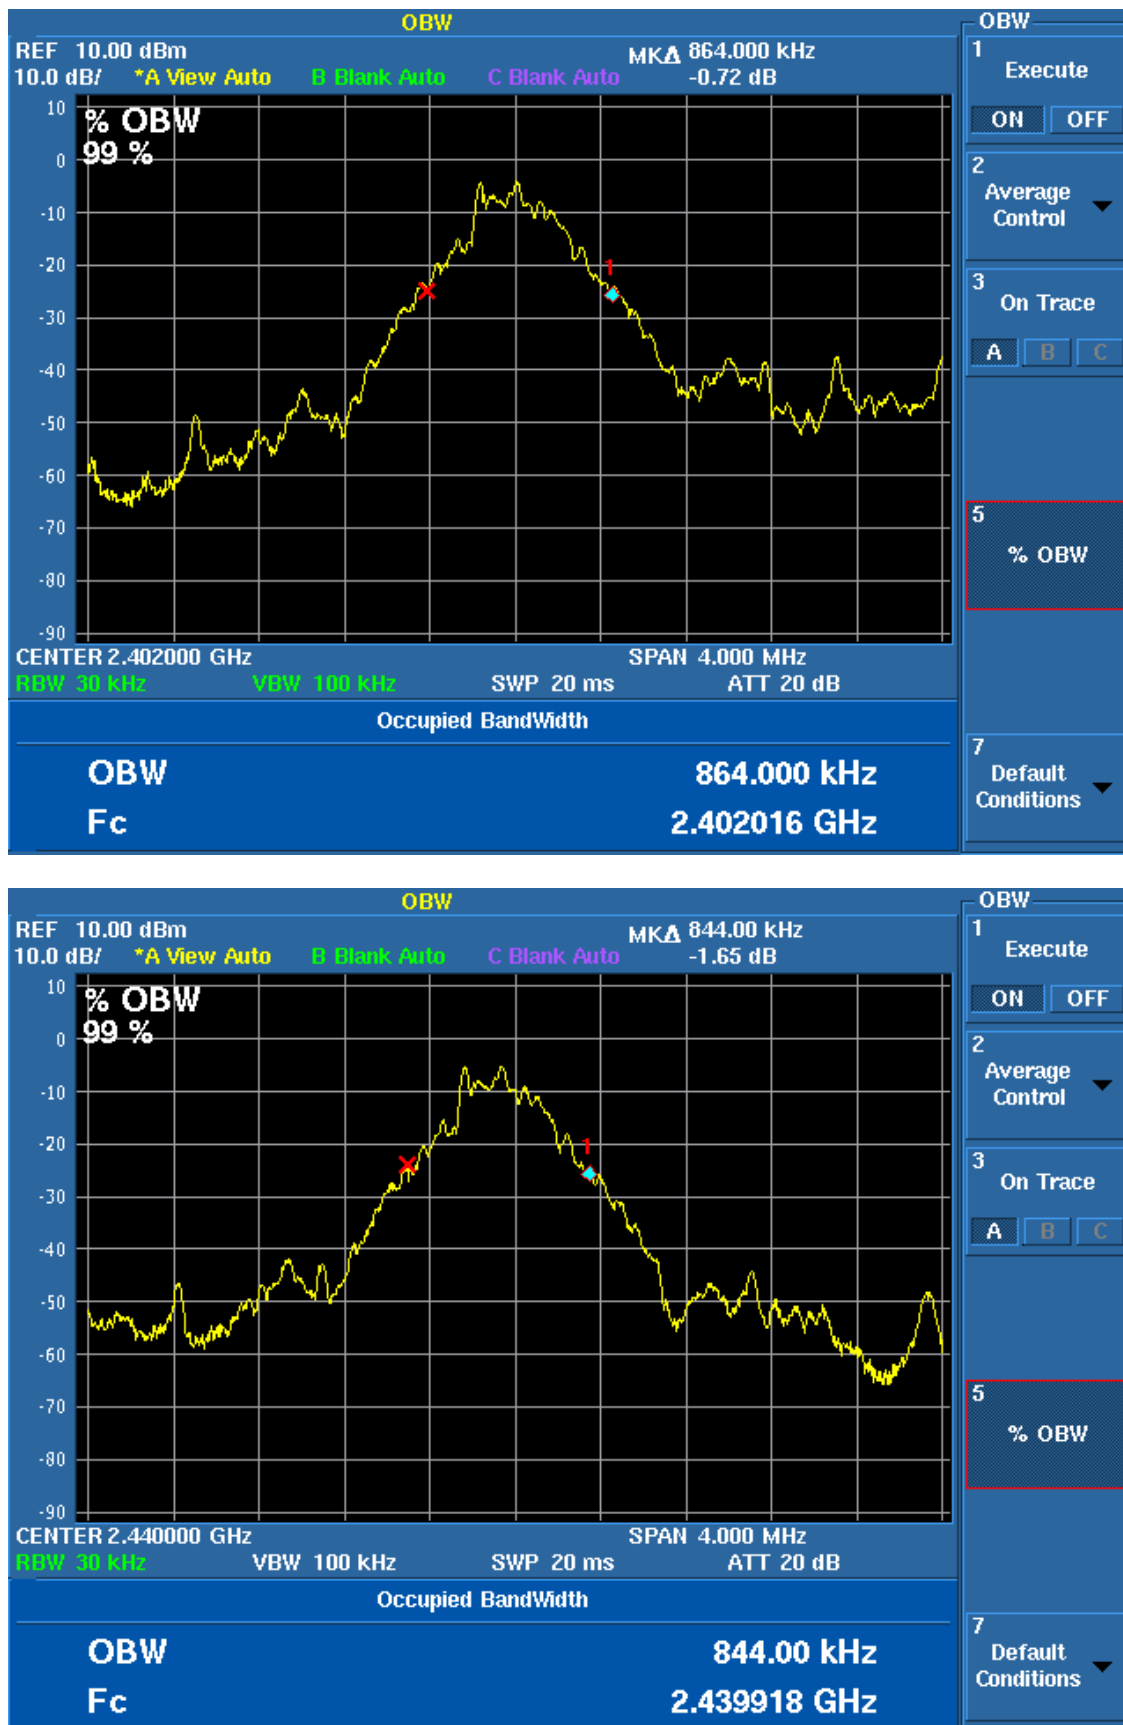



11.4 Average Output Power

The power output test method from ANSI C63.10-2013 section 11.9.1.1 was used for this test. The spectrum analyzer was set to peak channel power with a span of 20 MHz. A temporary coaxial connector was installed on the EUT for this test. The EUT output port was connected to the Spectrum analyzer Via a low loss coaxial cable. The trace was allowed to stabilize. The indicated level is the peak output power.

Span = 25 MHz; RBW = 1 MHz; VBW = 3 MHz

Tested by: Joseph Strzelecki/ Richard Tichgelaar

Test Date: 6/22/2018

Average Power


Frequency	Spec An Reading	Attenuator & cable Loss	Peak	Duty Cycle	Average Power
MHz	dBm	dB	dBm	%	mW
2402	5.9	1.9	7.8	31.2	1.9
2440	6.4	1.9	8.3	31.2	2.1
2480	6.7	2.0	8.7	31.2	2.3

The 31.2 % duty cycle is the worst case duty cycle for all channels operating simultaneously.

This is used for RF exposure calculations, so there are no limits.

Judgement: None; The data is used for RF exposure calculations only.

Testing of the GTDevice LLC, DBA Antlion Audio, Model GDL-0700, Wireless Microphone

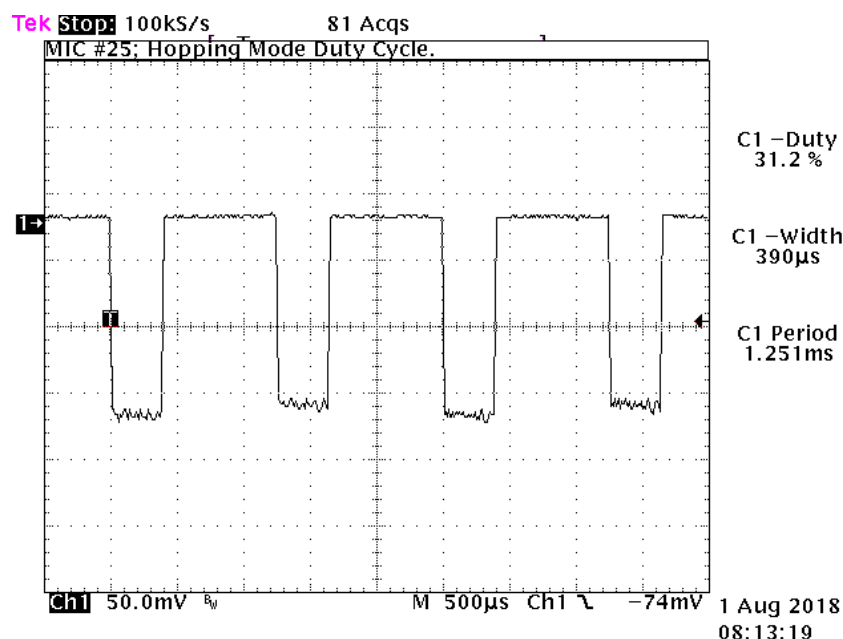

This scope trace shows the inverted signal, so actual duty cycle is the negative duty cycle.

11.4.1 Measurement Instrumentation Uncertainty

Measurement	Uncertainty
Radiated Emissions, E-field, 3 meters, 30 to 200 MHz	3.3 dB
Radiated Emissions, E-field, 3 meters, 200 to 1000 MHz	4.9 dB
Radiated Emissions, E-field, 3 meters, 1 to 18 GHz	4.8 dB
Radiated Emissions, E-field, 3 meters, 18 to 26 GHz	5.3 dB
99% Occupied Bandwidth using REC-43	1% of frequency span
Temperature THM-02	0.6 Deg C

The uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2 in accordance with CISPR 16-4-2.