

# **FCC Test Report**

Report No.: AGC05877220112FE05A

FCC ID : 2APA9-CMSXJ55A

**APPLICATION PURPOSE**: Class II permissive change

**PRODUCT DESIGNATION**: IMILAB EC5 Floodlight Camera

**BRAND NAME** : N/A

**MODEL NAME** : CMSXJ55A

**APPLICAN**: Shanghai Imilab Technology Co., Ltd.

**DATE OF ISSUE** : Nov. 18, 2022

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 24

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 11, 2022	Valid	Initial Release

**Note:** The original test report AGC05877220112FE05 (dated Mar. 11, 2022 and tested from Jan. 25, 2022 to Mar. 11, 2022) was modified on Nov. 18, 2022, including the following changes and additions:

- -Reduce the white light and cancel the network port;
- -Reduced one adapter;

Based on the above changes, additional tests for radiation emission and Conducted Emission.



#### **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
2.3. IEEE 802.11N MODULATION SCHEME	6
2.4. RELATED SUBMITTAL(S) / GRANT (S)	6
2.5. TEST METHODOLOGY	
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	6
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	8
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM	9
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	9
6. TEST FACILITY	10
7. RADIATED EMISSION	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SETUP	13
7.3. LIMITS AND MEASUREMENT RESULT	14
7.4. TEST RESULT	14
8. LINE CONDUCTED EMISSION TEST	20
8.1. LIMITS OF LINE CONDUCTED EMISSION TEST	20
8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	20
8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	21
8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	21
8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	22
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	24
APPENDIX R. PHOTOGRAPHS OF FUT	24



#### 1. VERIFICATION OF CONFORMITY

Applicant	Shanghai Imilab Technology Co., Ltd.
Address	Room 001A, Floor 11, Block 1, No. 588 Zixing Road, Minhang District, Shanghai, China
Manufacturer	Shanghai Imilab Technology Co., Ltd.
Address	Room 001A, Floor 11, Block 1, No. 588 Zixing Road, Minhang District, Shanghai, China
Product Designation	IMILAB EC5 Floodlight Camera
Brand Name	N/A
Test Model	CMSXJ55A
Date of receipt of test item	Nov. 01, 2022
Date of test	Nov. 07, 2022 to Nov. 18, 2022
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

#### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Bibo zhay	
•	Bibo Zhang (Project Engineer)	Nov. 18, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Nov. 18, 2022
Approved By	Max Zhang	
•	Max Zhang (Authorized Officer)	Nov. 18, 2022



#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "IMILAB EC5 Floodlight Camera". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Attriagor teorifical description of Eo F is described as following				
Operation Frequency	2.412GHz~2.462GHz			
Output Power (Average)	IEEE 802.11b:16.73dBm; IEEE 802.11g:14.73dBm;			
Output Power (Average)	IEEE 802.11n(20):14.37dBm;			
Output Bower (Book)	IEEE 802.11b:19.41dBm; IEEE 802.11g:21.93dBm;			
Output Power (Peak)	IEEE 802.11n(20):22.13dBm;			
Modulation	DSSS(DBPSK/DQPSK/CCK); OFDM(BPSK/QPSK/16-QAM/64-QAM)			
Number of channels	11			
Hardware Version	5.0.8_0209			
Software Version	LASM084A1-1			
Antenna Designation	PCB antenna (Comply with requirements of the FCC part 15.203)			
Antenna Gain	1dBi			
Power Supply	DC 12V by adapter			

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11.



#### 2.3. IEEE 802.11N MODULATION SCHEME

MCS	Nss	Modulation	R	NBPSC NCBPS NDBPS rate(I		NDBPS		nta //bps)		
Index	1100	modulation	- 1	INDI OO	800ns0				nsGl	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI Guard interval		

#### 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2APA9-CMSXJ55A** filing to comply with the FCC Part 15 requirements.

#### 2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

#### 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 7 of 24

#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.8 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.4 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel transmitting (TX)
2	Middle channel transmitting (TX)
3	High channel transmitting (TX)

#### Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)


Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

#### Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

# Software Setting

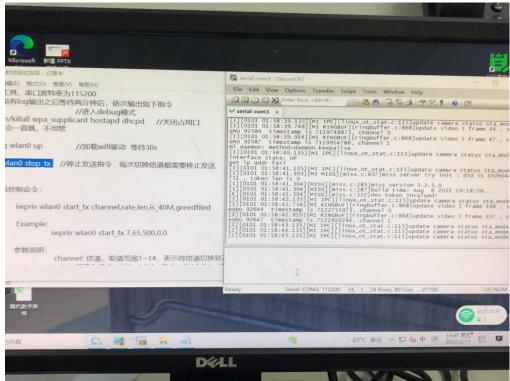




Page 9 of 24

# 5. SYSTEM TEST CONFIGURATION

#### **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:



#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	IMILAB EC5 Floodlight Camera	CMSXJ55A	2APA9-CMSXJ55A	EUT
2	Adapter	GQ12-120100-CU	Input: AC 100-240V, 50/60Hz, 0.4A Output: DC 12V, 1.0A	Accessory

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Page 10 of 24

#### 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

#### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESPI	101206	May.11, 2021	May.10, 2022
Test Receiver	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
Artificial power network	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Artificial power network	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test Software	FARA	EZ-EMC(Ver. AGC-CON03A1)	N/A	N/A	N/A





#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	100034	Sep. 06, 2021	Sep. 05, 2022
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Fliter	Micro-tronics	087	N/A	Mar. 23, 2020	Mar. 22, 2022
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	N/A	N/A
Attenuator	Weinachel Corp	58-30-33	N/A	Sep. 03, 2020	Sep. 02, 2022
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC K	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 21, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifier Assembly	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
Preamplifier Assembly	ETS LINDGREN	3117PA	00225134	Aug. 04, 2022	Aug. 03, 2024
Wideband Antenna	SCHWARZBEC K	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Test Software	FARA	EZ-EMC(Ver.RA -03A)	N/A	N/A	N/A



Page 12 of 24

#### 7. RADIATED EMISSION


#### 7.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




#### 7.2. TEST SETUP


#### Radiated Emission Test-Setup Frequency Below 30MHz

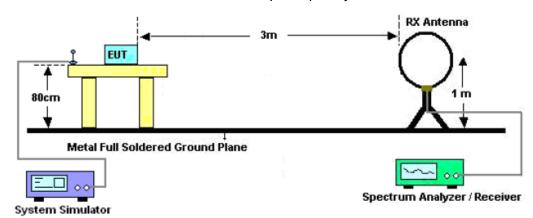

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

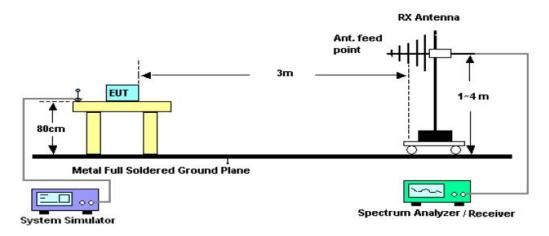

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

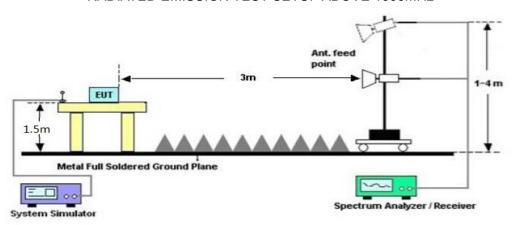

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 14 of 24

#### 7.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 7.4. TEST RESULT

#### Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



#### Radiated emission from 30MHz to 1000MHz

EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	21.8°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		39.0245	11.02	11.94	22.96	40.00	-17.04	peak
2		68.6310	10.30	13.30	23.60	40.00	-16.40	peak
3	2	208.5803	14.22	11.57	25.79	43.50	-17.71	peak
4	3	315.4808	12.95	17.08	30.03	46.00	-15.97	peak
5	* 4	119.1081	20.66	20.51	41.17	46.00	-4.83	peak
6	7	750.1083	15.76	21.00	36.76	46.00	-9.24	peak

**RESULT: PASS** 



EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	21.8°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

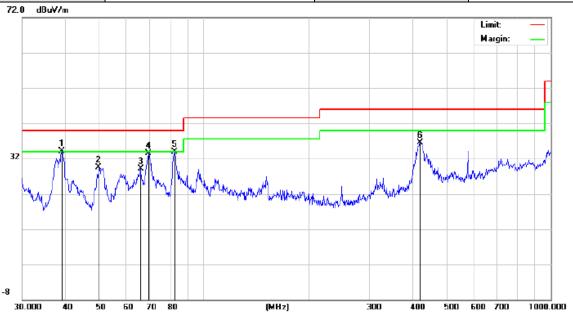


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	39.0244	25.01	9.12	34.13	40.00	-5.87	peak
2		49.8814	19.18	10.37	29.55	40.00	-10.45	peak
3		65.8030	16.93	12.09	29.02	40.00	-10.98	peak
4		69.3568	21.87	11.60	33.47	40.00	-6.53	peak
5		82.6481	22.68	11.29	33.97	40.00	-6.03	peak
6	4	419.1081	18.78	17.82	36.60	46.00	-9.40	peak

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.





#### Radiated emission above 1GHz

EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Valua Trea	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4824.000	53.46	0.08	53.54	74	-20.46	peak	
4824.000	46.25	0.08	46.33	54	-7.67	AVG	
7236.000	49.61	2.21	51.82	74	-22.18	peak	
7236.000	39.67	2.21	41.88	54	-12.12	AVG	
emark:							

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	55.42	0.08	55.5	74	-18.5	peak
4824.000	44.16	0.08	44.24	54	-9.76	AVG
7236.000	50.18	2.21	52.39	74	-21.61	peak
7236.000	39.49	2.21	41.7	54	-12.3	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	53.14	0.14	53.28	74	-20.72	peak
4874.000	42.19	0.14	42.33	54	-11.67	AVG
7311.000	48.61	2.36	50.97	74	-23.03	peak
7311.000	37.42	2.36	39.78	54	-14.22	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	25°C	Relative Humidity	58%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4874.000	54.22	0.14	54.36	74	-19.64	peak	
4874.000	41.46	0.14	41.6	54	-12.4	AVG	
7311.000	48.61	2.36	50.97	74	-23.03	peak	
7311.000	37.41	2.36	39.77	54	-14.23	AVG	
Remark:							

Factor = Antenna Factor + Cable Loss – Pre-amplifier.





EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	25°C	Relative Humidity	60%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4924.000	55.49	0.22	55.71	74	-18.29	peak	
4924.000	43.74	0.22	43.96	54	-10.04	AVG	
7386.000	50.16	2.64	52.8	74	-21.2	peak	
7386.000	40.37	2.64	43.01	54	-10.99	AVG	
Remark:							

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	IMILAB EC5 Floodlight Camera	Model Name	CMSXJ55A
Temperature	25°C	Relative Humidity	60%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type				
4924.000	56.34	0.22	56.56	74	-17.44	peak				
4924.000	46.15	0.22	46.37	54	-7.63	AVG				
7386.000	49.64	2.64	52.28	74	-21.72	peak				
7386.000	39.57	2.64	42.21	54	-11.79	AVG				
Remark:										
Factor = Antenna Factor + Cable Loss – Pre-amplifier.										

#### **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



#### 8. LINE CONDUCTED EMISSION TEST


#### 8.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

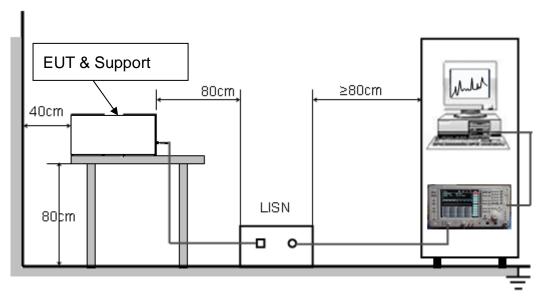



Page 21 of 24

#### 8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 12V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


#### 8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



#### 8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

#### Line Conducted Emission Test Line 1-L

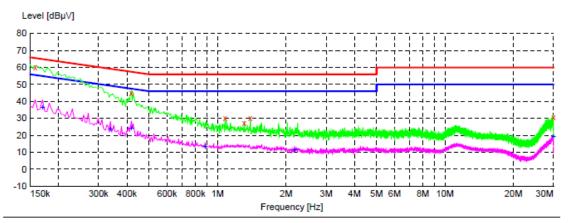

и и иMES agc\_fin

#### MEASUREMENT RESULT: "agc\_fin"

2022/11/7 21:17 Level Transd Limit Margin Frequency Detector Line dΒμV MHz dΒμV dΒ dΒ 5.4 0.158000 60.20 6.8 66 ь1 QP 0.418000 5.6 58 44.90 12.6 QP L1 5.5 56 1.078000 30.10 25.9 QP ь1 5.8 56 1.310000 27.30 18.7 ь1 QΡ 30.10 5.9 56 25.9 ь1 1.394000 QP 29.990000 9.6 29.1 ь1 30.90 60 QP


#### MEASUREMENT RESULT: "agc fin2"

2022/11/7 21:	15					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.170000	36.40	6.8	55	18.6	AV	L1
0.338000	24.00	5.9	49	25.3	AV	L1
0.418000	24.60	5.6	48	22.9	AV	L1
0.882000	13.40	5.4	46	32.6	AV	L1
2.182000	11.60	6.5	46	34.4	AV	L1
29.954000	19.20	9.6	50	30.8	AV	L1

#### **RESULT: PASS**



#### Line Conducted Emission Test Line 2-N

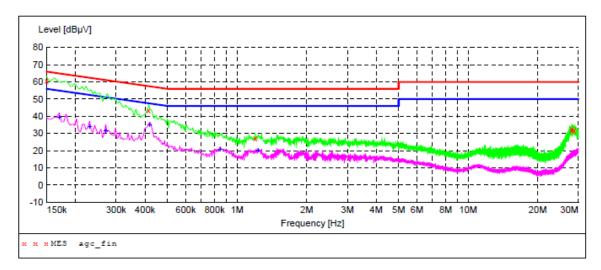


## MEASUREMENT RESULT: "agc\_fin"

2022/11/7	21:11					
Frequen M	ıcy Level Mz dBμV		Limit dBµV	Margin dB	Detector	Line
0.1500	00 60.60	6.9	66	5.4	QP	N
0.4140	000 43.40	5.6	58	14.2	QP	N
1.1980	000 27.20	5.7	56	28.8	QP	N
28.0420	000 31.60	9.4	60	28.4	QP	N
28.1580	000 32.80	9.4	60	27.2	QP	N
28.8140	000 31.50	9.5	60	28.5	QP	N

#### MEASUREMENT RESULT: "agc fin2"

2022/11/7	21:12					
-	cy Level Hz dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.1700	00 39.60	6.8	55	15.4	AV	N
0.2300	00 34.00	6.4	52	18.4	AV	N
0.2700	00 31.70	6.2	51	19.4	AV	N
0.4180	00 35.20	5.6	48	12.3	AV	N
0.8460	00 21.10	5.4	46	24.9	AV	N
1.2340	00 20.20	5.7	46	25.8	AV	N

#### **RESULT: PASS**





#### APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC05877220112AP02A

**APPENDIX B: PHOTOGRAPHS OF EUT** 

Refer to the Report No.: AGC05877220112AP03A

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.