

FCC Test Report

Report No.: AGC05877220901FE02A

FCC ID	:	2APA9-IMISW02
APPLICATION PURPOSE	:	Class II permissive change
PRODUCT DESIGNATION	:	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch
BRAND NAME	:	N/A
MODEL NAME	:	IMISW02
APPLICANT	:	Shanghai Imilab Technology Co., Ltd.
DATE OF ISSUE	:	Feb. 06, 2023
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0
<u>Attestation of (</u>	<u>Flo</u>	beal Compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date Valid Version		Notes	
V1.0	/	Feb. 06, 2023	Valid	Initial Release	

Note: The original test report AGC05877220901FE02 (dated Sep. 23, 2022 and tested from Sep. 07, 2022 to Sep. 23, 2022) was modified on Feb. 06, 2023, including the following changes and additions: -Changed the charging cable;

-The RF module of the current application product and the RF module of the original project are not subject to any changes, but the strap and screen have been replaced.

For the above described change(s), the Radiated Emission had been tested for the Class II device.



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
2.3. RELATED SUBMITTAL(S)/GRANT(S)	6
2.4. TEST METHODOLOGY	
2.5. SPECIAL ACCESSORIES	
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF TESTED SYSTEM	
5.2. EQUIPMENT USED IN TESTED SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. RADIATED EMISSION	11
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SETUP	
7.3. LIMITS AND MEASUREMENT RESULT	
7.4. TEST RESULT	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	



1. VERIFICATION OF COMPLIANCE

Applicant	Shanghai Imilab Technology Co., Ltd.		
Address	Room 001A, Floor 11, Block 1, No. 588 Zixing Road, Minhang District, Shanghai, China		
Manufacturer	Shanghai Imilab Technology Co., Ltd.		
Address	Room 001A, Floor 11, Block 1, No. 588 Zixing Road, Minhang District, Shanghai, China		
Product Designation	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch		
Brand Name	N/A		
Test Model	IMISW02		
Date of receipt of test item	Feb. 01, 2023		
Date of test	Feb. 01, 2023 to Feb. 06, 2023		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BLE/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Thea Yuang Prepared By Thea Huang Feb. 06, 2023 (Project Engineer) **Reviewed By** Calvin Liu Feb. 06, 2023 (Reviewer) Approved By Max Zhang

Max Zhang (Authorized Officer)

Feb. 06, 2023



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch". It is designed by way of utilizing the GFSK technology to achieve the system operation. A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.050dBm (Max)
Bluetooth Version	V5.2
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE ⊠GFSK 1Mbps □GFSK 2Mbps
Number of channels	40 Channels
Antenna Designation	Integral Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	-8.03dBi
Hardware Version	RH303V02
Software Version	V001174
Power Supply	DC 3.8V by battery or DC 5Vby adapter

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402 MHz	
	1	2404 MHz	
2400~2483.5MHz	:	:	
	38	2478 MHz	
	39	2480 MHz	



2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for FCC ID: 2APA9-IMISW02 filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		



Read BD Address

Load Script

4. DESCRIPTION OF TEST MODES

>LeTest_Start : PKT TX

NO.	TEST MODE DESCRIPTION		
1	Low channel TX		
2	Middle channel TX		
3	High channel TX		

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. For the test items not reflected in this report, refer to the original report (AGC05877220901FE02).

Software Setting			
Bluetooth RF Test Tool (RtlBluetoothMP.dll Version :5,2,2,15 RTLBTAPP Version :5.2.2,16)	_		×
Mode <u>A</u> bout			
D COM UART Port & Baudrate=115200 V Open Close	ГЕК		
Non Link Mode Hopping LE Test RW	Hot Key		
	F	HCI Reset	
LE PKT TX (for MP)	Т	est Mode	
Channel 0	Re	ad Thermal	
Data Len 0xff 🗨 Le Tx Gain Index 7			
Payload Type Pseudo-Random bit sequence 9 🗸	G	ietChipInfo	
	Sh	owTxPowe	f
Start Stop			
LE Fix Count 0	Power C OF	Tracking F	Set
Message	(* ON	4	Get
>>Stop hopping mode >>Run hopping mode Begin >>Stop hopping mode	PHY_S		•
>>Run hopping mode Begin >>Stop hopping mode	Ge	et BT Statu:	s



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	IMISW02	2APA9-IMISW02	EUT
2	Control Box	USB-TTL	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Not applicable

Note: 1. The BT function cannot transmit when charging.

2. EUT adds a third type of screen. For radiation emission, EUT has been tested.

3. For the test items not reflected in this report, refer to the original report (AGC05877220901FE02).



6. TEST FACILITY

Test Site		Attestation of Global Compliance (Shenzhen) Co., Ltd					
Location		1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China					
Designation Num	ber	CN1259					
FCC Test Firm Registration Num	ber	975832					
A2LA Cert. No.		5054.02					
Description		Attestation of	Global Compliance (Shenzhen) Co., L	td is accredited b	by A2LA	
TEST EQUIPMENT	OFI	RADIATED EM	ISSION TEST				
Equipment	Ма	anufacturer	Model	S/N	Cal. Date	Cal. Due	
TEST RECEIVER		R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023	
EXA Signal Analyzer		Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023	
2.4GHz Filter	EM Electronics		2400-2500	N/A	Mar. 22, 2022	Mar. 21, 2024	
Attenuator		ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024	
Horn antenna	SCH	WARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023	
Active loop antenna (9K-30MHz)	ZHINAN		ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024	
Double-Ridged Waveguide Horn	ETS LINDGREN		3117	00034609	Apr. 23, 2021	Apr. 22, 2023	
Broadband Preamplifier	ETS	S LINDGREN	3117PA	00225134	Sep. 02, 2022	Sep. 01, 2024	
ANTENNA	ANTENNA SCHWARZBECK		VULB9168	494	Jan. 05, 2023	Jan. 04, 2025	
Test software Tonscend		JS32-RE (Ver.2.5)	N/A	N/A	N/A		




7. RADIATED EMISSION

7.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



7.2. TEST SETUP

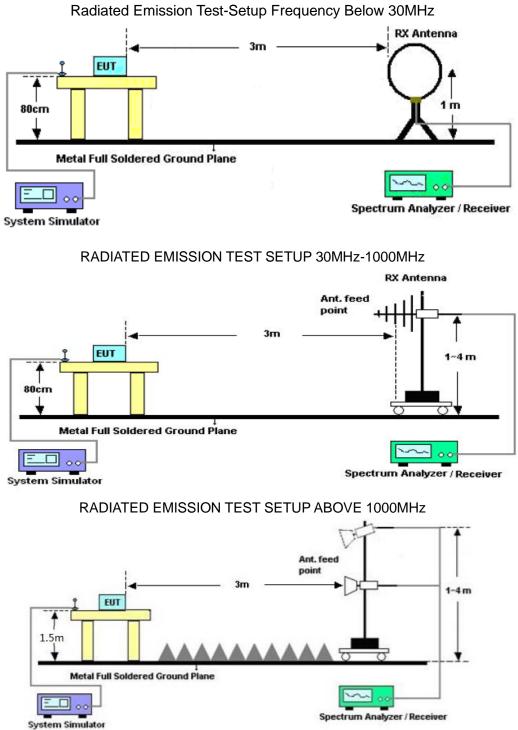



7.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

7.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



The third screen of the EUT:

Radiated emission from 30MHz to 1000MHz						
EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02			
Temperature	25° C	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Antenna	Horizontal			

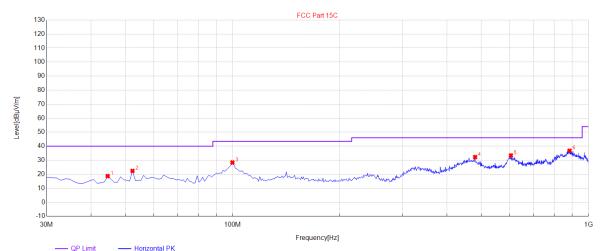


QP Limit ---- Horizonta

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.55	18.67	10.08	40.00	21.33	100	280	Horizontal
2	52.31	22.39	11.50	40.00	17.61	100	40	Horizontal
3	99.84	28.35	21.38	43.50	15.15	100	160	Horizontal
4	480.08	32.27	25.79	46.00	13.73	100	120	Horizontal
5	605.21	33.42	28.53	46.00	12.58	100	260	Horizontal
6	884.57	36.78	32.90	46.00	9.22	100	360	Horizontal

RESULT: PASS



EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

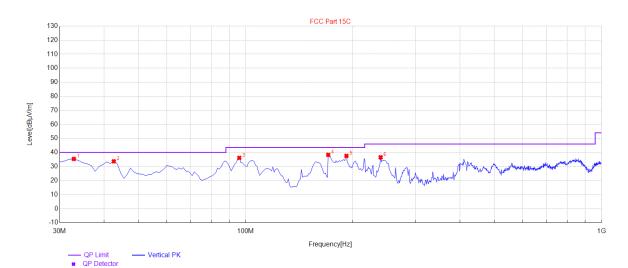

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	35.39	10.39	40.00	4.61	100	340	Vertical
2	42.61	33.71	12.15	40.00	6.29	100	210	Vertical
3	95.96	36.17	12.73	43.50	7.33	100	310	Vertical
4	170.65	38.33	18.23	43.50	5.17	100	100	Vertical
5	191.99	37.57	15.03	43.50	5.93	100	260	Vertical
6	239.52	36.57	13.69	46.00	9.43	100	230	Vertical

RESULT: PASS

Note:

1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been tested. The mode 1 is the worst case and recorded in the report.



Radiated emission above 1GHz

EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	43.23	0.08	43.31	74	-30.69	peak	
4804.000	35.39	0.08	35.47	54	-18.53	AVG	
7206.000	38.47	2.21	40.68	74	-33.32	peak	
7206.000	31.18	2.21	33.39	54	-20.61	AVG	
Remark:							
Eactor - Antor	actor = Antenna Factor + Cable Loss - Pre-amplifier						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.59	0.08	44.67	74	-29.33	peak
4804.000	34.47	0.08	34.55	54	-19.45	AVG
7206.000	38.28	2.21	40.49	74	-33.51	peak
7206.000	30.33	2.21	32.54	54	-21.46	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	44.54	0.14	44.68	74	-29.32	peak
4880.000	35.47	0.14	35.61	54	-18.39	AVG
7320.000	39.33	2.36	41.69	74	-32.31	peak
7320.000	31.28	2.36	33.64	54	-20.36	AVG
Remark:						
actor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4880.000	45.49	0.14	45.63	74	-28.37	peak
4880.000	38.33	0.14	38.47	54	-15.53	AVG
7320.000	40.58	2.36	42.94	74	-31.06	peak
7320.000	32.31	2.36	34.67	54	-19.33	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02	
Temperature	25° C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 3	Antenna	Horizontal	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	44.76	0.22	44.98	74	-29.02	peak
4960.000	35.54	0.22	35.76	54	-18.24	AVG
7440.000	38.59	2.64	41.23	74	-32.77	peak
7440.000	29.44	2.64	32.08	54	-21.92	AVG
emark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	IMILAB W02 lite Smart Watch, IMILAB W02 Pro Smart Watch, IMILAB W02 Smart Watch	Model Name	IMISW02
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	42.6	0.22	42.82	74	-31.18	peak
4960.000	34.52	0.22	34.74	54	-19.26	AVG
7440.000	38.41	2.64	41.05	74	-32.95	peak
7440.000	29.57	2.64	32.21	54	-21.79	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC05877220901AP01A

APPENDIX B: PHOTOGRAPHS OF EUT Refer to the Report No.: AGC05877220901AP02A

----END OF REPORT----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.