

FCC Test Report

Report No.: AGC06724190602FE03

FCC ID 2APAKBE1210

APPLICATION PURPOSE Original Equipment

PRODUCT DESIGNATION Visit CO alarm transmitter

BRAND NAME Bellman & Symfon

MODEL NAME BE1210

APPLICANT Bellman & Symfon AB

DATE OF ISSUE Jul. 04, 2019

STANDARD(S)

TEST PROCEDURE(S)

FCC Part 15 Subpart C Section 15.231

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com

E-mail: agc@agc-cert.com



Report No.: AGC06724190602FE03

Page 2 of 26

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jul. 04, 2019	Valid	Initial release




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM	7
5.2. EQUIPMENT USED IN EUT SYSTEM	7
5.3. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	8
7. TEST EQUIPMENT LIST	8
8. PROVISION FOR MOMENTARY OPERATION	9
8.1 MEASUREMENT PROCEDURE	9
8.2 TEST SETUP	9
8.3 TEST RESULT	10
9. DUTY CYCLE CORRECTION FACTOR	12
9.1 MEASUREMENT PROCEDURE	12
9.2 TEST SETUP	12
9.3 TEST RESULT	12
10. RADIATED EMISSION	13
10.1. MEASUREMENT PROCEDURE	13
10.2. TEST SETUP	15
10.3. TEST RESULT	16
11. BANDWIDTH	18
11.1. MEASUREMENT PROCEDURE	18
11.2. TEST SETUP	
11.3. TEST RESULT	19
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	20
APPENDIX B. PHOTOGRAPHS OF FUT	21







1. VERIFICATION OF CONFORMITY


Applicant	Bellman & Symfon AB		
Address	Södra Långebergsgatan 30 436 32, Askim Sweden		
Manufacturer	Bellman & Symfon AB		
Address	Södra Långebergsgatan 30 436 32, Askim Sweden		
Factory	Ei comanpy		
Address	Ei Electronics Campus, U 40-47 Shannon Industrial Estate Shannon, V14 H020 Co. Clare Ireland		
Product Designation	Visit CO alarm transmitter		
Brand Name	Bellman & Symfon		
Test Model	BE1210		
Date of test	Jun. 27, 2019 to Jul. 04, 2019		
Deviation	None		
Condition of Test Sample	le Normal		
Test Result	Pass		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.231. The test results of this report relate only to the tested sample identified in this report.

> Draven-li Tested By Draven Li(Li Ming Liang) Jul. 04, 2019 Max Zhang Reviewed By Max Zhang(Zhang Yi) Jul. 04, 2019 Forrest les Approved By Forrest Lei(Lei Yonggang) Jul. 04, 2019 **Authorized Officer**








2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

n or Lot is described as following		
433.92MHz		
78.14dBuV/m(Peak)@3m		
ООК		
1 00 00		
001A		
001		
PCB+Wire antenna		
2.2dBi		
DC 3V by battery (Duracell Alkaline battery 1.5V x2)		







3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Report No.: AGC06724190602FE03

Page 7 of 26

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION		
1	Transmitting mode(Automatic operated)		
2	Transmitting mode(Manual operated)		

- 1. All the test modes can be supply by new battery, and only the data of the worst case recorded in the test
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1:

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Visit CO alarm transmitter	Bellman & Symfon	BE1210	EUT


5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.231(a)(2)	Activated automatically	Compliant
ANSI C63.10 Clause 7.5	Average Factor	N/A
§15.231(b) & §15.209	(b) & §15.209 Field Strength of Fundamental and Spurious Emission	
§15.231(c)	Bandwidth	Compliant



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by			

7. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Attenuator	ZHINAN	E-002	N/A	Aug. 28, 2018	Aug. 27, 2019
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 25, 2018	Oct. 24, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2017	Sep. 27, 2019





Report No.: AGC06724190602FE03

Page 9 of 26

8. PROVISION FOR MOMENTARY OPERATION

8.1 MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency


RBW=1MHz, VBW=3MHz

Span: 0Hz

Sweep time: 10S

- 2. Set the EUT to transmit activated automatically. Use the "View" function of SPA to find the transmission time of being released.
- 3. Record the data and Reported.

8.2 TEST SETUP









8.3 TEST RESULT

Mode1(Automatic operated):

Test Mode: EUT @ 433.92MHz for RF Transmitter



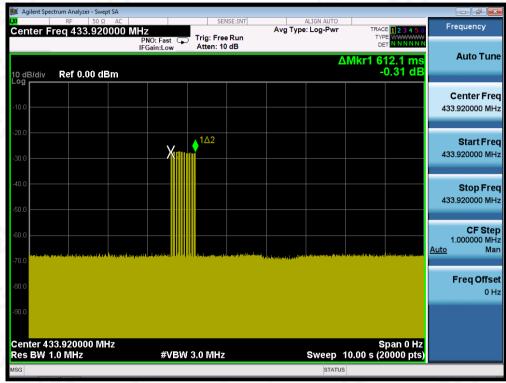

RESULT: PASS



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



Mode2(Manual operated):

Test Mode: EUT @ 433.92MHz for RF Transmitter

The time of stopping transmission	Limit (s)	
0.6181	5.00	

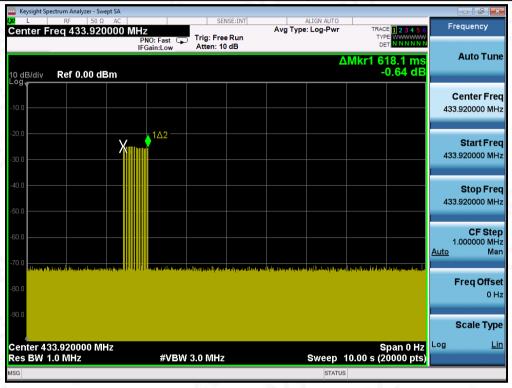


RESULT: PASS



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





9. DUTY CYCLE CORRECTION FACTOR

9.1 MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency


RBW=1MHz; VBW=3MHz

Span: 0Hz

Sweep time: more than two pulse trains or more than each type of pulse occupancy time

- 2. Set the EUT to transmit by manually operated. Use the "Delta mark" function of SPA to find the period time between two pulse trains and each type of pulse occupancy time.
- 3. Record the plots and Reported.

9.2 TEST SETUP



9.3 TEST RESULT

Note: The level of the peak emission are less than the average limit, so the average factor need not to be tested.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC06724190602FE03

Page 13 of 26

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Xixiang, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC06724190602FE03

Page 14 of 26

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP				






10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

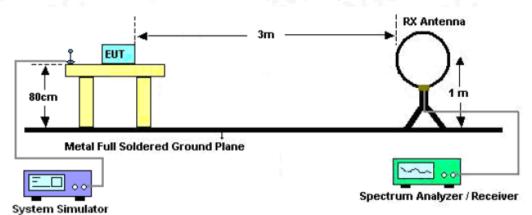

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

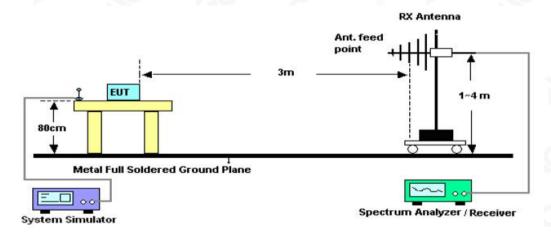

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

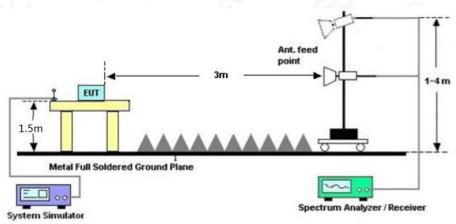



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,




10.3. TEST RESULT

Test Mode: EUT @ 433.92MHz for RF Transmitter **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ-Horizontal

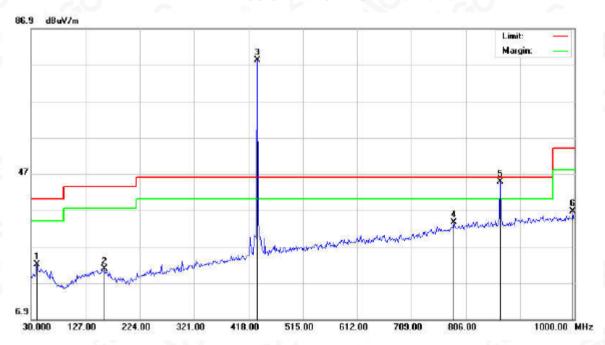

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		41.3166	1.88	20.04	21.92	40.00	-18.08	peak			
2		160.9499	1.79	19.09	20.88	43.50	-22.62	peak			
3	*	433.9200	54.47	23.67	78.14	80.80	-2.66	peak			
4		784.9832	3.58	30.07	33.65	46.00	-12.35	peak			
5	į	867.8400	13.58	31.28	44.86	60.80	-15.94	peak			
6		996.7667	4.03	32.53	36.56	54.00	-17.44	peak			




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,

Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com



RADIATED EMISSION BELOW 1GHZ-Vertical

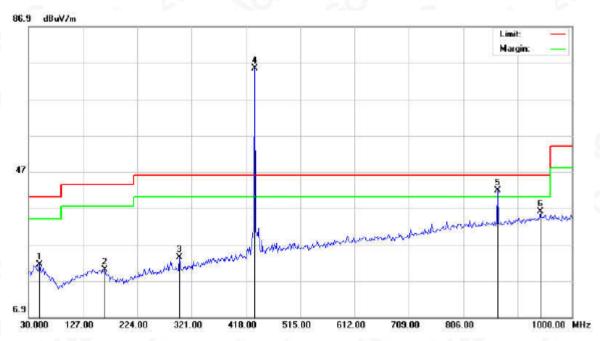

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	•	MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		49.4000	1.72	19.75	21.47	40.00	-18.53	peak			
2		165.8000	1.50	18.59	20.09	43.50	-23.41	peak			
3		299.9833	3.84	19.47	23.31	46.00	-22.69	peak			
4	*	433.9200	51.66	23.67	75.33	80.80	-5.47	peak			
5	Ţ	867.8400	10.53	31.28	41.81	60.80	-18.99	peak			
6		943.4166	4.03	32.07	36.10	46.00	-9.90	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Emissions of frequency range from 1GHz to 5GHz have 20dB margin. No recording in the test report.
 - 4. All test modes had been tested. The mode 2 was the worst case and record in the test report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





11. BANDWIDTH

11.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency

RBW=10kHz


VBW=30KHz

Span: 500kHz

Sweep time: Auto

- 2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 3. Record the plots and Reported.

11.2. TEST SETUP





Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,



11.3. TEST RESULT

Test Mode: EUT @ 433.92MHz for RF Transmitter

-20dB bandwidth	LIMIT	RESULT				
50.46kHz	1085.0KHz	Pass				
Note: Limit= Operation Frequency ×0.25%						

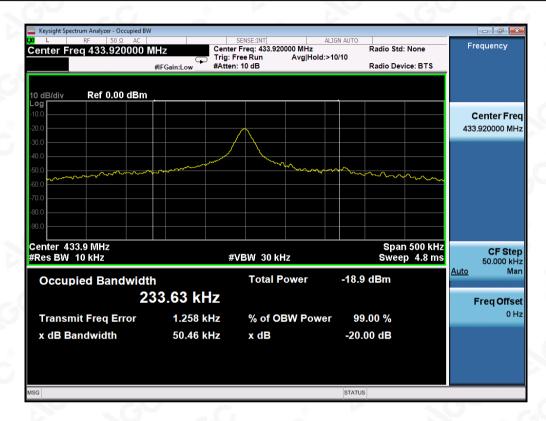


Note: All test modes had been tested. The mode 2 was the worst case and record in the test report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$





APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT




BOTTOM VIEW OF EUT





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





FRONT VIEW OF EUT




BACK VIEW OF EUT





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





LEFT VIEW OF EUT




RIGHT VIEW OF EUT





 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2

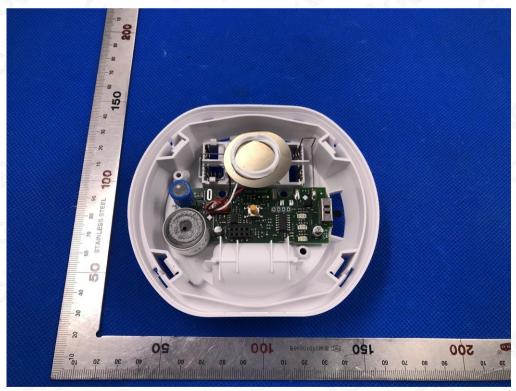




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






INTERNAL VIEW OF EUT-1

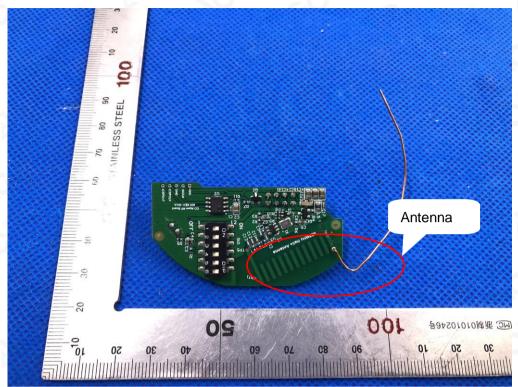


INTERNAL VIEW OF EUT-2

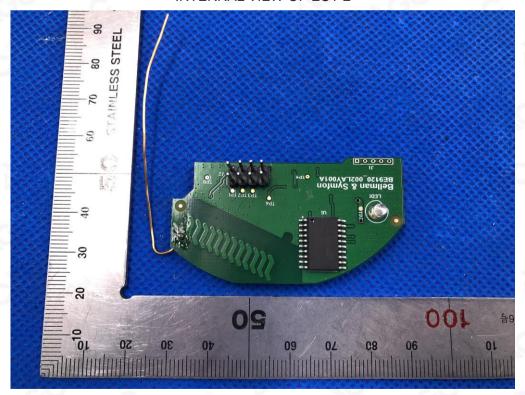




 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,






INTERNAL VIEW OF EUT-3

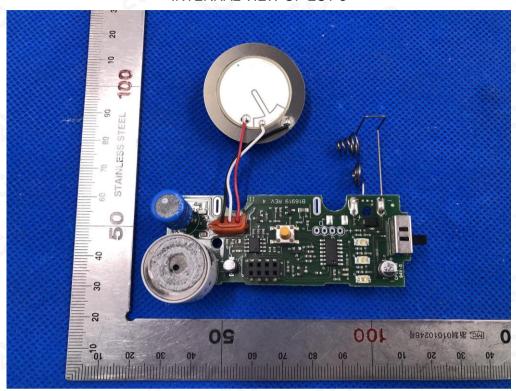


INTERNAL VIEW OF EUT-4

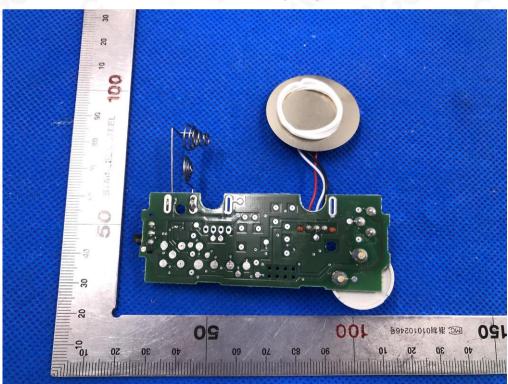




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,





INTERNAL VIEW OF EUT-5

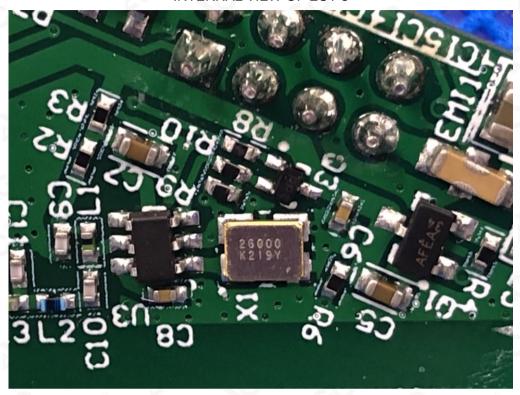

----END OF REPORT----



 $Attestation\ of\ Global\ Compliance (Shenzhen) Co., Ltd.$