Report No.: SEWM2209000196RG05

Rev.: Page: 1 of 22

TEST REPORT

Application No.: SEWM2209000196RG Applicant: Neutron Holdings, Inc.

85 2nd St, San Francisco, CA 94105 USA Address of Applicant:

Manufacturer: Neutron Holdings, Inc.

Address of Manufacturer: 85 2nd St, San Francisco, CA 94105 USA

EUT Description: Central Controller Lime-4.1-GL Model No.:

Trade Mark: Lime

FCC ID: 2APB2LIME-41-GLV2

Standard(s): FCC 47 CFR Part 15, Subpart B

Date of Receipt: 2022/10/21

Date of Test: 2022/11/26 to 2022/11/27

Date of Issue: 2022/12/08

Pass* **Test Result:**

Authorized Signature:

Panta Sun Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980 sgs.china@sgs.com

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 2 of 22

| Revision Record | | | | | | | | |
|--------------------------------------|--|------------|--|----------|--|--|--|--|
| Version Chapter Date Modifier Remark | | | | | | | | |
| 01 | | 2022/12/08 | | Original | | | | |

| Prepared By | King-P Li |
|-------------|-----------------------------|
| | (King-p Li) / Test Engineer |
| Checked By | 'well wei' |
| | (Well Wei) / Reviewer |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Decument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's osle responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or flatisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Authenticity of testing (inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CND_Doccheck@ess.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 郸编: 215000

t (86-512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 3 of 22

Test Summary

| <u> </u> | | | | | | | | | |
|---|-------------------------------|-----------------|---------|------|--|--|--|--|--|
| Emission Part | | | | | | | | | |
| Item Standard Method Requirement Re | | | | | | | | | |
| Conducted Emissions at Mains Terminals (150kHz-30MHz) | FCC 47 CFR Part 15, Subpart B | ANSI C63.4:2014 | Class B | Pass | | | | | |
| Radiated Emissions (30MHz-1GHz) | FCC 47 CFR Part 15, Subpart B | ANSI C63.4:2014 | Class B | Pass | | | | | |
| Radiated Emissions (above 1GHz) | FCC 47 CFR Part 15, Subpart B | ANSI C63.4:2014 | Class B | Pass | | | | | |

| Internal Source | Upper Frequency |
|--------------------|--|
| Below 1.705MHz | 30MHz |
| 1.705MHz to 108MHz | 1GHz |
| 108MHz to 500MHz | 2GHz |
| 500MHz to 1GHz | 5GHz |
| Above 1GHz | 5th harmonic of the highest frequency or 40GHz, whichever is lower |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government to enable the approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Action of the company of the Compa

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Pant, Suzhou Area, China (Jiangsu) Pitol Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 4 of 22

Contents

| 1 | 1 General Information | 5 |
|---|---|----|
| | 1.1 Description of Support Units 1.2 Test Location 1.3 Test Facility 1.4 Deviation from Standards 1.5 Abnormalities from Standard Conditions | |
| 2 | 2 Emission Test Results | 7 |
| | 2.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) 2.1.1 E.U.T. Operation 2.1.2 Test Setup Procedures 2.1.3 Measurement Data 2.2 Radiated Emissions (30MHz-1GHz) 2.2.1 E.U.T. Operation 2.2.2 Test Setup Procedures 2.2.3 Measurement Data 2.3 Radiated Emissions (above 1GHz) 2.3.1 E.U.T. Operation 2.3.2 Test Setup Procedures 2.3.3 Measurement Data | |
| 3 | B Equipment List | 19 |
| 4 | Measurement Uncertainty | 21 |
| 5 | 5 1 | |
| | 5.1 Test Setup | 22 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government to enable the approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Action of the company of the Compa

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 郸编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 5 of 22

General Information 1

| Product Name: | Central Controller | Central Controller | | | | | | | | |
|-------------------|--------------------|--------------------|-----------|--|--|--|--|--|--|--|
| Model No. (EUT): | Lime-4.1-GL | | | | | | | | | |
| Trade Mark: | Lime | | | | | | | | | |
| Hardware Version: | V4_1.2.1 | | | | | | | | | |
| Software Version: | V4_1.1.8 | /4_1.1.8 | | | | | | | | |
| IMEI: | 866258048612391 | | | | | | | | | |
| | Band | Tx (MHz) | Rx (MHz) | | | | | | | |
| | WCDMA Band II | 1850~1910 | 1930~1990 | | | | | | | |
| | WCDMA Band IV | 1710~1755 | 2110~2155 | | | | | | | |
| | WCDMA Band V | 824~849 | 869~894 | | | | | | | |
| | LTE Band 2 | 1850~1910 | 1930~1990 | | | | | | | |
| | LTE Band 4 | 1710~1755 | 2110~2155 | | | | | | | |
| | LTE Band 5 | 824~849 | 869~894 | | | | | | | |
| | LTE Band 7 | 2500~2570 | 2620~2690 | | | | | | | |
| | LTE Band 12 | 699~716 | 729~746 | | | | | | | |
| Frequency Bands: | LTE Band 13 | 777~787 | 746~756 | | | | | | | |
| , | LTE Band 25 | 1850~1915 | 1930~1995 | | | | | | | |
| | LTE Band 26 | 814~824 | 859~869 | | | | | | | |
| | (814 to 824 MHz) | 014 024 | 039-009 | | | | | | | |
| | LTE Band 26 | 824~849 | 869~894 | | | | | | | |
| | (824 to 849 MHz) | | | | | | | | | |
| | LTE Band 38 | 2570~2620 | 2570~2620 | | | | | | | |
| | LTE Band 41 | 2496~2690 | 2496~2690 | | | | | | | |
| | Wi-Fi 2.4G | 2412~2462 | 2412~2462 | | | | | | | |
| | Bluetooth | 2402~2480 | 2402~2480 | | | | | | | |
| | GNSS | 1 | 1559~1610 | | | | | | | |

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 6 of 22

1.1 Description of Support Units

| Description | Manufacturer | Model No. | Inventory No. | | |
|-------------|--------------------------------|------------------|---------------|--|--|
| Router | Smavwave Technology Co.,Ltd | SRT 421 | SUWI-04-34-01 | | |
| Computer | Lenovo | T14 | SUWI-03-33-04 | | |
| Mouse | Lenovo | 3D optical Mouse | SUWI-03-33-05 | | |
| Adaptor | Huawei | HW-050200C02 | SUWI-03-33-06 | | |

1.2 Test Location

All tests were performed at:

| Company: | SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. | | | | | | |
|----------------|--|--|--|--|--|--|--|
| Address: | South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone | | | | | | |
| Post code: | 215000 | | | | | | |
| Test engineer: | King-p Li | | | | | | |

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

1.4 Deviation from Standards

None

1.5 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 7 of 22

2 Emission Test Results

2.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

| Test Requirement: | 47 CFR Part 15, Subpart B | 17 CFR Part 15, Subpart B | | | | | | | |
|-------------------|--|---------------------------|----------|--|--|--|--|--|--|
| Test Method: | ANSI C63.4:2014 | | | | | | | | |
| Frequency Range: | 150kHz to 30MHz | | | | | | | | |
| Receiver Setup: | RBW = 9kHz, VBW = 30kHz | | | | | | | | |
| | Fraguency Bongo (MHz) | Limit(dBµV) | | | | | | | |
| | Frequency Range (MHz) | Quasi-peak | average | | | | | | |
| | 0.15M-0.5MHz | 66 ~ 56* | 56 ~ 46* | | | | | | |
| Limit: | 0.5M-5MHz | 56 | 46 | | | | | | |
| | 5M-30MHz | 60 | 50 | | | | | | |
| | *Decreases with the logarithm of the frequency | | | | | | | | |
| | Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz | | | | | | | | |

2.1.1 E.U.T. Operation

Operating Environment:

| Sperating Environment. | | | | | |
|---|--|--|--|--|--|
| Temperature: | 22~23°C | | | | |
| Humidity: | 44~46%RH | | | | |
| Atmospheric Pressure: | 101.0 kPa | | | | |
| Pretest these modes to find the worst case: | a: USB(adapter input)+BT+2.4GWLAN+WCDMA Band 5+GNSS b: USB(adapter input)+BT+2.4GWLAN+LTE Band 5+GNSS c: USB(adapter input)+BT+2.4GWLAN+LTE Band 12+GNSS d: USB(adapter input)+BT+2.4GWLAN+LTE Band 13+GNSS e: USB(adapter input)+BT+2.4GWLAN+LTE Band 26+GNSS | | | | |
| The worst case for final test: | a: USB(adapter input)+BT+2.4GWLAN+WCDMA Band 5+GNSS | | | | |






Report No.: SEWM2209000196RG05

Rev.: 01 Page: 8 of 22

2.1.2 Test Setup Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

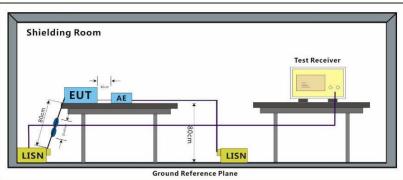

2.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 9 of 22

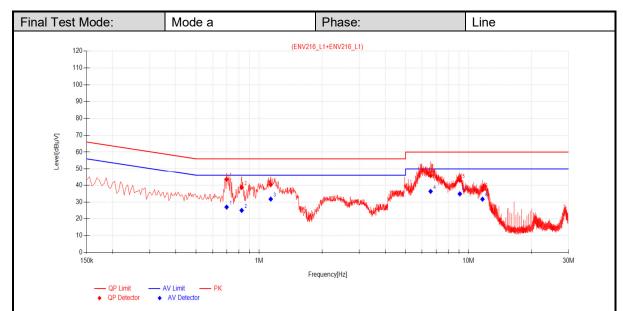

| Final | Final Data List | | | | | | | | | | |
|-------|------------------------|--------------------|-----------------------------|---------------------------|---------------------------|--------------------------|-----------------------------|---------------------------|---------------------------|--------------------------|-------------|
| NO | Frequenc y [MHz] | Facto r [dB] | QP Readin g [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margi n [dB] | AV Readin g [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margi n [dB] | Verdic t |
| 1 | 0.6990 | 10.58 | 32.98 | 43.56 | 56.00 | 12.44 | 16.39 | 26.97 | 46.00 | 19.03 | PASS |
| 2 | 0.8250 | 10.53 | 28.15 | 38.68 | 56.00 | 17.32 | 14.47 | 25.00 | 46.00 | 21.00 | PASS |
| 3 | 1.1355 | 10.68 | 29.65 | 40.33 | 56.00 | 15.67 | 21.07 | 31.75 | 46.00 | 14.25 | PASS |
| 4 | 6.5895 | 10.69 | 35.07 | 45.76 | 60.00 | 14.24 | 25.64 | 36.33 | 50.00 | 13.67 | PASS |
| 5 | 9.0870 | 10.66 | 32.26 | 42.92 | 60.00 | 17.08 | 24.18 | 34.84 | 50.00 | 15.16 | PASS |
| 6 | 11.6610 | 10.59 | 26.69 | 37.28 | 60.00 | 22.72 | 21.11 | 31.70 | 50.00 | 18.30 | PASS |

Remark:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
- 3. Margin = Limit[dB μ V] Value[dB μ V]




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gos.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gos.com/en/Terms-and-Conditions/T



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 10 of 22

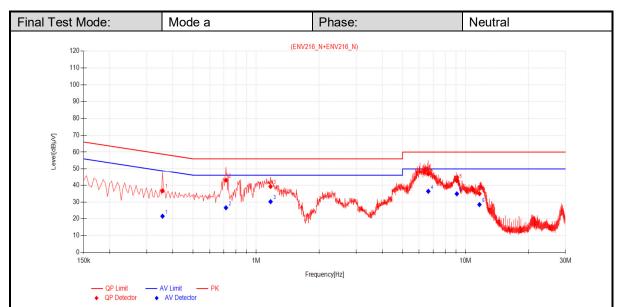

| Final | Final Data List | | | | | | | | | | |
|-------|------------------------|--------------------|-----------------------------|---------------------------|---------------------------|--------------------------|-----------------------------|---------------------------|---------------------------|--------------------------|-------------|
| NO | Frequenc y [MHz] | Facto r [dB] | QP Readin g [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margi n [dB] | AV Readin g [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margi n [dB] | Verdic t |
| 1 | 0.3570 | 10.81 | 25.89 | 36.70 | 58.80 | 22.10 | 10.73 | 21.54 | 48.80 | 27.26 | PASS |
| 2 | 0.7170 | 10.81 | 32.21 | 43.02 | 56.00 | 12.98 | 15.77 | 26.58 | 46.00 | 19.42 | PASS |
| 3 | 1.1715 | 10.76 | 28.48 | 39.24 | 56.00 | 16.76 | 19.45 | 30.21 | 46.00 | 15.79 | PASS |
| 4 | 6.6390 | 10.54 | 36.20 | 46.74 | 60.00 | 13.26 | 25.85 | 36.39 | 50.00 | 13.61 | PASS |
| 5 | 9.0870 | 10.63 | 32.09 | 42.72 | 60.00 | 17.28 | 24.23 | 34.86 | 50.00 | 15.14 | PASS |
| 6 | 11.6565 | 10.65 | 24.30 | 34.95 | 60.00 | 25.05 | 17.82 | 28.47 | 50.00 | 21.53 | PASS |

Remark:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
- 3. Margin = Limit[$dB\mu V$] Value[$dB\mu V$]



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gos.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gos.com/en/Terms-and-Conditions/T



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 11 of 22

2.2 Radiated Emissions (30MHz-1GHz)

| Test Requirement: | 47 CFR Part 15, Subpart B | | | | | | |
|-----------------------|---|---------------|------------|--|--|--|--|
| Test Method: | ANSI C63.4:2014 | | | | | | |
| Frequency Range: | 30MHz to 1GHz | | | | | | |
| Measurement Distance: | 3m | 3m | | | | | |
| | Frequency Range (MHz) | Limit(dBµV/m) | Detector | | | | |
| | 30MHz -88MHz | 40.0 | Quasi-peak | | | | |
| Limit: | 88MHz-216MHz | 43.5 | Quasi-peak | | | | |
| | 216MHz-960MHz | 46.0 | Quasi-peak | | | | |
| | 960MHz-1000MHz 54.0 Quasi-peak | | | | | | |
| Detector: | Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz | | | | | | |

2.2.1 E.U.T. Operation

| Temperature: | 22~23°C |
|---|---|
| Humidity: | 44~46%RH |
| Atmospheric Pressure: | 101.0 kPa |
| | a: USB(adapter input)+BT+2.4GWLAN+WCDMA Band 5+GNSS |
| . | b: USB(adapter input)+BT+2.4GWLAN+LTE Band 5+GNSS |
| Pretest these modes to find the worst case: | c: USB(adapter input)+BT+2.4GWLAN+LTE Band 12+GNSS |
| illia tile worst case. | d: USB(adapter input)+BT+2.4GWLAN+LTE Band 13+GNSS |
| | e: USB(adapter input)+BT+2.4GWLAN+LTE Band 26+GNSS |
| The worst case for final test: | d: USB(adapter input)+BT+2.4GWLAN+LTE Band 13+GNSS |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-and-Decument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document control to reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact ax telephone: (86-755) 8307 1443,




Report No.: SEWM2209000196RG05

Rev.: Page: 12 of 22

2.2.2 Test Setup Procedures

- 1. The EUT was placed in a semi Anechoic Chamber as show below
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest radiation.
- 4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- 5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- 6. Set the test-receiver system to Peak Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
- 7. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.

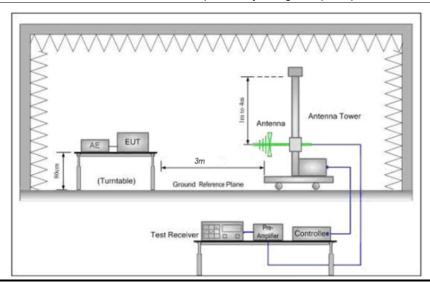

2.2.3 **Measurement Data**

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

The three polarities of X,Y,Z were measured by EUT, but only the worst data had been displayed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/T


South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 13 of 22

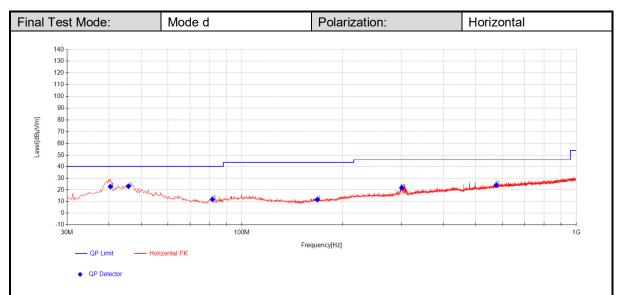

| Final | Final Data List | | | | | | | | | |
|-------|--------------------|-------------------|--------------|----------------|-------------------------|----------------------|----------------------|----------------|--------------|------------|
| NO. | Frequency [MHz] | Reading [dBµV] | AF [dB/m] | Factor [dB] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 40.4275 | 38.63 | 12.19 | -28.08 | 22.74 | 40.00 | 17.26 | 102 | 223 | Horizontal |
| 2 | 45.7625 | 37.85 | 13.21 | -28.04 | 23.02 | 40.00 | 16.98 | 142 | 223 | Horizontal |
| 3 | 81.6525 | 32.24 | 7.41 | -27.90 | 11.76 | 40.00 | 28.24 | 296 | 22 | Horizontal |
| 4 | 167.9825 | 30.21 | 7.88 | -26.52 | 11.57 | 43.50 | 31.93 | 263 | 163 | Horizontal |
| 5 | 300.63 | 34.62 | 13.41 | -26.32 | 21.71 | 46.00 | 24.29 | 265 | 0 | Horizontal |
| 6 | 576.11 | 30.29 | 18.33 | -24.65 | 23.97 | 46.00 | 22.03 | 241 | 223 | Horizontal |

Remark:

1. The Quasi-Peak measurements were performed on the EUT.

2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dB μ V/m] –Value[dB μ V/m]




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-And-Conditions/Terms-and-Conditions/Terms-And-Conditions/Terms-And-Conditions/T



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 14 of 22

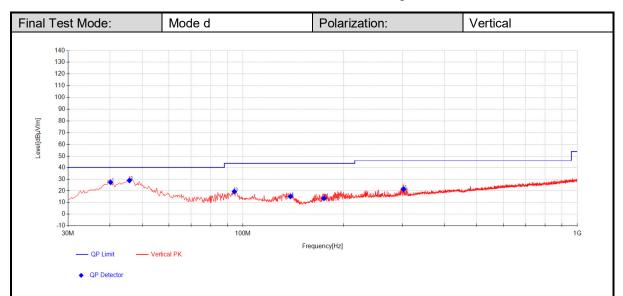

| Final | Final Data List | | | | | | | | | |
|-------|--------------------|-------------------|--------------|----------------|-------------------------|----------------------|----------------------|----------------|--------------|----------|
| NO. | Frequency [MHz] | Reading [dBµV] | AF [dB/m] | Factor [dB] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 40.185 | 43.21 | 12.14 | -28.08 | 27.27 | 40.00 | 12.73 | 201 | 358 | Vertical |
| 2 | 45.7625 | 43.63 | 13.21 | -28.04 | 28.80 | 40.00 | 11.20 | 142 | 90 | Vertical |
| 3 | 94.2625 | 36.85 | 10.05 | -27.54 | 19.37 | 43.50 | 24.13 | 263 | 14 | Vertical |
| 4 | 138.64 | 34.69 | 7.60 | -27.14 | 15.14 | 43.50 | 28.36 | 265 | 279 | Vertical |
| 5 | 174.53 | 32.02 | 8.17 | -26.65 | 13.54 | 43.50 | 29.96 | 255 | 20 | Vertical |
| 6 | 302.085 | 34.26 | 13.43 | -26.35 | 21.34 | 46.00 | 24.66 | 185 | 279 | Vertical |

Remark:

1. The Quasi-Peak measurements were performed on the EUT.

2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dB μ V/m] –Value[dB μ V/m]



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-And-Conditions/Terms-and-Conditions/Terms-And-Conditions/Terms-And-Conditions/T



Report No.: SEWM2209000196RG05

Rev.: 01 15 of 22 Page:

2.3 Radiated Emissions (above 1GHz)

| Test Requirement: | 47 CFR Part 15, Subpart B | | | | | | |
|-----------------------|--|----------------|----------|--|--|--|--|
| Test Method: | ANSI C63.4:2014 | | | | | | |
| Frequency Range: | Above 1GHz | | | | | | |
| Measurement Distance: | 3m | | | | | | |
| | Frequency (MHz) | Limit (dBµV/m) | Detector | | | | |
| Limit: | A1 4011 | 74 | Peak | | | | |
| | Above 1GHz | 54 | Average | | | | |
| Detector: | Peak for pre-scan (1000kHz resolution bandwidth) 5th harmonic of the highest frequency or 40GHz, whichever is lower. | | | | | | |

2.3.1 E.U.T. Operation

| Temperature: | 22~23°C |
|---|--|
| Humidity: | 44~46%RH |
| Atmospheric Pressure: | 101.0 kPa |
| Pretest these modes to find the worst case: | a: USB(adapter input)+BT+2.4GWLAN+WCDMA Band 5+GNSS b: USB(adapter input)+BT+2.4GWLAN+LTE Band 5+GNSS c: USB(adapter input)+BT+2.4GWLAN+LTE Band 12+GNSS d: USB(adapter input)+BT+2.4GWLAN+LTE Band 13+GNSS e: USB(adapter input)+BT+2.4GWLAN+LTE Band 26+GNSS |
| The worst case for final test: | d: USB(adapter input)+BT+2.4GWLAN+LTE Band 13+GNSS |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-and-Decument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document control to reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact ax telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 郎编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com




Report No.: SEWM2209000196RG05

Rev.: 01 Page: 16 of 22

2.3.2 Test Setup Procedures

- 1. The EUT was placed in a full Anechoic Chamber as show below
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz).
- 4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- 5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- 6. Set the test-receiver system to Peak and AV Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
- 7. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

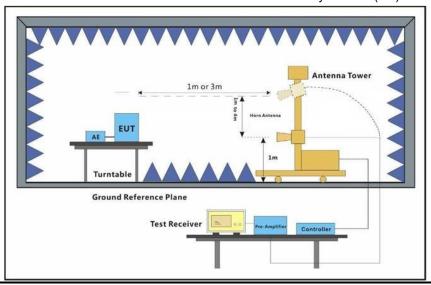

2.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The three polarities of X, Y, Z were measured by EUT, but only the worst data had been displayed. Scan from 5th harmonic of the highest frequency or 40GHz, whichever is lower, the disturbance above 18GHz was very low. The points marked on below plots are the highest emissions could be found when testing, so only below points had been displayed.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/T

t (86-512) 62992980



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 17 of 22

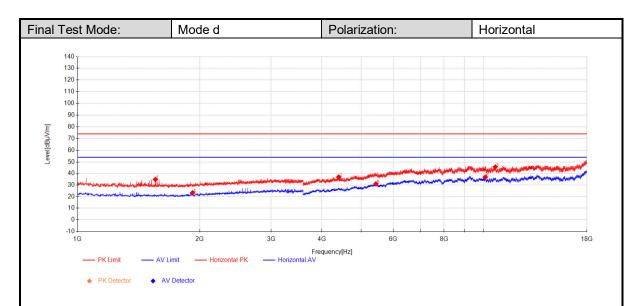

| Final | Final Data List | | | | | | | | | |
|-------|--------------------|-------------------|--------------|-------------------|----------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Frequency [MHz] | Reading [dBµV] | AF [dB/m] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 1555.9 | 57.60 | 25.56 | 34.65 | -48.51 | 74.00 | 39.35 | 196 | 356 | Horizontal |
| 2 | 4402.55 | 50.18 | 31.24 | 36.69 | -44.73 | 74.00 | 37.31 | 265 | 248 | Horizontal |
| 3 | 10706.15 | 42.32 | 39.28 | 45.71 | -35.89 | 74.00 | 28.29 | 241 | 223 | Horizontal |
| 4 | 1920.55 | 44.89 | 26.34 | 23.13 | -48.10 | 54.00 | 30.87 | 142 | 50 | Horizontal |
| 5 | 5436.15 | 42.08 | 32.60 | 30.84 | -43.84 | 54.00 | 23.16 | 256 | 149 | Horizontal |
| 6 | 10106.9 | 34.89 | 38.62 | 36.58 | -36.92 | 54.00 | 17.42 | 196 | 174 | Horizontal |

Remark:

- 1. The Peak and Average measurements were performed on the EUT.
- 2. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dB μ V/m] – Level[dB μ V/m]




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gos.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gos.com/en/Terms-and-Conditions/T



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 18 of 22

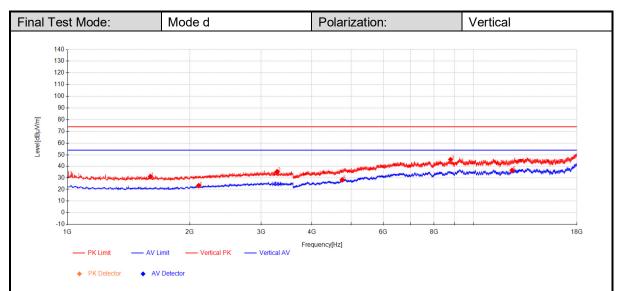

| Final | Final Data List | | | | | | | | | |
|-------|-----------------|---------|--------|----------|--------|----------|--------|--------|-------|----------|
| NO. | Frequency | Reading | AF | Level | Factor | Limit | Margin | Height | Angle | Dolovity |
| NO. | [MHz] | [dBµV] | [dB/m] | [dBµV/m] | [dB] | [dBµV/m] | [dB] | [cm] | [°] | Polarity |
| 1 | 1600.95 | 54.02 | 25.60 | 31.10 | -48.52 | 74.00 | 42.90 | 296 | 0 | Vertical |
| 2 | 3285.65 | 51.87 | 29.49 | 35.22 | -46.13 | 74.00 | 38.78 | 265 | 143 | Vertical |
| 3 | 8791.1 | 46.78 | 38.37 | 45.94 | -39.21 | 74.00 | 28.06 | 241 | 241 | Vertical |
| 4 | 2105 | 43.95 | 27.11 | 23.19 | -47.87 | 54.00 | 30.81 | 142 | 1 | Vertical |
| 5 | 4753.6 | 40.81 | 32.01 | 28.24 | -44.58 | 54.00 | 25.76 | 255 | 44 | Vertical |
| 6 | 12452.9 | 32.48 | 39.05 | 36.31 | -35.22 | 54.00 | 17.69 | 206 | 44 | Vertical |

Remark:

- 1. The Peak and Average measurements were performed on the EUT.
- 2. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dB μ V/m] – Level[dB μ V/m]



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-And-Conditions/Terms-and-Conditions/Terms-And-Conditions/Terms-And-Conditions/T



Report No.: SEWM2209000196RG05

Rev.: Page: 19 of 22

Equipment List

| CE Test System | | | | | | | | | |
|---|---------------|---------------------|---------------|---------------------------|------------------------------|--|--|--|--|
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date (yyyy/mm/dd) | Cal.Due date (yyyy/mm/dd) | | | | |
| Shielding Room | Brilliant-emc | N/A | SUWI-04-03-01 | 2021/05/08 | 2024/05/07 | | | | |
| Temperature and humidity meter | MingGao | TH101B | SUWI-01-01-06 | 2022/02/16 | 2023/02/15 | | | | |
| Test receiver | ROHDE&SCHWARZ | ESR7 | SUWI-01-10-01 | 2022/02/19 | 2023/02/18 | | | | |
| Artificial network | ROHDE&SCHWARZ | ENV216 | SUWI-01-19-01 | 2022/02/19 | 2023/02/18 | | | | |
| Artificial network | ROHDE&SCHWARZ | ENV216 | SUWI-01-19-02 | 2022/02/19 | 2023/02/18 | | | | |
| Wideband Radio Communication Tester | Anritsu | MT8820C | SUWI-01-16-08 | 2022/02/14 | 2023/02/13 | | | | |
| DC Power Supply | HYELEC | HY3005B | SUWI-01-18-01 | 2022/02/15 | 2023/02/14 | | | | |
| Measurement Software CE | Tonsend | JS32-CE V4.0.0.2 | SUWI-02-09-05 | NCR | NCR | | | | |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Decument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its internition only and within the limits of Client's instructions, if any. The Company's osle responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unautionized alteration, forgery, or latelistication of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND_Doccheck@sg.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 20 of 22

| RE Test System | | | | | | | | |
|--|-----------------------------------|--------------------|---------------|---------------------------|------------------------------|--|--|--|
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date (yyyy/mm/dd) | Cal.Due date (yyyy/mm/dd) | | | |
| Semi-Anechoic Chamber | Brilliant-emc | N/A | SUWI-04-02-01 | 2021/05/08 | 2024/05/07 | | | |
| Temperature and humidity meter | MingGao | TH101B | SUWI-01-01-05 | 2022/02/16 | 2023/02/15 | | | |
| Signal Analyzer | ROHDE&SCHWARZ | FSW43 | SUWI-01-02-04 | 2022/05/28 | 2023/05/27 | | | |
| Test receiver | ROHDE&SCHWARZ | ESR7 | SUWI-01-10-01 | 2022/02/19 | 2023/02/18 | | | |
| Receiving antenna | SCHWRZBECK MESS- ELEKTRONIK | VULB 9163 | SUWI-01-11-01 | 2021/05/16 | 2023/05/15 | | | |
| Receiving antenna | SCHWRZBECK MESS- ELEKTRONIK | BBHA 9120D | SUWI-01-11-02 | 2021/05/16 | 2023/05/15 | | | |
| Receiving antenna | SCHWRZBECK MESS- ELEKTRONIK | BBHA 9170 | SUWI-01-11-03 | 2021/05/14 | 2023/05/13 | | | |
| Amplifier | Tonscend | TAP9K3G40 | SUWI-01-14-01 | 2022/02/14 | 2023/02/13 | | | |
| Amplifier | Tonscend | TAP01018050 | SUWI-01-14-02 | 2022/02/14 | 2023/02/13 | | | |
| Amplifier | Tonscend | TAP18040048 | SUWI-01-14-03 | 2022/02/19 | 2023/02/18 | | | |
| Active Loop Antenna | SCHWRZBECK MESS- ELEKTRONIK | FMZB 1519B | SUWI-01-21-01 | 2021/06/10 | 2023/06/09 | | | |
| Wideband Radio Communication Tester | Anritsu | MT8820C | SUWI-01-16-08 | 2022/02/14 | 2023/02/13 | | | |
| Measurement Software | Tonscend | JS32-RE 4.0.0.0 | SUWI-02-09-04 | NCR | NCR | | | |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government to enable the approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Action of the company of the Compa

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 郸编: 215000

t (86-512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2209000196RG05

Rev.: 01 Page: 21 of 22

4 Measurement Uncertainty

| No. | Item | Measurement Uncertainty | | |
|-----|---------------------|---------------------------|--|--|
| 1 | Conduction Emission | ± 2.9dB (150kHz to 30MHz) | | |
| | | ± 4.8dB (Below 1GHz) | | |
| 2 | Radiated Emission | ± 4.8dB (1GHz to 18GHz) | | |
| | | ± 4.8dB (Above 18GHz) | | |

Remark:

The Ulab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号的6月厂房南部 鄉編: 215000



Report No.: SEWM2209000196RG05

Rev.: 01 22 of 22 Page:

Photographs 5

5.1 Test Setup

Refer to Appendix A.1 15B Setup Photos.

---End of Report---

