

Report No.: SEWM2209000196RG01

Rev.: 01 Page: 1 of 39

TEST REPORT

Application No.: SEWM2209000196RG **Applicant:** Neutron Holdings, Inc.

Address of Applicant: 85 2nd St, San Francisco, CA 94105 USA

Manufacturer: Neutron Holdings, Inc.

Address of Manufacturer: 85 2nd St, San Francisco, CA 94105 USA

EUT Description: Central Controller

Model No.: Lime-4.1-GL

Trade Mark: Lime

FCC ID: 2APB2LIME-41-GLV2

Standards: 47 CFR Part 2

47 CFR Part 22 47 CFR Part 24 47 CFR Part 27 47 CFR Part 90

Date of Receipt: 2022/10/21

Date of Test: 2022/10/26 to 2022/12/12

Date of Issue: 2022/12/12

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.spx. Actention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 2 of 39

1 Version

Revision Record				
Version Chapter Date Modifier Remark				
01		2022/12/08		Original

Prepared By	weller lin
	(Weller Liu) / Test Engineer
Checked By	well wei'
	(Well Wei) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: The content of the content

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Ploti Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 3 of 39

Contents

1	Ver	sion	2
2	Tes	t Summary	5
	2.1	UMTS Band 5/LTE Band 5/26(824~849 MHz)	5
	2.2	UMTS Band 2 /LTE Band 2 /25	6
	2.3	UMTS Band 4 /LTE Band 4	7
	2.4	LTE Band 7/38/41	8
	2.5	LTE Band 12	10
	2.6	LTE Band 13	11
	2.7	LTE Band 26(814~824 MHz)	12
3	Ger	neral Information	13
	3.1	Details of Client	13
	3.2	Test Location	13
	3.3	Test Facility	13
	3.4	General Description of EUT	14
	3.5	Test Mode	15
	3.6	Test Environment	15
	3.7	Description of Support Units	15
	3.8	Technical Specification	16
	3.9	Test Frequencies	18
4	Des	scription of Tests	25
	4.1	Conducted Output Power	25
	4.2	Effective (Isotropic) Radiated Power of Transmitter	26
	4.3		
	4.4	Band Edge at Antenna Terminals	28
	4.5		
	4.6		
	4.7	Field Strength of Spurious Radiation	31
	4.8		
	4.9		
		4.9.1 Test Setup 1	



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printeverleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions/T

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 w t (86–512) 62992980 sg



Rev.:	01	
Page:	4 of 39	

	4.9.2 Test Setup 2	33
	4.9.3 Test Setup 3	
	4.10 Test Conditions	35
5	Main Test Instruments	36
6	Measurement Uncertainty	38
	Appendixes	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are refained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 5 of 39

2 Test Summary

2.1 UMTS Band 5/LTE Band 5/26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix	Pass
Output Data			B.1&B.4&B.10	
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Reference r HR/2019/1001	•
Modulation Characteristics	§2.1047	Digital modulation	Reference r HR/2019/1001	•
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference r HR/2019/1001	•
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference r HR/2019/1001	•
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Reference r HR/2019/1001	•
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of B.1&B.4&B.10	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Reference r HR/2019/1001	•

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report HR/2019/10016E-0101. The FCC ID is XMR201906EG21G has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on 2019/05/07.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sg t (86–512) 62992980 sgs.chir



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 6 of 39

2.2 UMTS Band 2 /LTE Band 2 /25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix	Pass
Output Data			B.1&B.2&B.8	
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Reference HR/2019/1001	•
Modulation Characteristics	§2.1047	Digital modulation	Reference HR/2019/1001	•
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference HR/2019/1001	•
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference HR/2019/1001	•
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Reference HR/2019/1001	•
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1&B.2&B.8	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Reference HR/2019/1001	•

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report HR/2019/10016E-0101.

The FCC ID is XMR201906EG21G has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on 2019/05/07.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document comment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 7 of 39

2.3 UMTS Band 4 /LTE Band 4

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix	Pass
Output Data	327.100(4)(1)		B.1&B.3	
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Reference r HR/2019/1001	•
Modulation Characteristics	§2.1047	Digital modulation	Reference r HR/2019/1001	•
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference r HR/2019/1001	•
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference r HR/2019/1001	•
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Reference r HR/2019/1001	•
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1&B.3	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference r HR/2019/1001	•

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report HR/2019/10016E-0101.

The FCC ID is XMR201906EG21G has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on 2019/05/07.



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditi

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 v t (86–512) 62992980 s



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 8 of 39

2.4 LTE Band 7/38/41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.5&B.11&B.12	Pass
Peak-Average Ratio		≤13 dB	Reference report HR/2019/10016E-0101	
Modulation Characteristics	§2.1047	Digital modulation	Reference re HR/2019/10016	•
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference re HR/2019/10016	•
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Reference ro HR/2019/10016	•
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz X MHz 10th harmonics X=Max {6MHz, EBW}	Reference re HR/2019/10016	•
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz X MHz 10th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B.5&B.11&B.12	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference re HR/2019/10016	•
Remark:				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ss.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 w t (86–512) 62992980 sg



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 9 of 39

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report HR/2019/10016E-0101. The FCC ID is XMR201906EG21G has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on 2019/05/07.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 10 of 39

2.5 LTE Band 12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.6	Pass
Peak-Average Ratio		Limit≤13 dB	Reference re HR/2019/10016	•
Modulation Characteristics	§2.1047	Digital modulation	Reference re HR/2019/10016	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference re HR/2019/10016	
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference re HR/2019/10016	•
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Reference re HR/2019/10016	•
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.6	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference re HR/2019/10016	•

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report HR/2019/10016E-0101. The FCC ID is XMR201906EG21G has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on 2019/05/07.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgs t (86–512) 62992980 sgs.china



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 11 of 39

2.6 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.7	Pass
Peak-Average Ratio		Limit≤13 dB	Reference HR/2019/100	
Modulation Characteristics	§2.1047	Digital modulation	Reference HR/2019/100	•
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Reference HR/2019/100	•
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference HR/2019/100	•
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Reference HR/2019/100 ²	•
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.7	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference HR/2019/100	•

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report HR/2019/10016E-0101. The FCC ID is XMR201906EG21G has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on 2019/05/07.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are tested for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 12 of 39

2.7 LTE Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B.9	Pass
· · · · · · · · · · · · · · · · · · ·				
Peak-Average Ratio		Limit≤13 dB	Reference	
			HR/2019/1001	
Modulation	§2.1047	Digital modulation	Reference	-
Characteristics	•	, and the second	HR/2019/1001	
Bandwidth	§2.1049	OBW: No limit.	Reference	•
	3	EBW: No limit.	HR/2019/1001	6E-0101
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Reference (HR/2019/1001	•
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Reference HR/2019/1001	•
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 7 of Appendix B.9	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Reference HR/2019/1001	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report HR/2019/10016E-0101. The FCC ID is XMR201906EG21G has been certified, and the test report issued by SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch on 2019/05/07.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are refained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2209000196RG01

Rev.: Page: 13 of 39

General Information 3

3.1 Details of Client

Applicant:	Neutron Holdings, Inc.
Address of Applicant:	85 2nd St, San Francisco, CA 94105 USA
Manufacturer:	Neutron Holdings, Inc.
Address of Manufacturer:	85 2nd St, San Francisco, CA 94105 USA

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Weller Liu, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327





Report No.: SEWM2209000196RG01

Rev.: 01 Page: 14 of 39

3.4 General Description of EUT

EUT Description:	Central Controller	Central Controller					
Model No.:	Lime-4.1-GL						
Trade Mark:	Lime						
Hardware Version:	V4_1.2.1	/4_1.2.1					
Software Version:	V4_1.1.8	/4_1.1.8					
IMEI:	RF Conducted 862771040478102						
IIVI⊏I.	RSE 866258048612391						
Antenna Type:	PIFA Antenna						
	WCDMA Band II:	A Band II: 3.82dBi		WCDMA Band	IV:	4.65dBi	
	WCDMA Band V: 1.72dBi		Bi				
	LTE Band 2:	3.82dBi		LTE Band 4:		4.65dBi	
	LTE Band 5:	1.72dBi		LTE Band 7:		3.79dBi	
Antenna Gain:	LTE Band 12:	-5.190	dBi	LTE Band 13:		-2.47dBi	
	LTE Band 25:	3.82d	Bi	LTE Band 26:		1.72dBi	
	LTE Band 38:	3.85d	Bi	LTE Band 41:		3.96dBi	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.					ovided by the	
DE Cables	0.8dB(Below 1GHz)	1.0dB(1.0~	-2.4GHz)	1.2dB(2.4~3.4GHz)	
RF Cable:	1.5dB(Above 3.4GHz)						

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are refained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 15 of 39

3.5 Test Mode

Test Mode	Test Modes Description			
UMTS/TM1	UMTS system, WCDMA, QPSK modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2 LTE system, 16QAM modulation				
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests			
Relative Humidity	44-46 % RH Ambient			
Value	Temperature(°C) Voltage(V)			
NTNV	22~23 48			

Remark:

NV: Normal Voltage NT: Normal Temperature

3.7 Description of Support Units

The EUT has been tested as an independent unit.





Report No.: SEWM2209000196RG01

Rev.: 01 Page: 16 of 39

3.8 Technical Specification

Characteristics	Description						
Radio System Type							
	Band		TX			RX	
	UMTS Band II		1850 to 1910 MHz			1930 to 1990 MHz	
	UMTS Band I\	/	1710 to 1755 MHz			2110 to 2155 MHz	
	UMTS Band V		824 to 849	MHz		869 to 89	94 MHz
	LTE Band 2		1850 to 19	10 MHz		1930 to 1	990 MHz
	LTE Band 4		1710 to 17	55 MHz		2110 to 2	2155 MHz
	LTE Band 5		824 to 849	MHz		869 to 89	94 MHz
	LTE Band 7		2500 to 25	70 MHz		2620 to 2	2690 MHz
Supported Frequency Range	LTE Band 12		699 to 716	MHz		729 to 74	6 MHz
	LTE Band 13		777 to 787	MHz		746 to 75	66 MHz
	LTE Band 25		1850 to 19	15MHz		1930 to 1	995 MHz
	LTE Band 26		814 to 824	MHz		859 to 86	9 MHz
	(814 to 824 MHz)		01110021				
	LTE Band 26		824 to 849 MHz			869 to 894 MHz	
	(824 to 849 MH)		0570 / 00	00.841.1		0570 / 6	2000 1411
	LTE Band 38		2570 to 26				2620 MHz
	LTE Band 41		2496 to 26	90MHz		2496 to 2	2690MHz
	UMTS system:		⊠5 MHz ⊠1.4 MHz ⊠3 MHz			7	N
	LTE Band 2				Ľ	₫5 MHz	⊠10 MHz
			⊠15 MHz			7=	N40 M41
	LTE Band 4		⊠1.4 MHz		Ľ	₫5 MHz	⊠10 MHz
	LTE Dande		⊠15 MHz			7c MII-	∇/40 MII-
	LTE Band 5		⊠1.4 MHz			5 MHz	⊠10 MHz
Supported Channel Bandwidth	LTE Band 7		⊠5 MHz	⊠10 MHz		15 MHz	⊠20 MHz
	LTE Band 12		⊠1.4 MHz		Ľ	₫5 MHz	⊠10 MHz
	LTE Band 13		⊠5 MHz	⊠10 MHz		75 141	N40 MIL-
	LTE Band 25		⊠1.4 MHz		Ľ	₫5 MHz	⊠10 MHz
	ITED 100%	24.4.00.4\	⊠15 MHz	⊠20 MHz	<u> </u>	75 8411	N40 1411
	LTE Band 26(8	314-824)	⊠1.4 MHz			5 MHz	⊠10 MHz
	LTE Band 26(8	324-849)	⊠1.4 MHz	⊠3 MHz	Ľ	₫5 MHz	⊠10 MHz
			⊠15 MHz				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx.and, and conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx., attention is drawn to the limitation of liability, indemification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号約6号厂房南部 邮编: 215000 t (86–512) 62992980 www t (86–512) 62992980 sgs.



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 17 of 39

				3. 00	
	LTE Band38	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
	LTE Band41	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		PA, DC-HSD played in this		out only the	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: The content of the content

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 w t (86–512) 62992980 sg



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 18 of 39

3.9 Test Frequencies

Test Mode	TX / RX	RF Channel				
rest widde	1/ 1/ 1/	Low (L)	Middle (M)	High (H)		
	TX RX	Channel 9262	Channel 9400	Channel 9538		
WCDMA Band II		1852.4 MHz	1880.0 MHz	1907.6 MHz		
WCDINA Band II		Channel 9662	Channel 9800	Channel 9938		
		1932.4 MHz	1960.0 MHz	1987.6 MHz		

Test Mode	TX / RX	RF Channel				
rest Mode	IA/ NA	Low (L)	Middle (M)	High (H)		
		Channel 1312	Channel 1413	Channel 1513		
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz		
WCDIVIA Band IV	DV	Channel 1537	Channel 1638	Channel 1738		
	RX	2112.4 MHz	2132.6 MHz	2152.6 MHz		

Test Mode	TX / RX	RF Channel				
rest Mode	IA/KA	Low (L)	Middle (M)	High (H)		
	/ TX RX	Channel 4132	Channel 4182	Channel 4233		
		826.4MHz	836.4 MHz	846.6 MHz		
WCDMA Band V		Channel 4357	Channel 4407	Channel 4458		
		871.4 MHz	881.4 MHz	891.6 MHz		
		862.9MHz	865.5 MHz	868.1 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: The content of the content

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 19 of 39

			ı agc.	13 01 33	
Test Mode	Bandwidth	TX / RX		RF Channel	
i est Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	DV	Channel 607	Channel 900	Channel 1193
	RX	KA	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
	TX	TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	DV	Channel 615	Channel 900	Channel 1185
		RX	1931.5 MHz	1960 MHz	1988.5 MHz
			Channel 18625	Channel 18900	Channel 19175
		TX	1852.5 MHz	1880 MHz	1907.5 MHz
	5MHz	RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LIE Banu Z		TX	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
	10MHz	RX	Channel 650	Channel 900	Channel 1150
		KA.	1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
		KA.	1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		KΛ	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document comment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 20 of 39

			1 agc. 20 01 00			
Test Mode	Bandwidth	TX / RX		RF Channel		
i est iviode	Dariuwiuiri	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 19957	Channel 20175	Channel 20393	
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz	
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375	
		KΛ	2112.5 MHz	2132.5MHz	2152.5 MHz	
			Channel 19965	Channel 20175	Channel 20385	
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz	
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350	
		KΛ	2115 MHz	2132.5MHz	2150 MHz	
			Channel 19975	Channel 20175	Channel 20375	
	5MHz	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz	
		RX	Channel 1975	Channel 2175	Channel 2375	
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz	
LTE Danu 4	10MHz	TX	Channel 20000	Channel 20175	Channel 20350	
			1715 MHz	1732.5 MHz	1750 MHz	
		RX	Channel 2000	Channel 2175	Channel 2350	
			2115 MHz	2132.5MHz	2150 MHz	
			Channel 20025	Channel 20175	Channel 20325	
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz	
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325	
		IXX	2117.5 MHz	2132.5MHz	2147.5 MHz	
			Channel 20050	Channel 20175	Channel 20300	
		TX	1720 MHz	1732.5 MHz	1745 MHz	
	20MHz	DV	Channel 2050	Channel 2175	Channel 2300	
		RX	2120 MHz	2132.5MHz	2145 MHz	

Toot Mode	Dondwidth	TV / DV	RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 20407	Channel 20525	Channel 20643	
		TX	824.7 MHz	836.5 MHz	848.3 MHz	
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643	
		KA.	869.7 MHz	881.5 MHz	893.3 MHz	
			Channel 20415	Channel 20525	Channel 20635	
	ЗМНz	TX	825.5 MHz	836.5 MHz	847.5 MHz	
		RX	Channel 2415	Channel 2525	Channel 2635	
LTE Davide			870.5 MHz	881.5 MHz	892.5 MHz	
LTE Band 5		TX	Channel 20425	Channel 20525	Channel 20625	
			826.5 MHz	836.5 MHz	846.5 MHz	
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625	
		KA.	871.5 MHz	881.5 MHz	891.5 MHz	
			Channel 20450	Channel 20525	Channel 20600	
		TX	829 MHz	836.5 MHz	844 MHz	
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600	
		KΛ	874 MHz	881.5 MHz	889 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Terms-and-Conditions/Terms-and-Conditions-and-Conditions-And-Terms-and-Conditions-and-Conditions-and-Conditions-And-Terms-and-Conditions-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SEWM2209000196RG01

Rev.: Page: 21 of 39

		1 ago. 21 01 00				
Test Mode	Bandwidth	TX / RX	RF Channel			
Test Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 20775	Channel 21100	Channel 21425	
		TX	2502.5 MHz	2535 MHz	2567.5 MHz	
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825	
		KA.	2622.5 MHz	2655 MHz	2687.5 MHz	
			Channel 20800	Channel 21100	Channel 21400	
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz	
		RX	Channel 2800	Channel 3100	Channel 3400	
1.75.5			2625 MHz	2655 MHz	2685 MHz	
LTE Band 7		TX	Channel 20825	Channel 21100	Channel 21375	
			2507.5 MHz	2535 MHz	2562.5 MHz	
	15MHz	RX	Channel 2825	Channel 3100	Channel 3375	
		KA	2627.5 MHz	2655 MHz	2682.5 MHz	
			Channel 20850	Channel 21100	Channel 21350	
		TX	2510 MHz	2535 MHz	2560 MHz	
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350	
		KΛ	2630 MHz	2655 MHz	2680 MHz	

Took Mode	Danielo dalle	TV / DV	RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 23017	Channel 23095	Channel 23173	
		TX	699.7 MHz	707.5 MHz	715.3 MHz	
	1.4MHz	DV	Channel 5017	Channel 5095	Channel 5173	
		RX	729.7 MHz	737.5 MHz	745.3 MHz	
			Channel 23025	Channel 23095	Channel 23165	
	3MHz	TX	700.5 MHz	707.5 MHz	714.5 MHz	
		RX	Channel 5025	Channel 5095	Channel 5165	
LTE David 40			730.5 MHz	737.5 MHz	744.5 MHz	
LTE Band 12		TX	Channel 23035	Channel 23095	Channel 23155	
			701.5 MHz	707.5 MHz	713.5 MHz	
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155	
		KA	731.5 MHz	737.5 MHz	743.5 MHz	
			Channel 23060	Channel 23095	Channel 23130	
		TX	704 MHz	707.5 MHz	711 MHz	
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130	
		INΛ	734 MHz	737.5 MHz	741 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-and-Ferms-and-Con

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的0号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 22 of 39

			. ago:			
Took Mode	Donada si altha	TV / DV	RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 23025	Channel 23230	Channel 23255	
		TX	779.5 MHz	782 MHz	784.5 MHz	
	5MHz	RX	Channel 5205	Channel 5230	Channel 5255	
LTE Band 13			748.5 MHz	751 MHz	753.5 MHz	
LIE Dallu 13	10MHz	TX	Channel 23230	Channel 23230	Channel 23230	
			782 MHz	782 MHz	782 MHz	
		DV	Channel 5230	Channel 5230	Channel 5230	
		RX	751 MHz	751 MHz	751 MHz	

Took Mode	Donalis i déla	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 26047	Channel 26365	Channel 26683
		TX	1850.7 MHz	1882.5 MHz	1914.3 MHz
	1.4MHz	RX	Channel 8047	Channel 8365	Channel 8683
		KA	1930.7 MHz	1962.5 MHz	1994.3 MHz
			Channel 26055	Channel 26365	Channel 26675
		TX	1851.5 MHz	1882.5 MHz	1913.5 MHz
	3MHz	RX	Channel 8055	Channel 8365	Channel 8675
		KA.	1931.5 MHz	1962.5 MHz	1993.5 MHz
			Channel 26065	Channel 26365	Channel 26665
	5MHz	TX	1852.5 MHz	1882.5 MHz	1912.5 MHz
		RX	Channel 8065	Channel 8365	Channel 8665
LTC Dond OF			1932.5 MHz	1962.5 MHz	1992.5 MHz
LTE Band 25	10MHz	TX	Channel 26090	Channel 26365	Channel 26640
			1855 MHz	1882.5 MHz	1910 MHz
		RX	Channel 8090	Channel 8365	Channel 8640
			1935 MHz	1962.5 MHz	1990 MHz
			Channel 26115	Channel 26365	Channel 26615
		TX	1857.5 MHz	1882.5 MHz	1907.5 MHz
	15MHz	RX	Channel 8115	Channel 8365	Channel 8615
		100	1937.5 MHz	1962.5 MHz	1987.5 MHz
			Channel 26140	Channel 26365	Channel 26590
		TX	1860 MHz	1882.5 MHz	1905 MHz
	20MHz	RX	Channel 8140	Channel 8365	Channel 8590
		KΛ	1940 MHz	1962.5 MHz	1985 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-and-Ferms-and-Con

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 23 of 39

			ı agc.	20 01 00		
Test Mode	Bandwidth	TX / RX	RF Channel			
i est iviode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 26697	Channel 26740	Channel 26783	
		TX	814.7 MHz	819 MHz	823.3 MHz	
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783	
		KA.	859.7 MHz	864MHz	868.3 MHz	
			Channel 26705	Channel 26740	Channel 26775	
	3MHz	TX	815.5 MHz	819 MHz	822.5 MHz	
		RX	Channel 8705	Channel 8740	Channel 8775	
LTE Band 26			860.5 MHz	864MHz	867.5 MHz	
(814-824)		TX	Channel 26715	Channel 26740	Channel 26765	
(011 02 1)			816.5 MHz	819 MHz	821.5 MHz	
	5MHz	DV	Channel 8715	Channel 8740	Channel 8755	
		RX	861.5 MHz	864MHz	866.5 MHz	
			Channel 26740	Channel 26740	Channel 26740	
		TX	819 MHz	819 MHz	819 MHz	
	10MHz	DV	Channel 8740	Channel 8740	Channel 8740	
		RX	864MHz	864MHz	864MHz	

	5 1 1 1 11	TV / DV		RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)		
			Channel 26797	Channel 26915	Channel 27033		
		TX	824.7 MHz	836.5 MHz	848.3 MHz		
	1.4MHz	RX	Channel 8697	Channel 8915	Channel 9033		
		NA	859.7 MHz	881.5 MHz	893.3 MHz		
		>-	Channel 26805	Channel 26915	Channel 27025		
	0.111.1	TX	825.5 MHz	836.5 MHz	847.5 MHz		
	3MHz	RX	Channel 8805	Channel 8915	Channel 9025		
		KΛ	860.5 MHz	881.5 MHz	892.5 MHz		
	5MHz	TX	Channel 26815	Channel 26915	Channel 27015		
LTE Band26			826.5 MHz	836.5 MHz	846.5 MHz		
(824-849)		RX	Channel 8815	Channel 8915	Channel 9015		
(5=1.5.15)			871.5 MHz	881.5 MHz	891.5 MHz		
			Channel 26840	Channel 26915	Channel 26990		
		TX	829 MHz	836.5 MHz	844 MHz		
	10MHz	RX	Channel 8840	Channel 8915	Channel 8990		
		IXX	874 MHz	881.5 MHz	889 MHz		
			Channel 26865	Channel 26915	Channel 26965		
	15MHz	TX	831.5 MHz	836.5 MHz	841.5 MHz		
		RX	Channel 8865	Channel 8915	Channel 8965		
		100	876.5 MHz	881.5 MHz	886.5 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: The content of the content

South of No. 6 Plant, No. 1, Runsteing Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 24 of 39

	: ago: = : a: co					
Toot Mode	Dondwidth	TV / DV	RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
	5MHz	TX/RX	Channel 37775	Channel38000	Channel 38225	
	SIVITZ	17/107	2572.5 MHz	2595 MHz	2617.5 MHz	
	10MHz	TX/RX	Channel 37800	Channel38000	Channel 38200	
LTC Daniel 20			2575 MHz	2595 MHz	2615 MHz	
LTE Band 38	1 <i>E</i> M⊔→	TX/RX	Channel 37825	Channel38000	Channel 38175	
	15MHz I X/RX	IA/IXA	2577.5 MHz	2595 MHz	2612.5 MHz	
	201/11-	TX/RX	Channel 37850	Channel38000	Channel 38150	
	20MHz I X/RX		2580 MHz	2595 MHz	2610 MHz	

Toot Mode	Bandwidth	TX / RX	RF Channel			
Test Mode	Danawiatri	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 39675	Channel40620	Channel 41565	
	5MHz	5MHz TX / RX		2593 MHz	2687.5 MHz	
			Channel 39700	Channel40620	Channel 41540	
LTE Band 41	10MHz	TX / RX	2501 MHz	2593 MHz	2685 MHz	
(2496-2690)			Channel 39725	Channel40620	Channel 41515	
(= :00 = 000)	15MHz	TX / RX	2503.5 MHz	2593 MHz	2682.5 MHz	
			Channel 39750	Channel40620	Channel 41490	
	20MHz	TX / RX	2506 MHz	2593 MHz	2680 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: The content of the content

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 25 of 39

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf, for electronic format documents subject to Terms and Conditions for Electronic Documents at https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号的6号厂房南部 邮编: 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980



Report No.: SEWM2209000196RG01

Rev.: Page: 26 of 39

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 27 of 39

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms--Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suthou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区园胜路;日的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 28 of 39 Page:

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize





Report No.: SEWM2209000196RG01

Rev.: Page: 29 of 39

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings





Report No.: SEWM2209000196RG01

Rev.: 01 Page: 30 of 39

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.appx.and, for electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-e-Document.spx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 31 of 39

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 32 of 39

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2209000196RG01


Rev.: 01 Page: 33 of 39

4.9 Test Setups

4.9.1 Test Setup 1

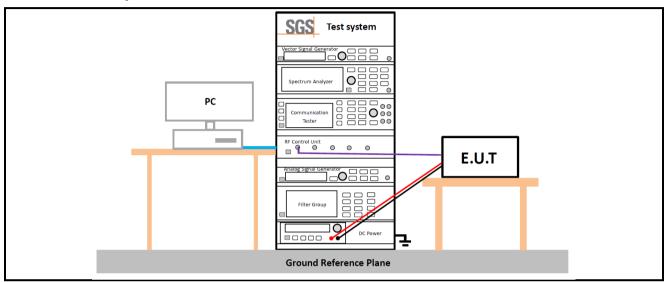

4.9.2 Test Setup 2

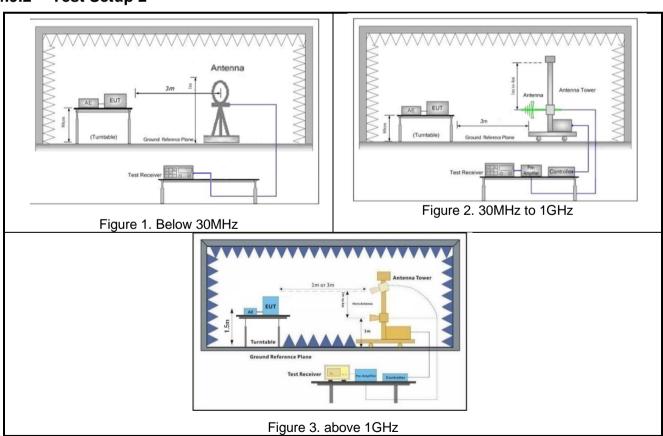



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a


South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsg t (86–512) 62992980 sgs.china(



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 34 of 39

4.9.3 Test Setup 3

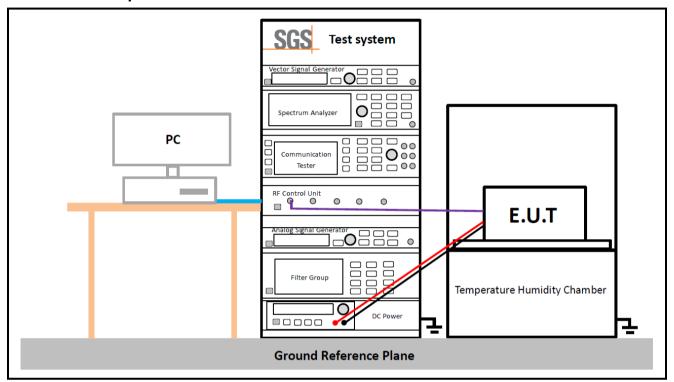



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 35 of 39

4.10Test Conditions

	Transmit Output Power Data - Average Power, Total					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	UMTS/TM1;LTE/TM2					
	Field Strength of Spurious Radiation					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 2					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	UMTS/TM1;LTE/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAD Doccheck@sss.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 36 of 39

5 Main Test Instruments

RF conducted test								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)			
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07			
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2022/02/16	2023/02/15			
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16			
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR			
Radio Communication	Anritsu	MT8821C	SUWI-01-26-03	2021/12/04	2022/12/03			
Analyzer	Annisu	101100210	30771-01-20-03	2022/11/23	2023/11/22			
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2022/02/14	2023/02/13			
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2022/02/15	2023/02/14			
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2022/02/15	2023/02/14			
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15			
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: The content of the content

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

0 t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 37 of 39

RSE Test System						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24	
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-15	2022/02/16	2023/02/15	
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27	
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2021/12/04	2022/12/03	
				2022/11/23	2023/11/22	
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2022/02/19	2023/02/18	
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2022/02/15	2023/02/14	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-04	2021/12/05	2023/12/04	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13	
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09	
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2021/12/04	2022/12/03	
				2022/11/23	2023/11/22	
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2021/12/04	2022/12/03	
Amplinei				2022/11/23	2023/11/22	
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2021/12/04	2022/12/03	
				2022/11/23	2023/11/22	
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2022/02/14	2023/02/13	
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions-And-Ferms-and-Conditions-and-Ferms-and-Con

South of No. F Plant, No. 1, Purasheng Tosad, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 v t (86–512) 62992980 s



Report No.: SEWM2209000196RG01

Rev.: 01 Page: 38 of 39

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in

accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty	
1	Total RF power, conducted	±0.54dB	
2		± 3.13dB (9k - 30MHz)	
	Radiated Emission	± 4.8dB (30M - 1GHz)	
		± 4.8dB (1GHz to 18 GHz)	
		± 4.8dB (Above 18GHz)	

Remark:

The U_{lab} (lab Uncertainty) is less than U_{cispr/ETSI} (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2209000196RG01

Rev.: 01

Page: 39 of 39

7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.1	WCDMA Band II&IV&V
Appendix B.2	LTE Band 2
Appendix B.3	LTE Band 4
Appendix B.4	LTE Band 5
Appendix B.5	LTE Band 7
Appendix B.6	LTE Band 12
Appendix B.7	LTE Band 13
Appendix B.8	LTE Band 25
Appendix B.9	LTE Band 26(814-824)
Appendix B.10	LTE Band 26(824-849)
Appendix B.11	LTE Band 38
Appendix B.12	LTE Band 41

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com