


IPA1002 Quick Setting Guide

I. Connect Method

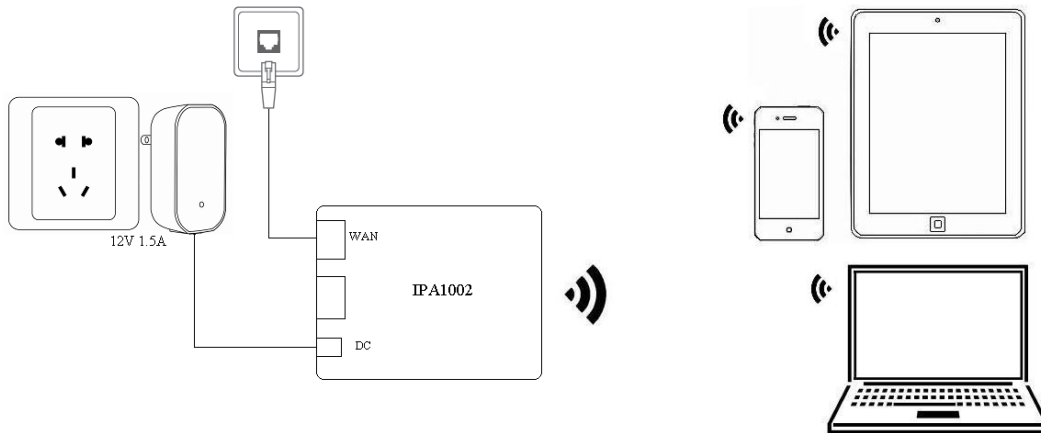

II. Set Network

1. Power on the device (12V/1.5A);


2. Smart phone or PC connect to SSID of IPA1002,

WiFi SSID: IPALARM_***** (The last six characters of MAC address)

WiFi password: ipalarmwifi

3. Open browser, input 192.168.251.254, then enter;

4. Input user name and password, both are admin, click “Login” to enter configured page:

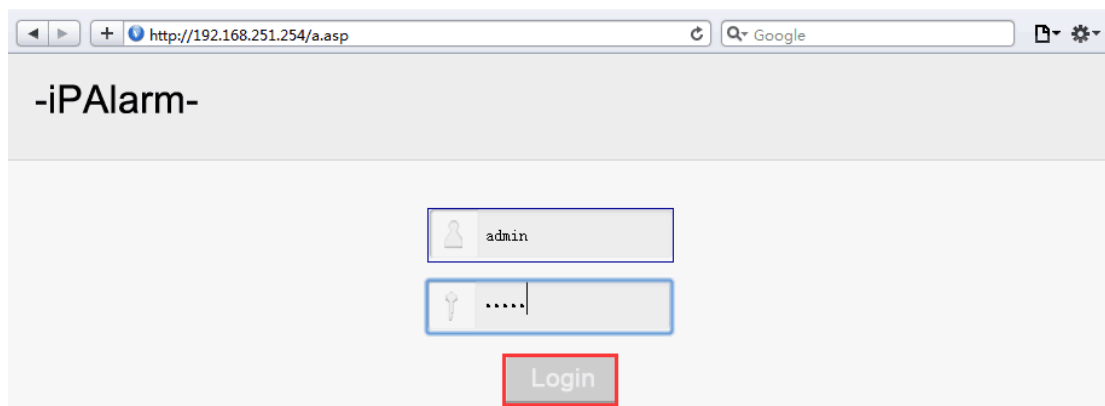

5. Choose “WAN Setting”---“Basic Settings”, change Connection Type to PPPoE (ADSL), then input User name and password provided by ISP, click “Apply” to connect network;

Operative Status

WAN Settings >>

LAN Settings

WiFi Settings

System Settings

Basic Settings DDNS

WAN Connection Type

Connection Type PPPoE (ADSL)

Remote Management Disable Enable

PPPoE Mode

User Name

Password

Operation Mode Always on

Always on mode: Redial Period 60 seconds

Dial on Demand mode: Idle Time 5 minutes

MAC Clone

MAC Address Get PC MAC

Apply Cancel

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

FCC ID: 2APB8-IPA1002