

RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	Smart POS Payment Terminal
Test Model:	CM30
Sample ID:	202311-0170-7-2#
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	DC 24V
Test Engineer:	Yan zhen ming
Note: For a more detailed features description, please refer to the report TBR-C-202311-0170-8 The report only show the worst case data.	

Contents


1. Duty Cycle.....	3
2. Maximum Conducted Output Power.....	7
3. -6dB Bandwidth.....	11
4. Occupied Channel Bandwidth.....	15
5. Maximum Power Spectral Density Level.....	19
6. Band Edge.....	23
7. Conducted RF Spurious Emission.....	28
8. Restrict Band.....	35

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	85.2	0.7	0.47
NVNT	BLE 1Mbps	2440	Ant1	85.2	0.7	0.47
NVNT	BLE 1Mbps	2480	Ant1	84.8	0.72	0.47
NVNT	BLE 2Mbps	2402	Ant1	57.22	2.42	0.93
NVNT	BLE 2Mbps	2440	Ant1	57.45	2.41	0.93
NVNT	BLE 2Mbps	2480	Ant1	57.22	2.42	0.93



Test Graphs



Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

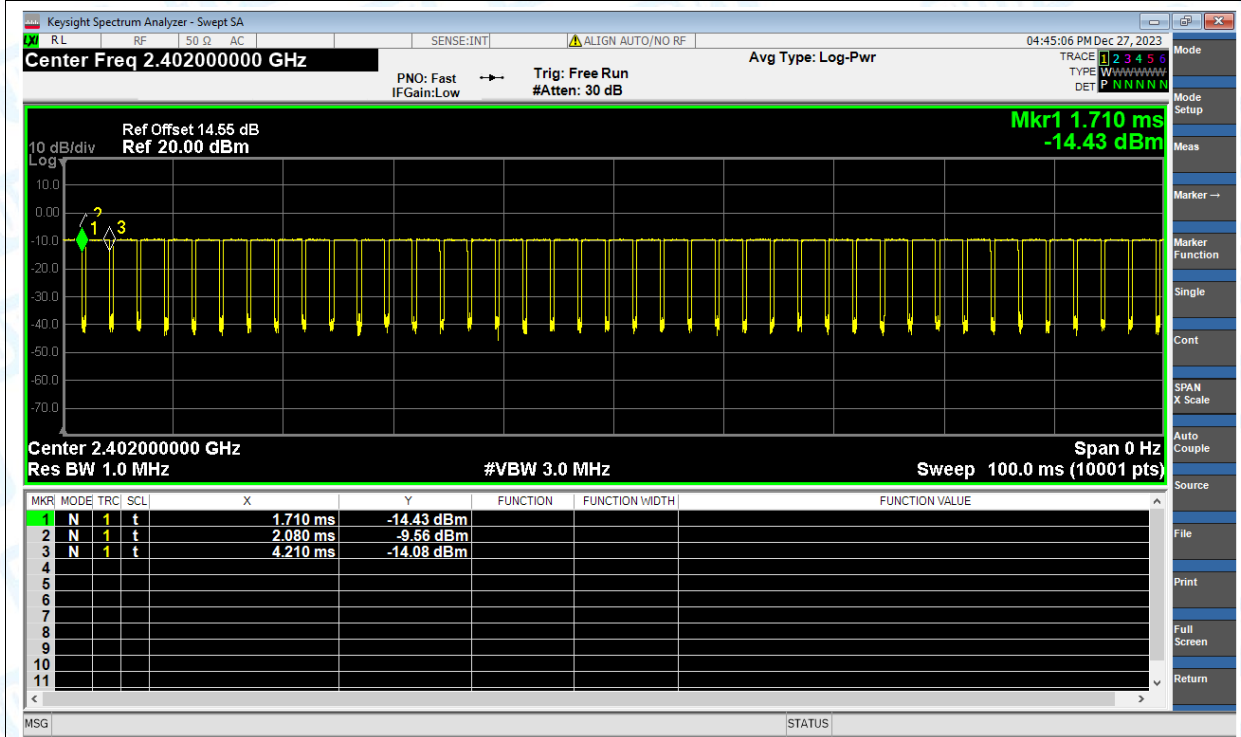

Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

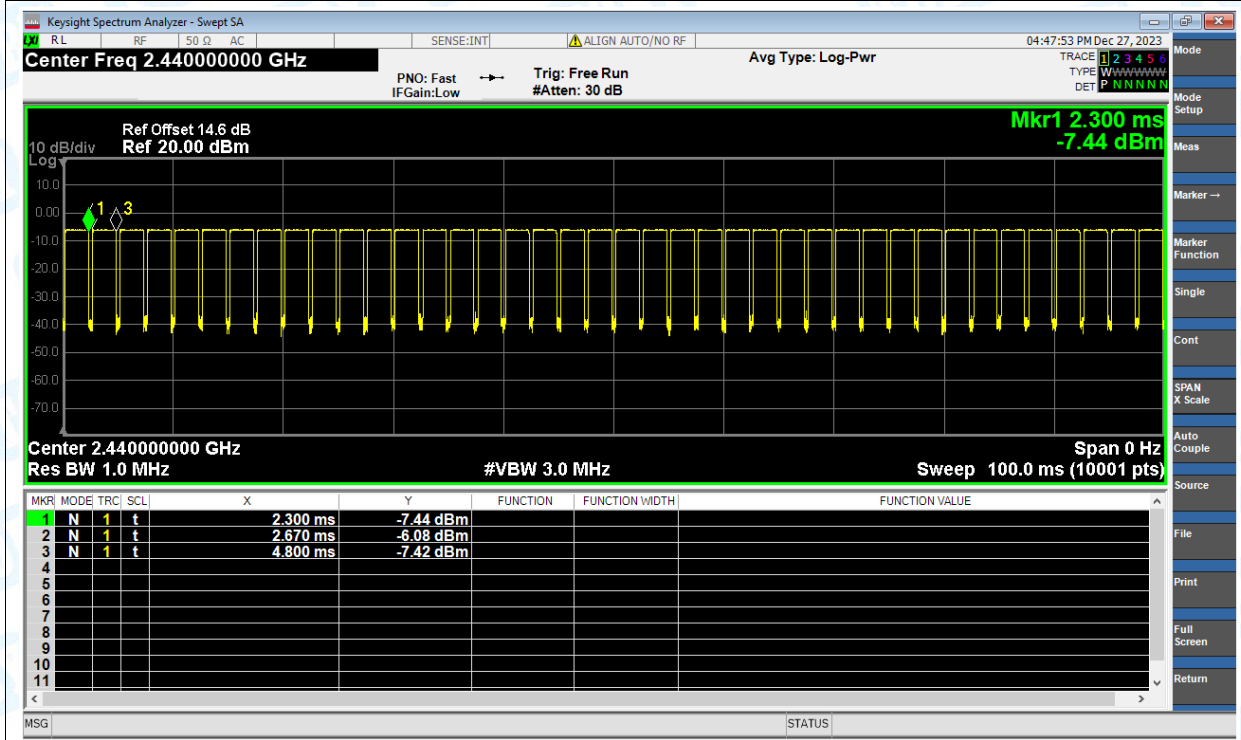

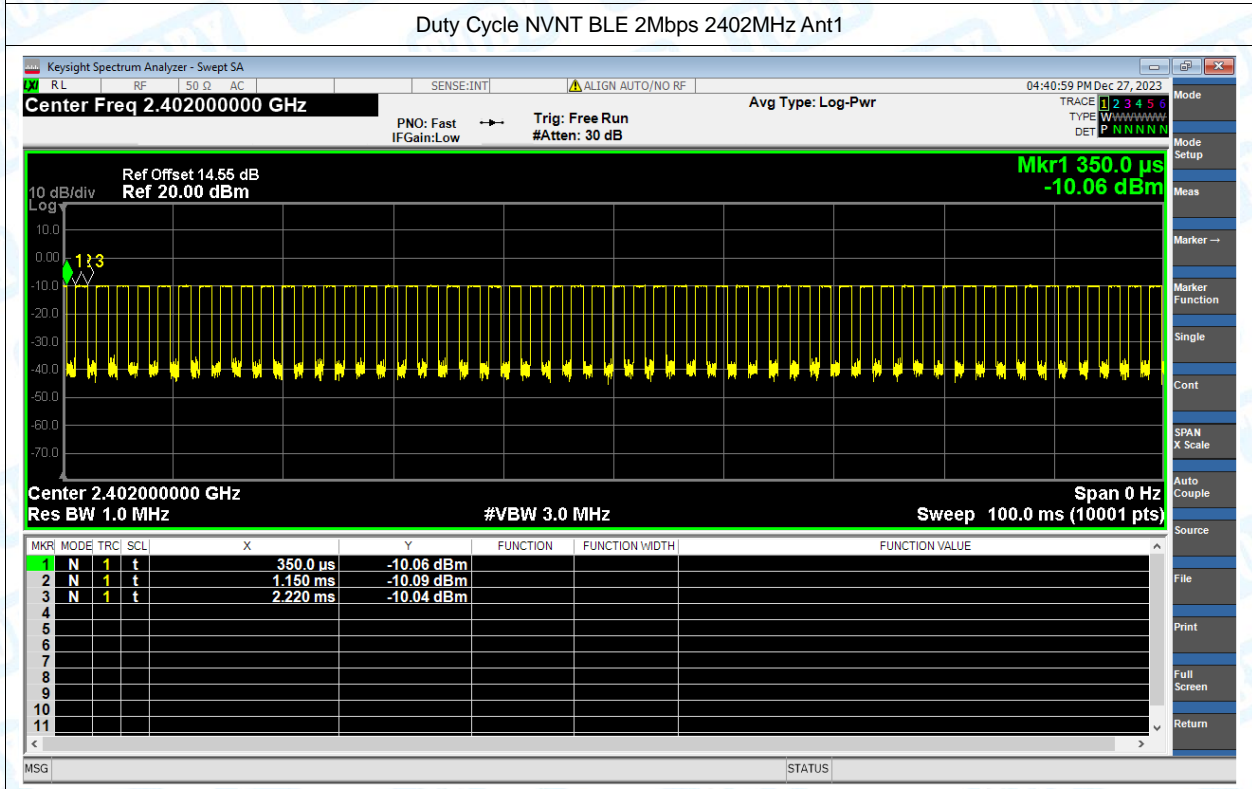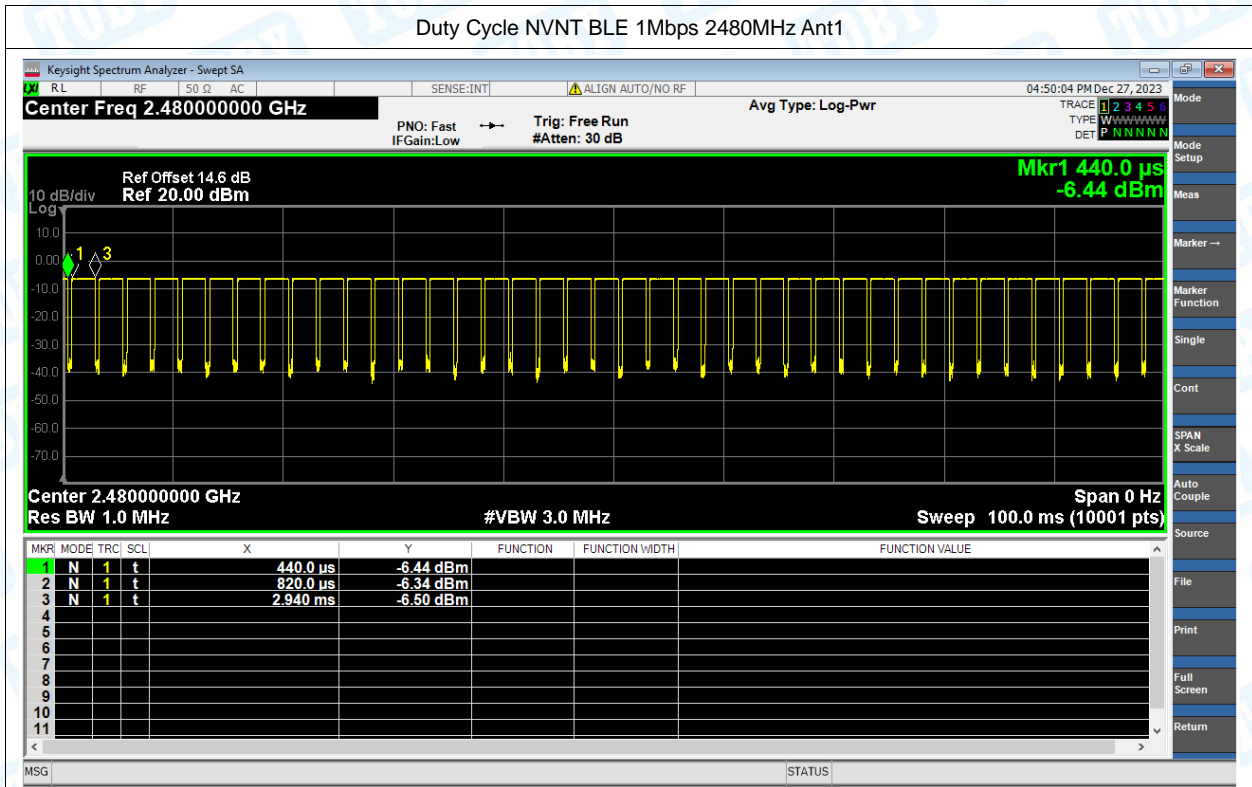

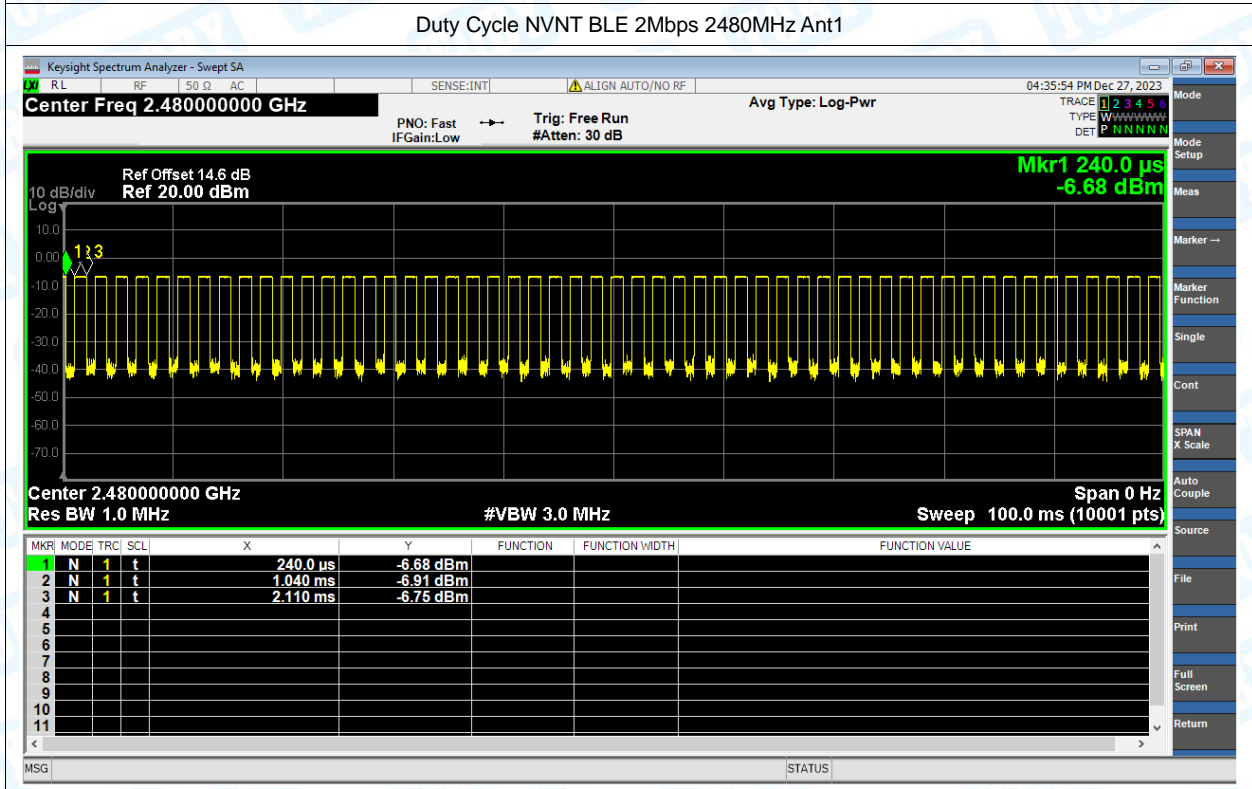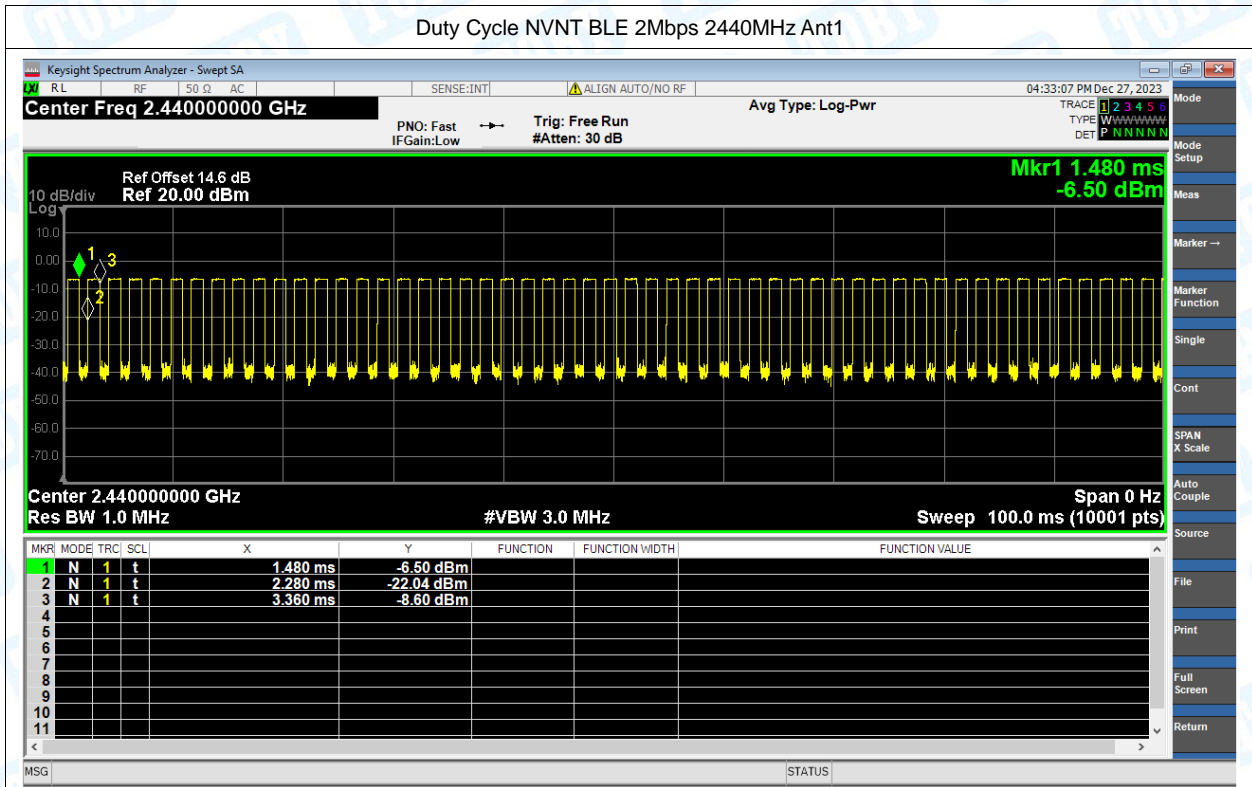


2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-8.917	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	-5.666	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	-5.852	30	Pass
NVNT	BLE 2Mbps	2402	Ant1	-9.139	30	Pass
NVNT	BLE 2Mbps	2440	Ant1	-5.702	30	Pass
NVNT	BLE 2Mbps	2480	Ant1	-5.796	30	Pass

Test Graphs


Power NVNT BLE 1Mbps 2402MHz Ant1

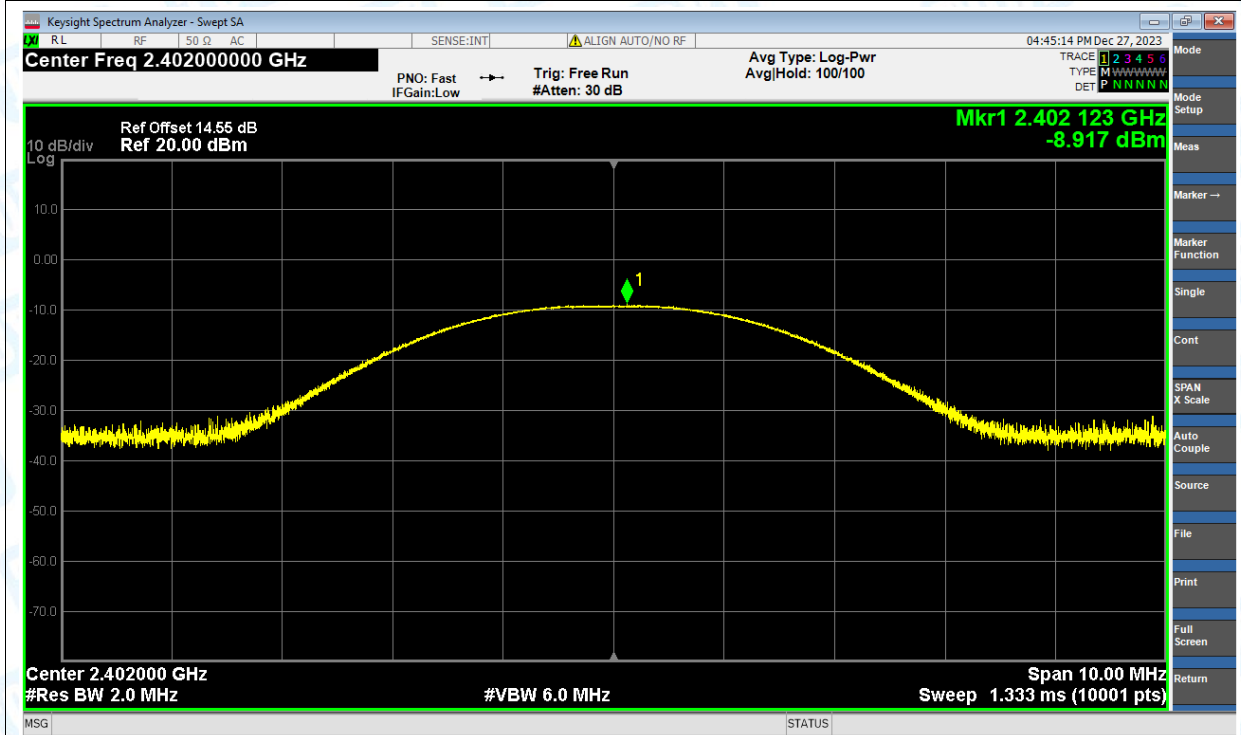


Power NVNT BLE 1Mbps 2440MHz Ant1

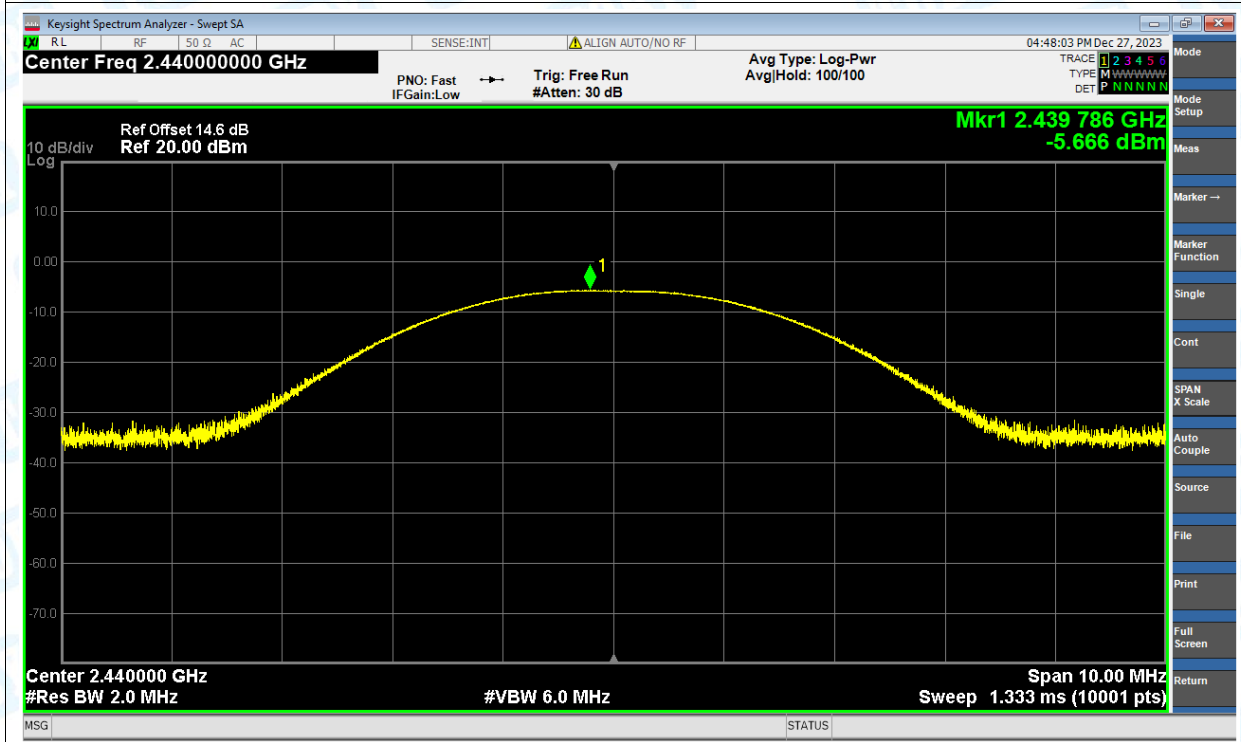


Power NVNT BLE 1Mbps 2480MHz Ant1

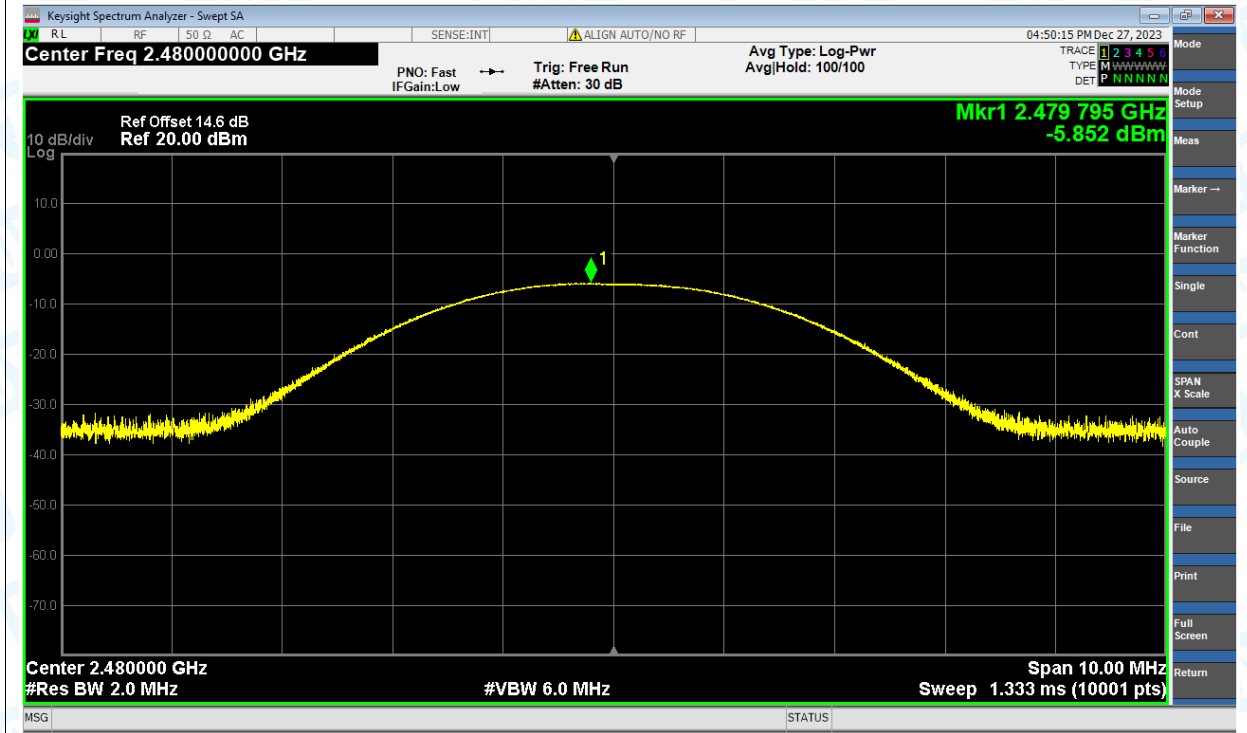


Power NVNT BLE 2Mbps 2402MHz Ant1

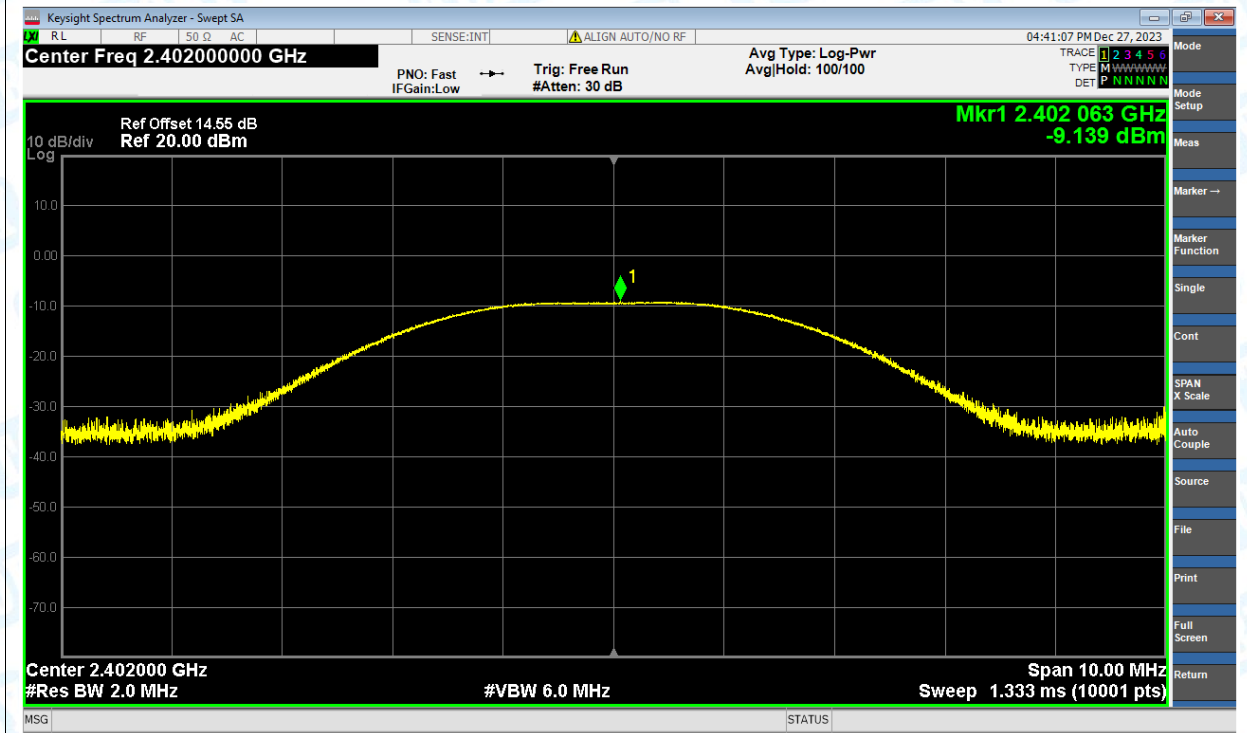

Power NVNT BLE 2Mbps 2440MHz Ant1

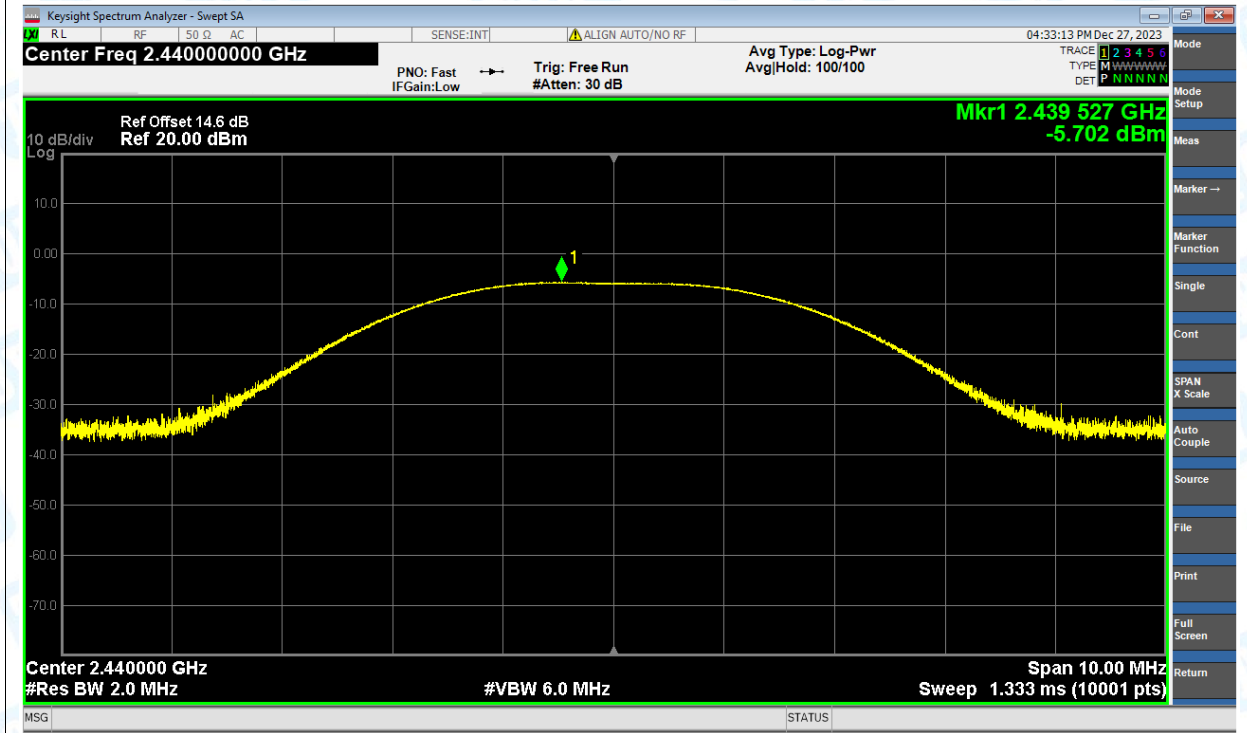

Power NVNT BLE 2Mbps 2480MHz Ant1

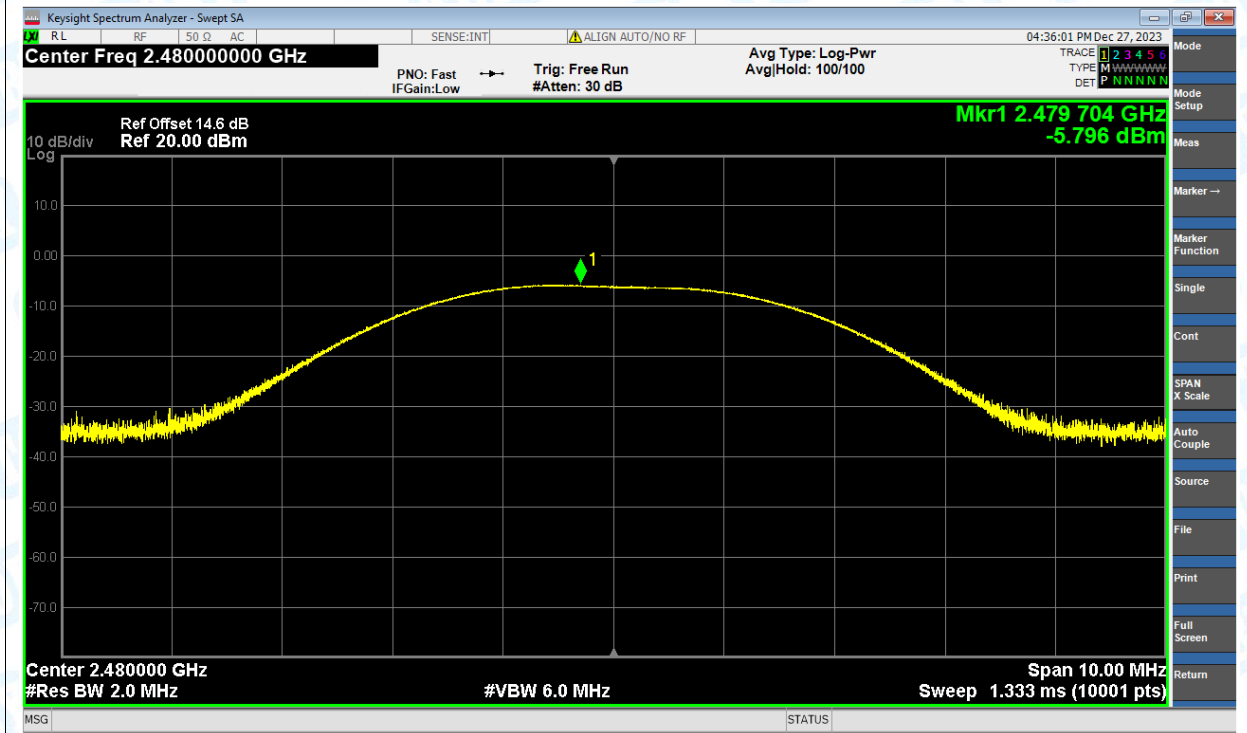


3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.71	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.66	0.5	Pass
NVNT	BLE 2Mbps	2402	Ant1	1.16	0.5	Pass
NVNT	BLE 2Mbps	2440	Ant1	1.34	0.5	Pass
NVNT	BLE 2Mbps	2480	Ant1	1.25	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

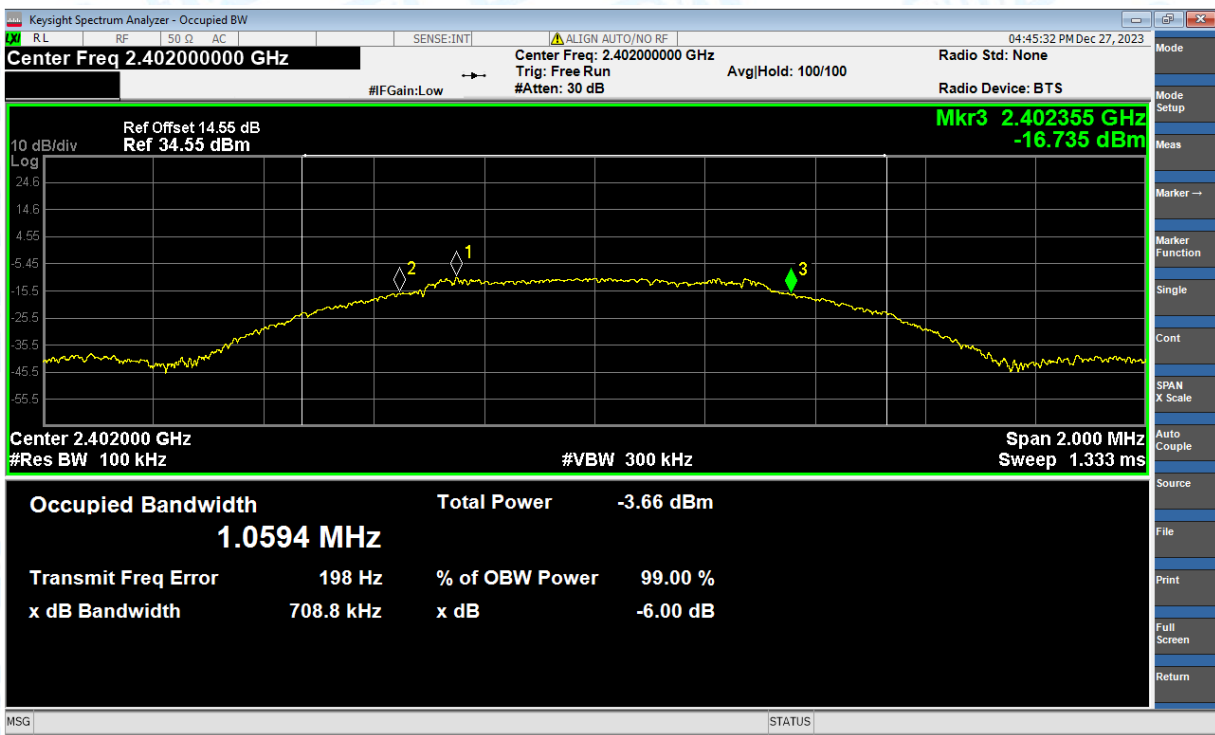


-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

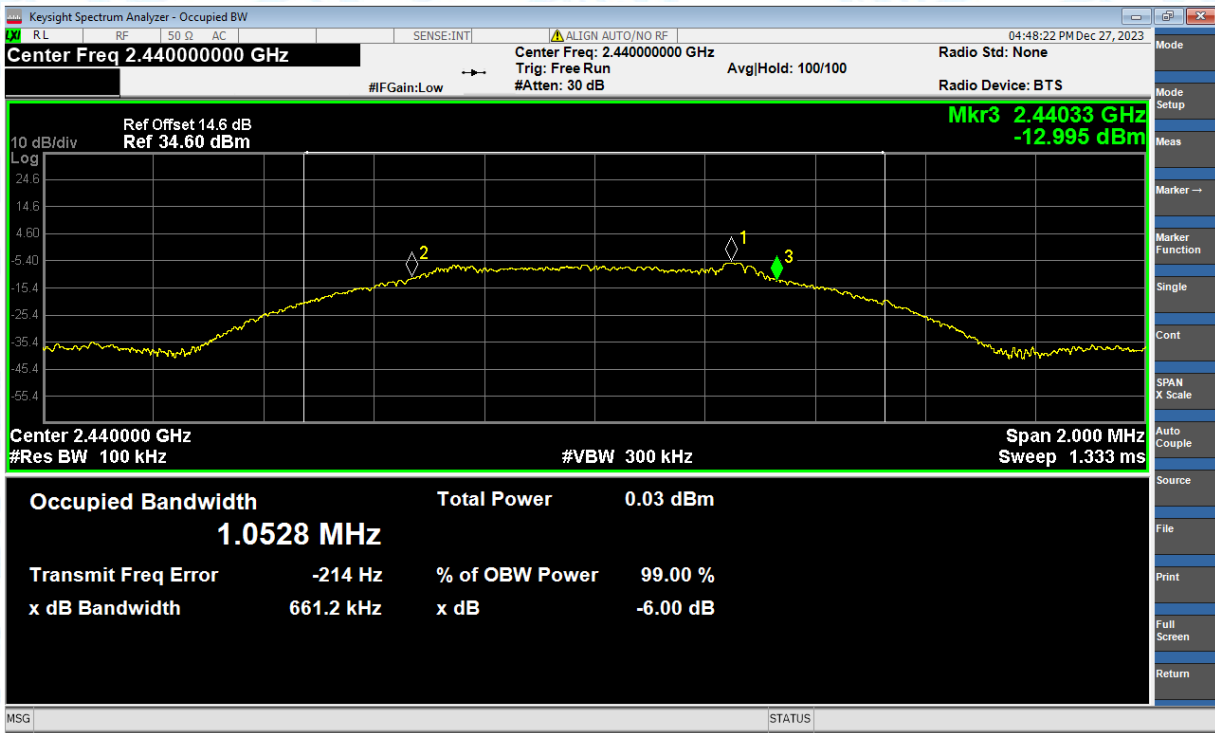


-6dB Bandwidth NVNT BLE 1Mbps 2480MHz Ant1

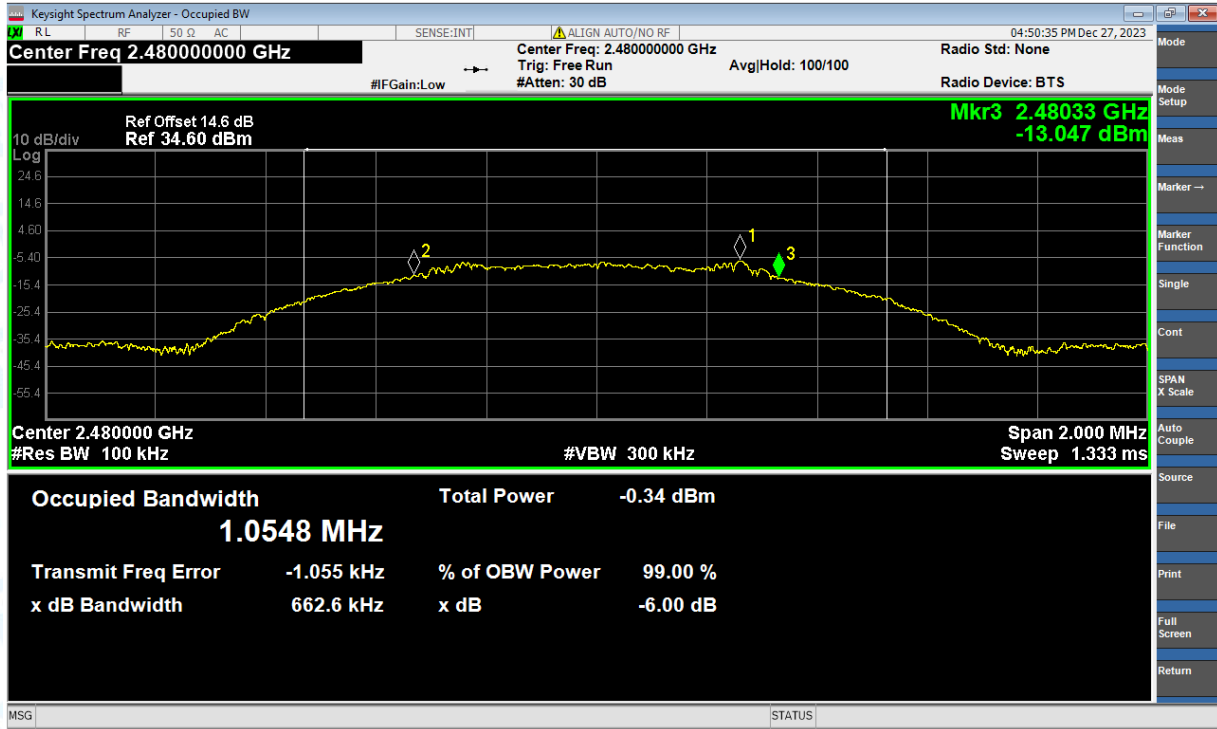


-6dB Bandwidth NVNT BLE 2Mbps 2402MHz Ant1

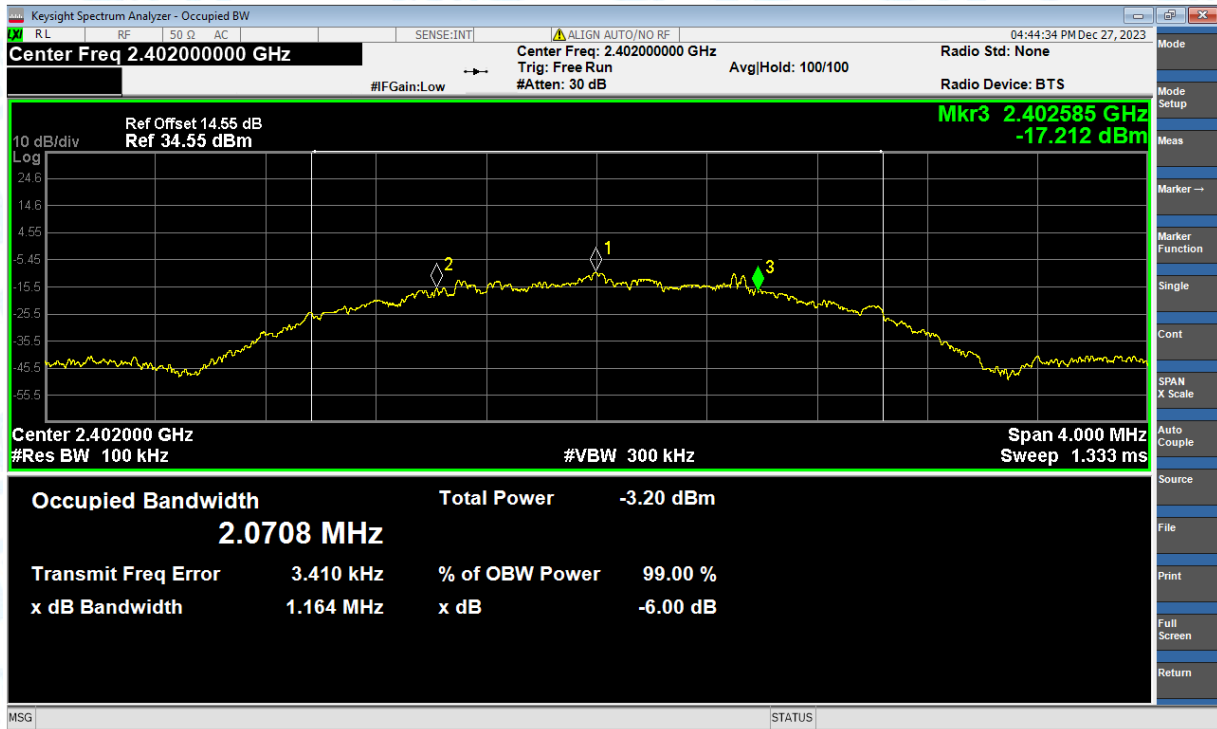

-6dB Bandwidth NVNT BLE 2Mbps 2440MHz Ant1

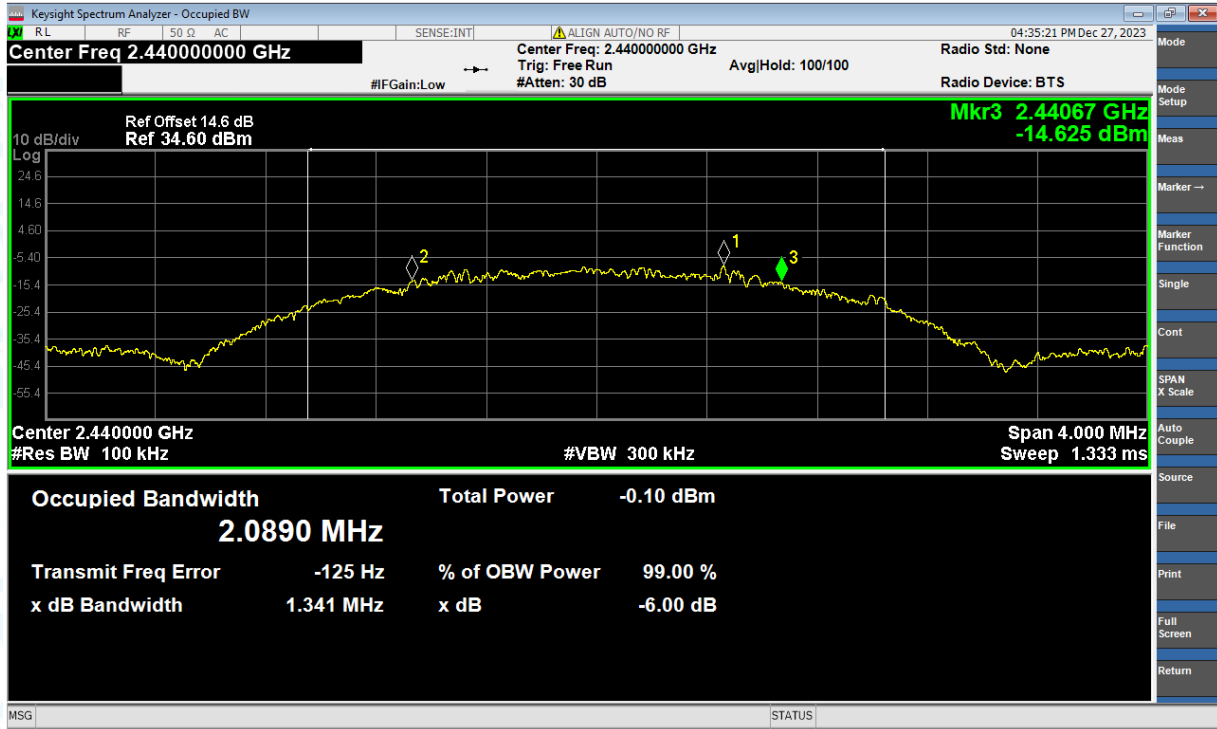

-6dB Bandwidth NVNT BLE 2Mbps 2480MHz Ant1

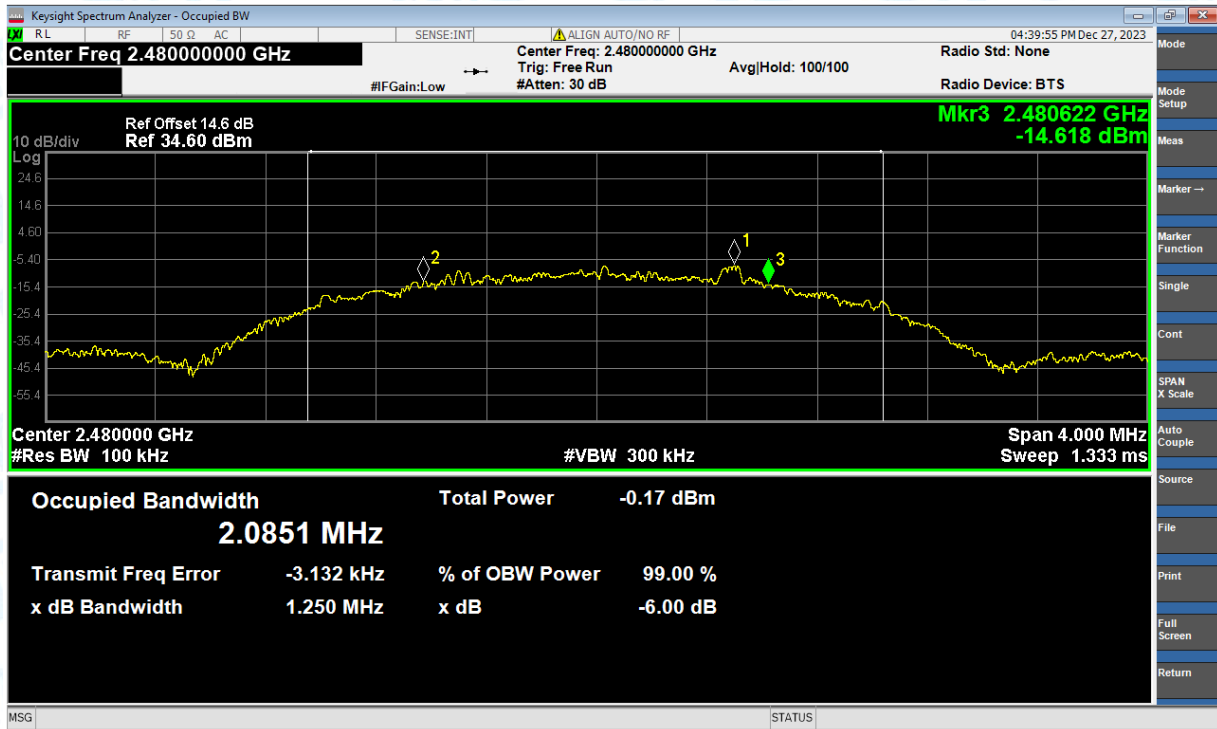


4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.05
NVNT	BLE 1Mbps	2440	Ant1	1.048
NVNT	BLE 1Mbps	2480	Ant1	1.051
NVNT	BLE 2Mbps	2402	Ant1	2.084
NVNT	BLE 2Mbps	2440	Ant1	2.081
NVNT	BLE 2Mbps	2480	Ant1	2.08

Test Graphs


OBW NVNT BLE 1Mbps 2402MHz Ant1

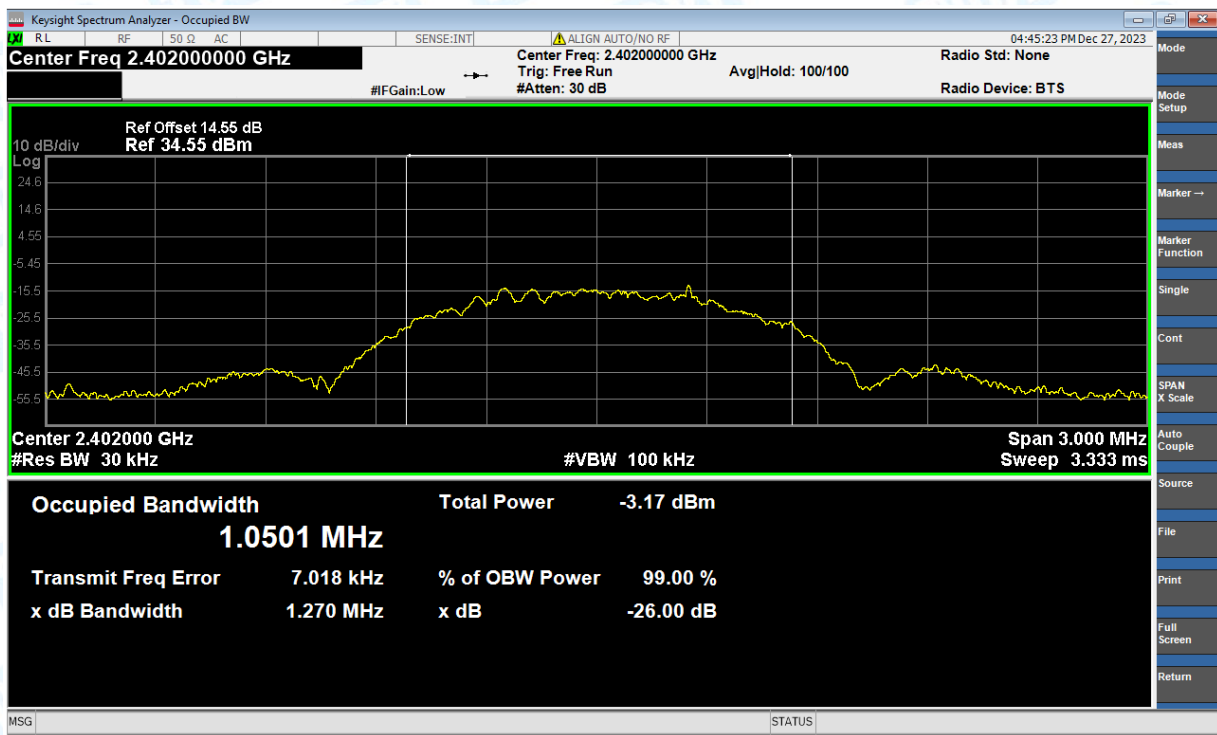


OBW NVNT BLE 1Mbps 2440MHz Ant1

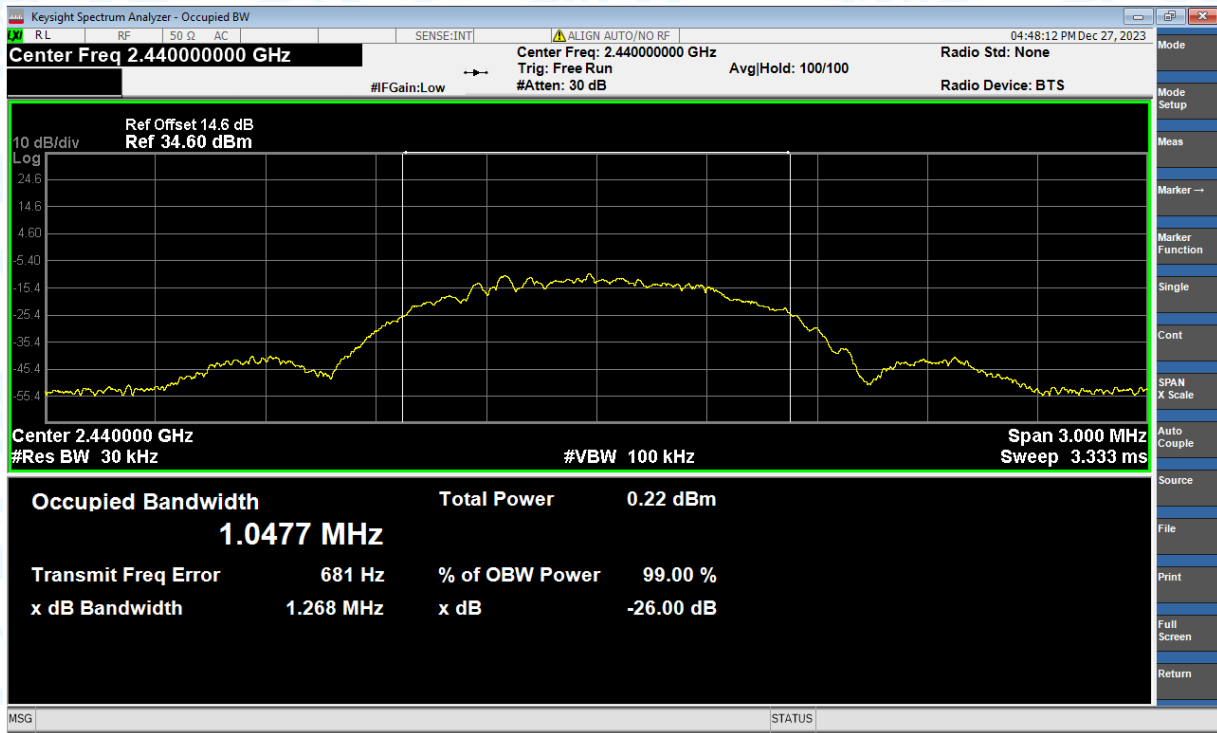


OBW NVNT BLE 1Mbps 2480MHz Ant1

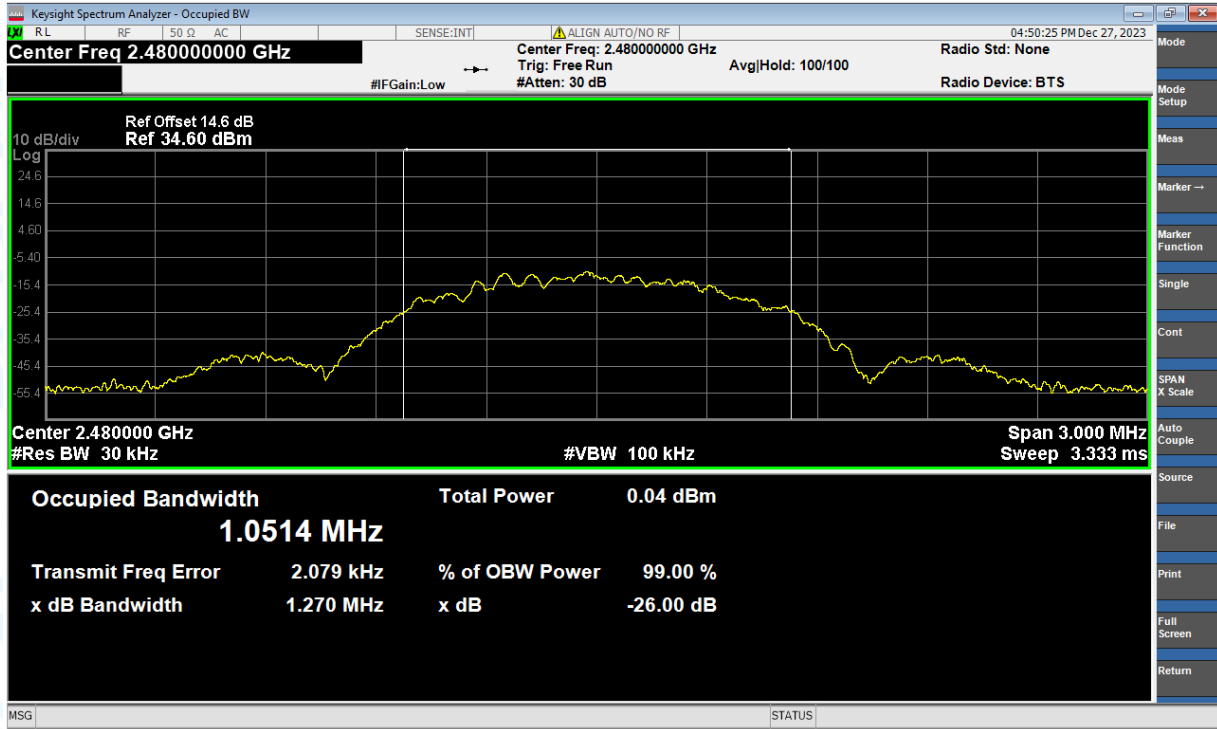


OBW NVNT BLE 2Mbps 2402MHz Ant1

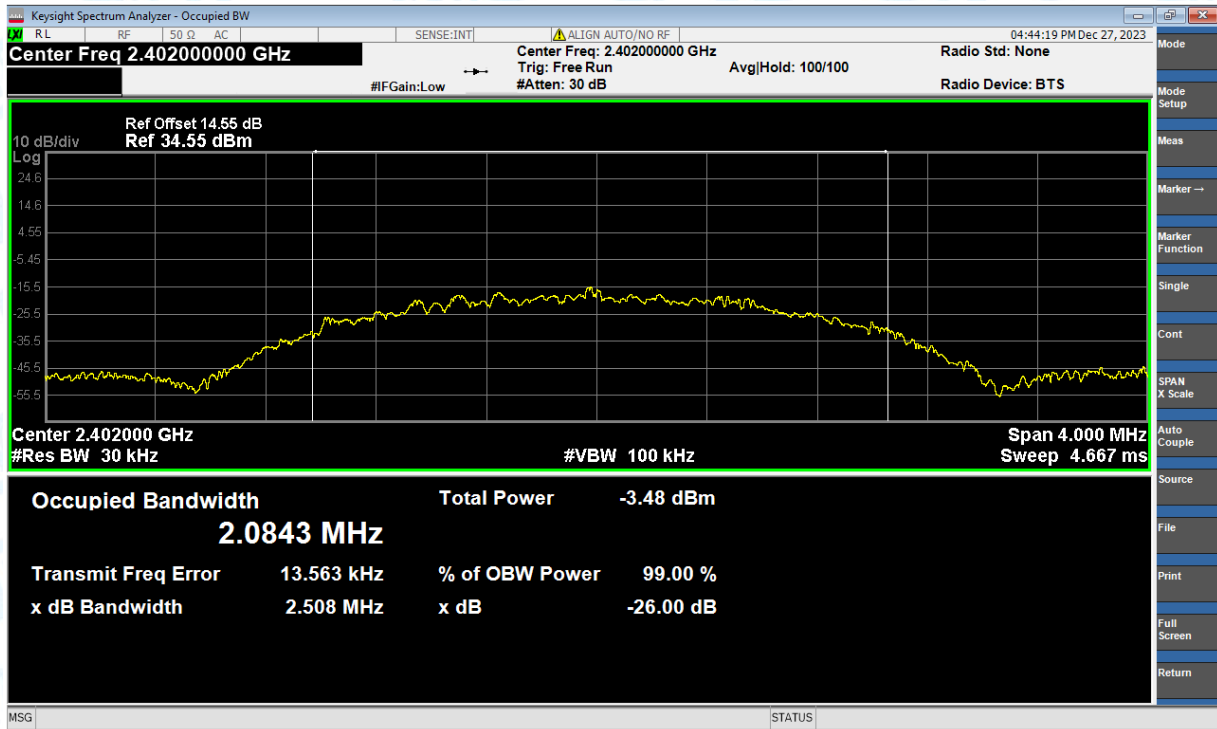

OBW NVNT BLE 2Mbps 2440MHz Ant1

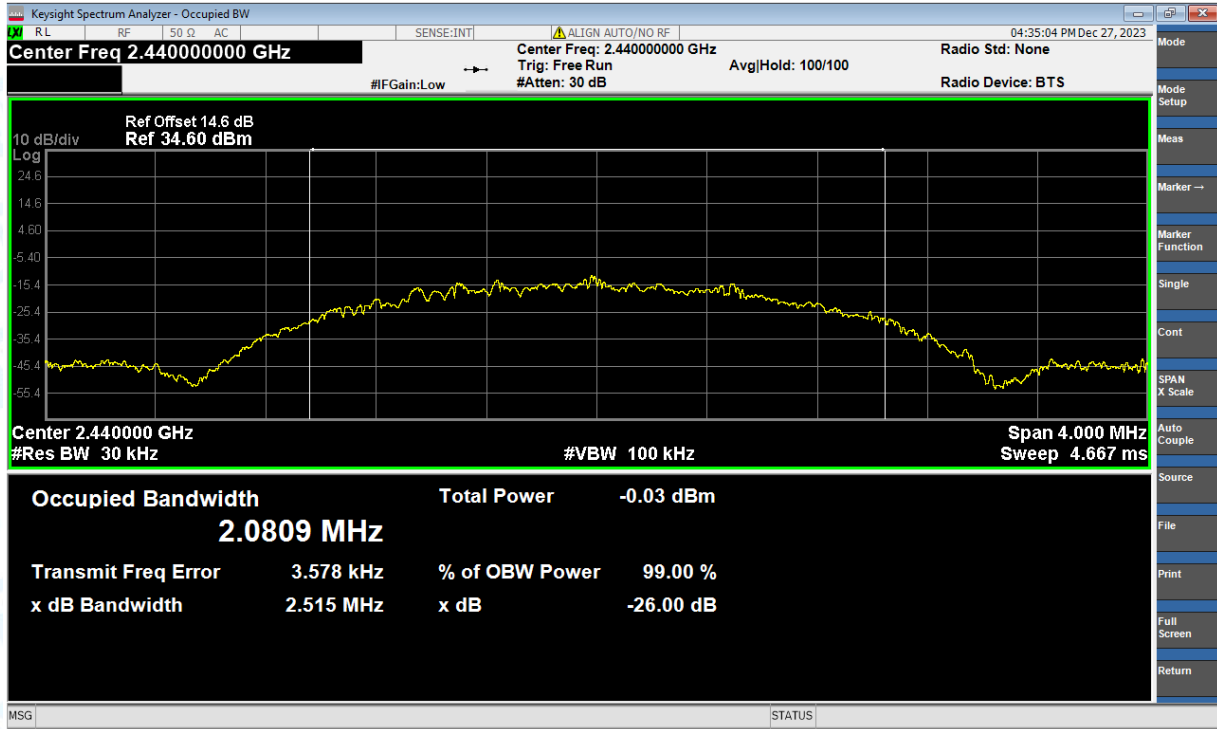

OBW NVNT BLE 2Mbps 2480MHz Ant1

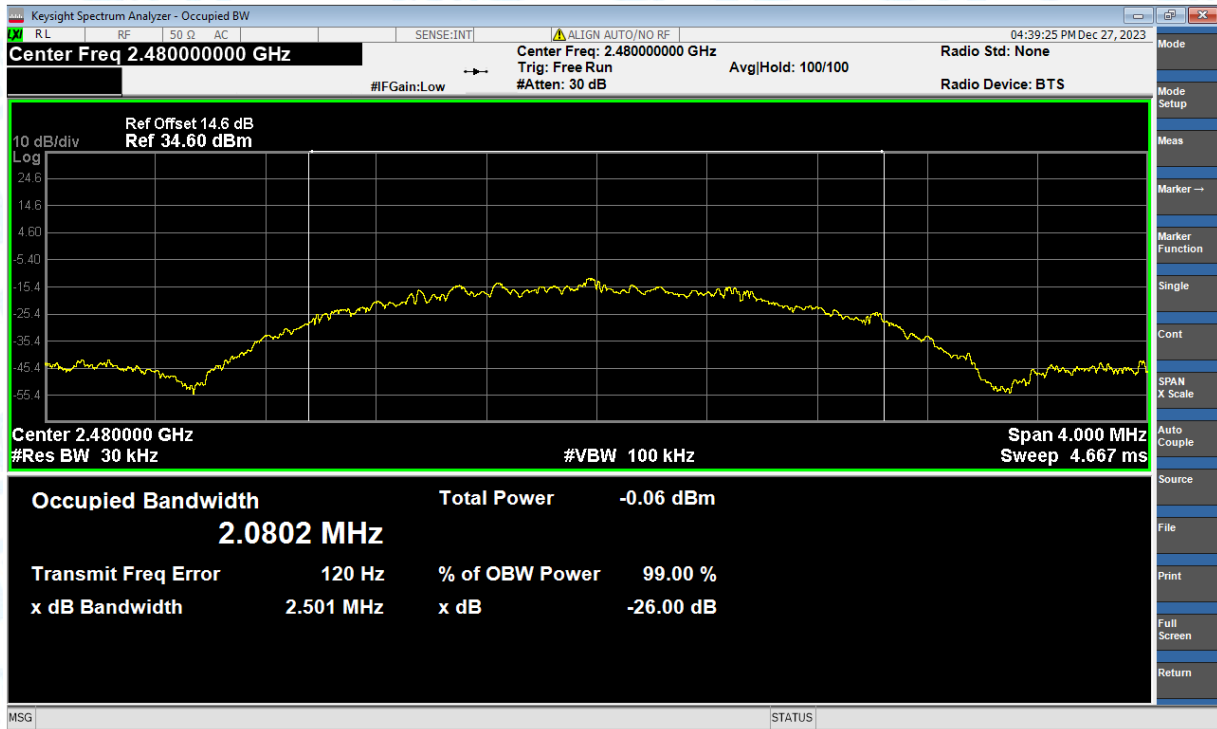


5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-25.746	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-22.14	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-22.32	8	Pass
NVNT	BLE 2Mbps	2402	Ant1	-28.215	8	Pass
NVNT	BLE 2Mbps	2440	Ant1	-24.653	8	Pass
NVNT	BLE 2Mbps	2480	Ant1	-24.859	8	Pass



Test Graphs



PSD NVNT BLE 1Mbps 2402MHz Ant1

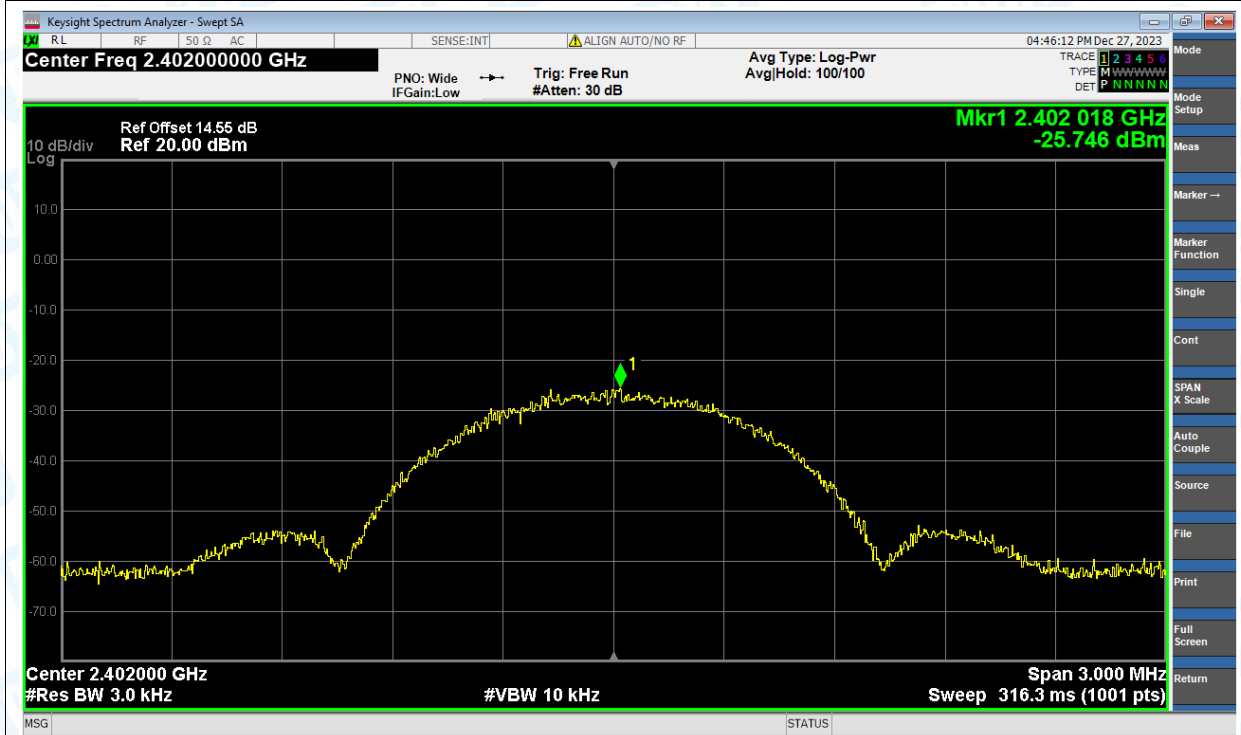

PSD NVNT BLE 1Mbps 2440MHz Ant1

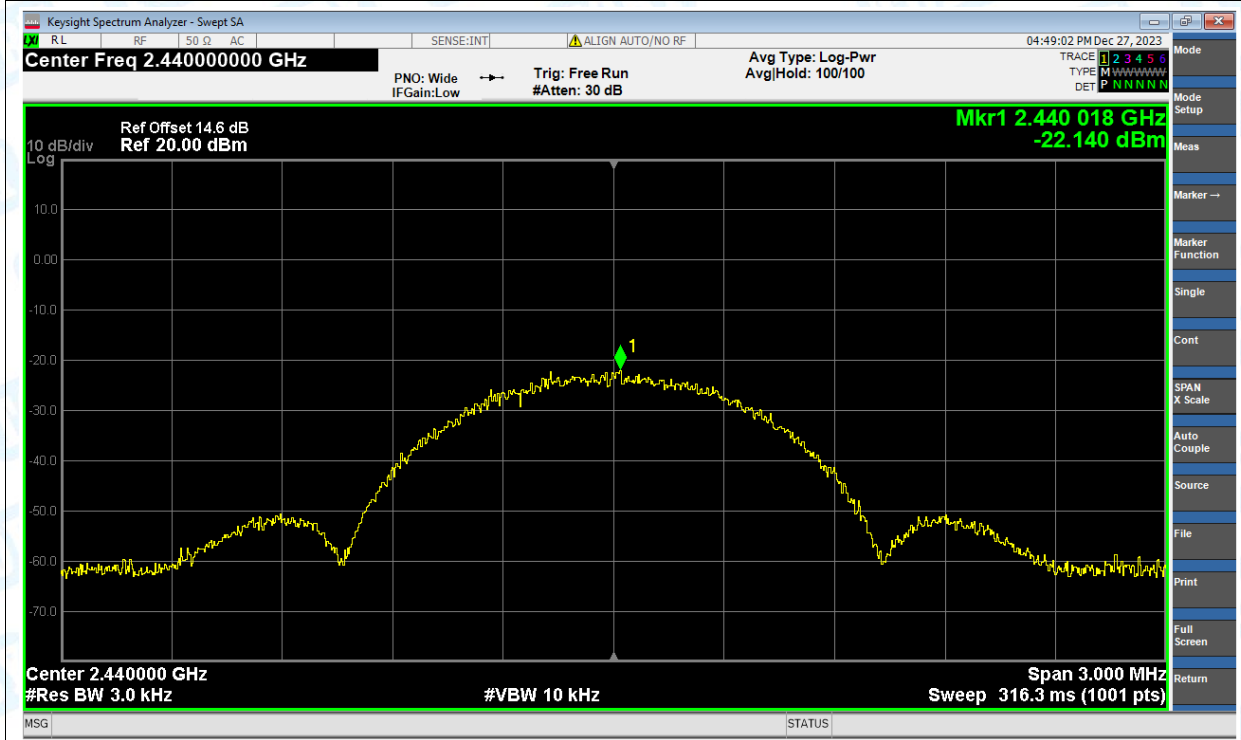

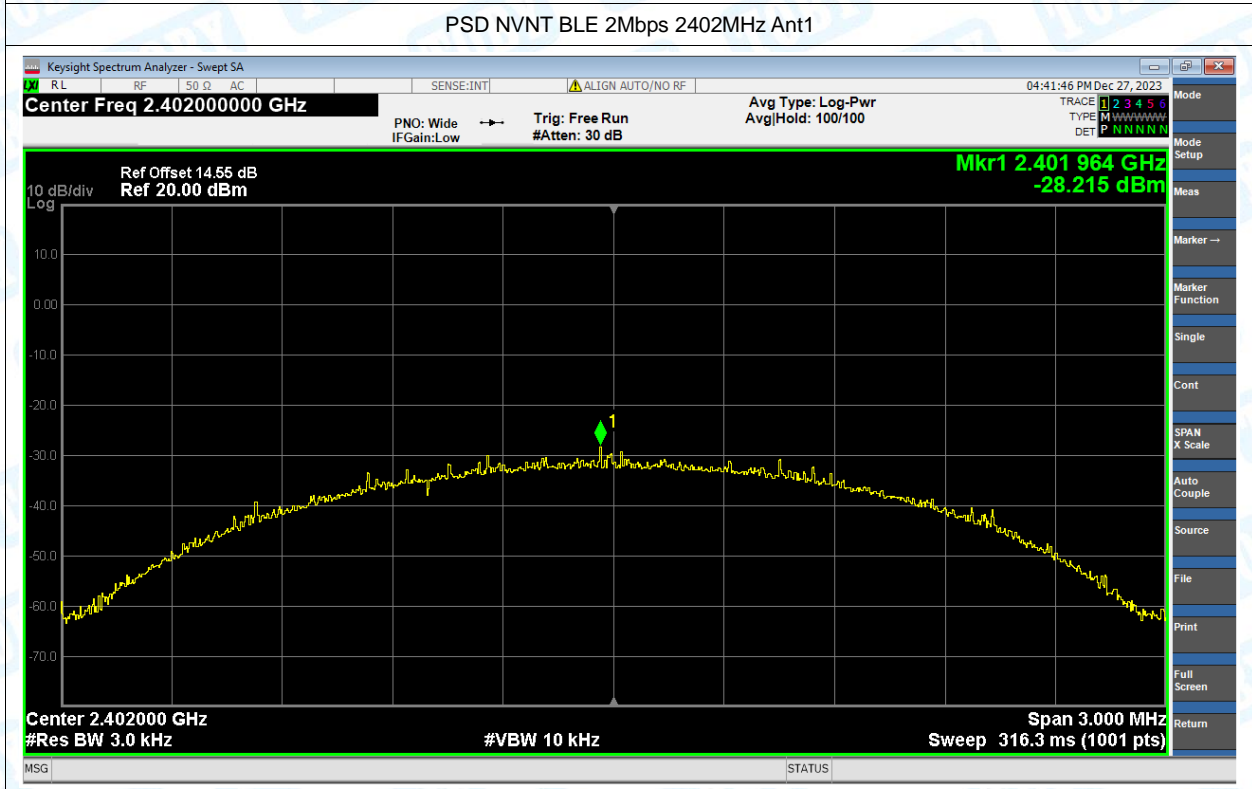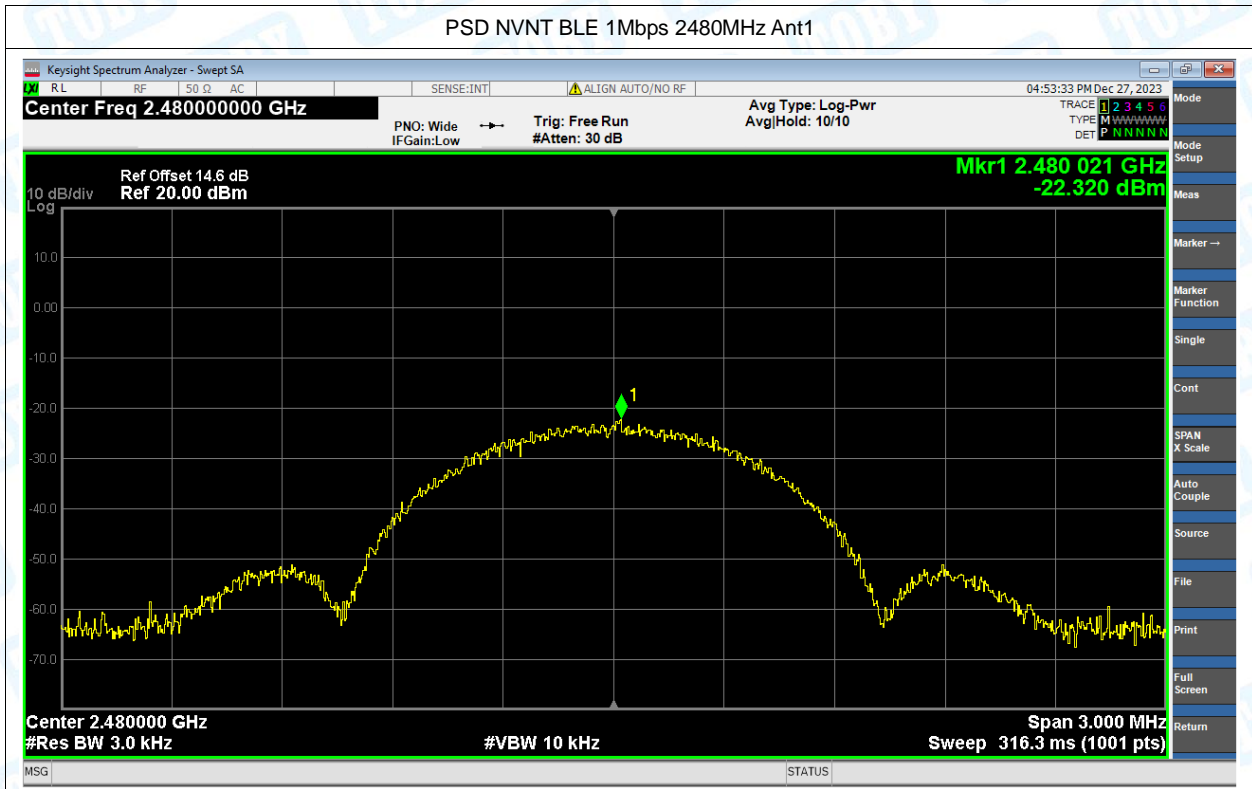

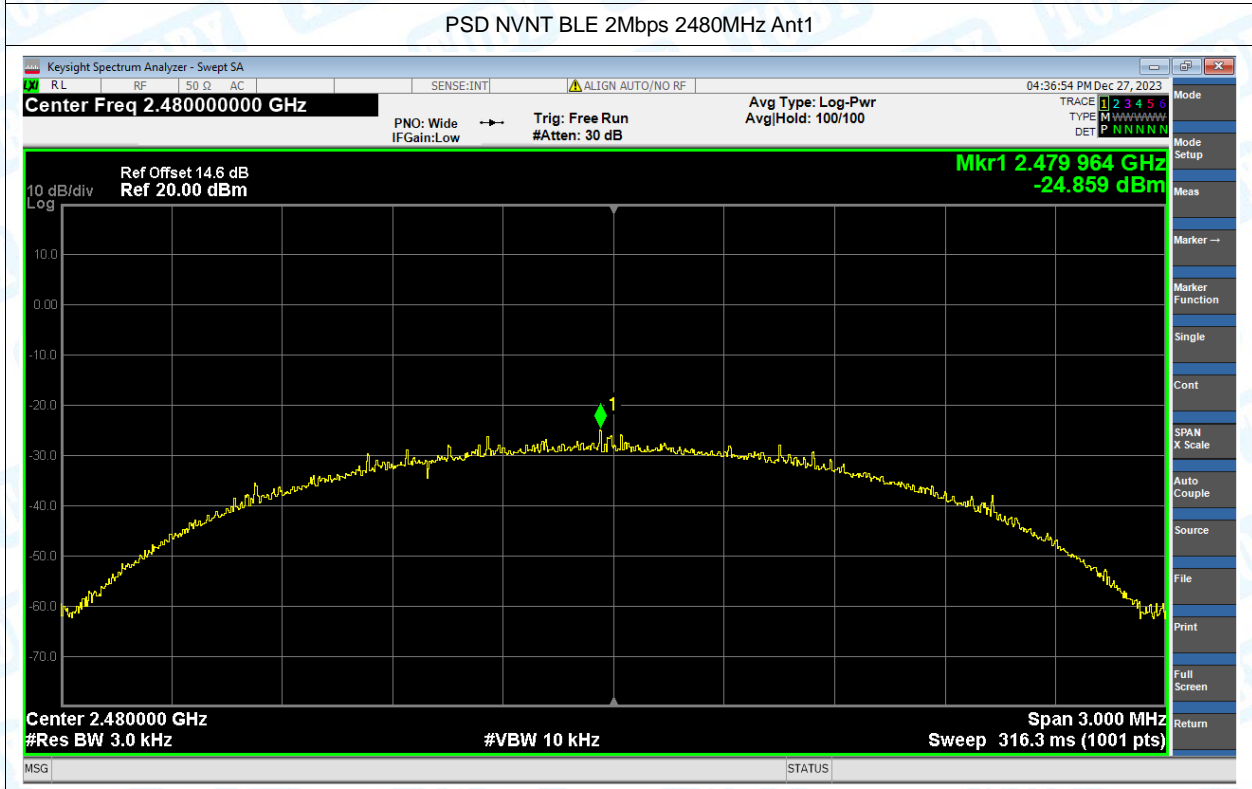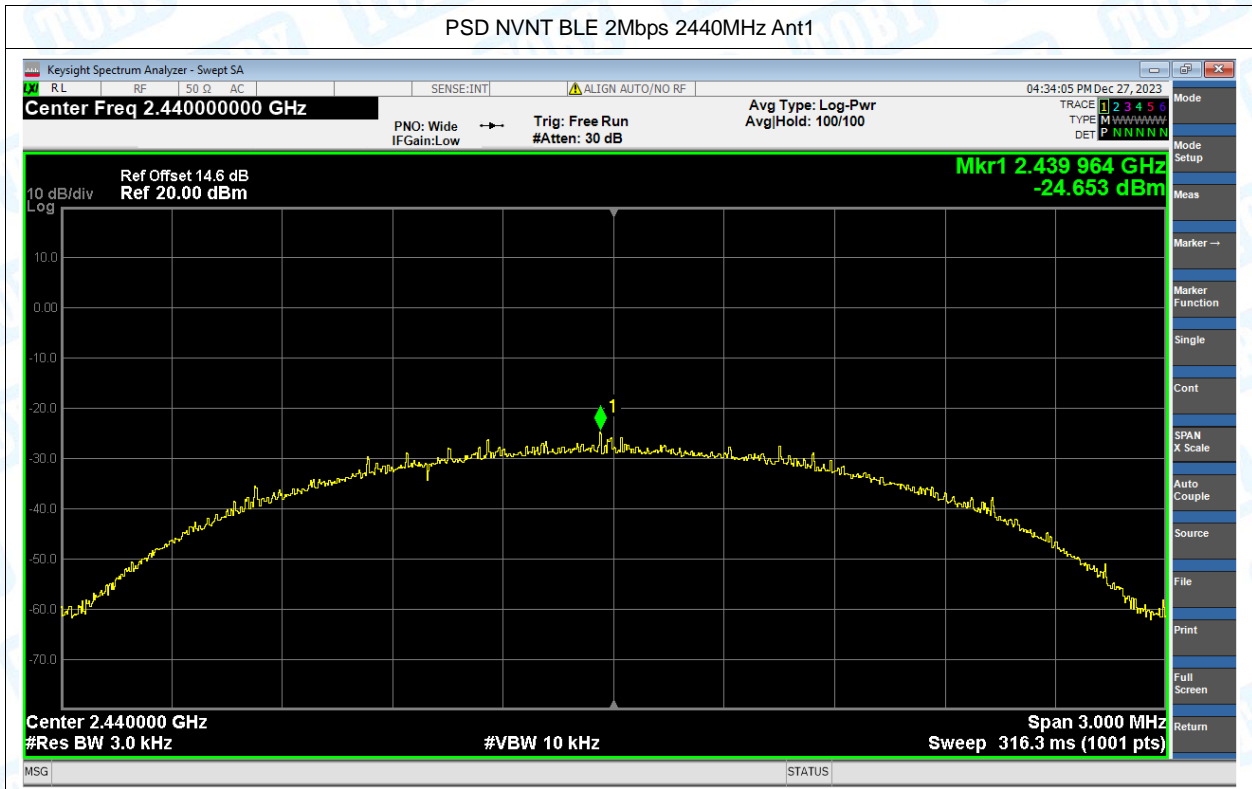


6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-34.19	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-37.97	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-34.19	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-36.81	-20	Pass

Test Graphs


Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

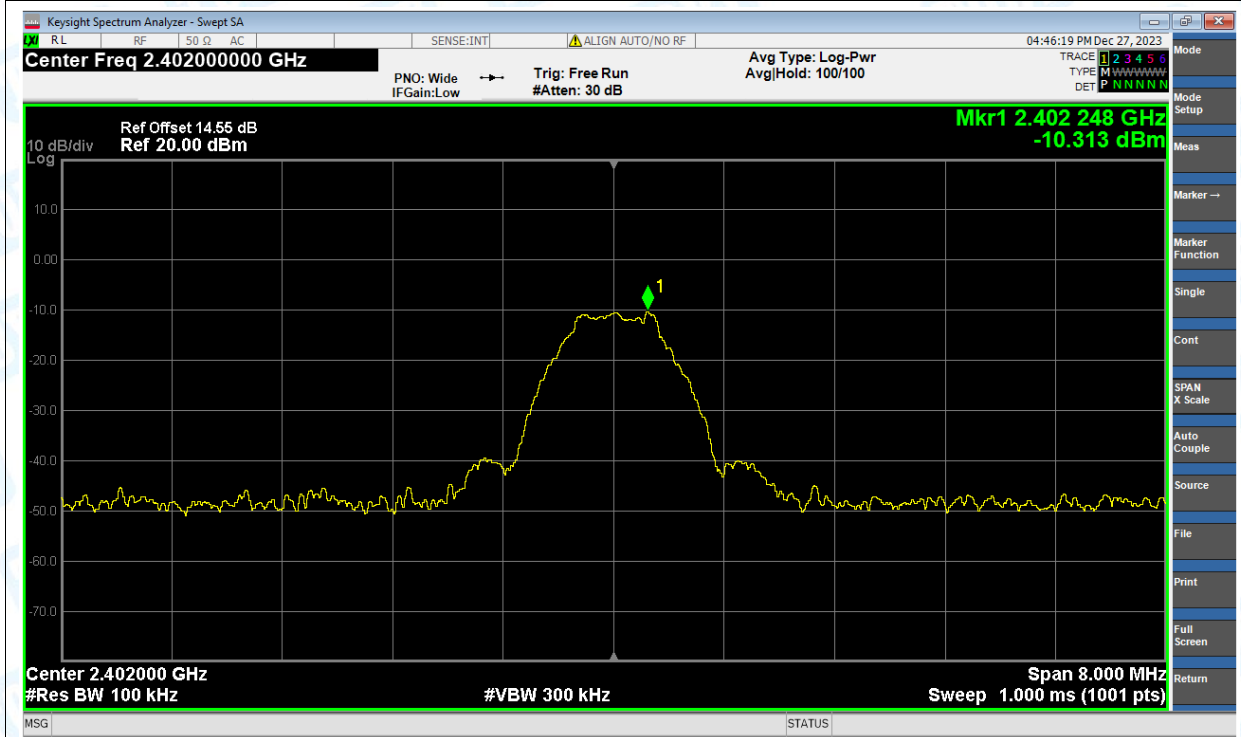


Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

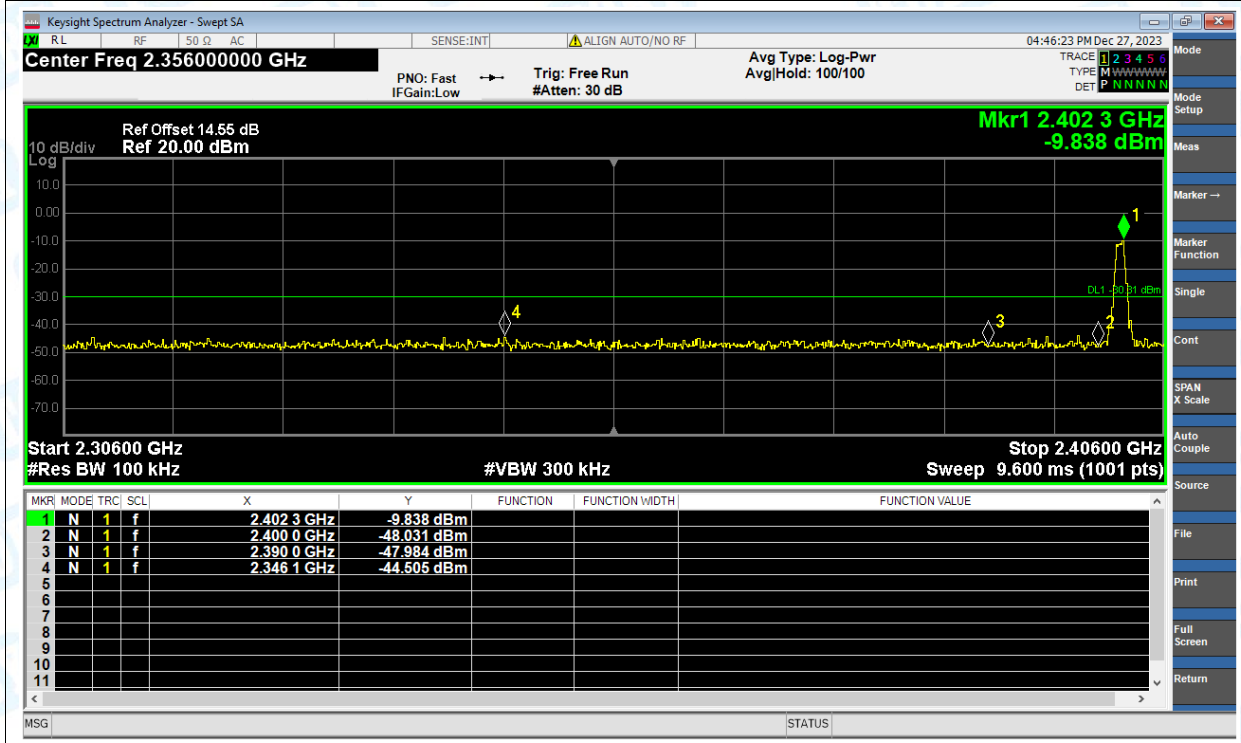


Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref

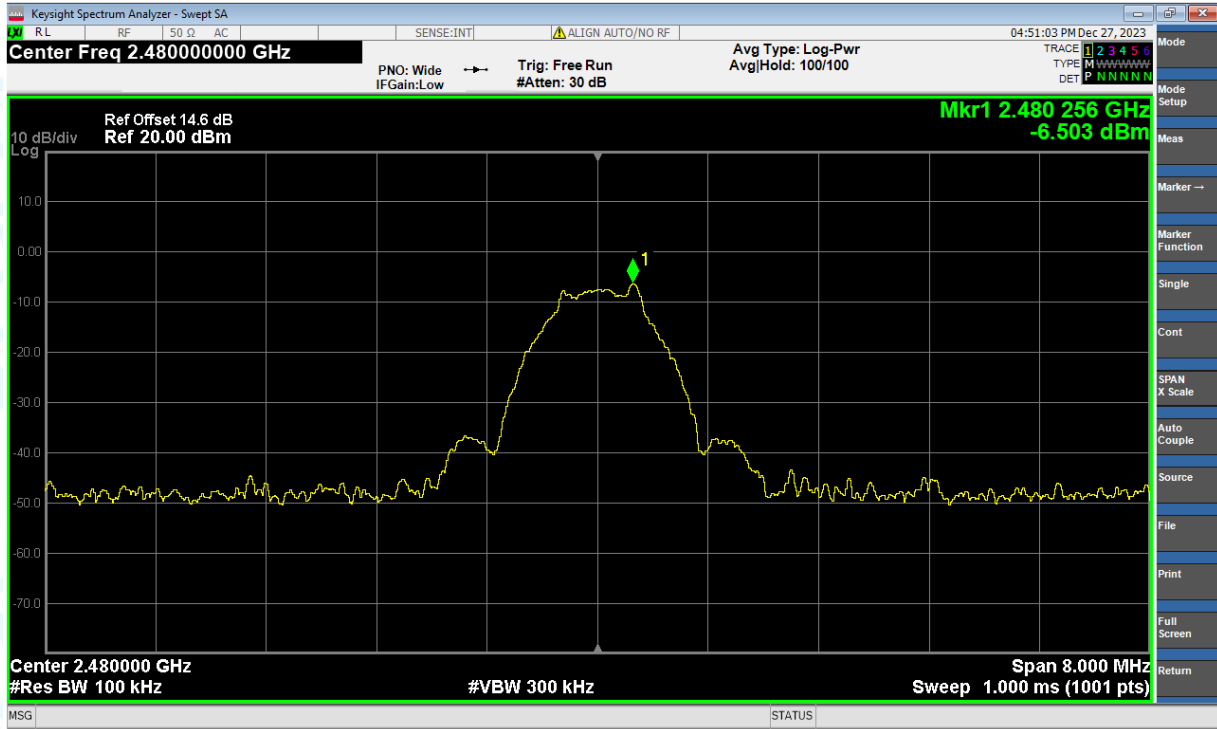


Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

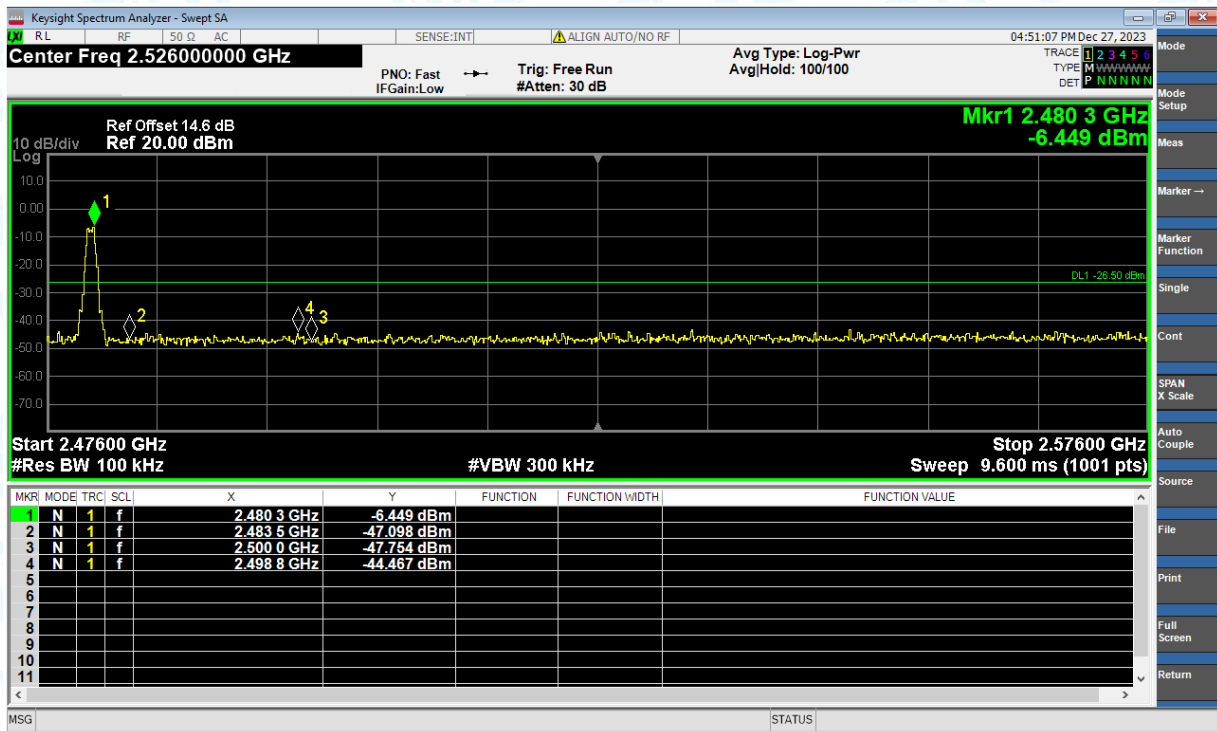

Band Edge NVNT BLE 2Mbps 2402MHz Ant1 Ref

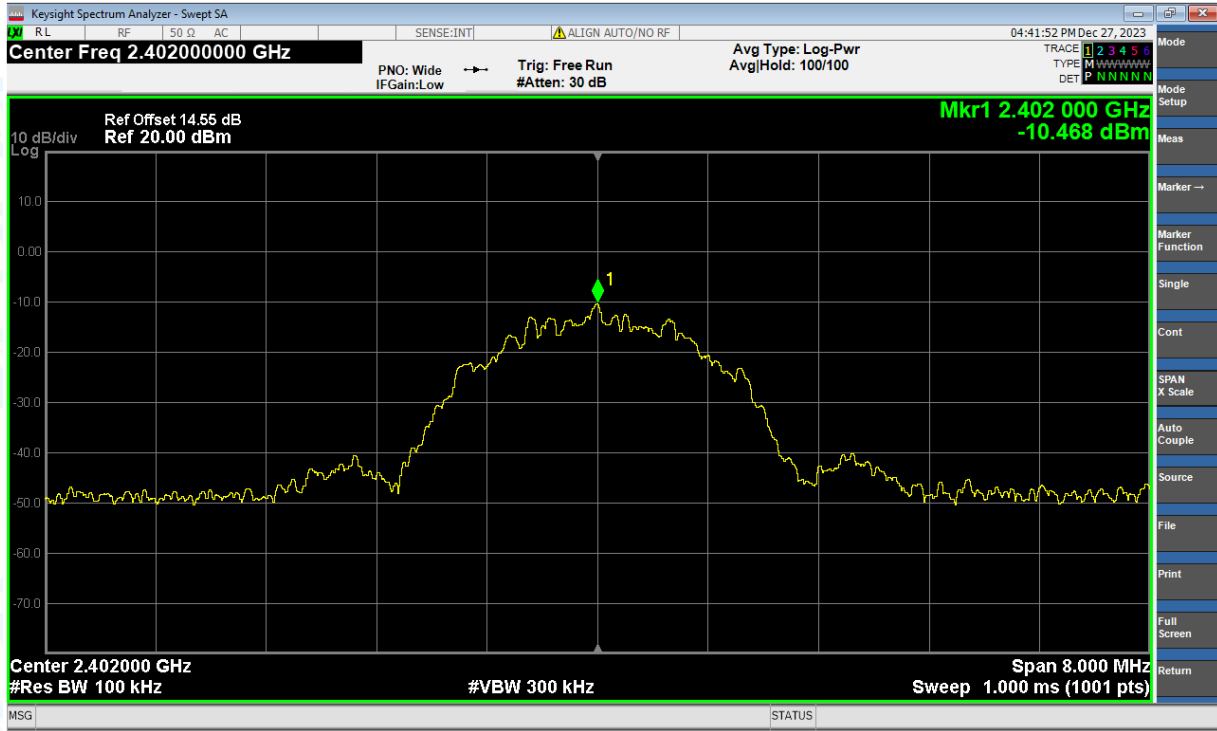


Band Edge NVNT BLE 2Mbps 2402MHz Ant1 Emission

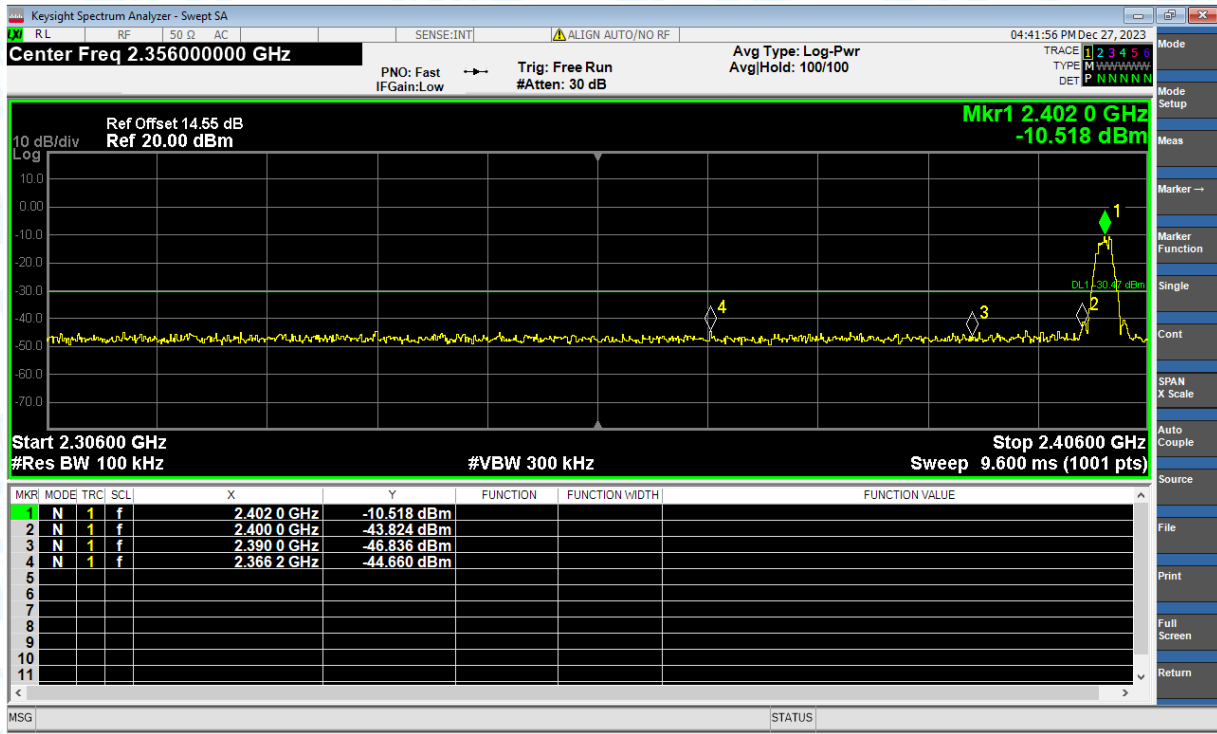

Band Edge NVNT BLE 2Mbps 2480MHz Ant1 Ref



Band Edge NVNT BLE 2Mbps 2480MHz Ant1 Emission

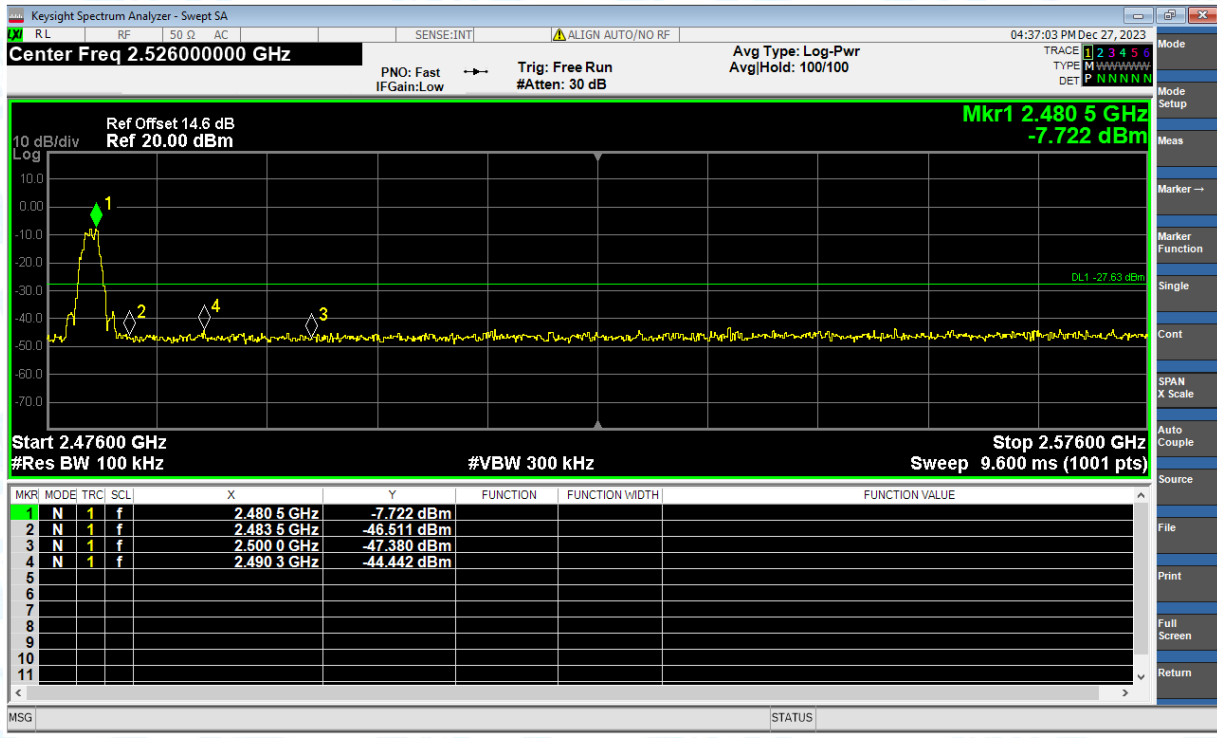


7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-34.14	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-24.24	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-22.95	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-33.32	-20	Pass
NVNT	BLE 2Mbps	2440	Ant1	-23.43	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-23.1	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

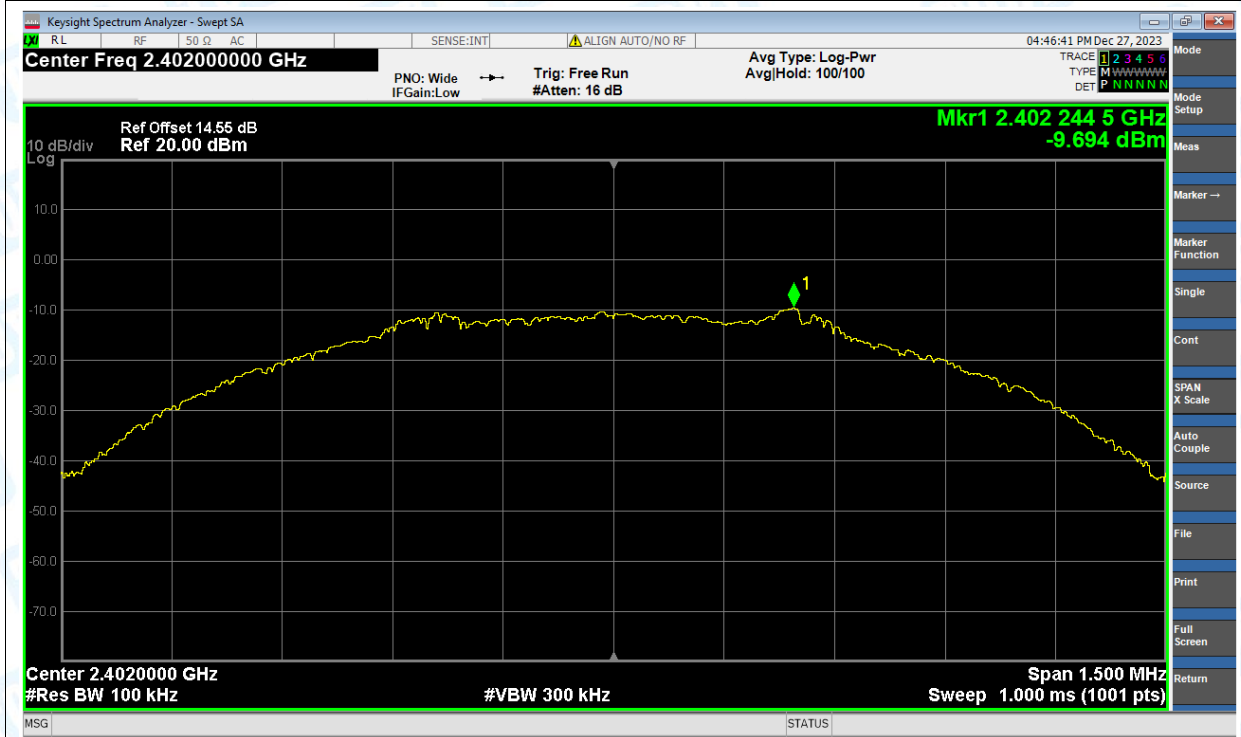


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

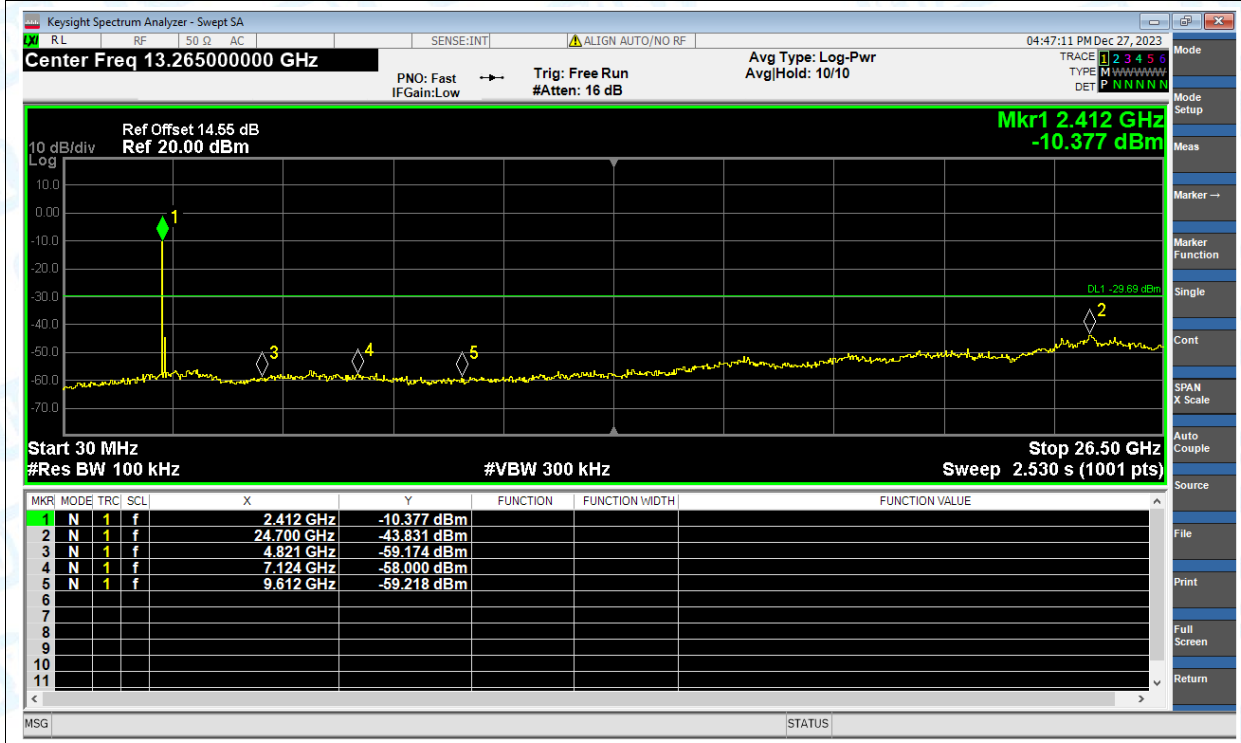


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Ref

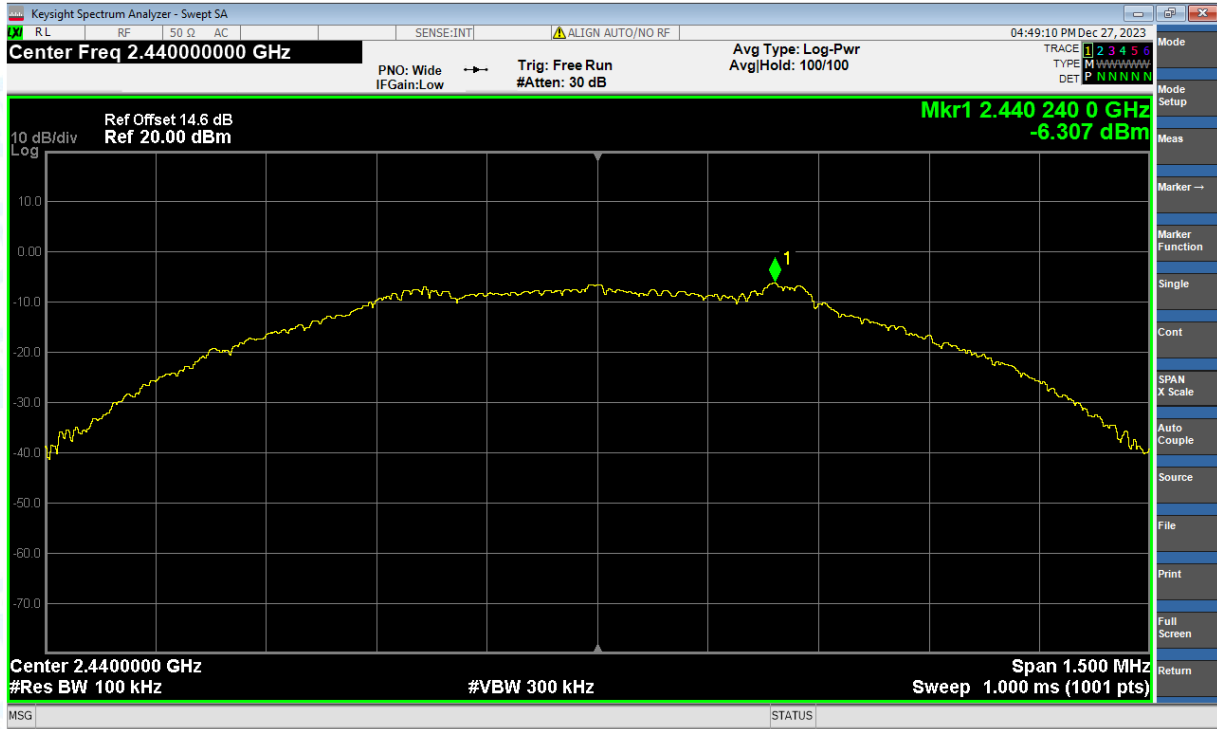


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Emission

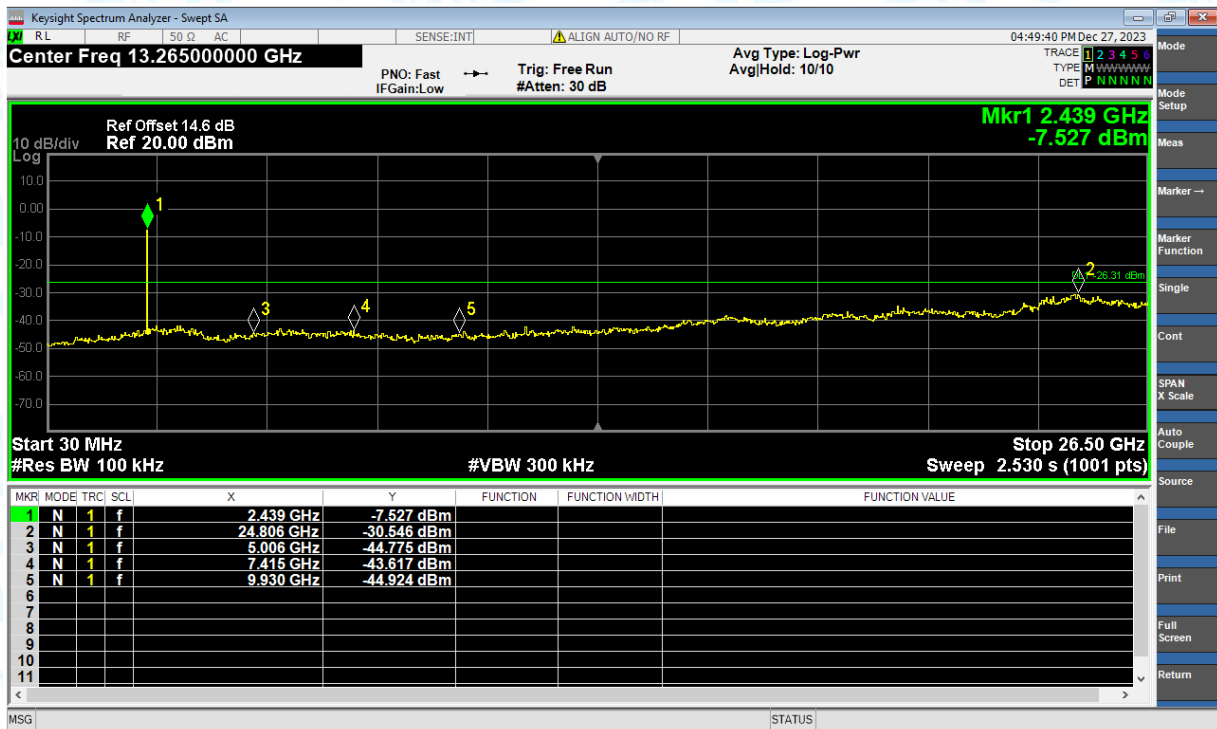

Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref

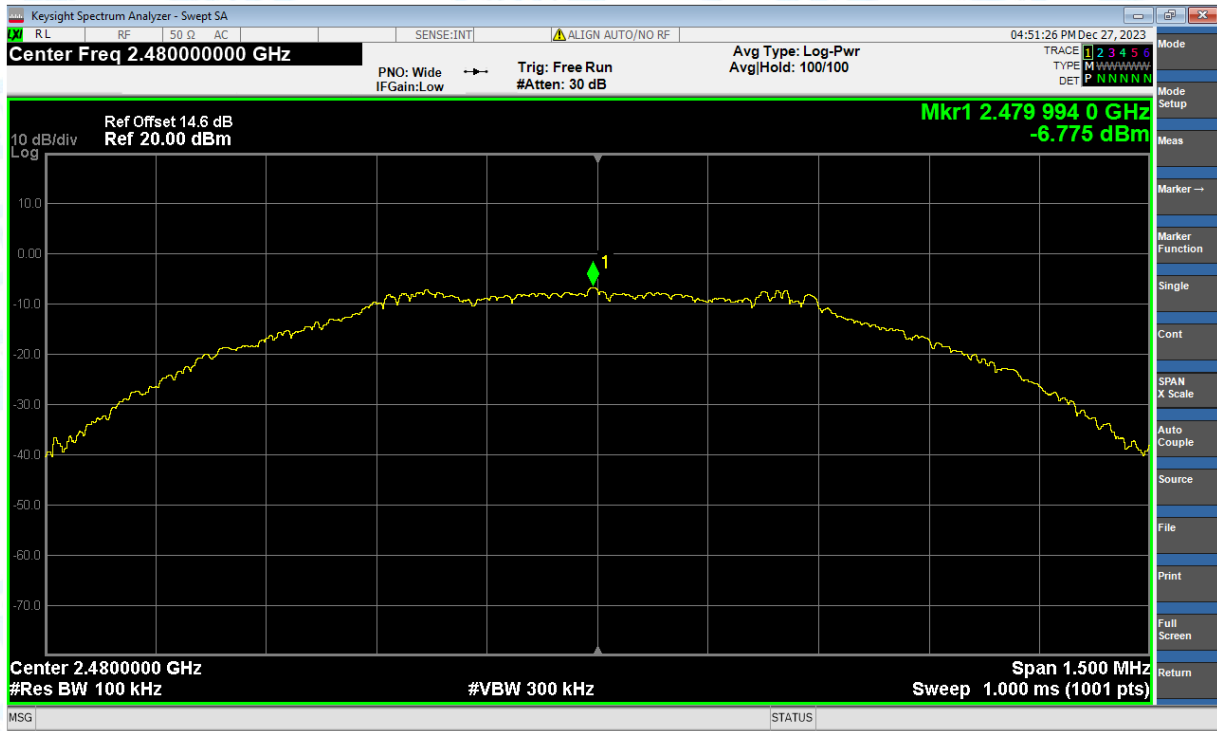


Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

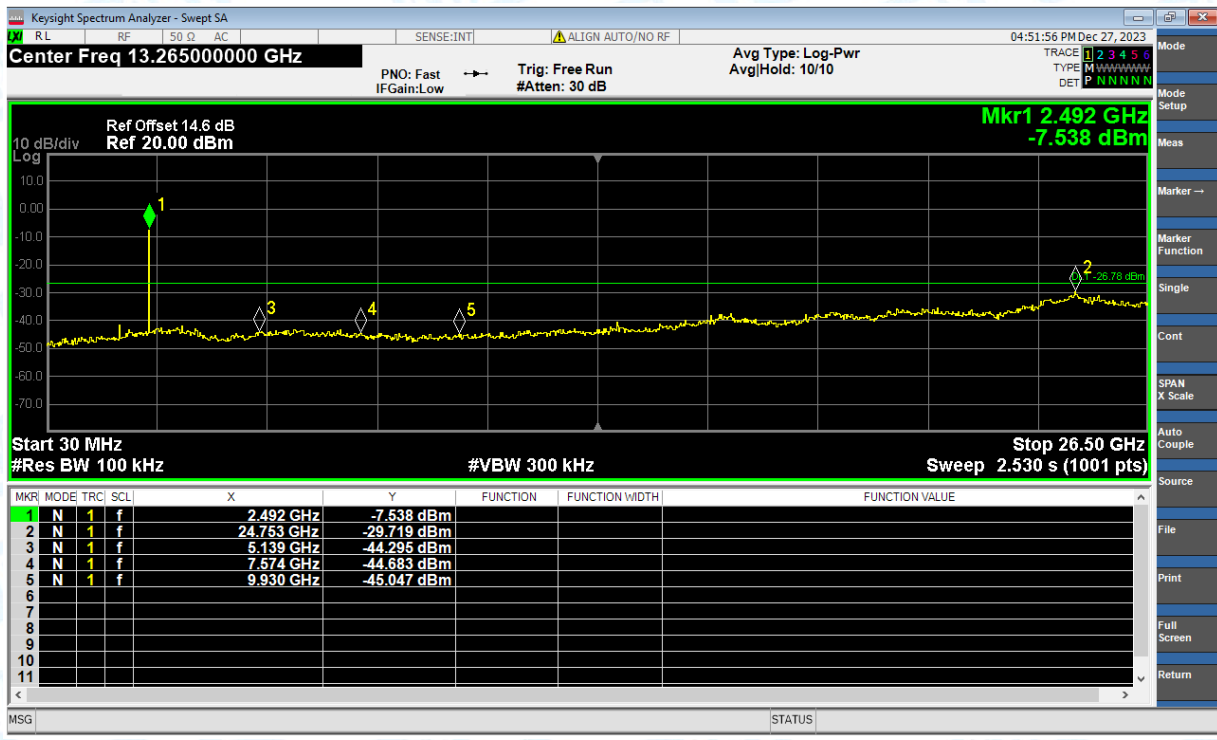


Tx. Spurious NVNT BLE 2Mbps 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2Mbps 2402MHz Ant1 Emission

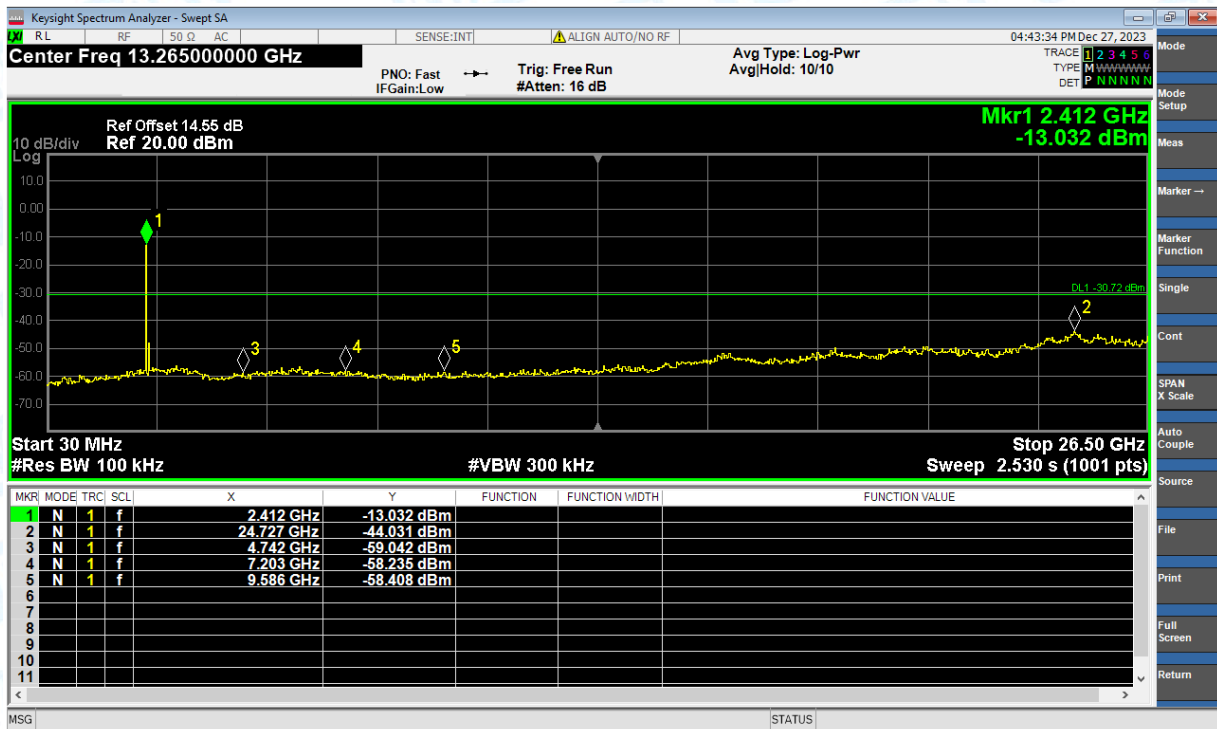


Tx. Spurious NVNT BLE 2Mbps 2440MHz Ant1 Ref

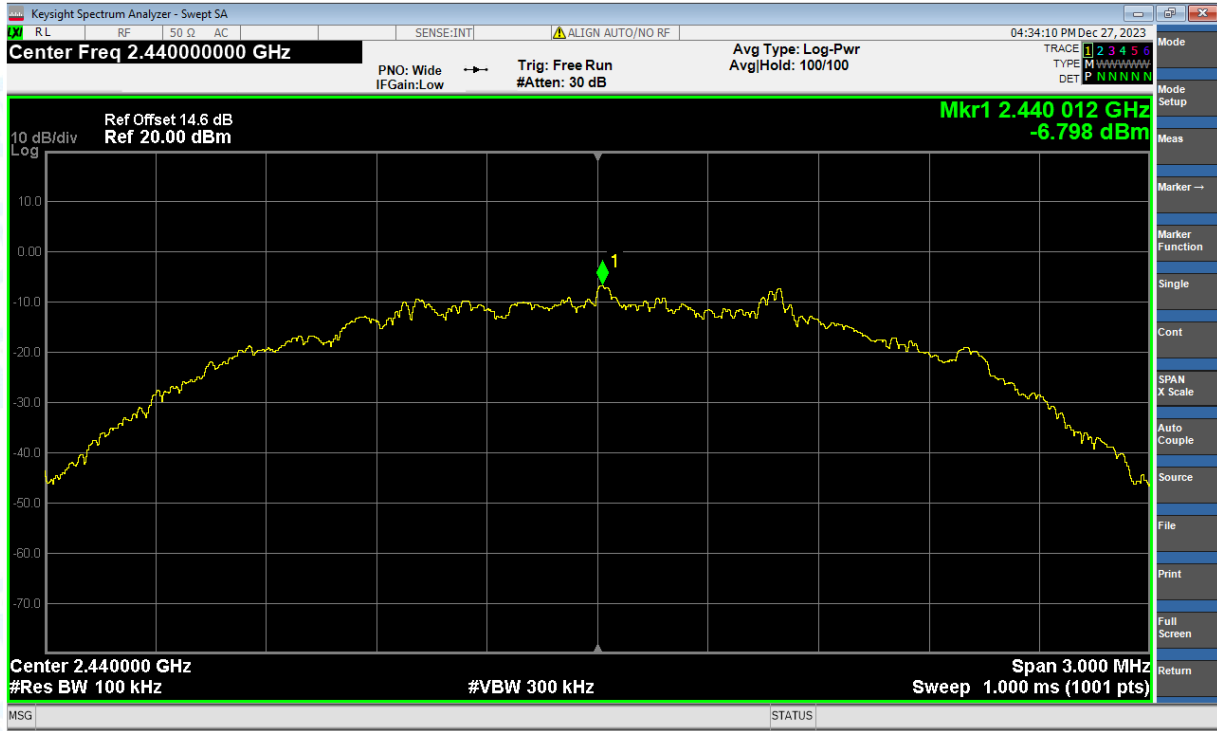


Tx. Spurious NVNT BLE 2Mbps 2440MHz Ant1 Emission

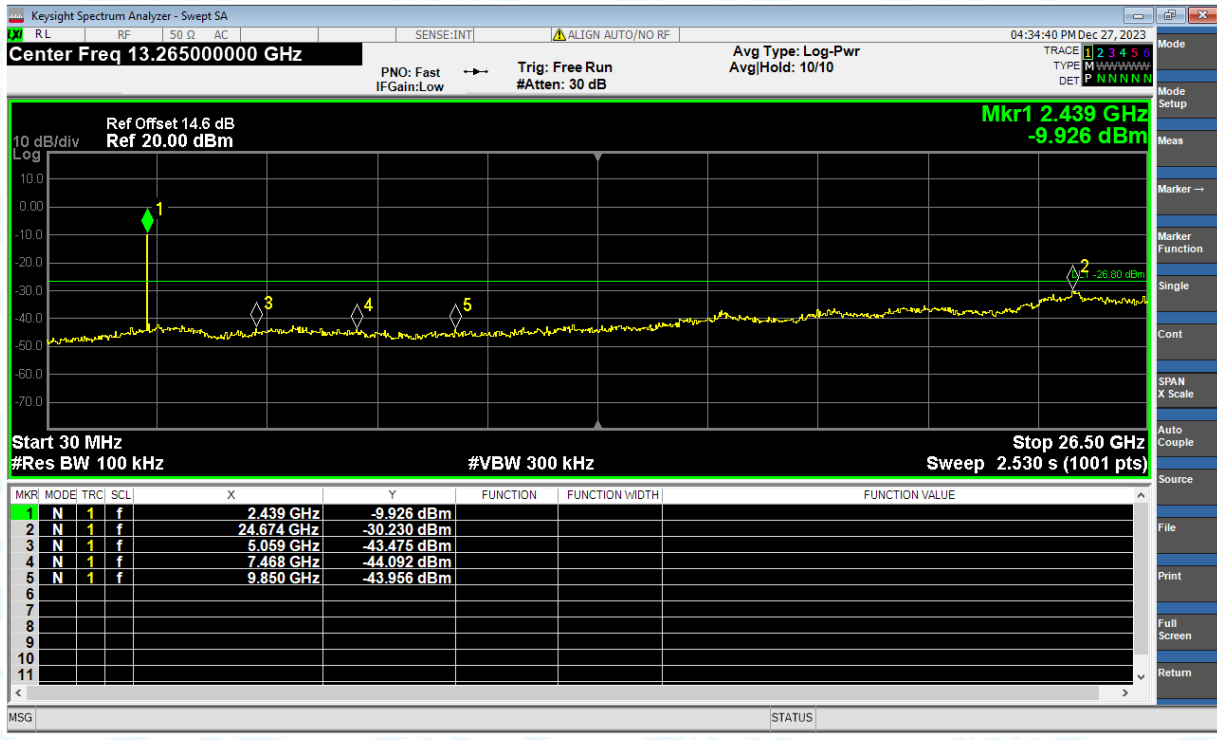

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Ref

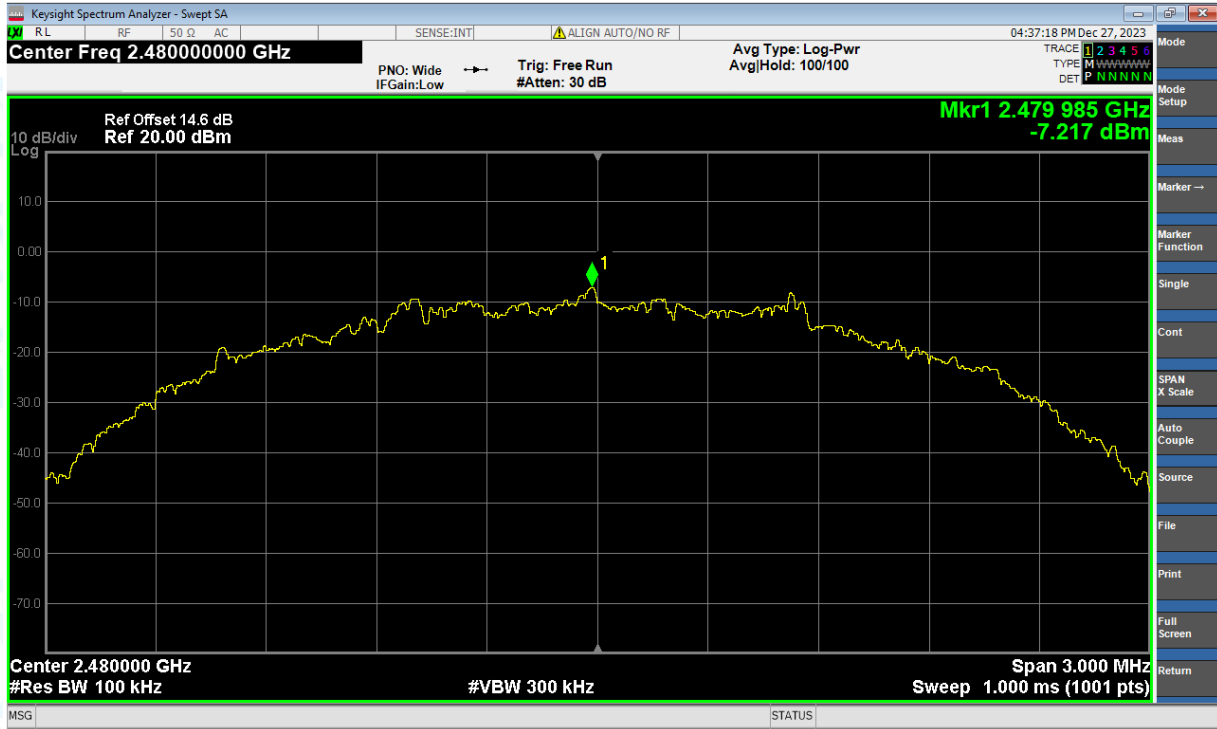

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Emission

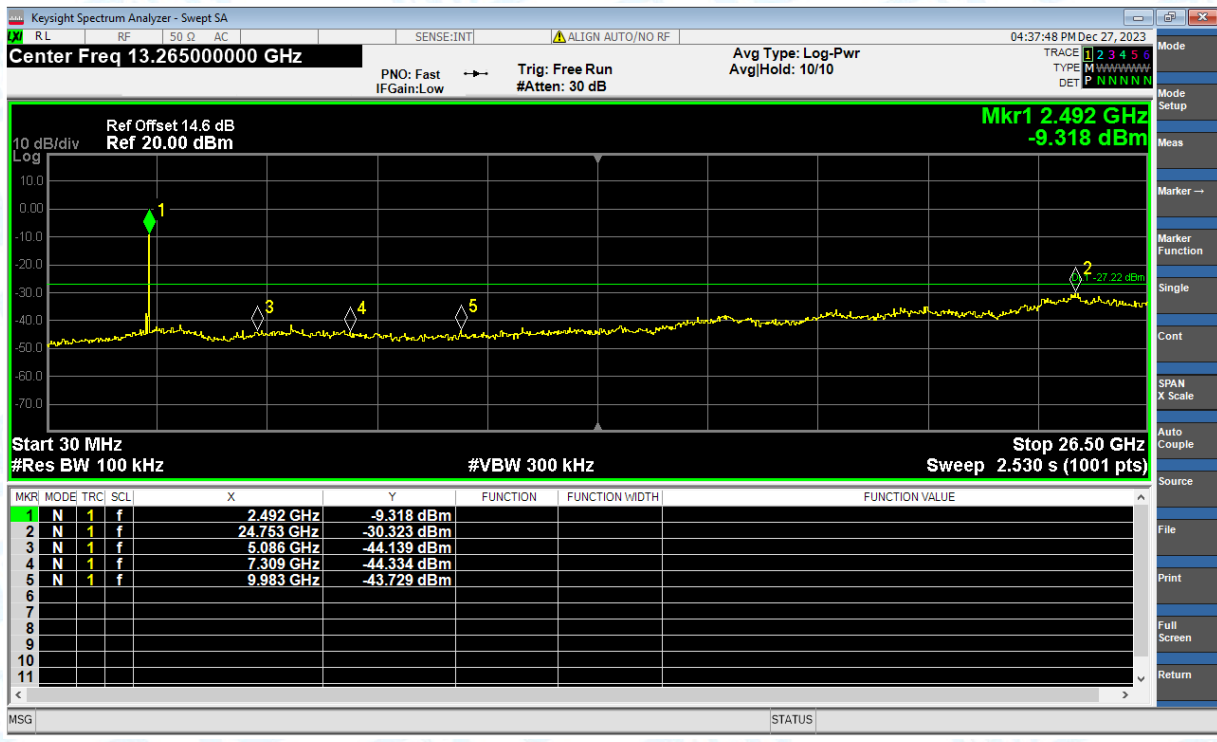


8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-52.99	2	-	44.27	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-59.76	2	0.7	38.2	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2364.528	-48.85	2	-	48.41	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2375.568	-57.31	2	0.7	40.65	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-52.48	2	-	44.78	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-60.25	2	0.7	37.71	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-51.51	2	-	45.75	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-59.75	2	0.72	38.23	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2497.168	-48.84	2	-	48.42	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2493.208	-56.83	2	0.72	41.15	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-51.59	2	-	45.67	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-59.49	2	0.72	38.49	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-52.53	2	-	44.73	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-59.67	2	2.42	40.01	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2327.376	-48.81	2	-	48.45	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2319.984	-57.25	2	2.42	42.43	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-51.97	2	-	45.29	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-62.06	2	2.42	37.62	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-51.66	2	-	45.6	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-59.33	2	2.42	40.35	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2486.92	-48.47	2	-	48.79	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2492.608	-57.15	2	2.42	42.53	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-50.6	2	-	46.66	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-60.53	2	2.42	39.15	Average	54	Pass

Test Graphs


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

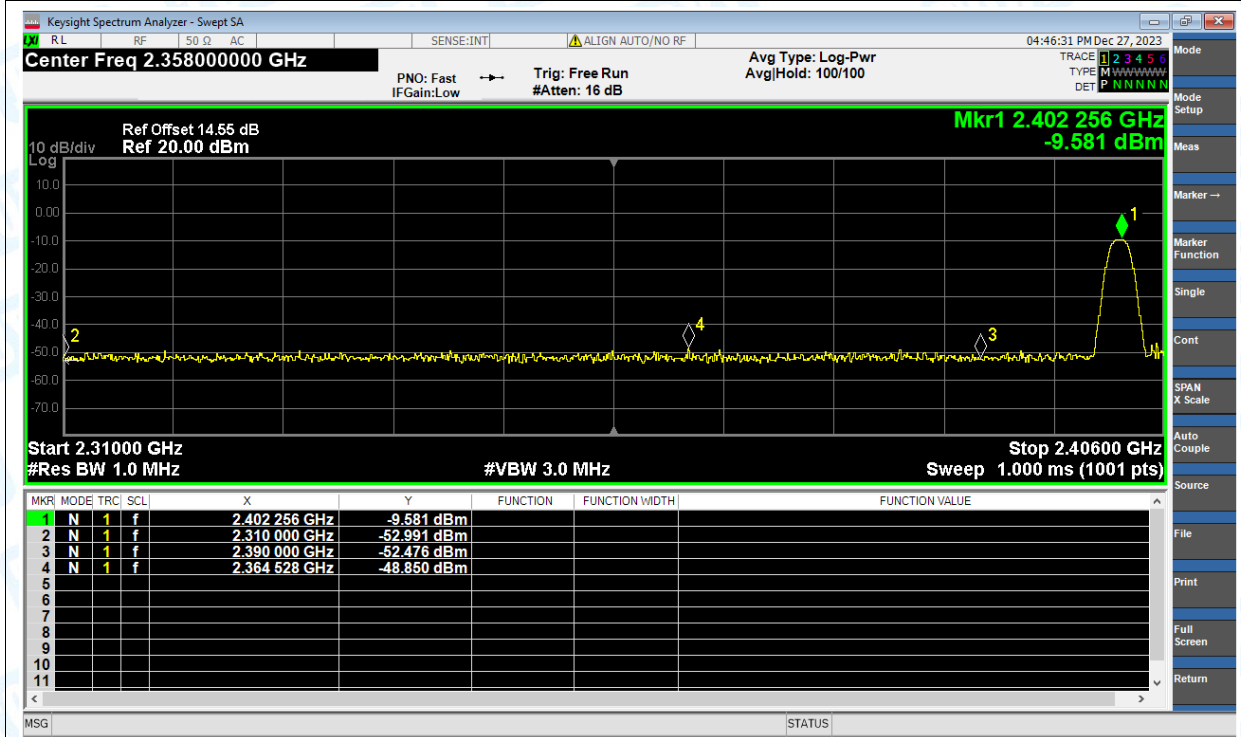


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

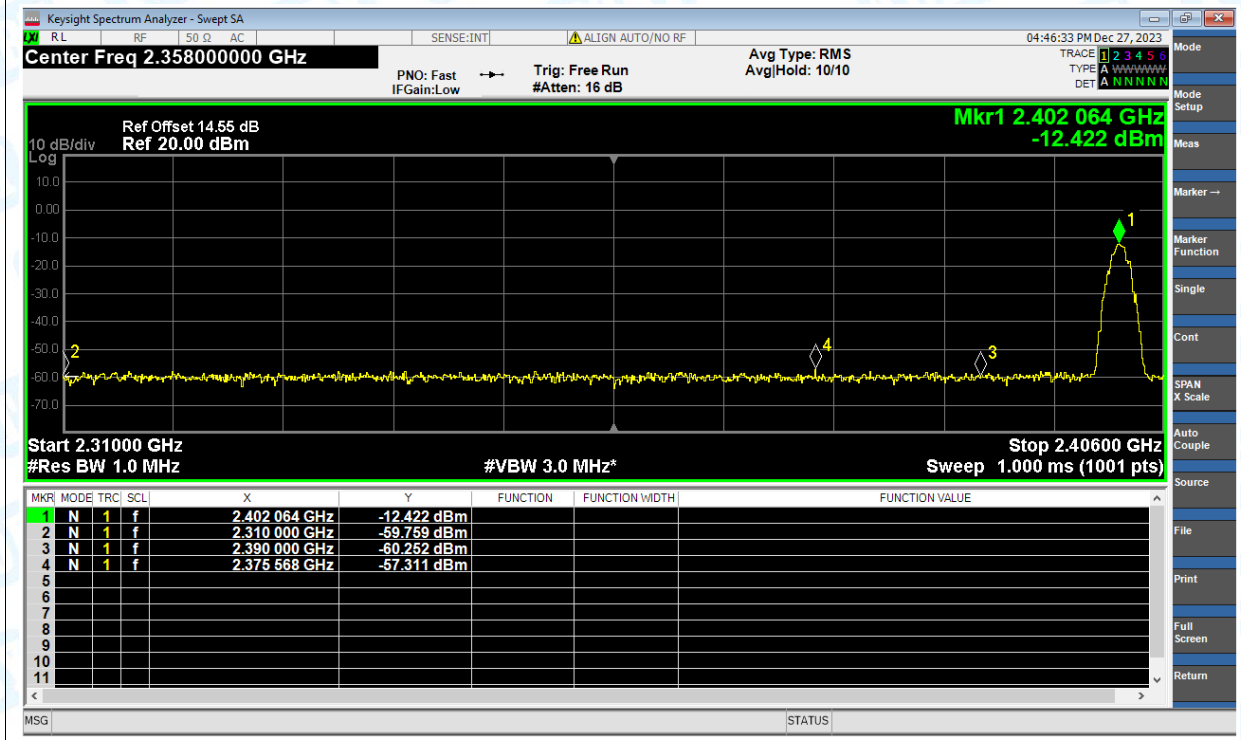


Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

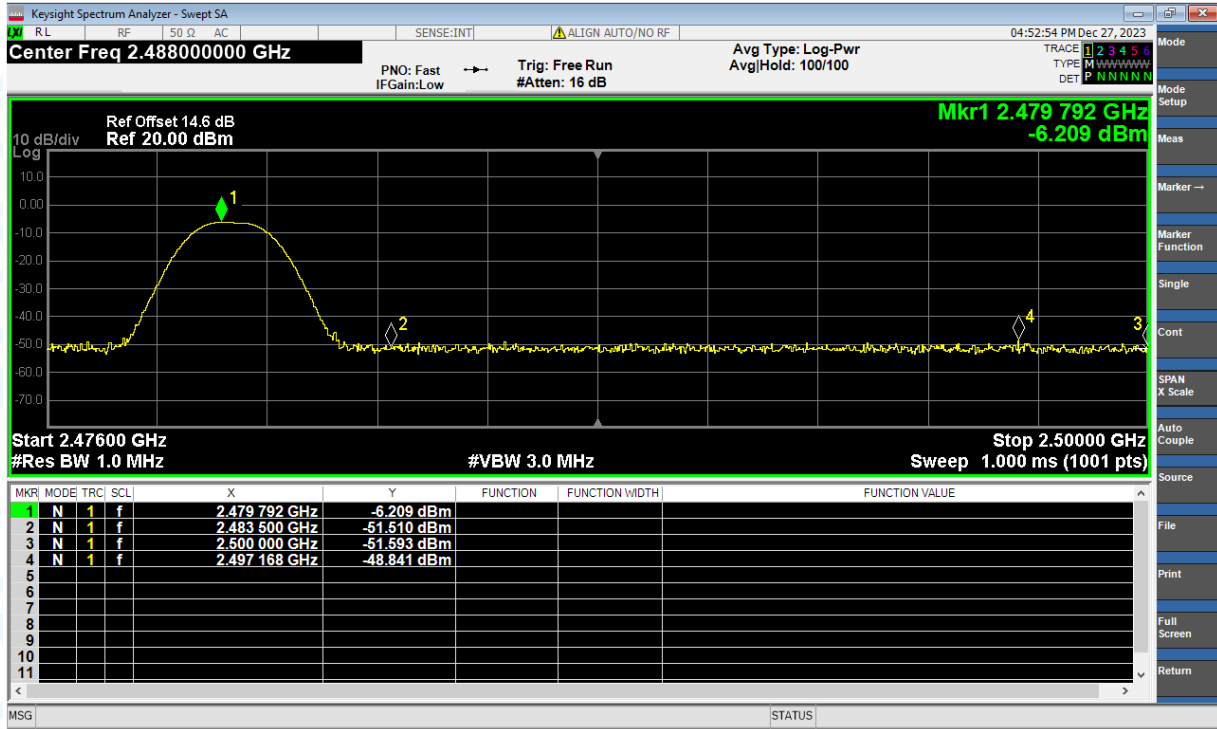


Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

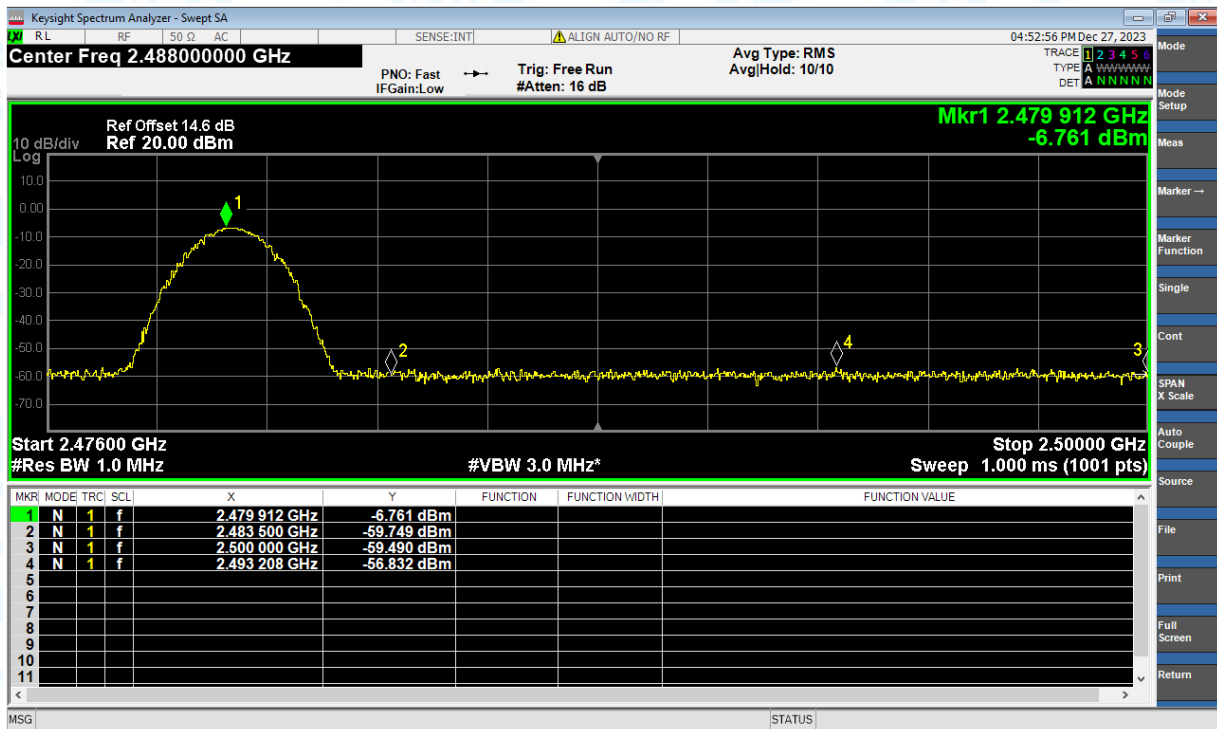


Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Peak

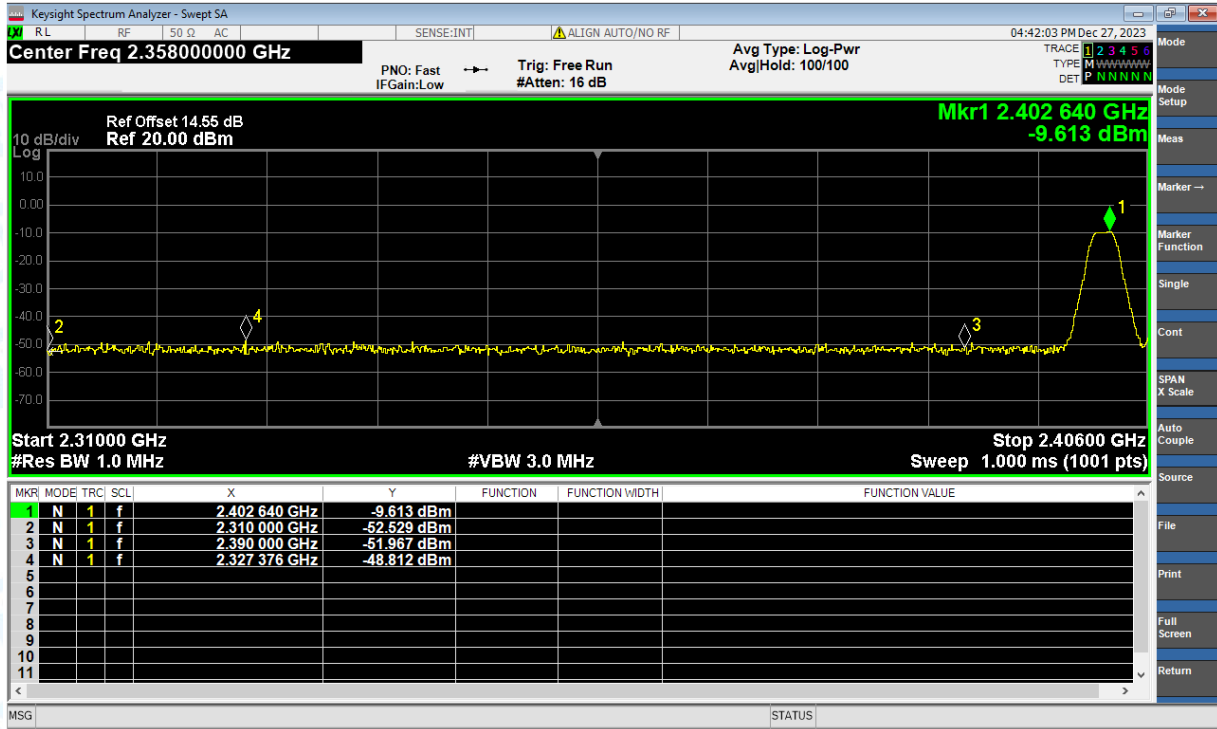


Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Average

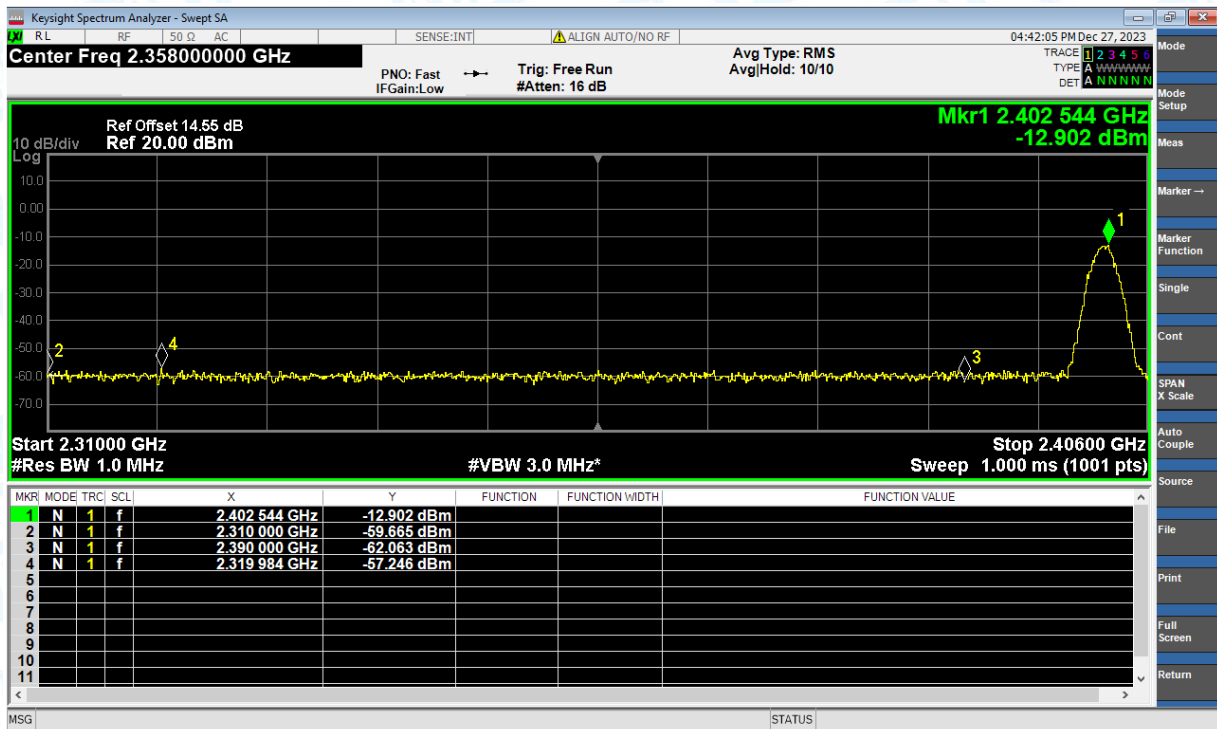

Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Peak

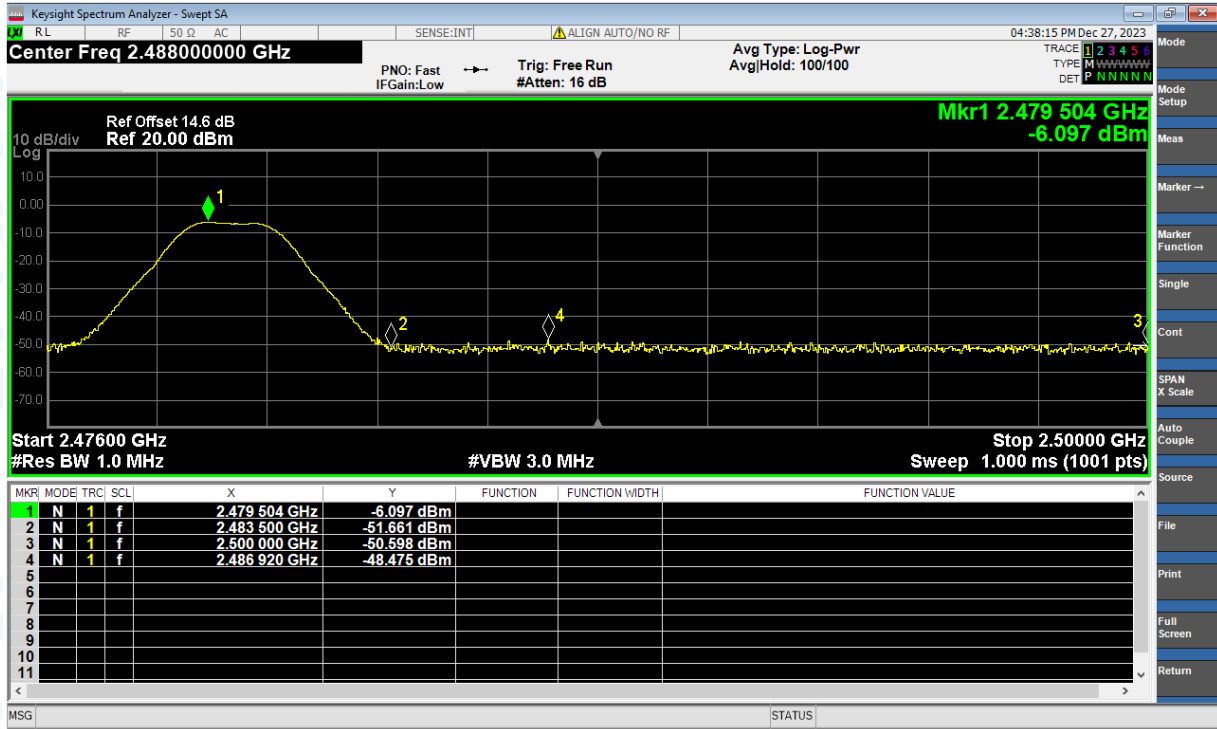

Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Average

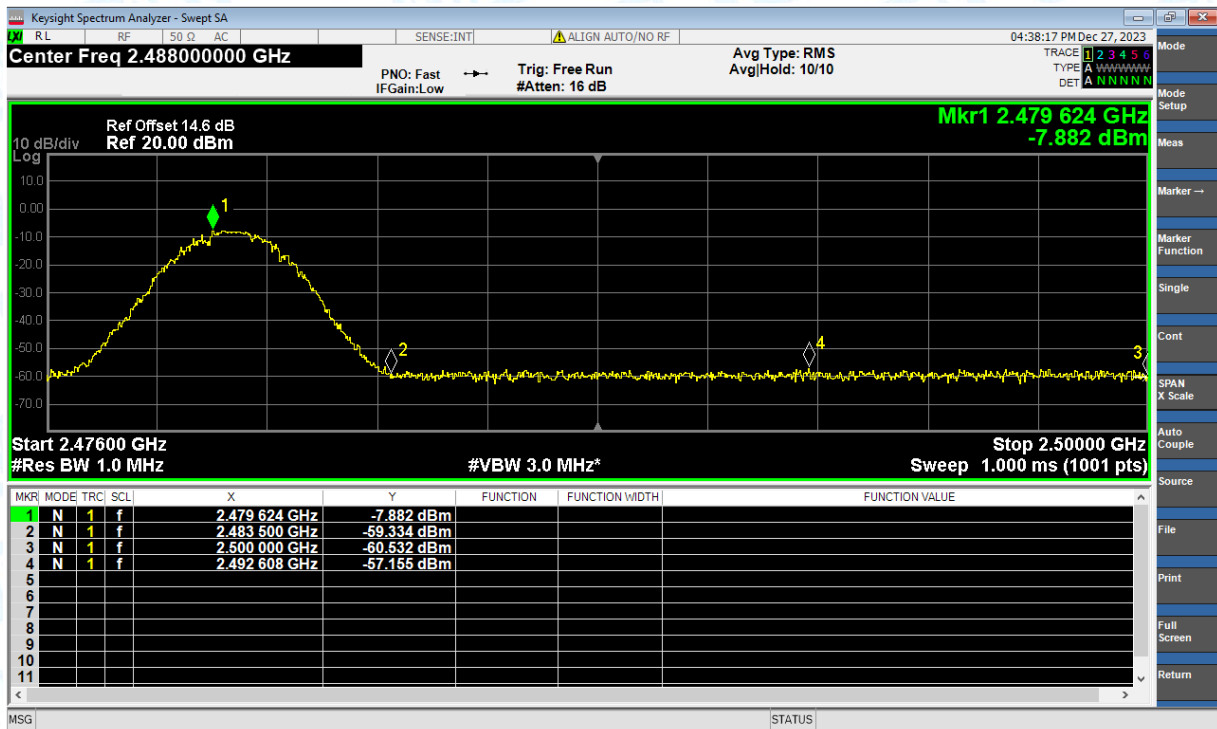

-----END OF THE REPORT-----