


Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2437MHz

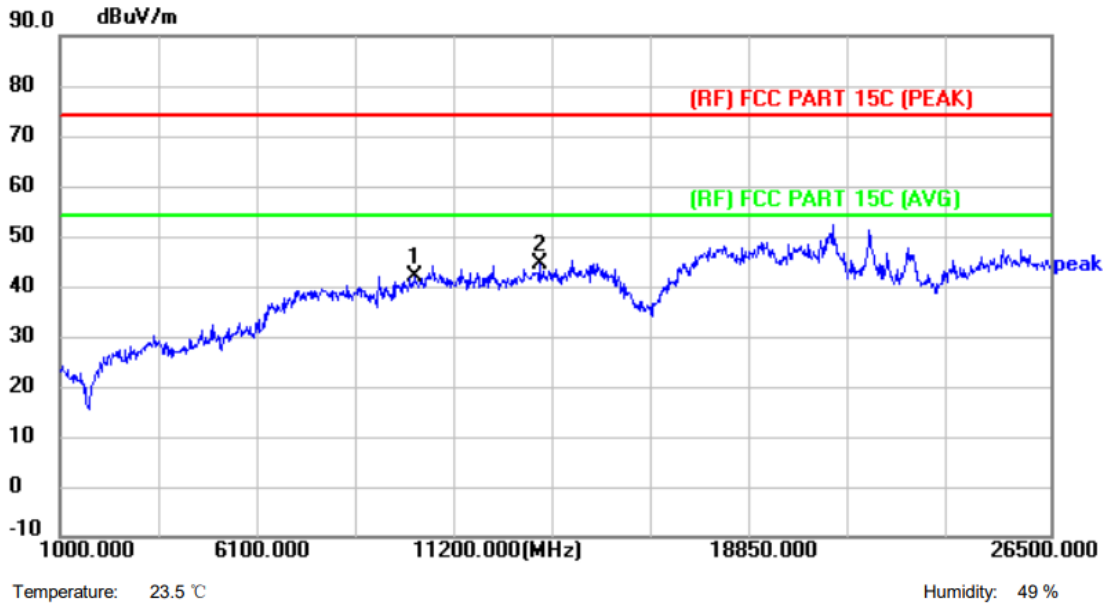


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10154.500	44.30	-2.49	41.81	74.00	-32.19	peak
2 *	13342.000	43.08	1.40	44.48	74.00	-29.52	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2462MHz

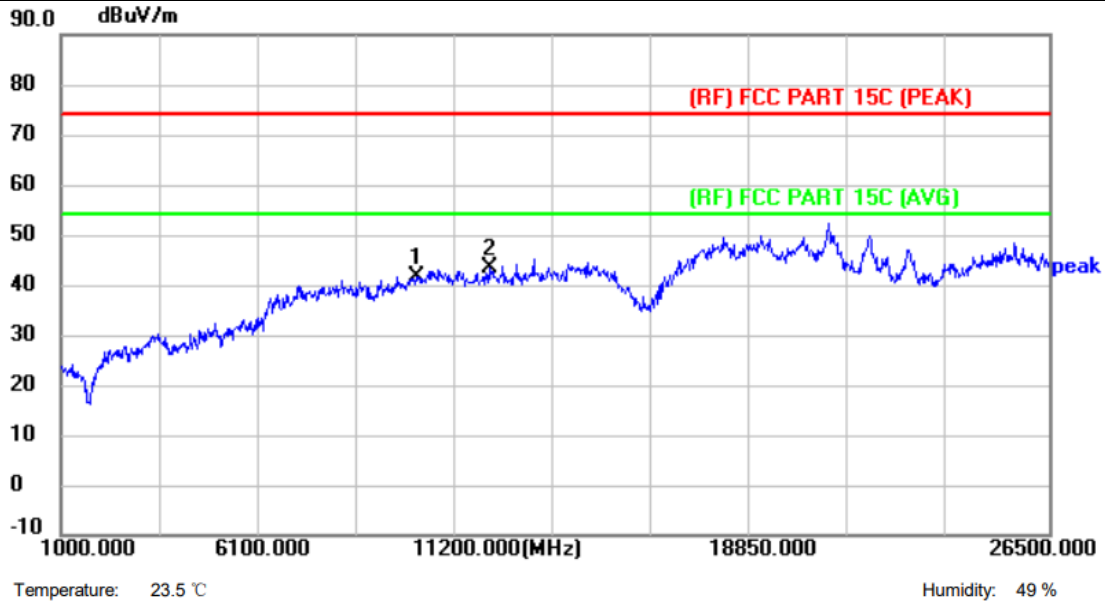


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10205.500	43.95	-2.44	41.51	74.00	-32.49	peak
2 *	12092.500	42.95	0.60	43.55	74.00	-30.45	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2462MHz

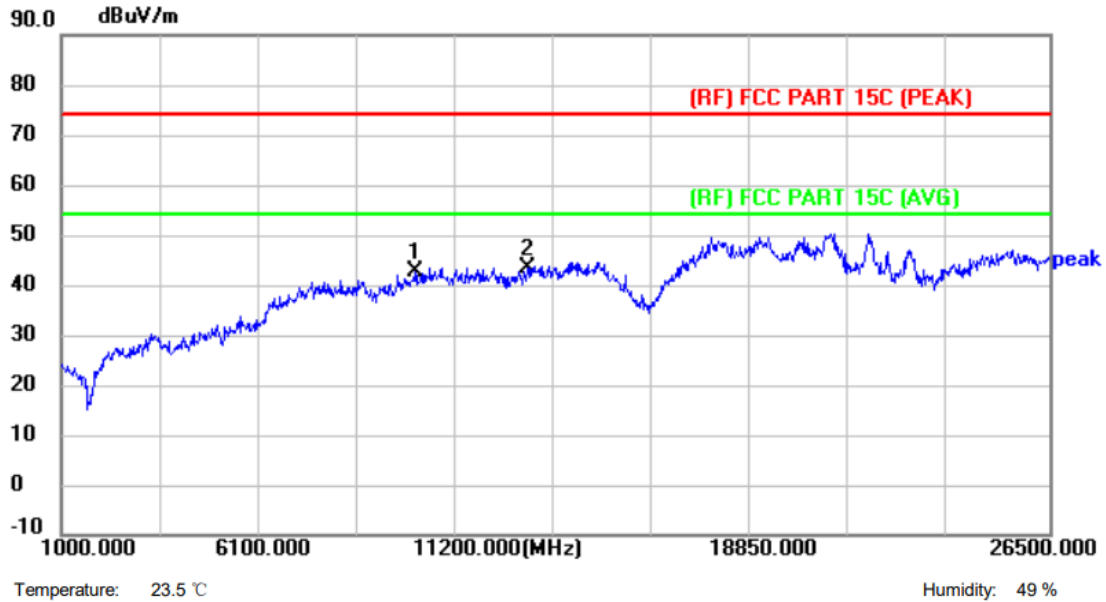


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10129.000	45.15	-2.53	42.62	74.00	-31.38	peak
2 *	13036.000	42.17	1.40	43.57	74.00	-30.43	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT20) Mode 2412MHz

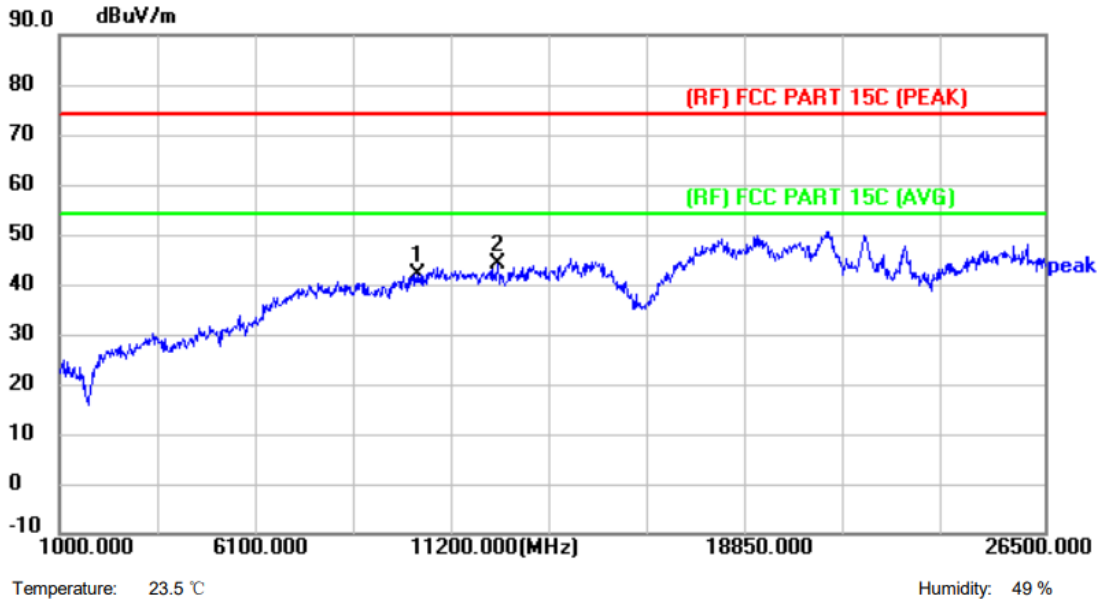


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10256.500	44.27	-2.27	42.00	74.00	-32.00	peak
2 *	12347.500	43.29	0.90	44.19	74.00	-29.81	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT20) Mode 2412MHz

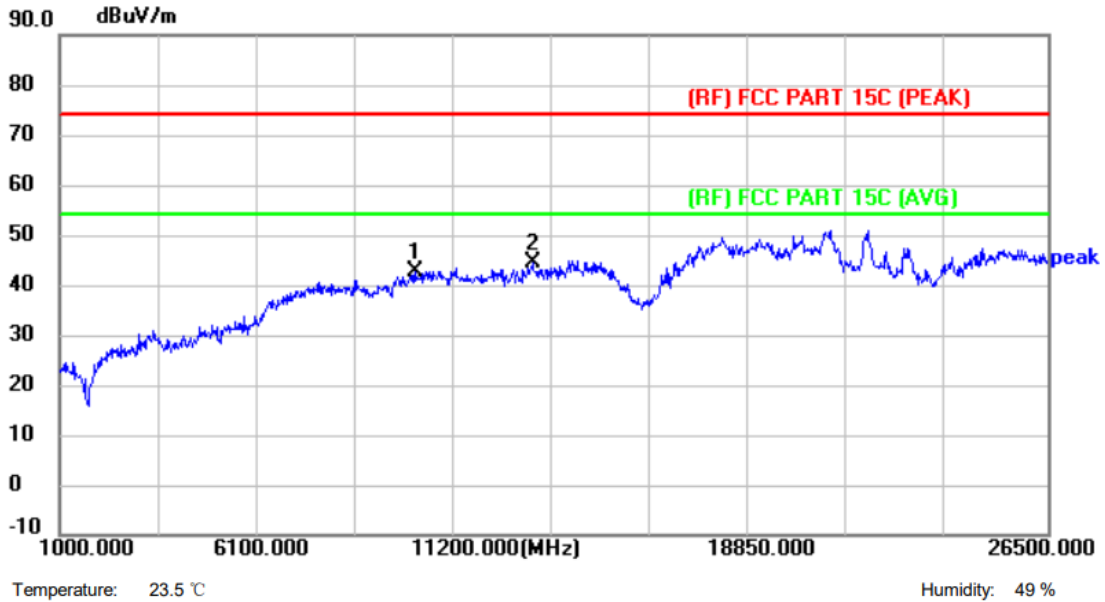


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10205.500	45.05	-2.44	42.61	74.00	-31.39	peak
2 *	13214.500	42.58	1.71	44.29	74.00	-29.71	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT20) Mode 2437MHz

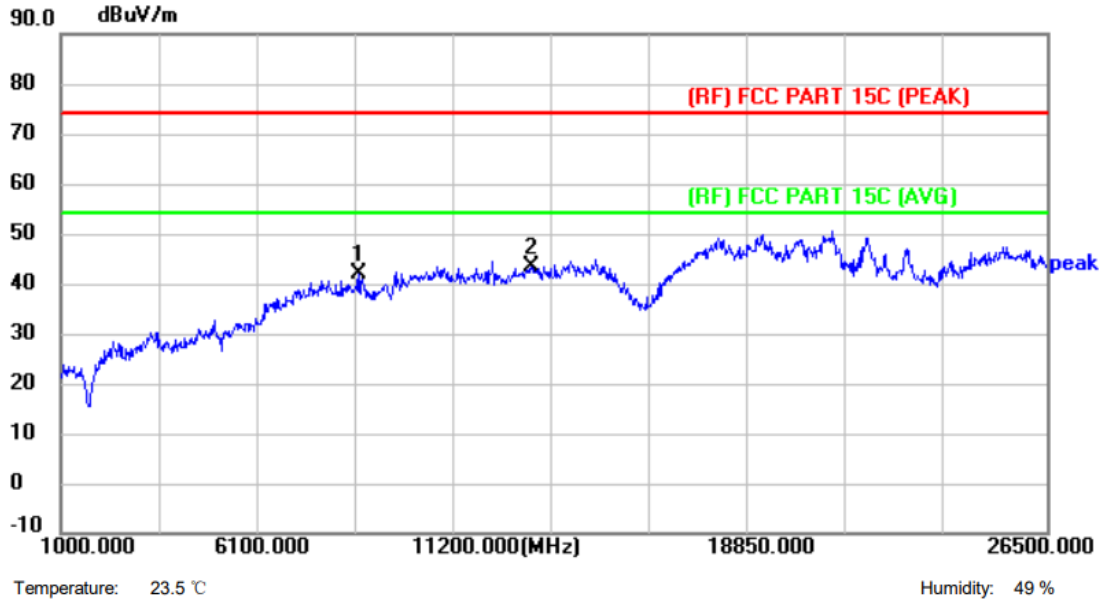


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8701.000	49.52	-7.67	41.85	74.00	-32.15	peak
2 *	13163.500	41.96	1.56	43.52	74.00	-30.48	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT20) Mode 2437MHz

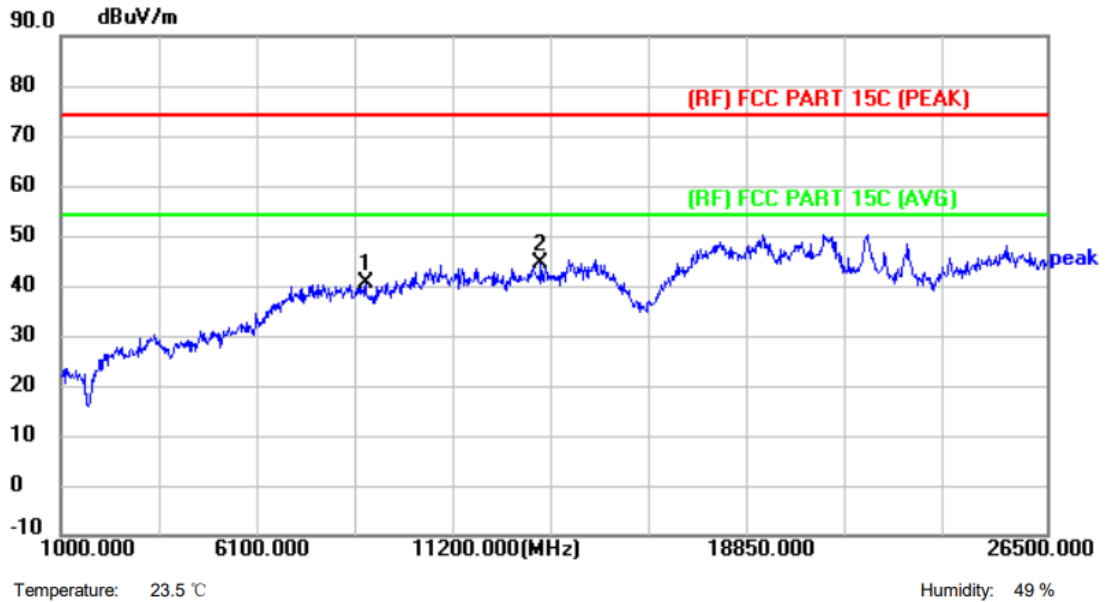


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8879.500	48.32	-7.84	40.48	74.00	-33.52	peak
2 *	13418.500	43.17	1.24	44.41	74.00	-29.59	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT20) Mode 2462MHz

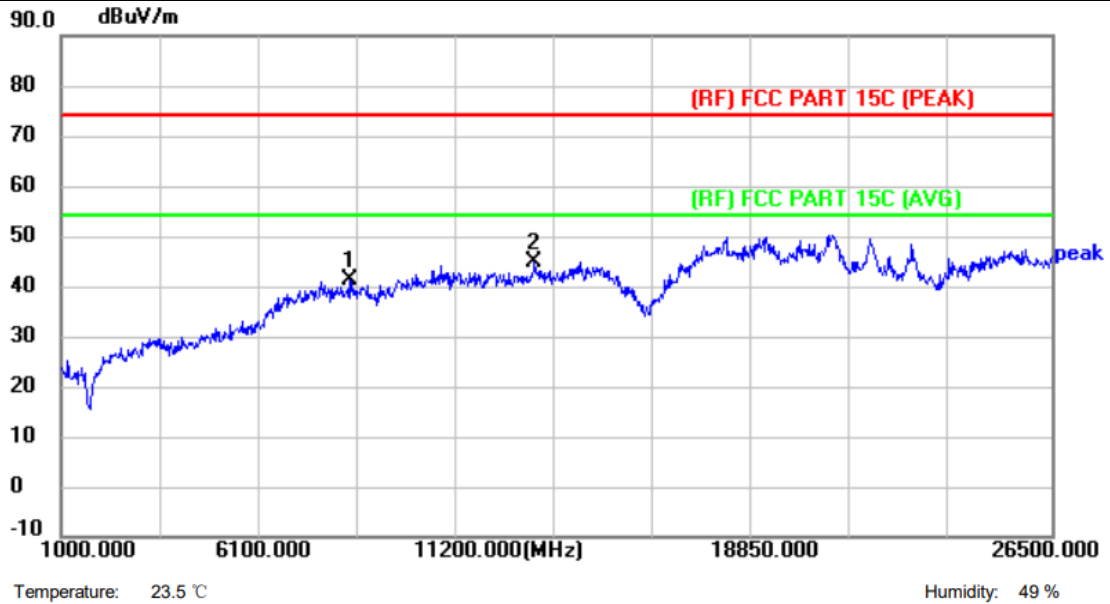


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8420.500	49.13	-7.93	41.20	74.00	-32.80	peak
2 *	13189.000	43.02	1.70	44.72	74.00	-29.28	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT20) Mode 2462MHz

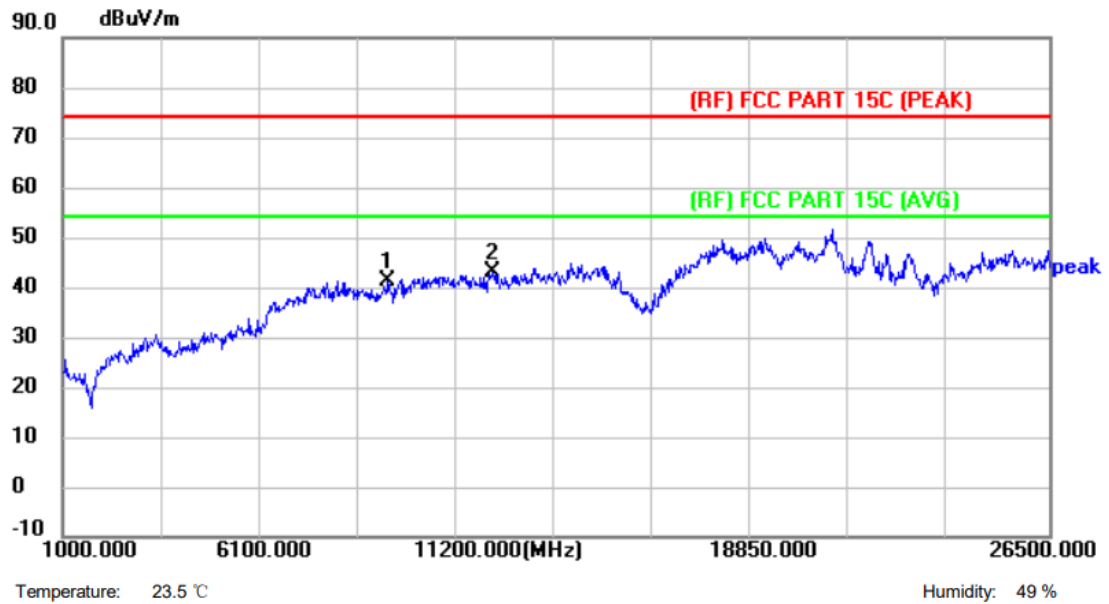


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	9415.000	46.75	-5.42	41.33	74.00	-32.67	peak
2 *	12118.000	42.39	0.60	42.99	74.00	-31.01	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT40) Mode 2422MHz

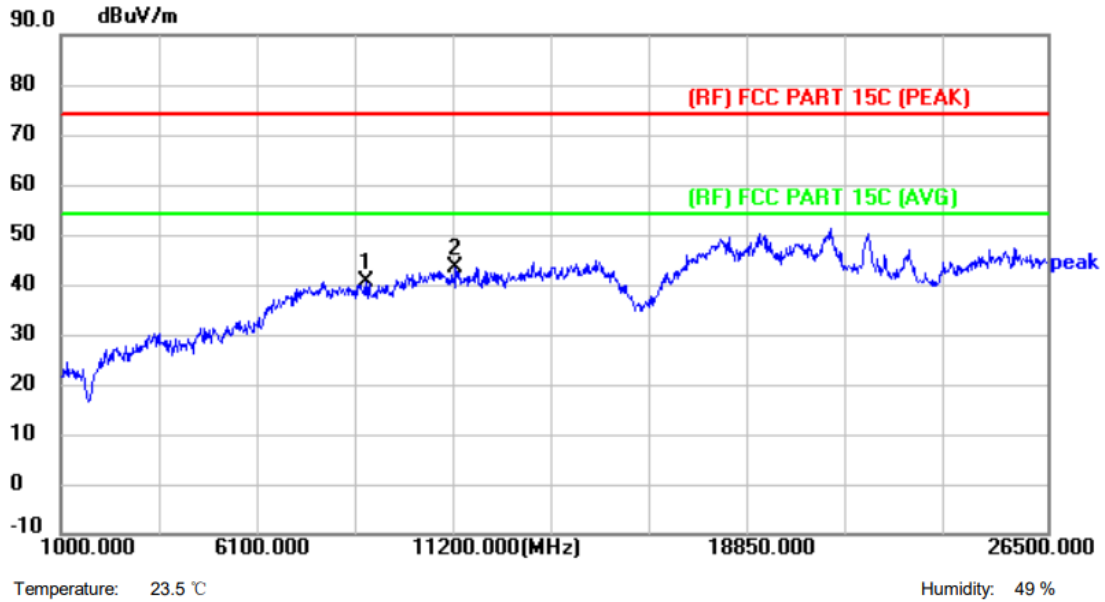


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8879.500	48.34	-7.84	40.50	74.00	-33.50	peak
2 *	11200.000	44.04	-0.54	43.50	74.00	-30.50	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT40) Mode 2422MHz

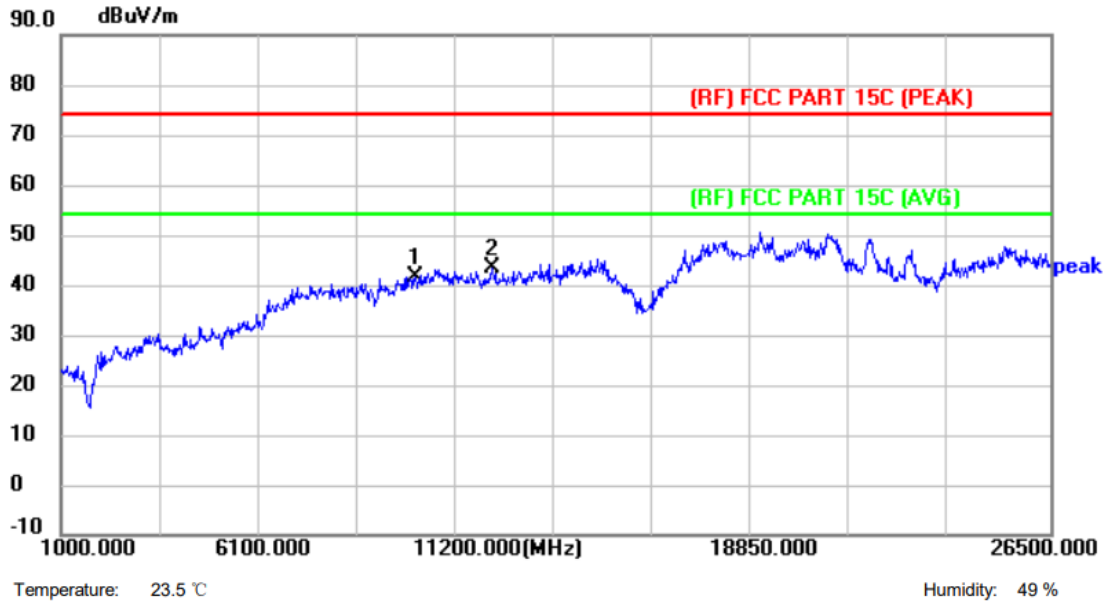


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10154.500	44.22	-2.49	41.73	74.00	-32.27	peak
2 *	12118.000	42.68	0.60	43.28	74.00	-30.72	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT40) Mode 2437MHz

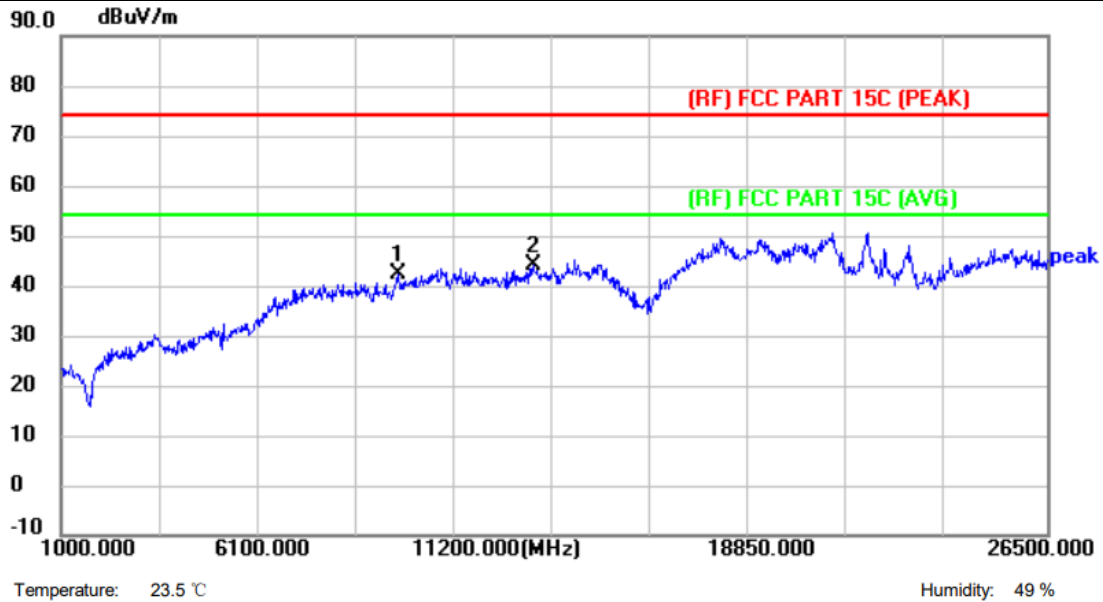


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	9721.000	46.29	-4.06	42.23	74.00	-31.77	peak
2 *	13214.500	42.24	1.71	43.95	74.00	-30.05	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT40) Mode 2437MHz

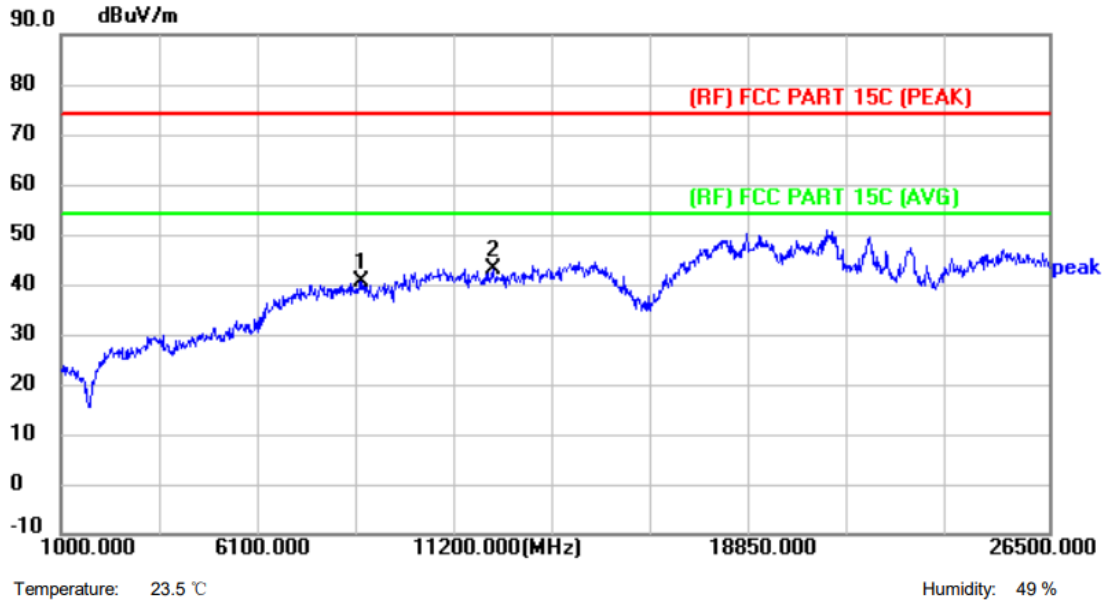


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8752.000	48.26	-7.61	40.65	74.00	-33.35	peak
2 *	12143.500	42.32	0.56	42.88	74.00	-31.12	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT40) Mode 2452MHz

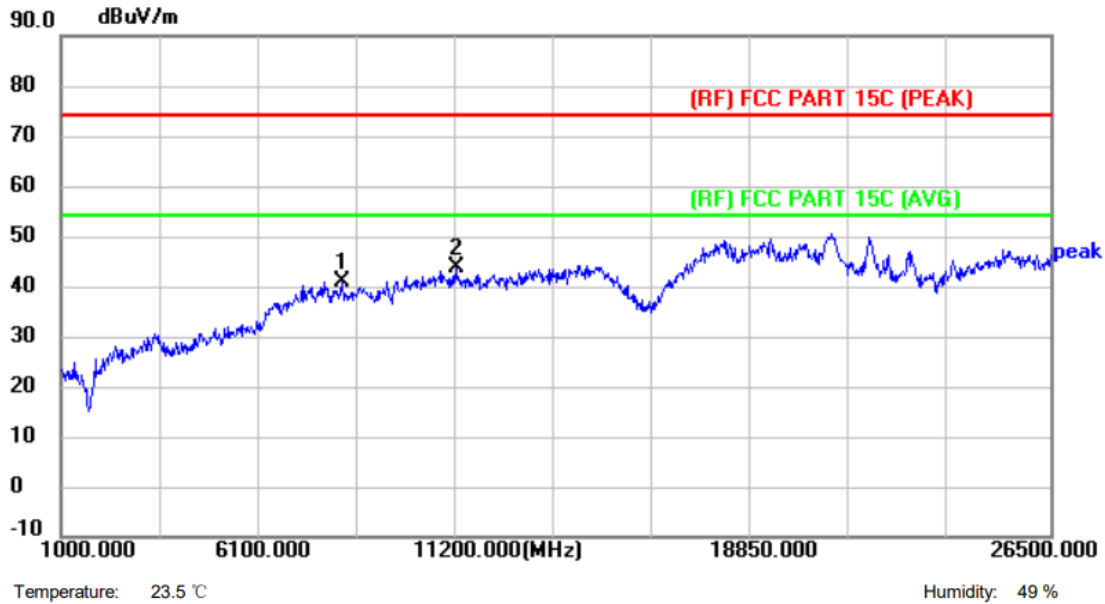


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8242.000	49.17	-8.19	40.98	74.00	-33.02	peak
2 *	11174.500	44.35	-0.58	43.77	74.00	-30.23	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT40) Mode 2452MHz

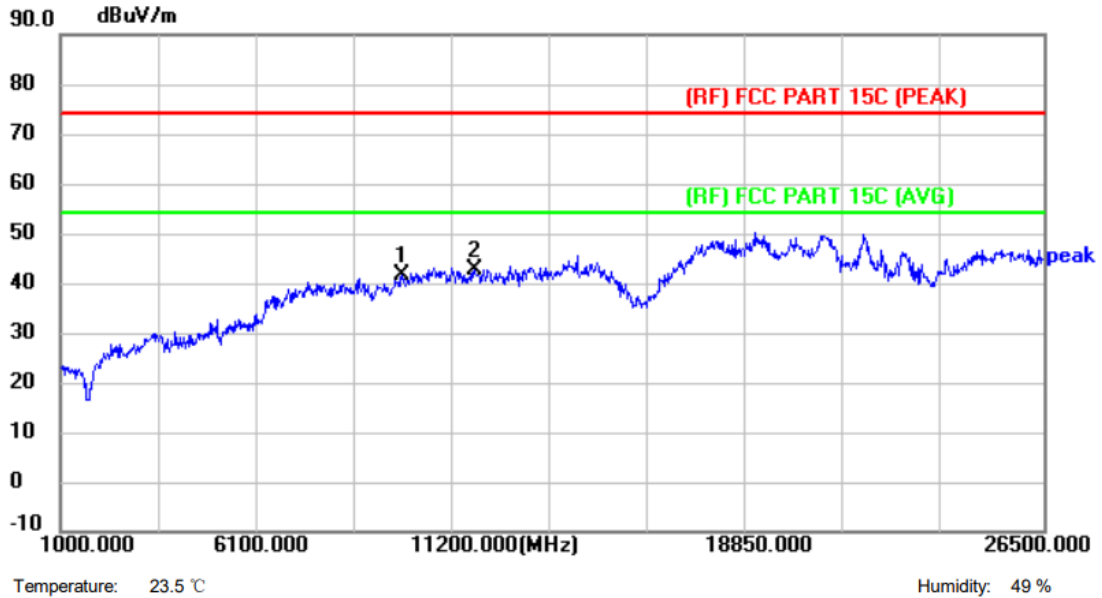


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	9874.000	45.20	-3.43	41.77	74.00	-32.23	peak
2 *	11735.500	42.34	0.30	42.64	74.00	-31.36	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

External antenna

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2412MHz

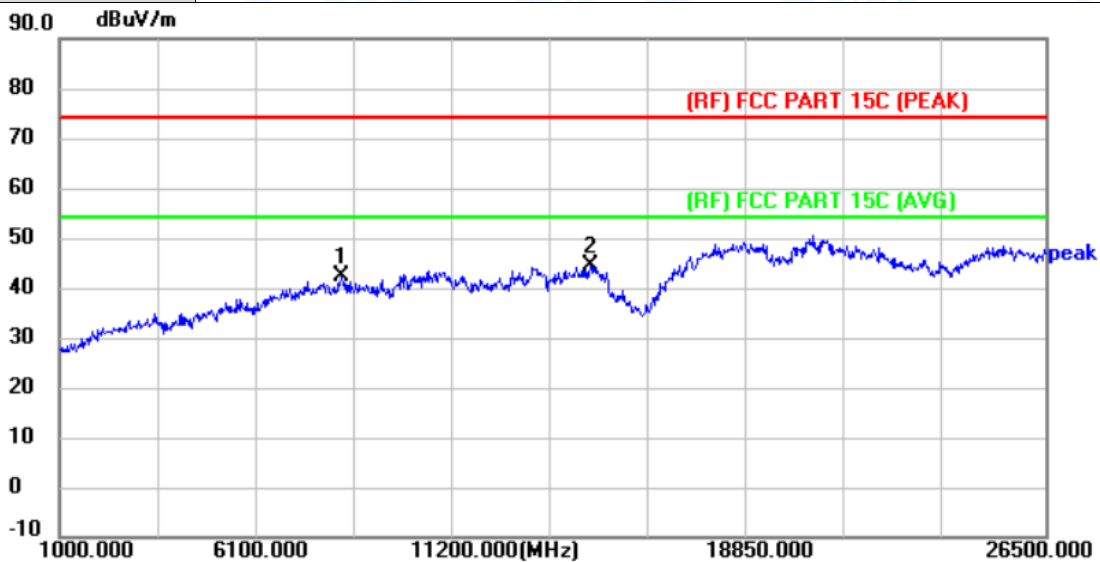

Temperature: 23.5 °C


Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8318.500	49.07	-6.89	42.18	74.00	-31.82	peak
2 *	14719.000	41.11	3.36	44.47	74.00	-29.53	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2412MHz

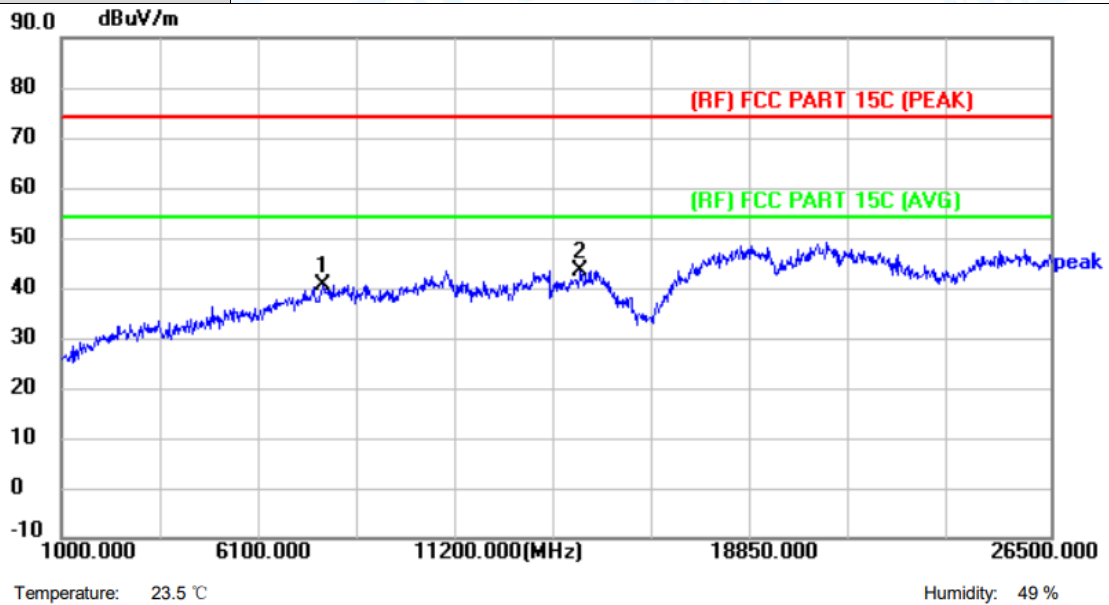


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	7757.500	48.09	-7.64	40.45	74.00	-33.55	peak
2 *	14387.500	40.47	3.02	43.49	74.00	-30.51	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2437MHz

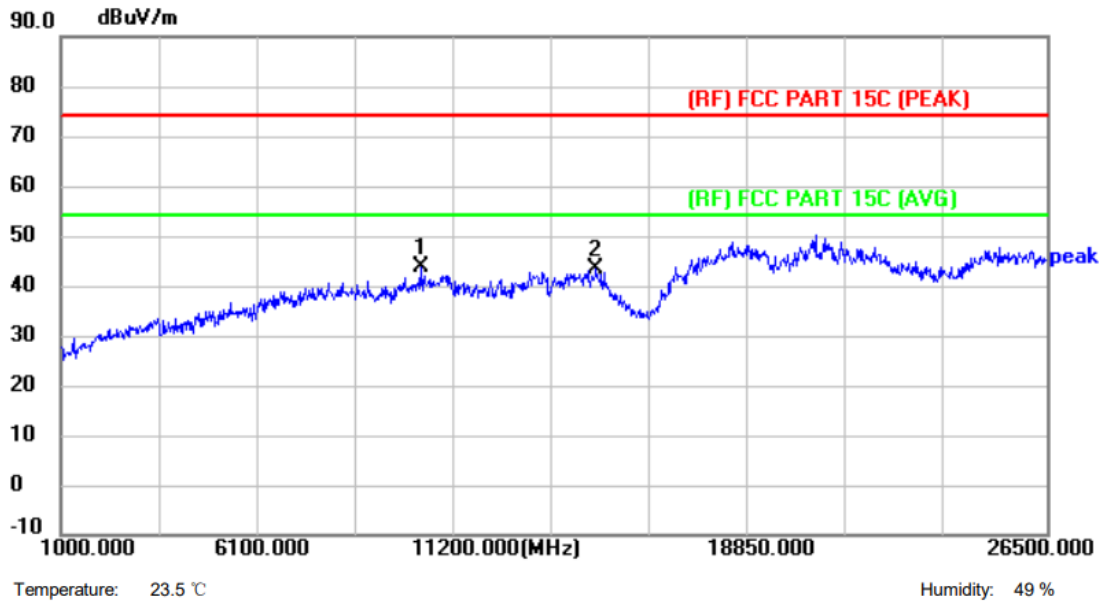


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10307.500	45.35	-1.54	43.81	74.00	-30.19	peak
2	14846.500	39.77	3.50	43.27	74.00	-30.73	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2437MHz

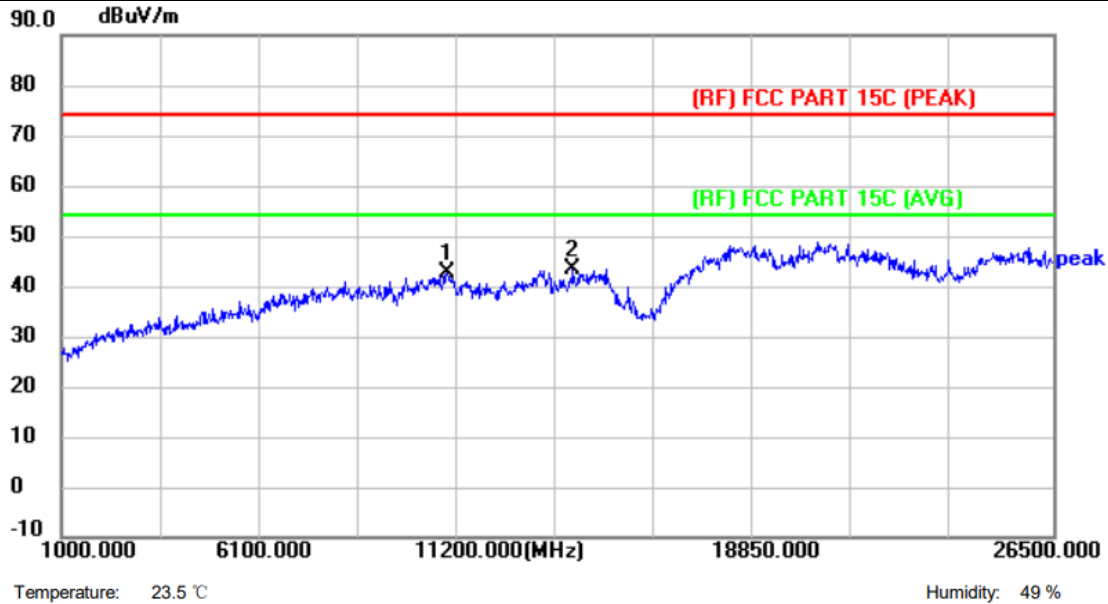


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10919.500	42.93	-0.13	42.80	74.00	-31.20	peak
2 *	14158.000	40.49	2.78	43.27	74.00	-30.73	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2462MHz

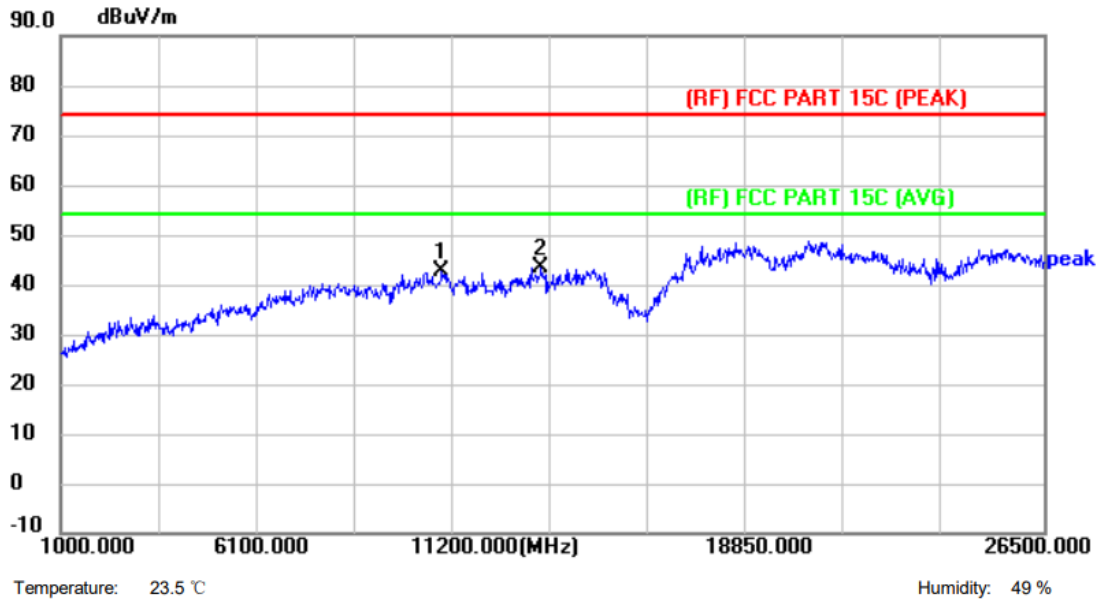


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10894.000	42.88	-0.19	42.69	74.00	-31.31	peak
2 *	13469.500	41.39	2.16	43.55	74.00	-30.45	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2462MHz

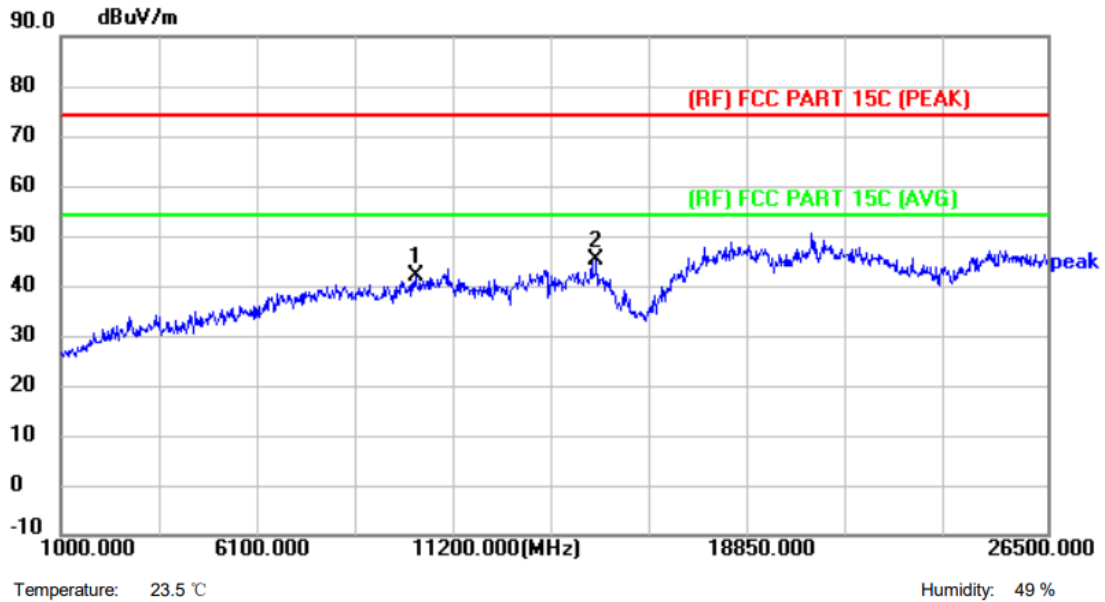


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10180.000	43.74	-1.83	41.91	74.00	-32.09	peak
2 *	14846.500	41.52	3.50	45.02	74.00	-28.98	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2412MHz

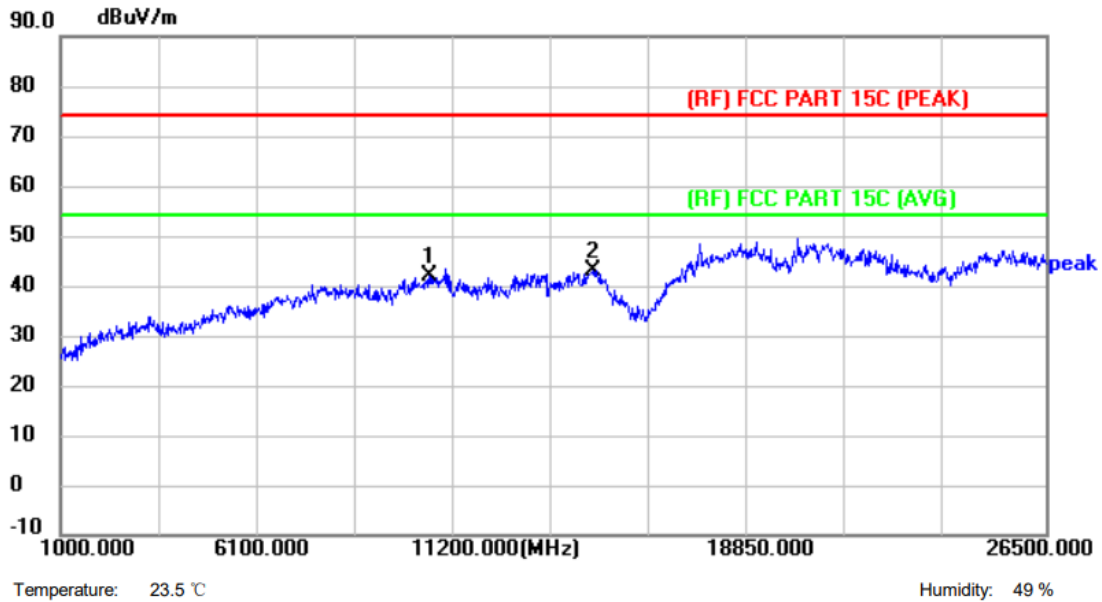


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10562.500	42.95	-0.96	41.99	74.00	-32.01	peak
2 *	14770.000	39.58	3.42	43.00	74.00	-31.00	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2412MHz

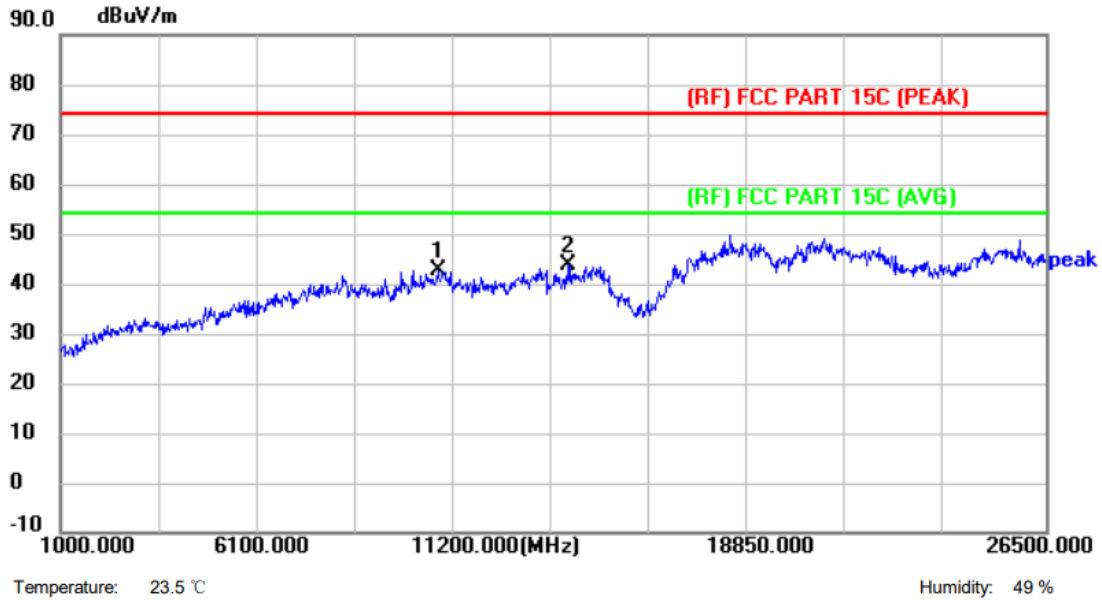


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10766.500	43.15	-0.48	42.67	74.00	-31.33	peak
2 *	14158.000	40.90	2.78	43.68	74.00	-30.32	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2437MHz

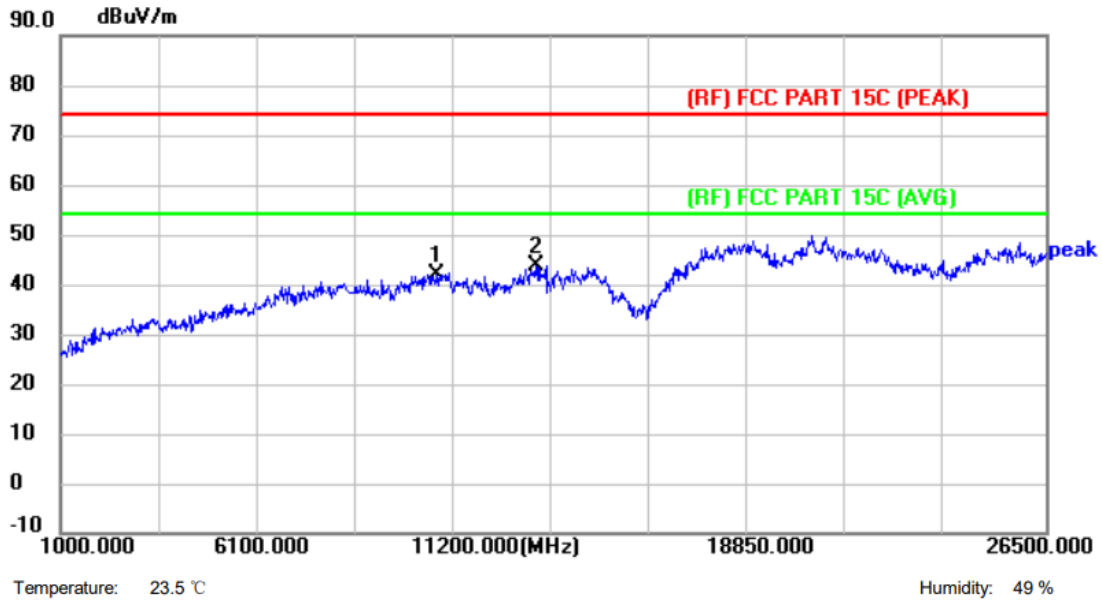


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10715.500	42.46	-0.60	41.86	74.00	-32.14	peak
2 *	13291.000	41.75	2.00	43.75	74.00	-30.25	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2437MHz

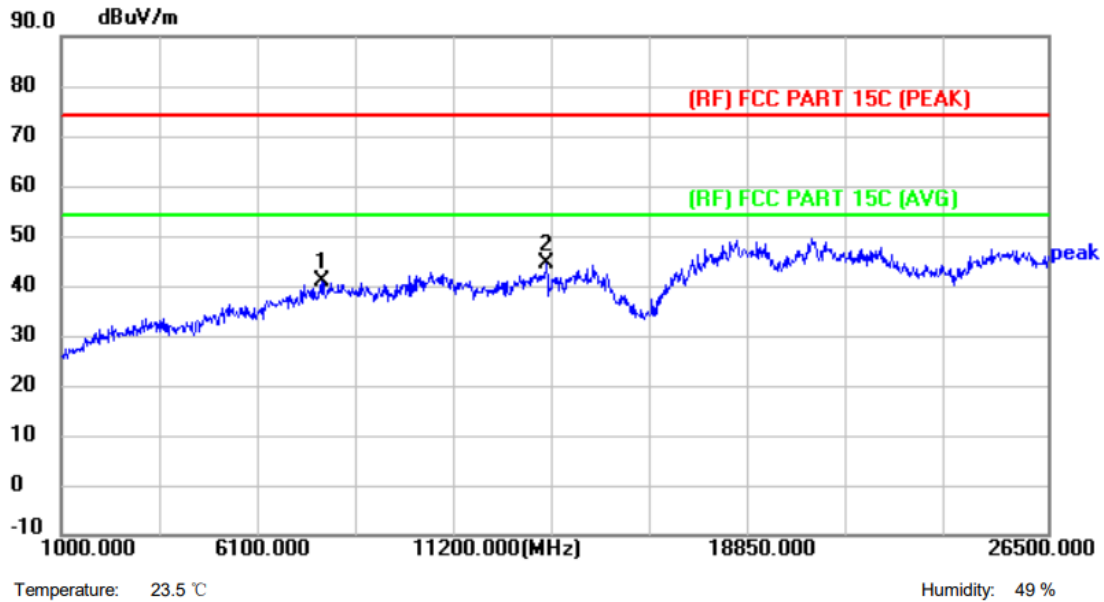


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	7732.000	48.41	-7.67	40.74	74.00	-33.26	peak
2 *	13546.000	42.15	2.22	44.37	74.00	-29.63	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2462MHz

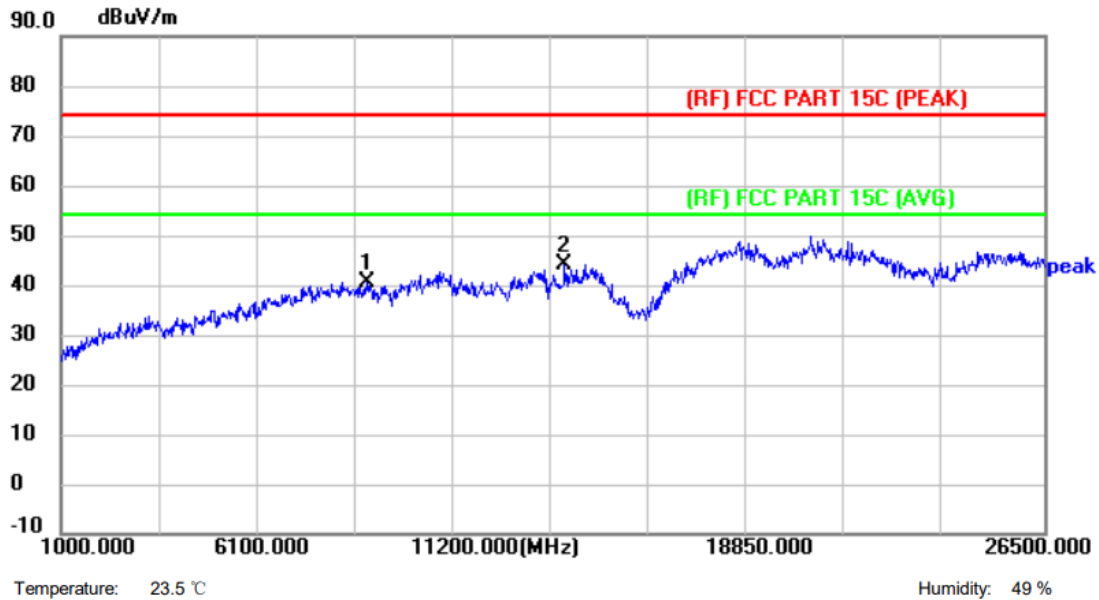


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8930.500	46.64	-6.02	40.62	74.00	-33.38	peak
2 *	14056.000	41.38	2.67	44.05	74.00	-29.95	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2462MHz

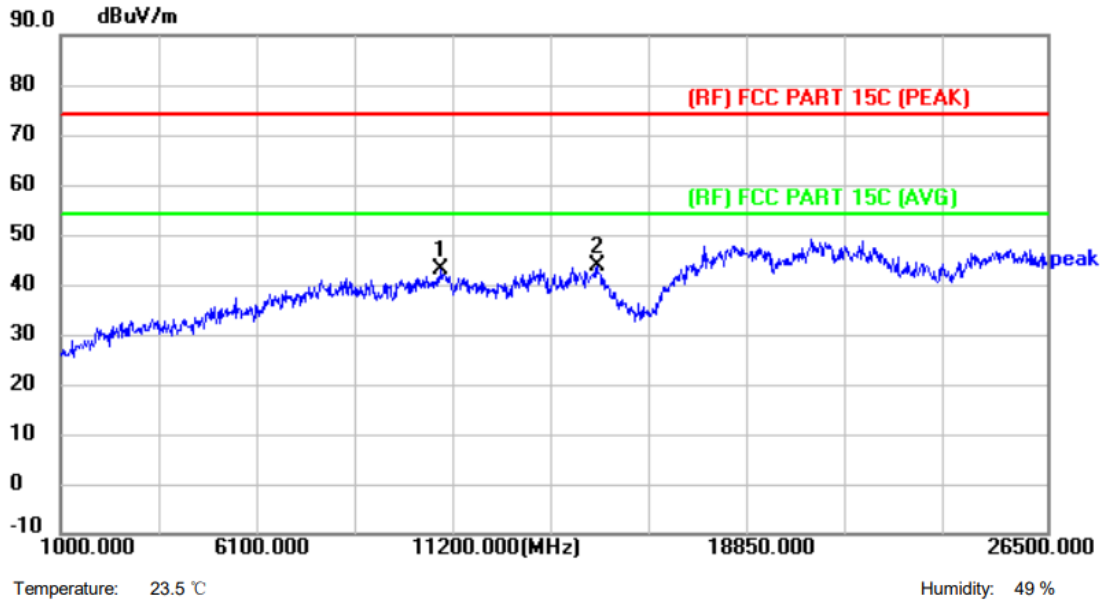


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10817.500	43.52	-0.36	43.16	74.00	-30.84	peak
2 *	14872.000	40.05	3.53	43.58	74.00	-30.42	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT20) Mode 2412MHz

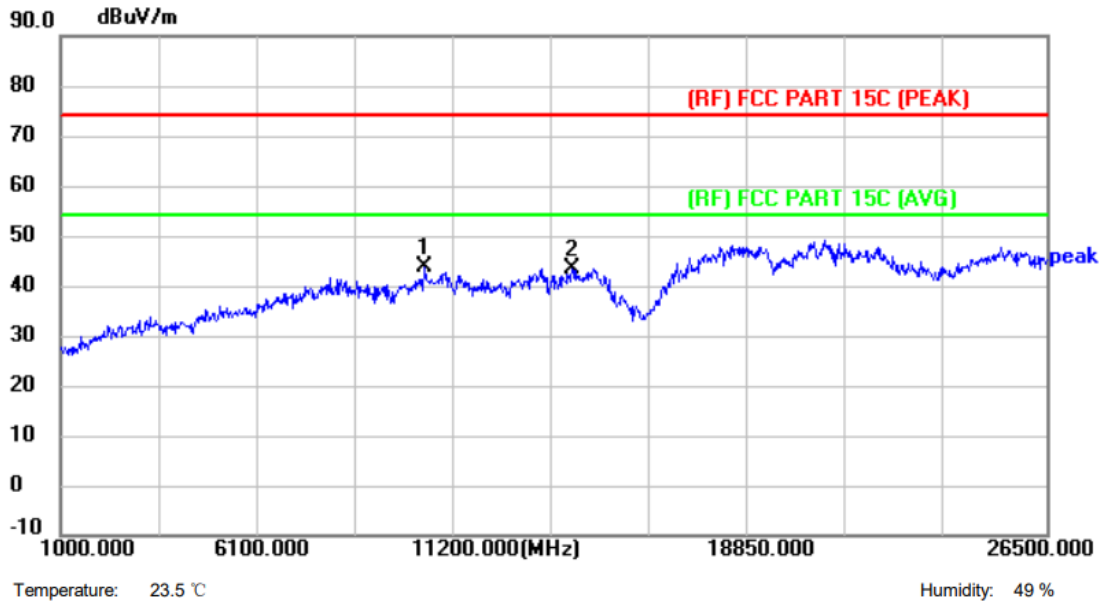


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10435.000	45.02	-1.25	43.77	74.00	-30.23	peak
2	14234.500	40.68	2.85	43.53	74.00	-30.47	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT20) Mode 2412MHz

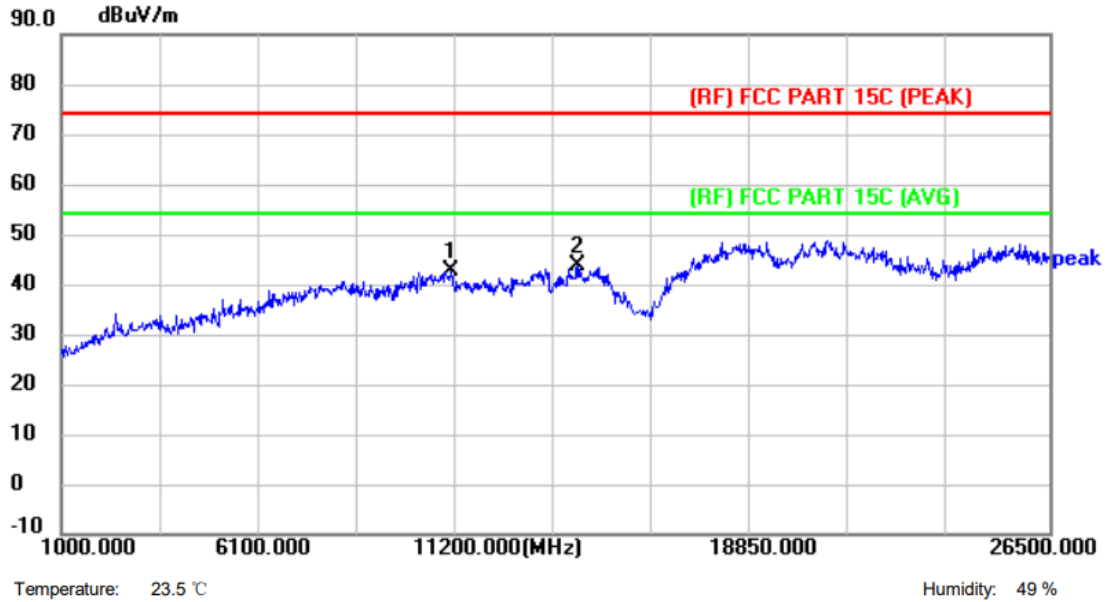


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11072.500	42.55	0.14	42.69	74.00	-31.31	peak
2 *	14336.500	40.75	2.96	43.71	74.00	-30.29	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT20) Mode 2437MHz

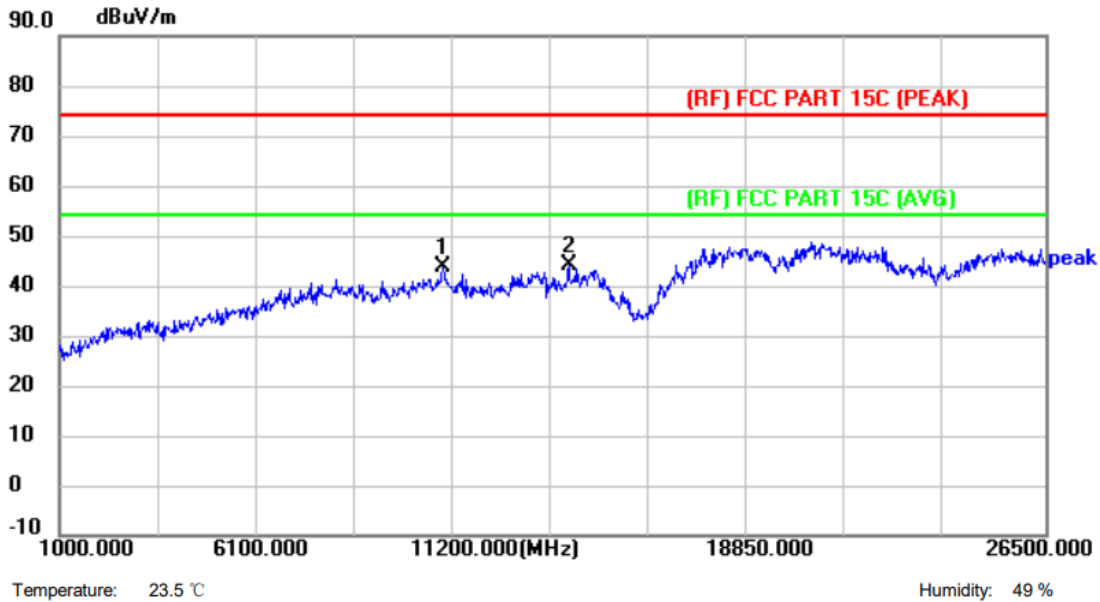


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10919.500	43.99	-0.13	43.86	74.00	-30.14	peak
2 *	14183.500	41.27	2.80	44.07	74.00	-29.93	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT20) Mode 2437MHz

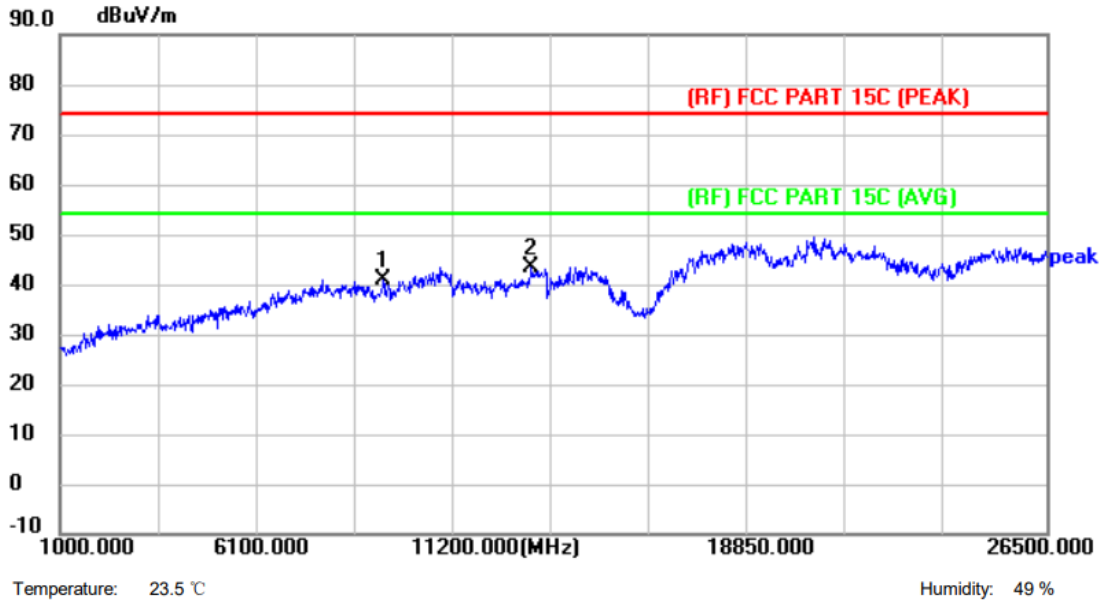


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	9364.000	45.62	-4.58	41.04	74.00	-32.96	peak
2 *	13189.000	41.60	1.92	43.52	74.00	-30.48	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT20) Mode 2462MHz

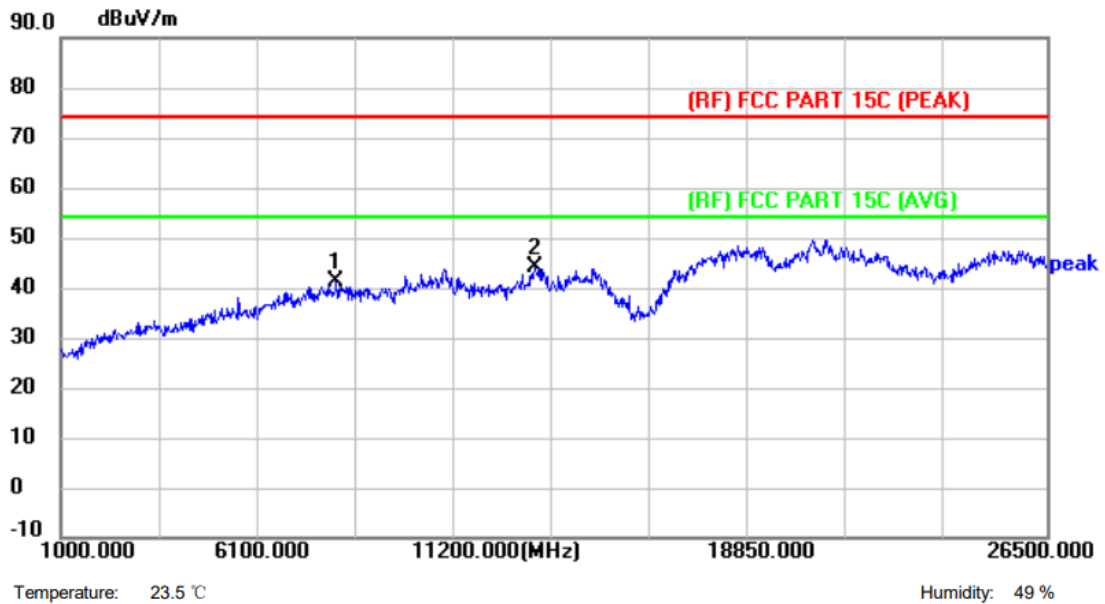


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8114.500	48.48	-7.18	41.30	74.00	-32.70	peak
2 *	13265.500	42.17	1.98	44.15	74.00	-29.85	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT20) Mode 2462MHz

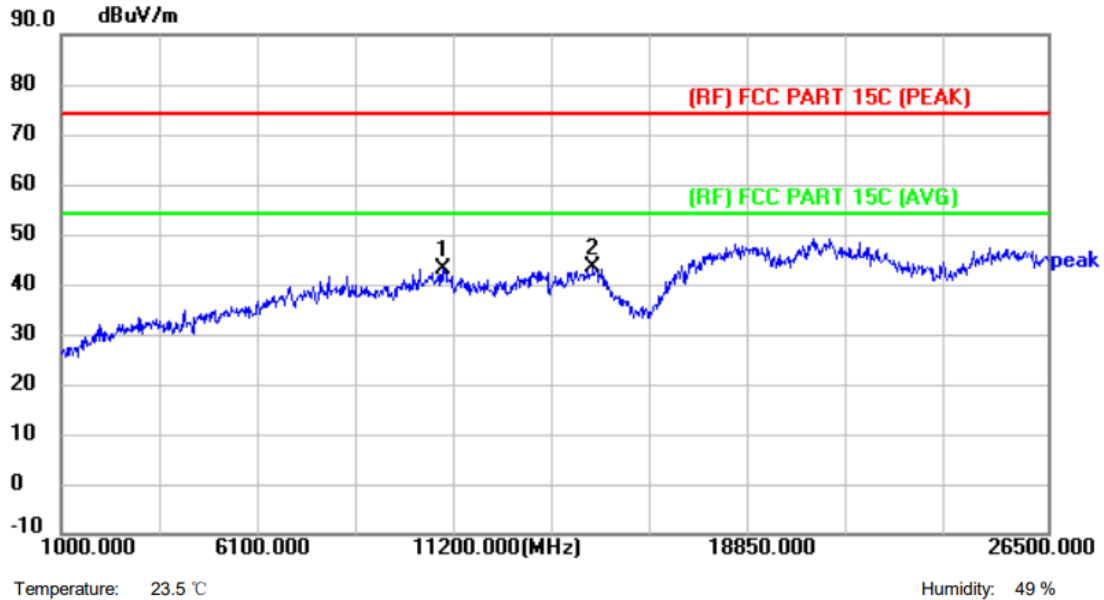


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10894.000	43.24	-0.19	43.05	74.00	-30.95	peak
2 *	14744.500	40.00	3.39	43.39	74.00	-30.61	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT40) Mode 2422MHz

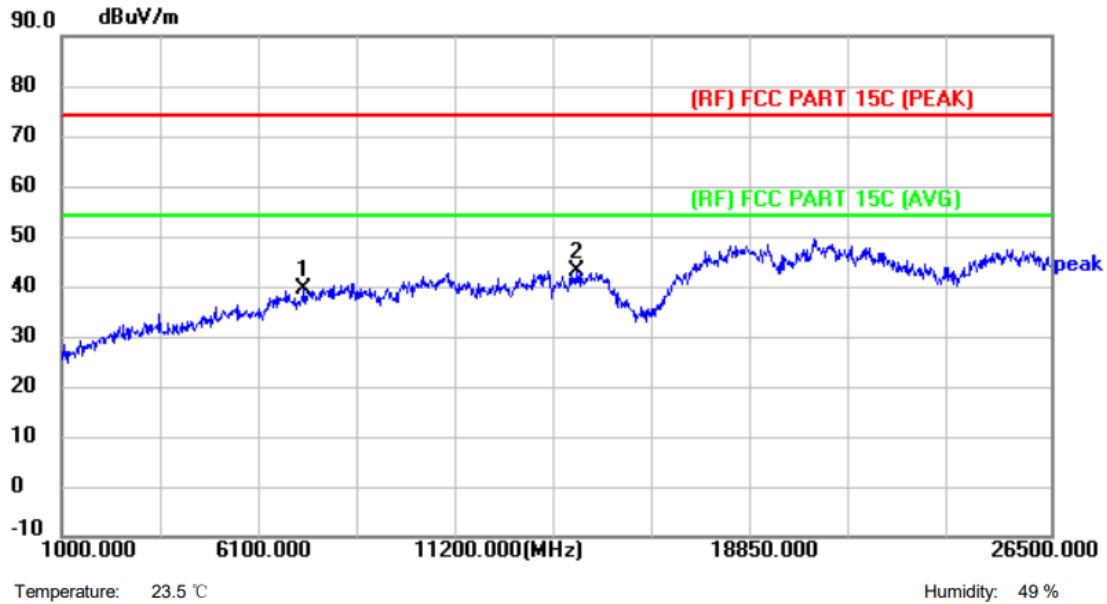


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	7247.500	48.27	-8.68	39.59	74.00	-34.41	peak
2 *	14260.000	40.18	2.89	43.07	74.00	-30.93	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT40) Mode 2422MHz

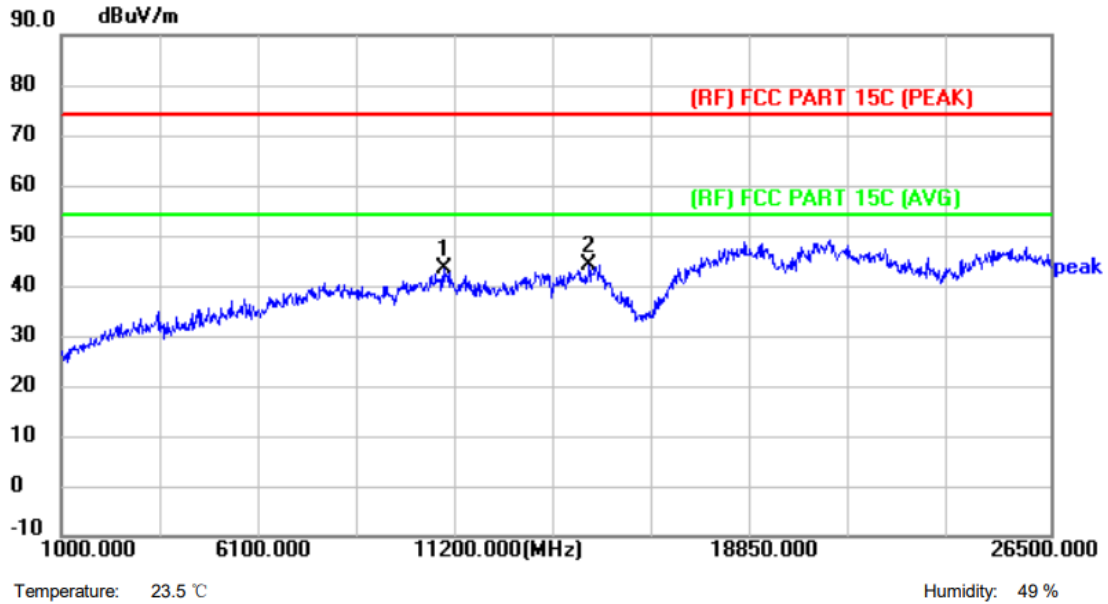


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10894.000	43.47	-0.19	43.28	74.00	-30.72	peak
2 *	14617.000	40.94	3.26	44.20	74.00	-29.80	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT40) Mode 2437MHz

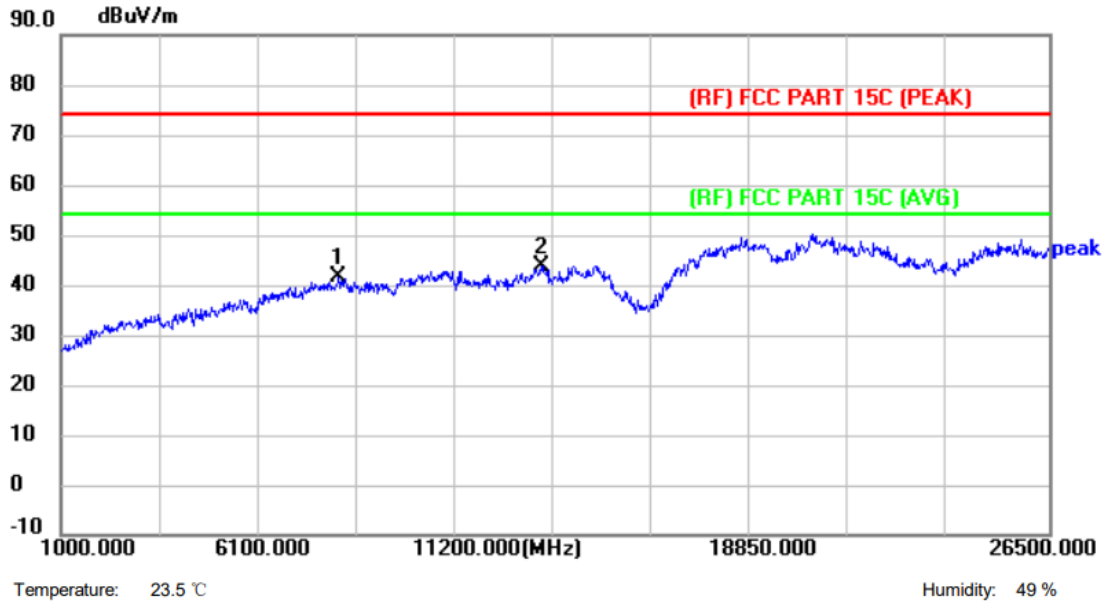


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8165.500	48.84	-7.11	41.73	74.00	-32.27	peak
2 *	13393.000	41.75	2.10	43.85	74.00	-30.15	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT40) Mode 2437MHz

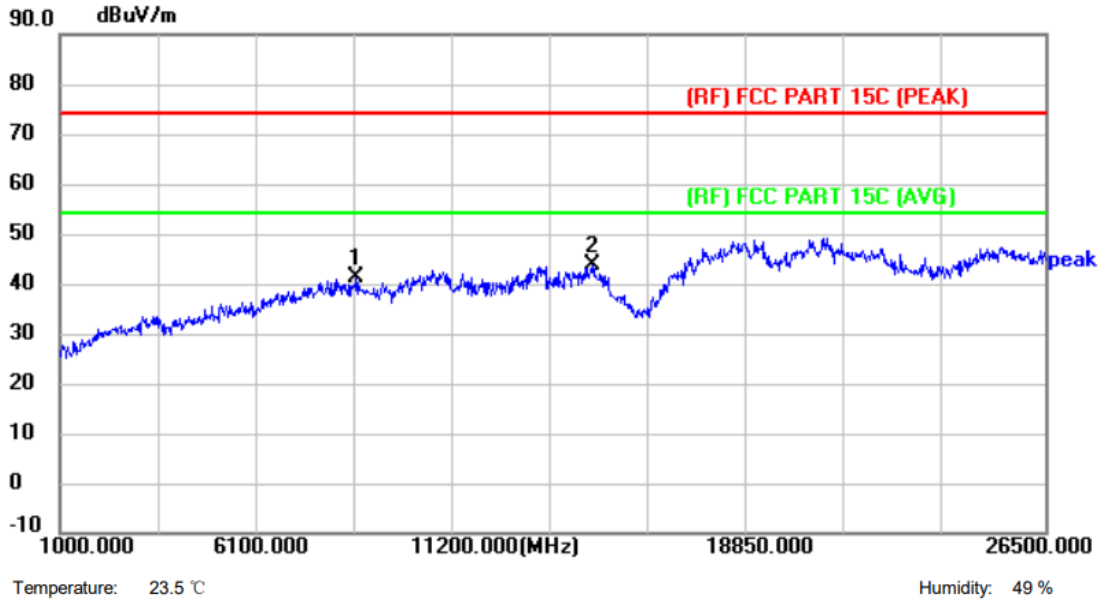


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8675.500	47.70	-6.38	41.32	74.00	-32.68	peak
2 *	14795.500	40.32	3.45	43.77	74.00	-30.23	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Horizontal
Test Mode:	TX n(HT40) Mode 2452MHz

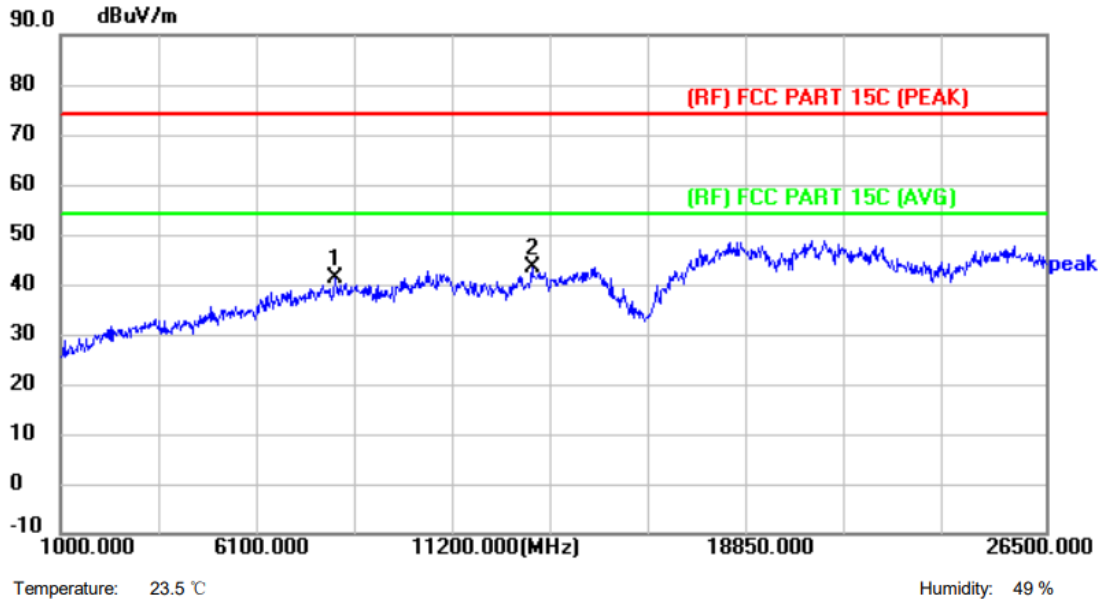


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	8089.000	48.50	-7.21	41.29	74.00	-32.71	peak
2 *	13214.500	41.46	1.95	43.41	74.00	-30.59	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-26.5GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Voltage:	DC 24V
Ant. Pol.	Vertical
Test Mode:	TX n(HT40) Mode 2452MHz

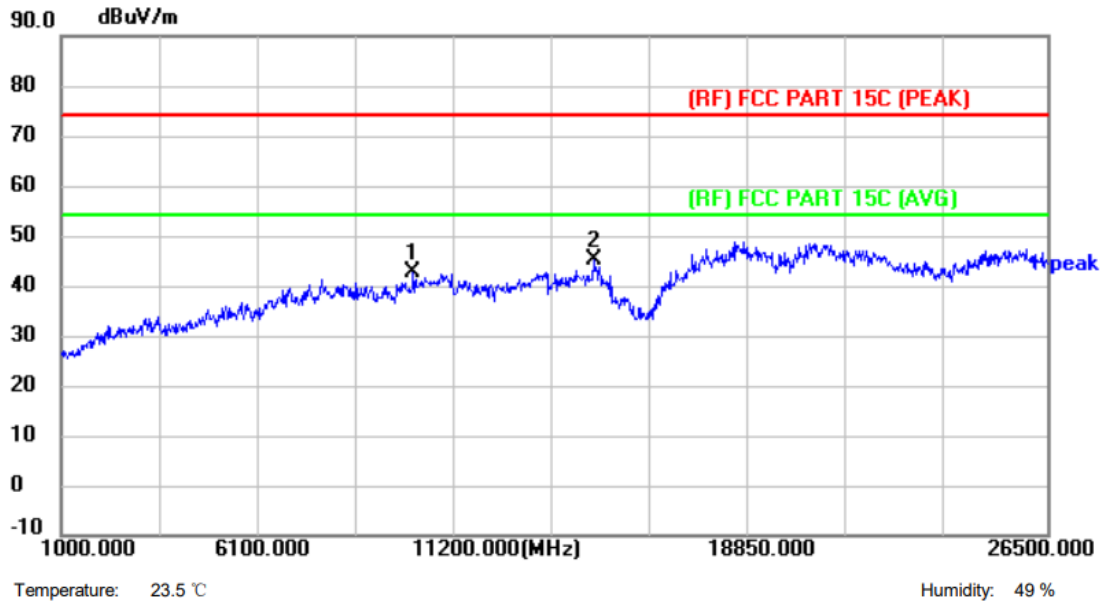

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10103.500	44.84	-2.01	42.83	74.00	-31.17	peak
2 *	14795.500	41.72	3.45	45.17	74.00	-28.83	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

-----END OF REPORT-----