

Appendix A: Test Results

APPENDIX A: TEST RESULTS	1
APPENDIX A.1: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL & HARMONICS	2
30MHz - 1GHz.....	2
1GHz - 18GHz.....	4
APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH	10
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH	12
APPENDIX A.4: TEST RESULTS OF BAND EDGE.....	14
APPENDIX A.5: TEST RESULTS OF CONDUCTED EMISSION	22


Appendix A.1: Test Results of Field Strength of Fundamental & Harmonics

Note: The testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz to 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz


EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2480MHz(1Mbps)
Test Voltage:: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

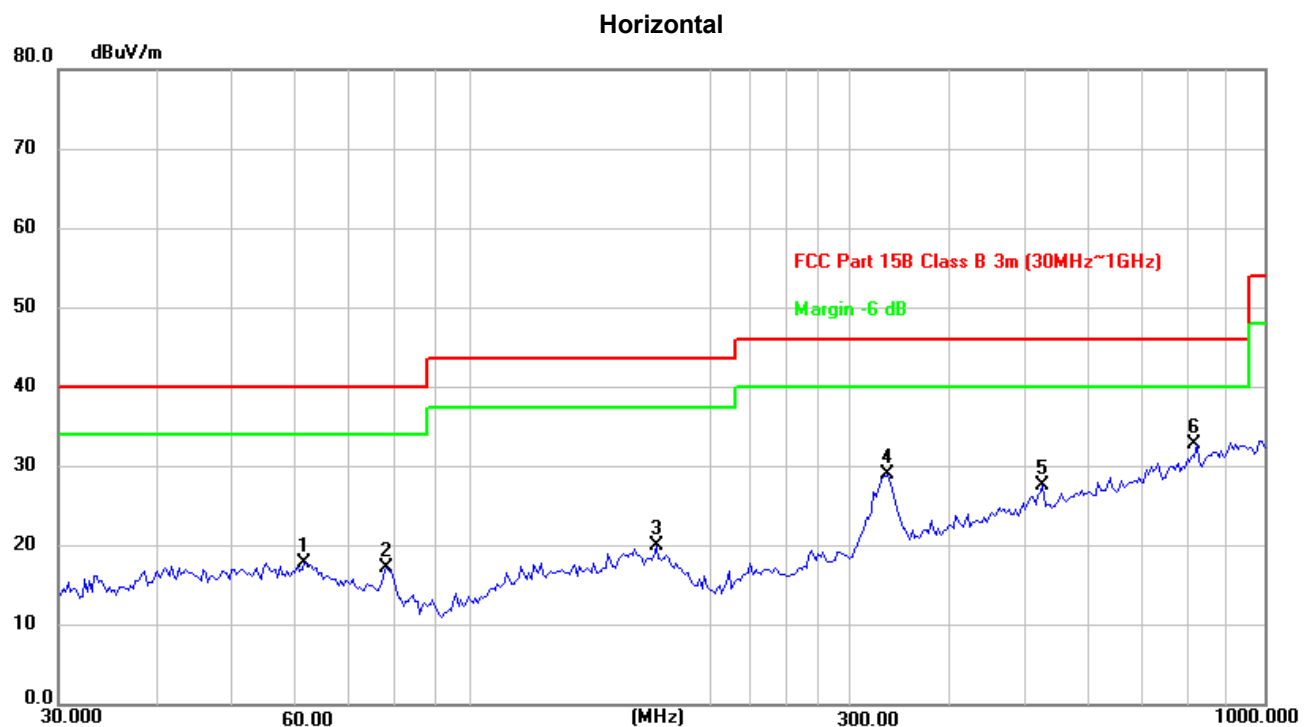

Critical_Freqs

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	61.3463	33.17	-15.22	17.95	40.00	-22.05	peak	100	123
2	77.8653	35.37	-18.15	17.22	40.00	-22.78	peak	100	231
3	170.7926	33.85	-13.84	20.01	43.50	-23.49	peak	100	43
4	334.8588	41.13	-12.12	29.01	46.00	-16.99	peak	200	109
5	524.5541	33.79	-6.21	27.58	46.00	-18.42	peak	200	34
6	821.7103	33.09	-0.34	32.75	46.00	-13.25	peak	100	134

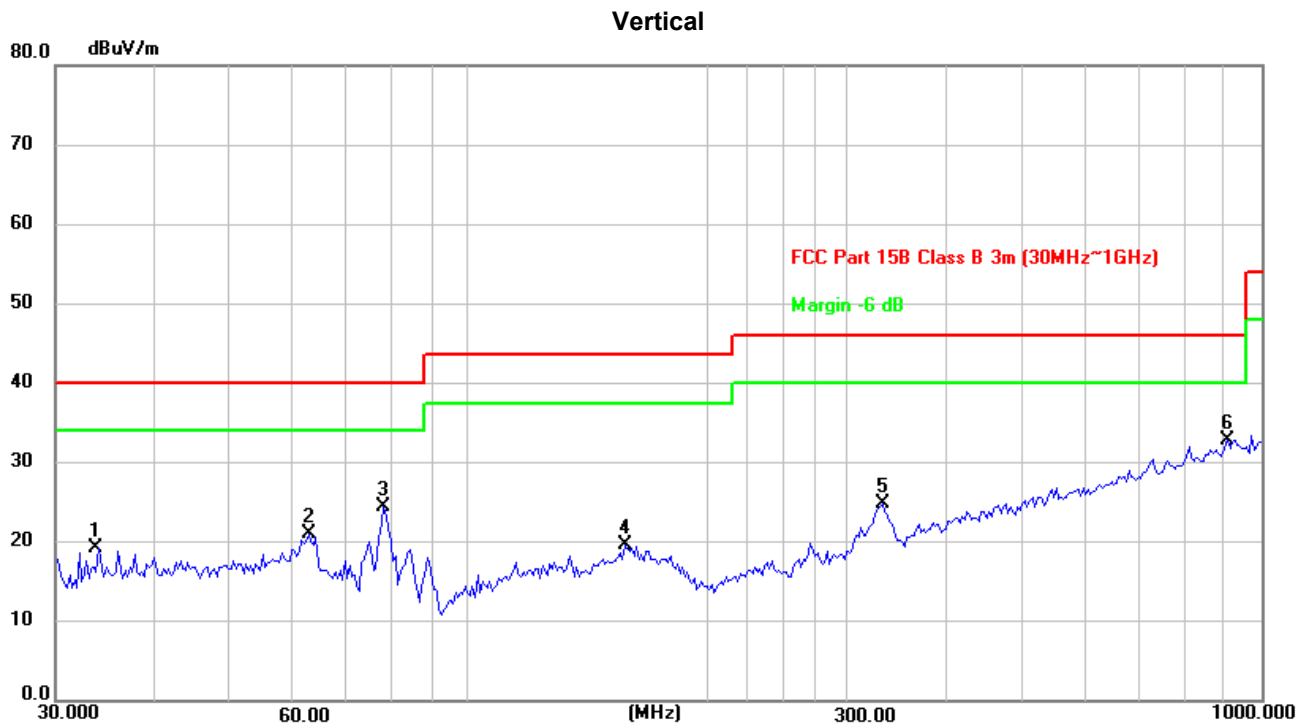

Critical_Freqs

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	34.0363	36.70	-17.45	19.25	40.00	-20.75	peak	100	132
2	62.6506	36.53	-15.39	21.14	40.00	-18.86	peak	100	22
3	77.8653	42.50	-18.15	24.35	40.00	-15.65	peak	200	312
4	157.0073	32.94	-13.38	19.56	43.50	-23.94	peak	200	242
5	332.5187	37.16	-12.23	24.93	46.00	-21.07	peak	100	198
6	906.4824	31.43	1.33	32.76	46.00	-13.24	peak	300	56

1GHz - 18GHz

Note: The highest waveform in the figure is ANT+ Fundamental.

EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2402MHz(1Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2402.335	95.86	-0.39	95.47	114	-18.53	peak	296	60
2	2402.335	84.79	-0.39	84.40	94	-9.60	AVG	296	60

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4804.000	45.12	5.30	50.42	74.00	-23.58	peak	210	304
2	4804.000	36.23	5.30	41.53	54.00	-12.47	AVG	210	304
3	7206.000	46.37	12.40	58.77	74.00	-15.23	peak	204	272
4	7206.000	37.78	12.40	50.18	54.00	-3.82	AVG	204	272

Vertical

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2401.954	97.22	-0.39	96.83	114	-17.17	peak	310	198
2	2401.954	86.75	-0.39	86.36	94	-7.64	AVG	310	198

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4804.000	44.48	5.30	49.78	74.00	-24.22	peak	266	89
2	4804.000	32.53	5.30	37.83	54.00	-16.17	AVG	266	89
3	7206.000	43.59	12.40	55.99	74.00	-18.01	peak	100	222
4	7206.000	33.94	12.40	46.34	54.00	-7.66	AVG	100	222

EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2440MHz(1Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2440.000	98.10	-0.31	97.79	114	-16.21	peak	116	122
2	2440.000	81.93	-0.31	81.62	94	-12.38	AVG	116	122

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4880.000	43.97	6.25	50.22	74.00	-23.78	peak	100	320
2	4880.000	32.21	6.25	38.46	54.00	-15.54	AVG	100	320
3	7320.000	45.69	12.65	58.34	74.00	-15.66	peak	208	294
4	7320.000	37.56	12.65	50.21	54.00	-3.79	AVG	208	294

Vertical

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2440.000	93.84	-0.31	93.53	114.00	-20.47	peak	269	133
2	2440.000	83.41	-0.31	83.10	94.00	-10.90	AVG	269	133

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4880.000	41.84	6.25	48.09	74.00	-25.91	peak	253	142
2	4880.000	30.62	6.25	36.87	54.00	-17.13	AVG	253	142
3	7320.000	43.79	12.65	56.44	74.00	-17.56	peak	182	147
4	7320.000	33.72	12.65	46.37	54.00	-7.63	AVG	182	147

EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2480MHz(1Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2479.982	94.91	-0.21	94.70	114	-19.30	peak	177	127
2	2479.982	84.55	-0.21	84.34	94	-9.66	AVG	177	127

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4960.000	46.34	6.16	52.50	74.00	-21.50	peak	200	127
2	4960.000	37.26	6.16	43.42	54.00	-10.58	AVG	200	127
3	7440.000	45.64	12.91	58.55	74.00	-15.45	peak	168	7
4	7440.000	38.49	12.91	51.40	54.00	-2.60	AVG	168	7

Vertical

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2480.168	96.32	-0.21	96.11	114	-17.89	peak	300	135
2	2480.168	85.81	-0.21	85.60	94	-8.40	AVG	300	135

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4960.000	44.50	6.16	50.66	74.00	-23.34	peak	123	304
2	4960.000	34.28	6.16	40.44	54.00	-13.56	AVG	123	304
3	7440.000	43.13	12.91	56.04	74.00	-17.96	peak	100	125
4	7440.000	34.93	12.91	47.84	54.00	-6.16	AVG	100	125

EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2402MHz(2Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2402.144	93.64	-0.39	93.25	114	-20.75	peak	133	120
2	2402.144	83.30	-0.39	82.91	94	-11.09	AVG	133	120

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4804.000	45.56	5.30	50.86	74.00	-23.14	peak	234	304
2	4804.000	34.31	5.30	39.61	54.00	-14.39	AVG	234	304
3	7206.000	45.13	12.40	57.53	74.00	-16.47	peak	215	278
4	7206.000	37.68	12.40	50.08	54.00	-3.92	AVG	215	278

Vertical

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2401.764	93.43	-0.39	93.04	114	-20.96	peak	303	349
2	2401.764	82.88	-0.39	82.49	94	-11.51	AVG	303	349

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4804.000	41.97	5.30	47.27	74.00	-26.73	peak	100	50
2	4804.000	30.20	5.30	35.50	54.00	-18.50	AVG	100	50
3	7206.000	42.99	12.40	55.39	74.00	-18.61	peak	283	284
4	7206.000	35.27	12.40	47.67	54.00	-6.33	AVG	283	284

EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2440MHz(2Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2440.000	95.23	-0.31	94.92	114	-19.08	peak	114	122
2	2440.000	84.37	-0.31	84.06	94	-9.94	AVG	114	122

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4880.000	43.81	6.25	50.06	74.00	-23.94	peak	226	304
2	4880.000	31.95	6.25	38.20	54.00	-15.80	AVG	226	304
3	7320.000	44.43	12.65	57.08	74.00	-16.92	peak	222	276
4	7320.000	36.63	12.65	49.28	54.00	-4.72	AVG	222	276

Vertical

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2440.000	95.08	-0.31	94.77	114	-19.23	peak	274	122
2	2440.000	84.39	-0.31	84.08	94	-9.92	AVG	274	122

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4880.000	40.87	6.25	47.12	74.00	-26.88	peak	100	222
2	4880.000	29.01	6.25	35.26	54.00	-18.74	AVG	100	222
3	7320.000	42.89	12.65	55.54	74.00	-18.46	peak	209	90
4	7320.000	32.31	12.65	44.96	54.00	-9.04	AVG	209	90

EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2480MHz(2Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2480.355	94.05	-0.21	93.84	114	-20.16	peak	178	123
2	2480.355	83.81	-0.21	83.60	94	-10.40	AVG	178	123

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4960.000	43.61	6.16	49.77	74.00	-24.23	peak	209	308
2	4960.000	31.14	6.16	37.30	54.00	-16.70	AVG	209	308
3	7440.000	45.69	12.91	58.60	74.00	-15.40	peak	214	289
4	7440.000	37.62	12.91	50.53	54.00	-3.47	AVG	214	289

Vertical

Critical_Freqs(Fundamental frequency)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2480.355	96.09	-0.21	95.88	114	-18.12	peak	293	135
2	2480.355	85.49	-0.21	85.28	94	-8.72	AVG	293	135

Critical_Freqs(Suprious Emission out of band)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	4960.000	43.45	6.16	49.61	74.00	-24.39	peak	373	293
2	4960.000	31.59	6.16	37.75	54.00	-16.25	AVG	373	293
3	7440.000	41.88	12.91	54.79	74.00	-19.21	peak	185	156
4	7440.000	33.29	12.91	46.20	54.00	-7.80	AVG	185	156

Appendix A.2: Test Results of 20dB Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
1Mbps	Ant1	2402	1.207	---	PASS
		2440	1.210	---	PASS
		2480	1.211	---	PASS
2Mbps	Ant1	2402	2.294	---	PASS
		2440	2.299	---	PASS
		2480	2.299	---	PASS

1Mbps_2402



1Mbps_2440



1Mbps_2480



2Mbps_2402



2Mbps_2440



2Mbps_2480



Appendix A.3: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
1Mbps	Ant1	2402	1.0585	---	PASS
		2440	1.0587	---	PASS
		2480	1.0628	---	PASS
2Mbps	Ant1	2402	2.0400	---	PASS
		2440	2.0450	---	PASS
		2480	2.0483	---	PASS

1Mbps_2402



1Mbps_2440



1Mbps_2480



2Mbps_2402



2Mbps_2440




2Mbps_2480



Appendix A.4: Test Results of Band Edge

EUT Information


EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2402MHz(1Mbps)
Test Voltage: DC5V from Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

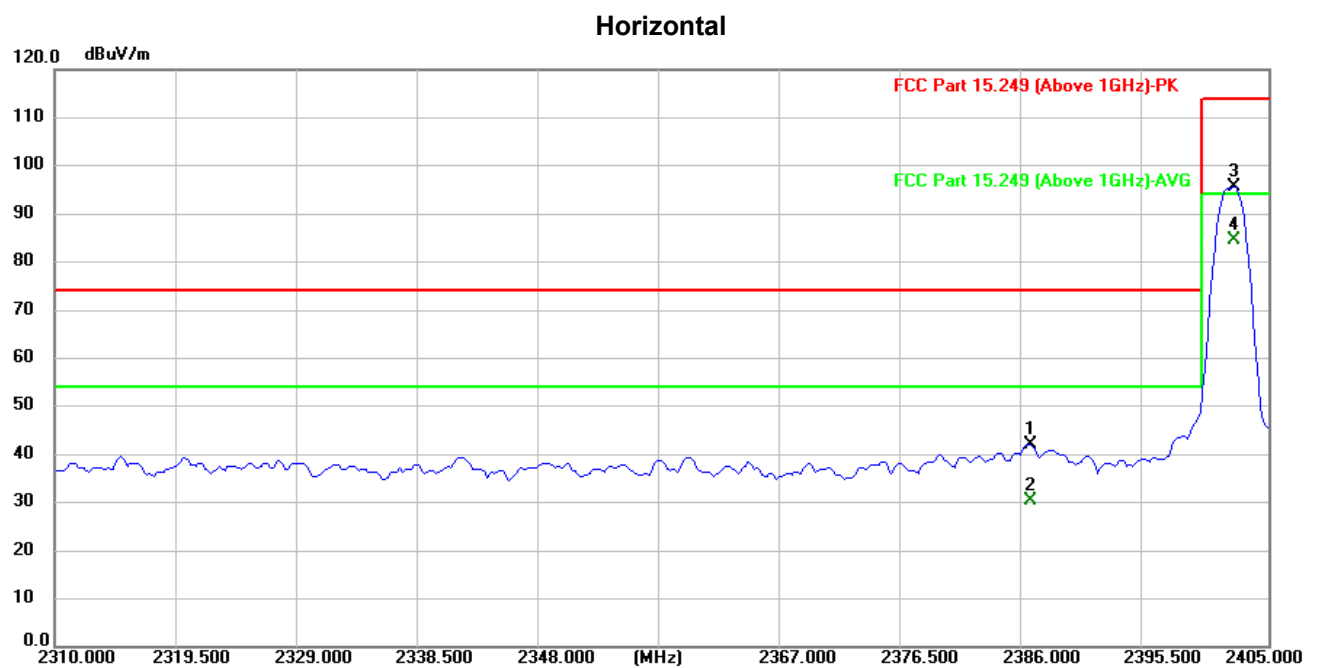

Critical_Freqs(Fundamental frequency & Bandedge)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2386.343	42.51	-0.42	42.09	74.00	-31.91	peak	296	60
2	2386.343	30.81	-0.42	30.39	54.00	-23.61	AVG	296	60

Vertical

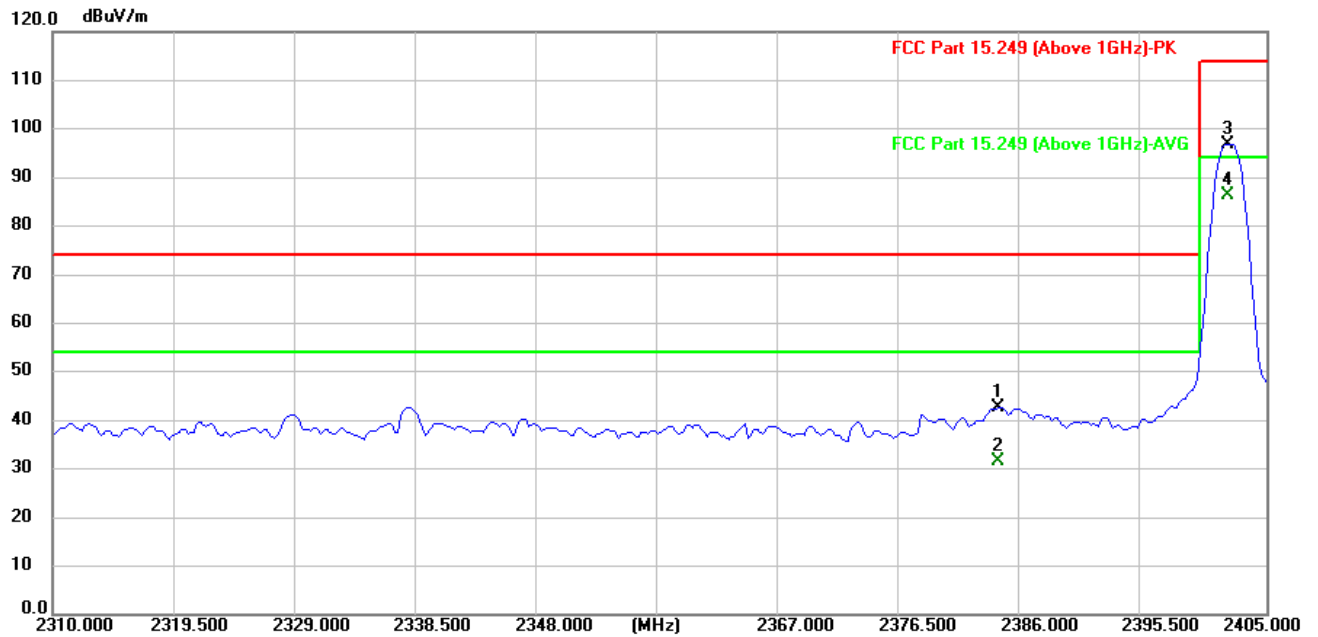


Critical_Freqs(Fundamental frequency & Bandedge)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2384.248	43.06	-0.43	42.63	74.00	-31.37	peak	310	198
2	2384.248	32.04	-0.43	31.61	54.00	-22.39	AVG	310	198

EUT Information

EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2480MHz(1Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He


Horizontal

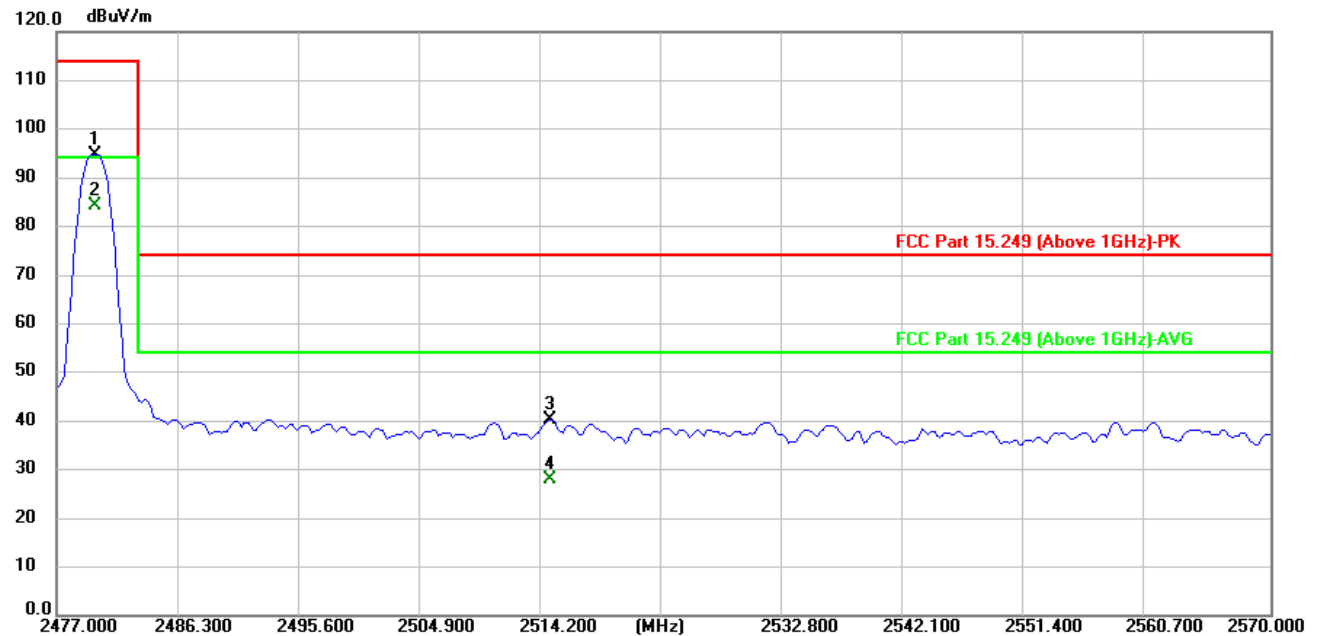

Critical_Freqs(Fundamental frequency & Bandedge)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
3	2514.834	40.40	-0.14	40.26	74.00	-33.74	peak	177	127
4	2514.834	28.00	-0.14	27.86	54.00	-26.14	AVG	177	127

Vertical

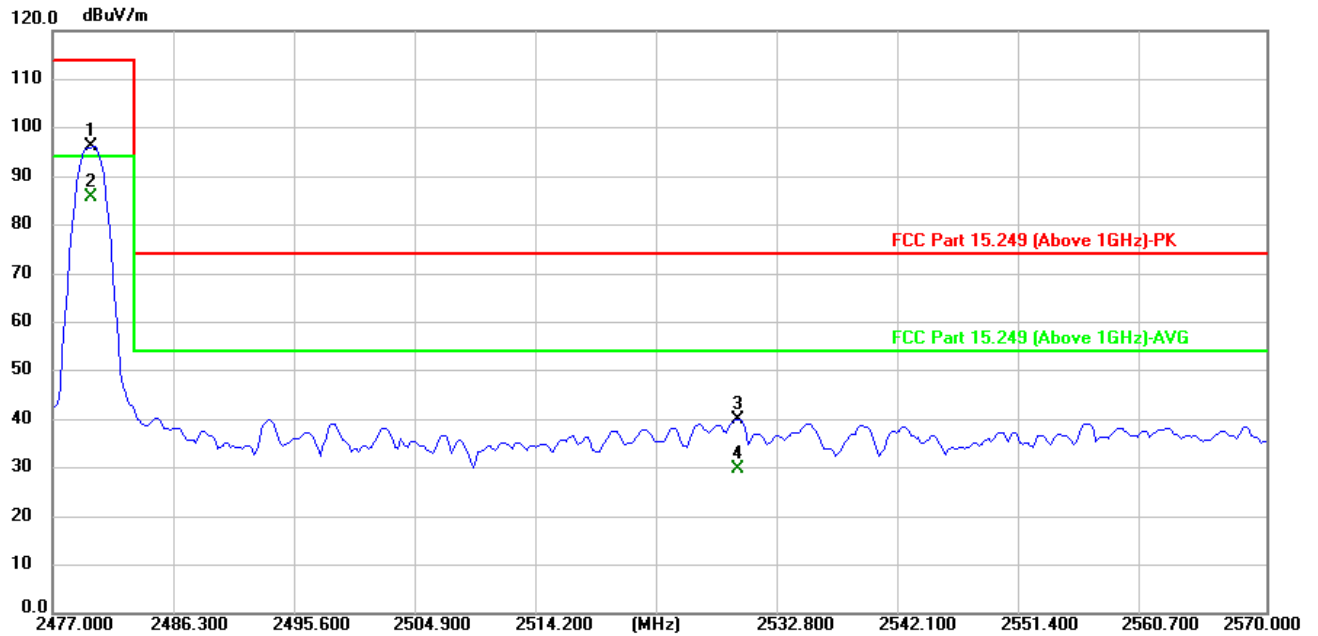


Critical_Freqs(Fundamental frequency & Bandedge)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
3	2529.557	40.18	-0.10	40.08	74.00	-33.92	peak	300	135
4	2529.557	29.73	-0.10	29.63	54.00	-24.37	AVG	300	135

EUT Information


EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2402MHz(2Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

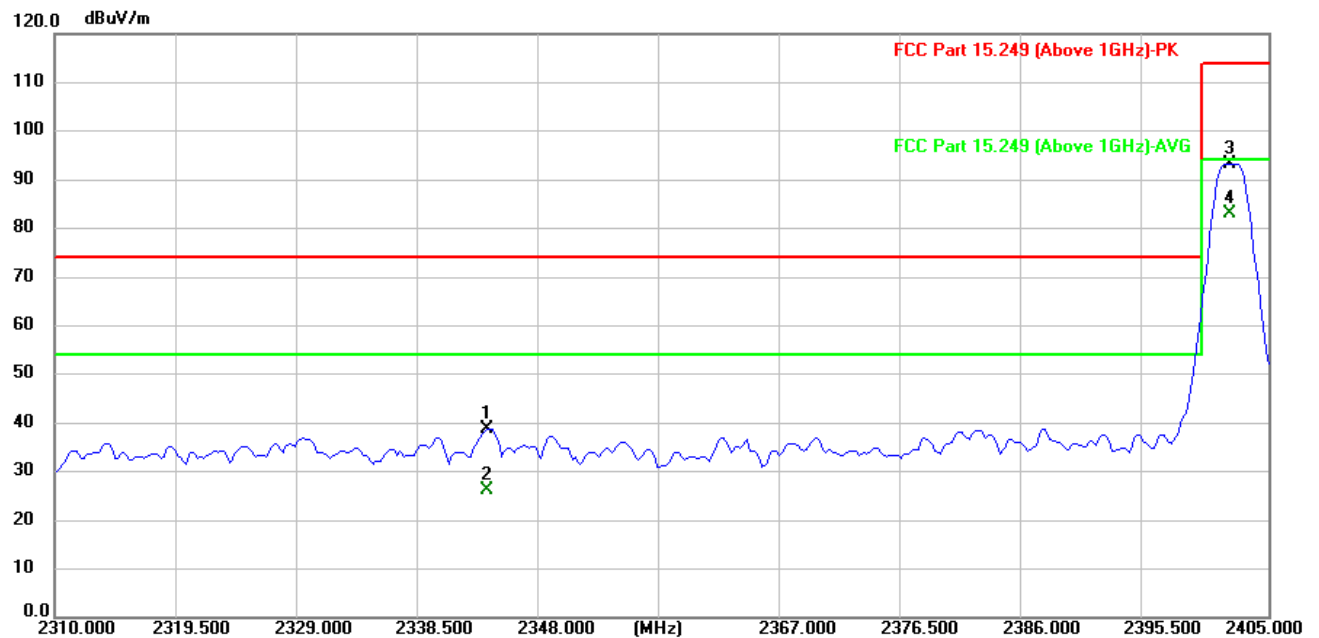

Critical Freqs(Fundamental frequency & Bandedge)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2344.078	39.39	-0.51	38.88	74.00	-35.12	peak	133	120
2	2344.078	26.83	-0.51	26.32	54.00	-27.68	AVG	133	120

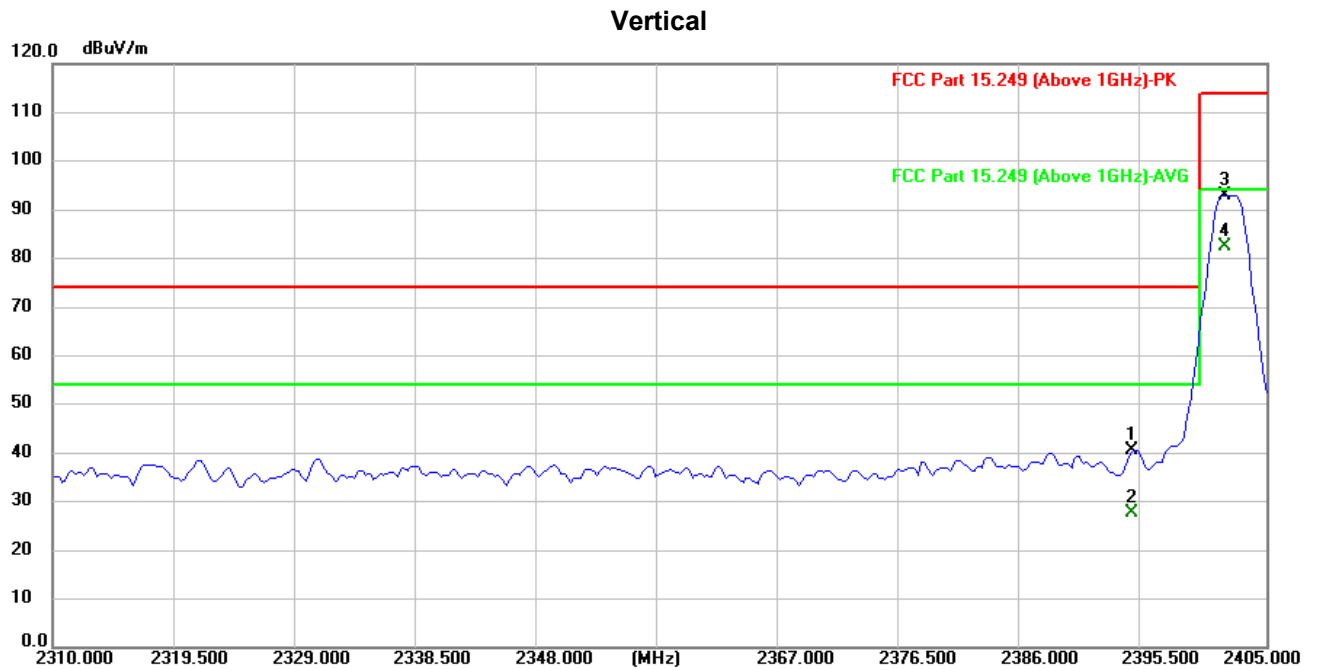


Critical_Freqs(Fundamental frequency & Bandedge)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	2394.719	41.01	-0.40	40.61	74.00	-33.39	peak	303	349
2	2394.719	27.96	-0.40	27.56	54.00	-26.44	AVG	303	349

EUT Information


EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test Mode: TX 2480MHz(2Mbps)
Test Voltage: DC 5V From Adapter
Remark: Temp 24 Humi: 55%
Test Standard: FCC 15.249
Tested By: Hua
Reviewed By: Scott He

Horizontal

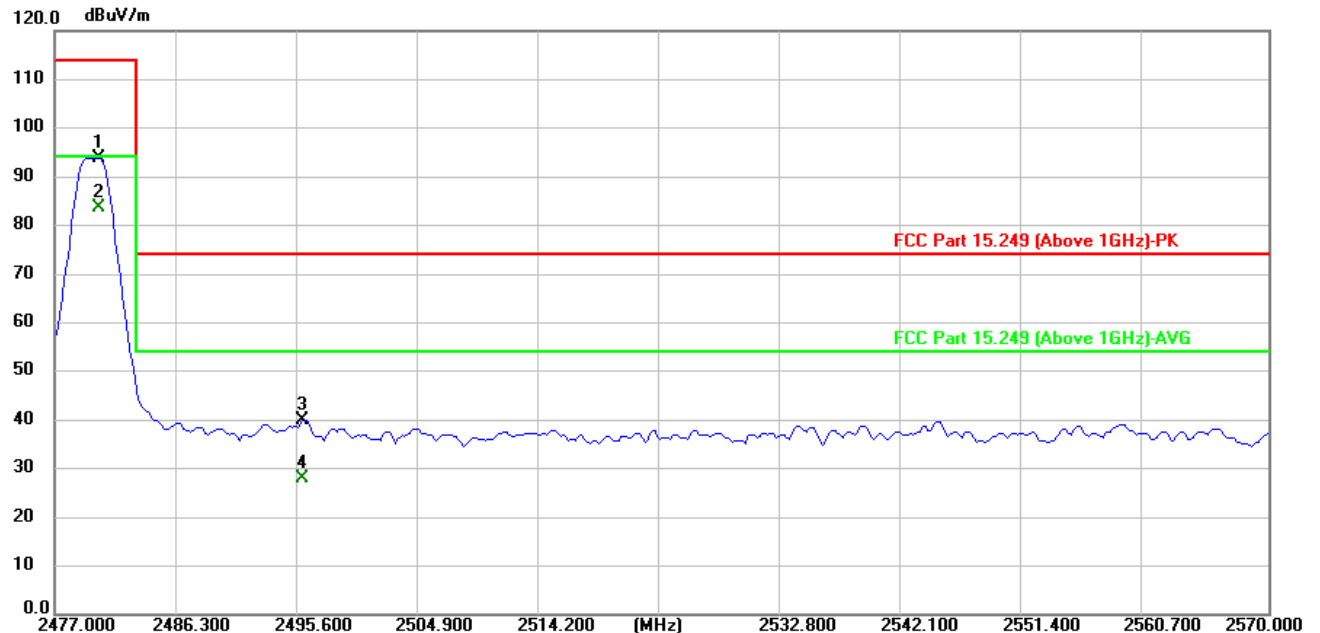

Critical Freqs(Fundamental frequency & Bandedge)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
3	2496.196	40.24	-0.18	40.06	74.00	-33.94	peak	178	123
4	2496.196	28.30	-0.18	28.12	54.00	-25.88	AVG	178	123

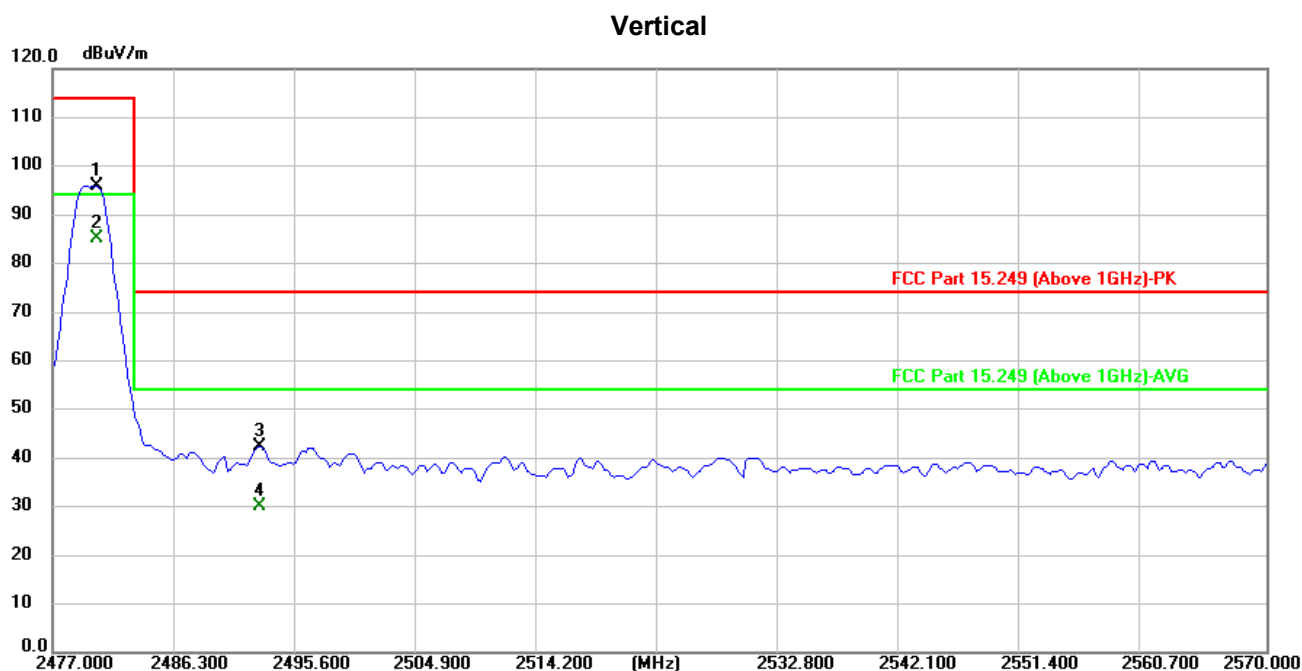

Critical_Freqs(Fundamental frequency & Bandedge)


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
3	2492.842	42.51	-0.18	42.33	74.00	-31.67	peak	293	135
4	2492.842	30.28	-0.18	30.10	54.00	-23.90	AVG	293	135

Appendix A.5: Test Results of Conducted Emission

EUT Information


EUT Name: 2.4GHz Digital Wireless Headphone
Model: BH1080J
Test mode: TX
Test Voltage: DC 5V From Adapter
Test By: Hua
Review By: Scott He

L1

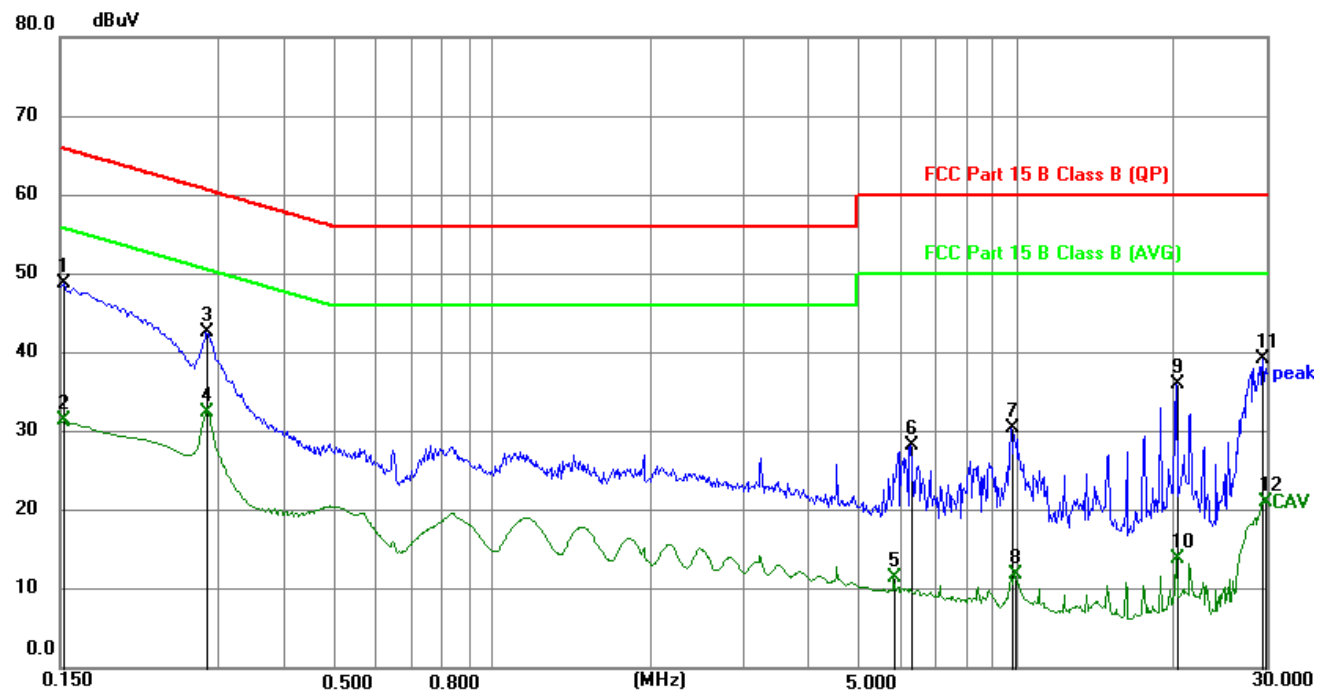

Critical Freqs

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	38.53	10.18	48.71	65.88	-17.17	peak
2	0.1522	21.20	10.18	31.38	55.88	-24.50	AVG
3	0.2850	32.34	10.17	42.51	60.67	-18.16	peak
4	0.2850	22.29	10.17	32.46	50.67	-18.21	AVG
5	5.8560	1.43	10.00	11.43	50.00	-38.57	AVG
6	6.2970	18.27	10.01	28.28	60.00	-31.72	peak
7	9.7733	20.24	10.11	30.35	60.00	-29.65	peak
8	9.9398	1.74	10.11	11.85	50.00	-38.15	AVG
9	20.1683	25.63	10.39	36.02	60.00	-23.98	peak
10	20.1683	3.41	10.39	13.80	50.00	-36.20	AVG
11	29.6610	28.78	10.39	39.17	60.00	-20.83	peak
12	29.9085	10.68	10.39	21.07	50.00	-28.93	AVG

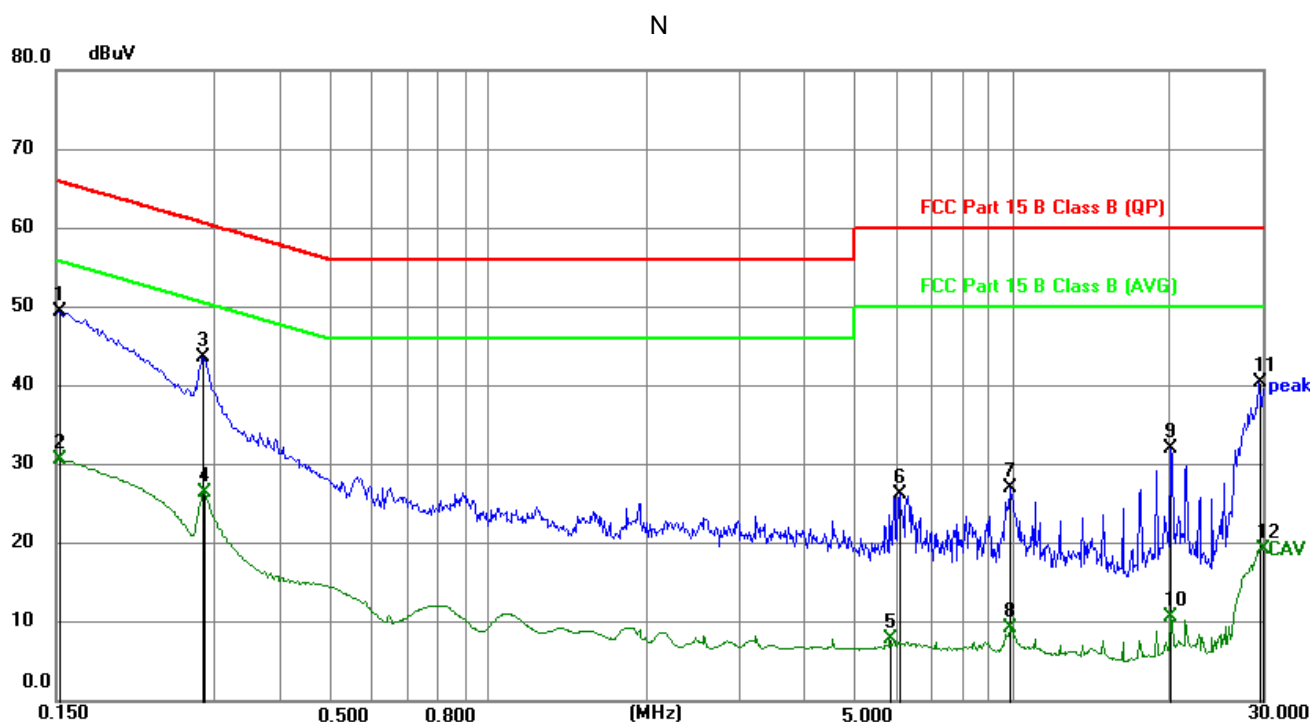

Critical Freqs

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	39.26	10.18	49.44	65.88	-16.44	peak
2	0.1522	20.52	10.18	30.70	55.88	-25.18	AVG
3	0.2850	33.51	10.17	43.68	60.67	-16.99	peak
4	0.2872	16.31	10.17	26.48	50.60	-24.12	AVG
5	5.8538	-2.21	10.00	7.79	50.00	-42.21	AVG
6	6.0900	16.27	10.00	26.27	60.00	-33.73	peak
7	9.9555	16.95	10.11	27.06	60.00	-32.94	peak
8	9.9555	-0.86	10.11	9.25	50.00	-40.75	AVG
9	20.1615	21.62	10.40	32.02	60.00	-27.98	peak
10	20.1615	0.30	10.40	10.70	50.00	-39.30	AVG
11	29.6115	30.08	10.39	40.47	60.00	-19.53	peak
12	29.9063	8.91	10.39	19.30	50.00	-30.70	AVG