



REPORT No. : XM19070036W04

TEST REPORT

MANUFACTURER : Hot Pepper, Inc.

PRODUCT NAME : 4G Feature Phone

MODEL NAME : HPP-LF2

BRAND NAME : Hot Pepper

FCC ID : 2APD4-A90L

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2019-08-21

TEST DATE : 2019-08-21 to 2020-01-17

ISSUE DATE : 2020-01-20

Edited by :

Lai Huihuang

Lai Huihuang(Test engineer)

Review by:

Elvis

Elvis Wang(Auditor)

Approved by:

Anne Liu

Anne Liu (Supervisor)

NOTE: 1.The report is invalid when there is no the approver signature and the special stamp for test report. 2.The test report shall not be reproduced except in full without prior written permission of the company. 3.The report copy is invalid when there is no the special stamp for test repor. 4.The altered report is invalid. 5.The entrust test is responsibility for the received sample only.



DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Test Standards and Results	5
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna requirement	6
2.2. Number of Hopping Frequency	7
2.3. Peak Output Power	10
2.4. 20dB Bandwidth	17
2.5. Carried Frequency Separation	24
2.6. Time of Occupancy (Dwell time)	31
2.7. Conducted Spurious Emissions and Band Edge	38
2.8. Restricted Frequency Bands	55
2.9. Conducted Emission	69
2.10. Radiated Emission	73
Annex A Test Uncertainty	131
Annex B Testing Laboratory Information	132

Change History		
Version	Date	Reason for change
1.0	2020-01-20	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Hot Pepper, Inc.
Applicant Address:	5151 California Ave., Suite 100, Irvine 92617, USA
Manufacturer:	Hot Pepper, Inc.
Manufacturer Address:	5151 California Ave., Suite 100, Irvine 92617, USA

1.2. Equipment Under Test (EUT) Description

Product Name:	4G Feature Phone	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	A90L_MAINBOARD_P1	
Software Version:	HPP-LF2-V1.0.3-190809	
Modulation Type:	Bluetooth: FHSS GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps)	
Operating Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz);	
Bluetooth Version:	Bluetooth classic	
Antenna Type:	PIFA Antenna	
Antenna Gain:	0.3dBi	
Accessory Information:	Battery	
	Manufacturer:	Shenzhen HUATIAN TONG TECHNOLOGY CO.LTD
	Brand Name:	Hot Pepper
	Model No.:	HPP-LF2
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	1700mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	AC Adapter	
	Manufacturer:	Shenzhen Tianyin Electronics Co.,Ltd.



	Brand Name:	Hot Pepper
	Model No.:	TPA-46B050100UU
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	100-240V ~ 50/60Hz 0.2A
	Rated Output:	5V=1.0A

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Aug 21, 2019	Lai Huihuang	PASS
3	15.247(b)	Peak Output Power	Aug 21, 2019	Lai Huihuang	PASS
4	15.247(a)	20dB Bandwidth	Aug 21, 2019	Lai Huihuang	PASS
5	15.247(a)	Carrier Frequency Separation	Aug 21, 2019	Lai Huihuang	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Aug 21, 2019	Lai Huihuang	PASS
7	15.247(d)	Conducted Spurious Emission and Band Edge	Aug 21, 2019 Jan 17, 2019	Lai Huihuang	PASS
8	15.247(d)	Restricted Frequency Bands	Sep 5, 2019	Hui Li	PASS
9	15.209, 15.247(d)	Radiated Emission	Sep 6, 2019	Hui Li	PASS
10	15.207	Conducted Emission	Sep 6, 2019	Hui Li	PASS

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please reference ANNEX B(4).

2.2.3. Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete


2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.


A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS


B. Test Plots:

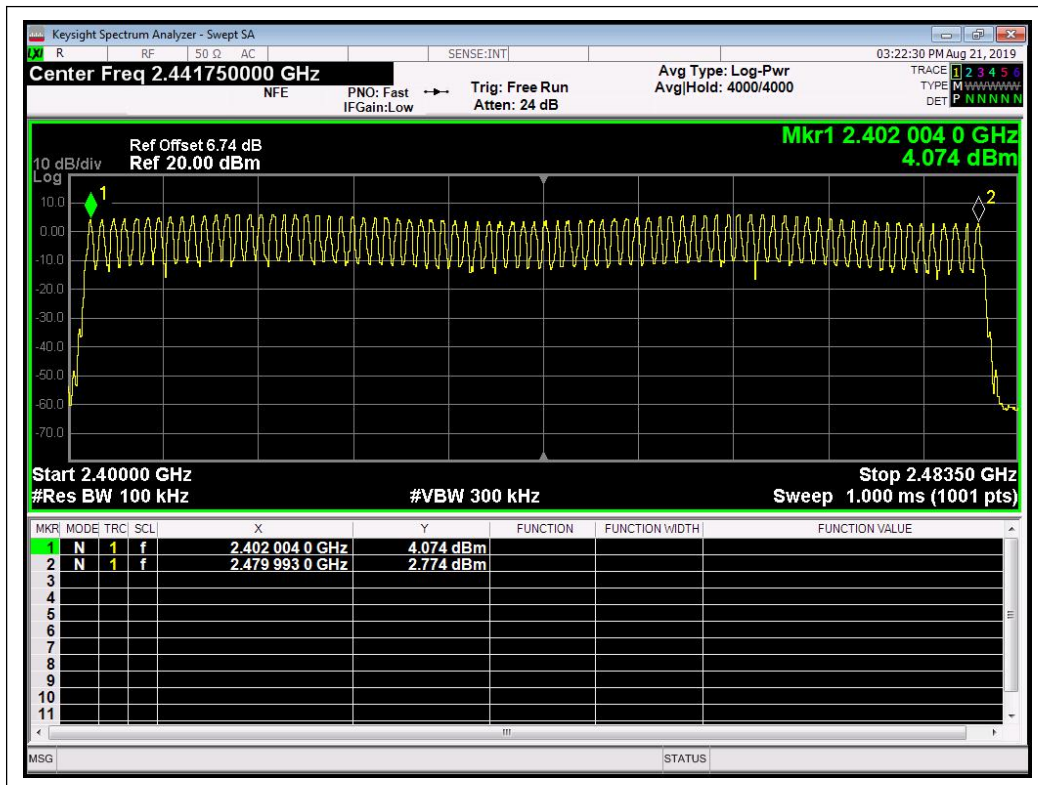

(GFSK)

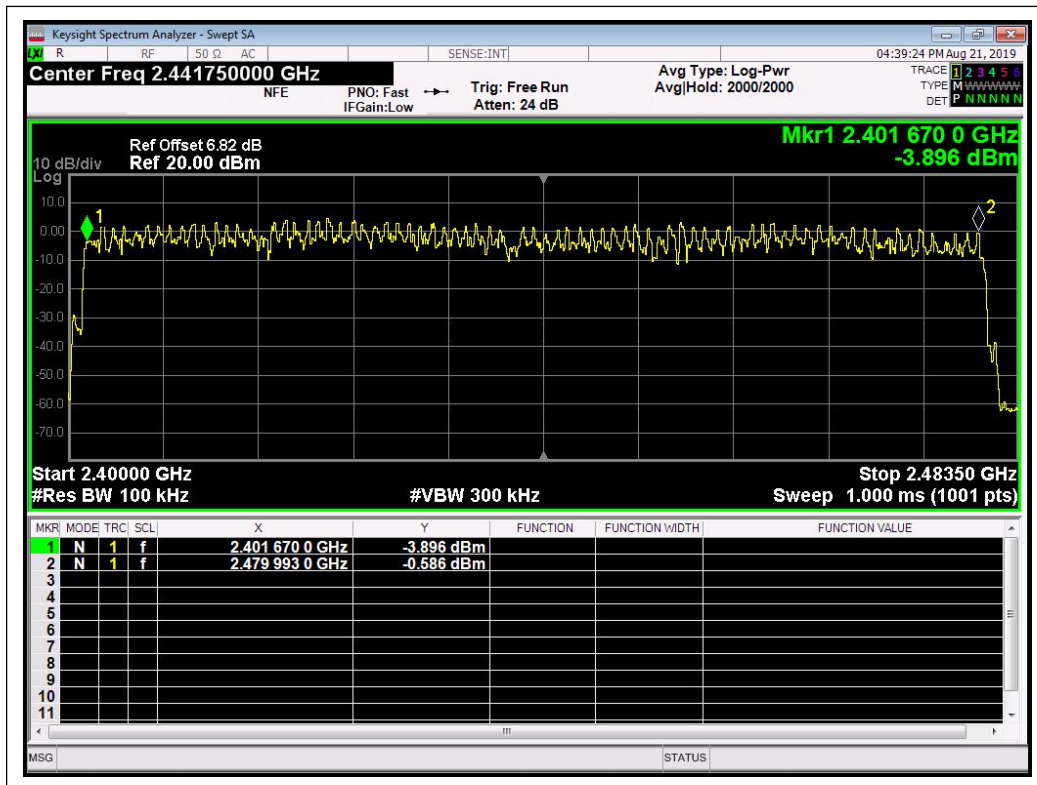

($\pi/4$ -DQPSK)

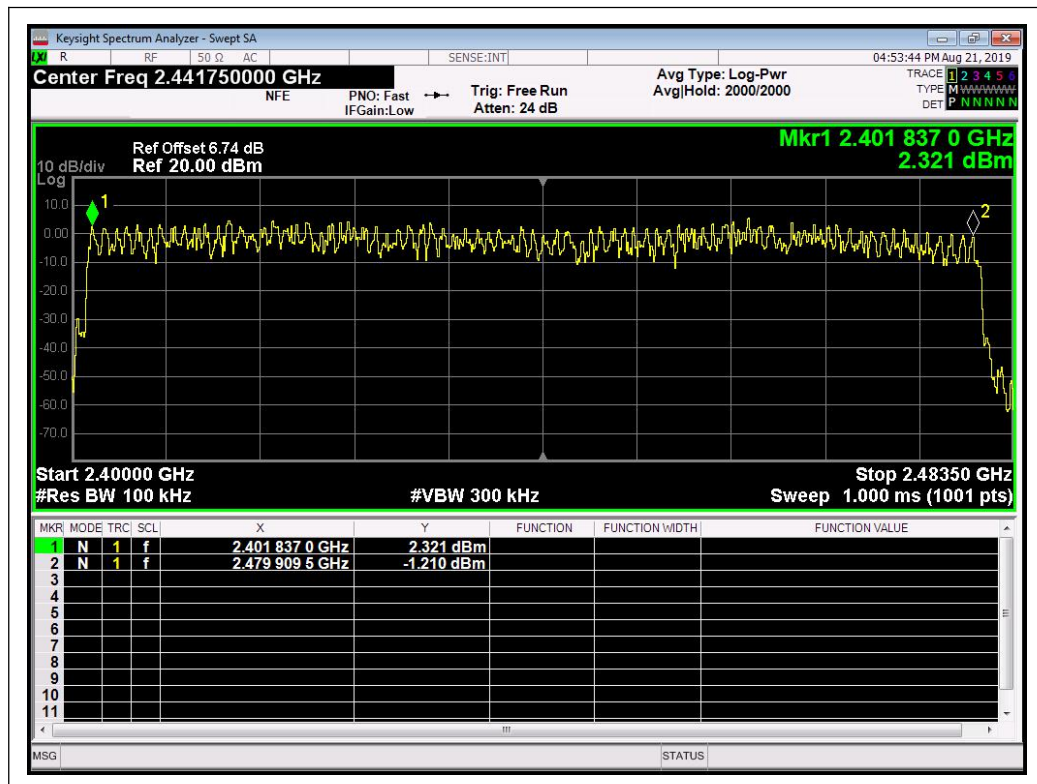

(8- DPSK)

2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B(4).

2.3.3. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the RBW to 3MHz
- c) Set VBW to 8MHz
- d) Set span to 10MHz
- e) Sweep time to auto couple.
- f) Detector=peak.
- g) Trace mode=max hold.
- h) Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

2.3.4. Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module.

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.349	0.003	21	0.125	PASS
39	2441	3.759	0.002			PASS
78	2480	3.099	0.002			PASS


B. Test Plots:

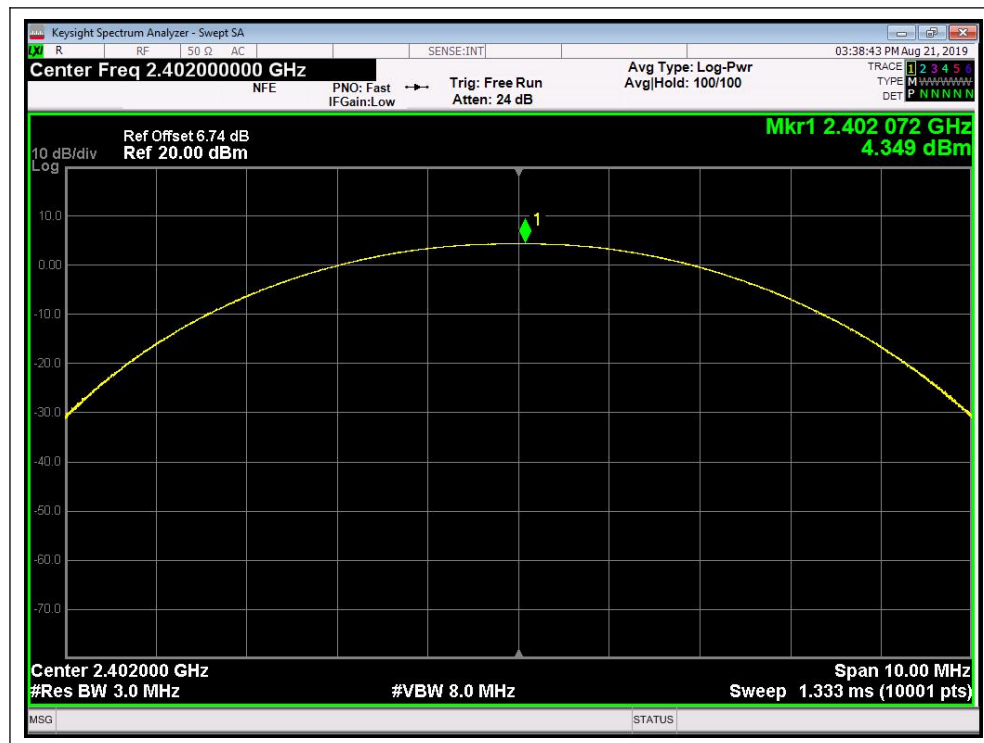

(GFSK, Channel 0, 2402MHz)

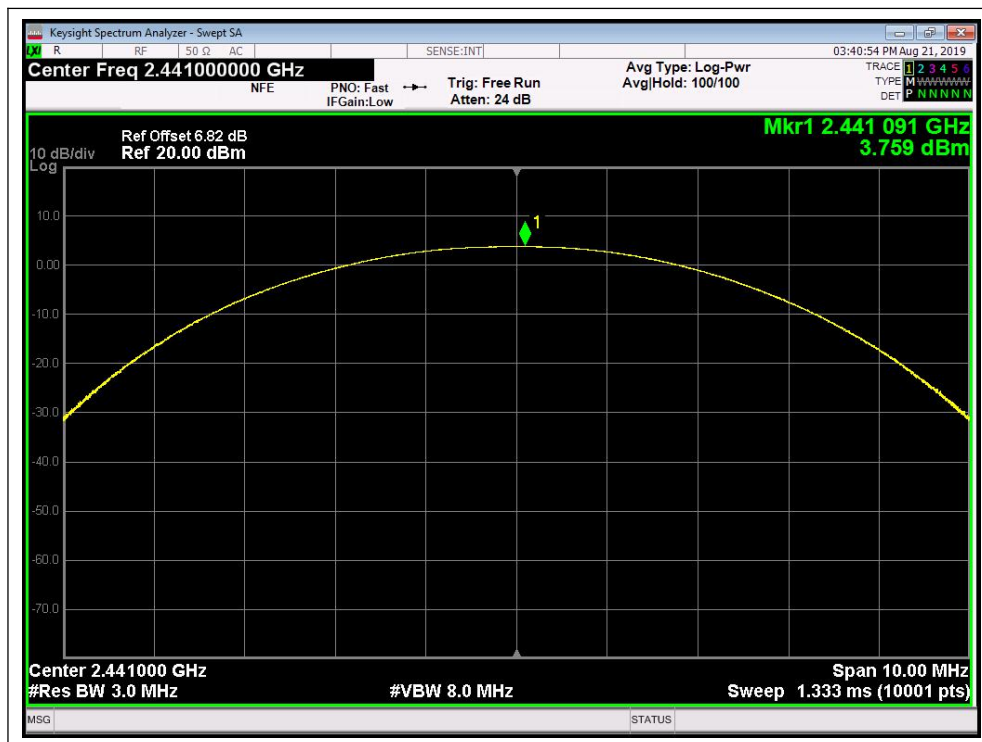

(GFSK, Channel 39, 2441MHz)

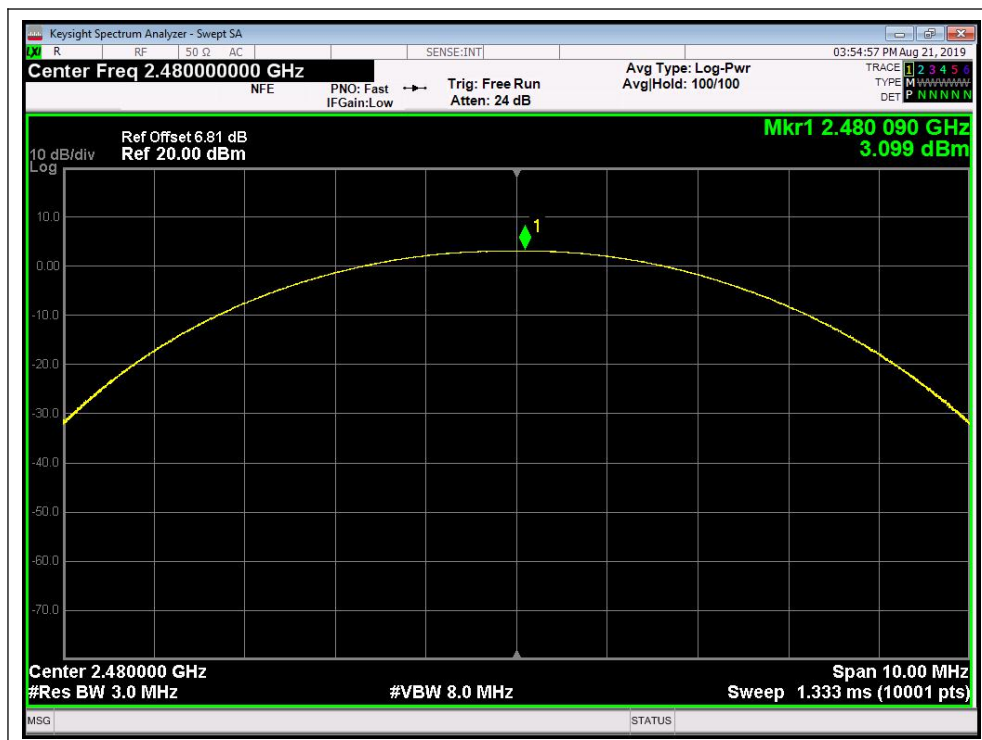


(GFSK, Channel 78, 2480MHz)


 $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	3.692	0.002	21	0.125	PASS
39	2441	2.845	0.001			PASS
78	2480	1.013	0.001			PASS

B. Test Plots:

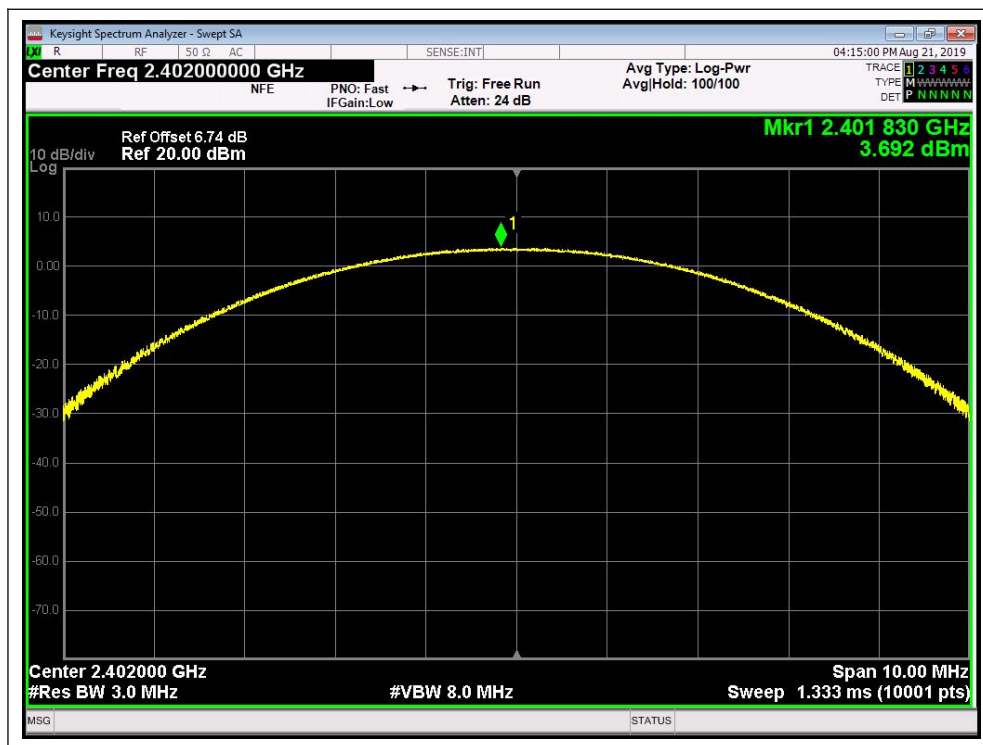 $(\pi/4$ -DQPSK, Channel 0, 2402MHz)

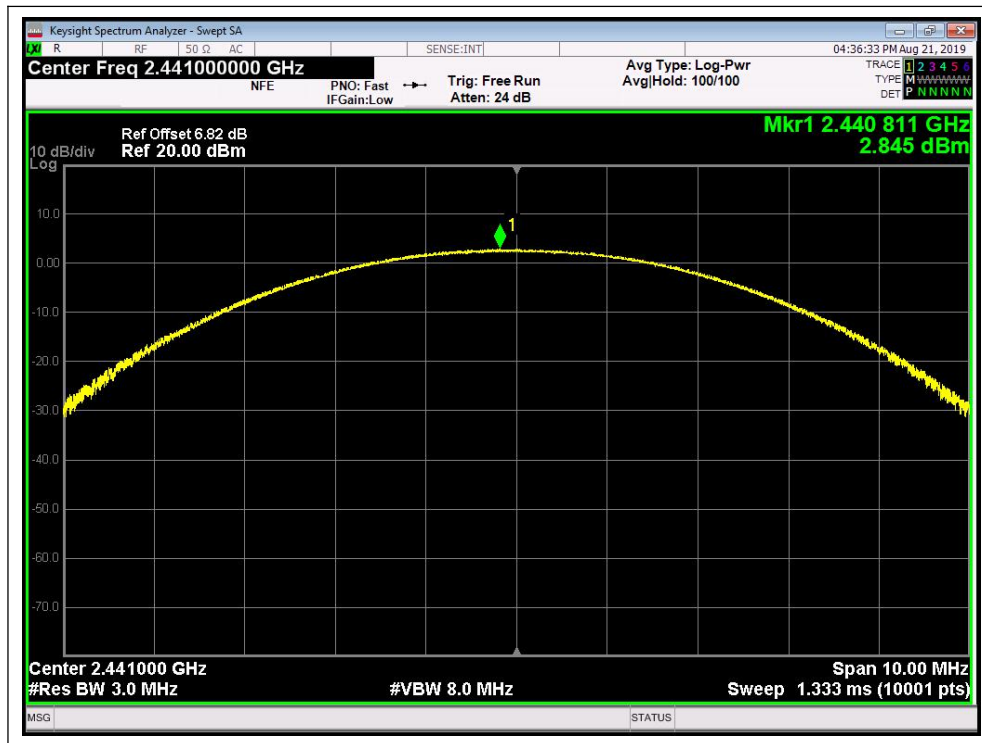


($\pi/4$ -DQPSK, Channel 39, 2441MHz)

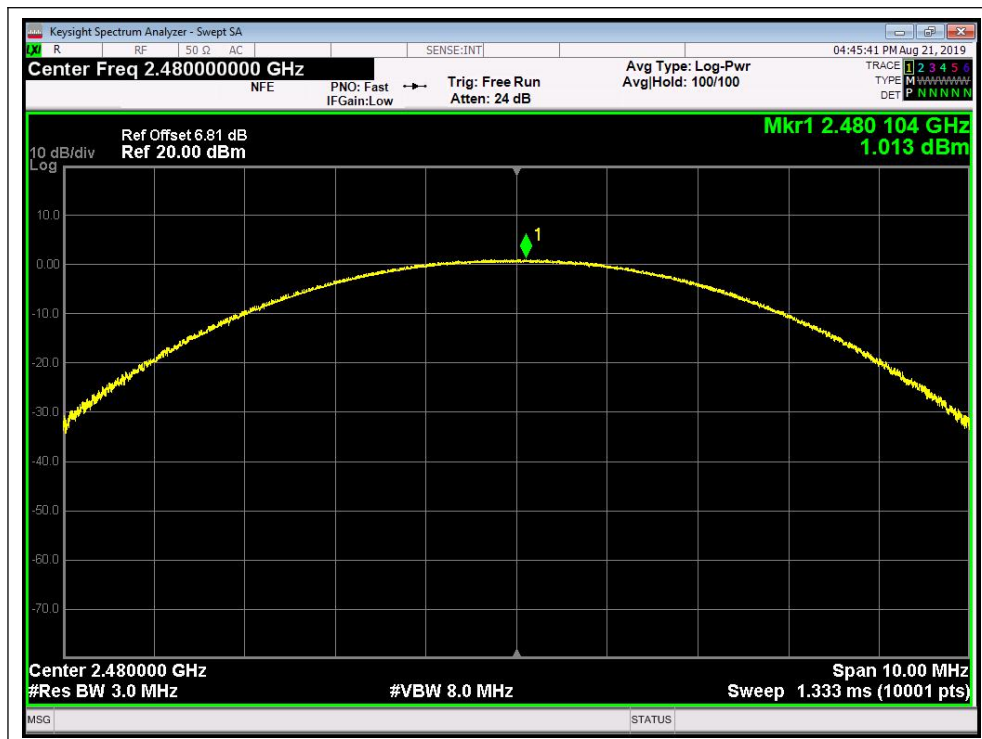


($\pi/4$ -DQPSK, Channel 78, 2480MHz)

**8-DPSK Mode****A. Test Verdict:**


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.16	0.003	21	0.125	PASS
39	2441	3.27	0.002			PASS
78	2480	1.46	0.001			PASS

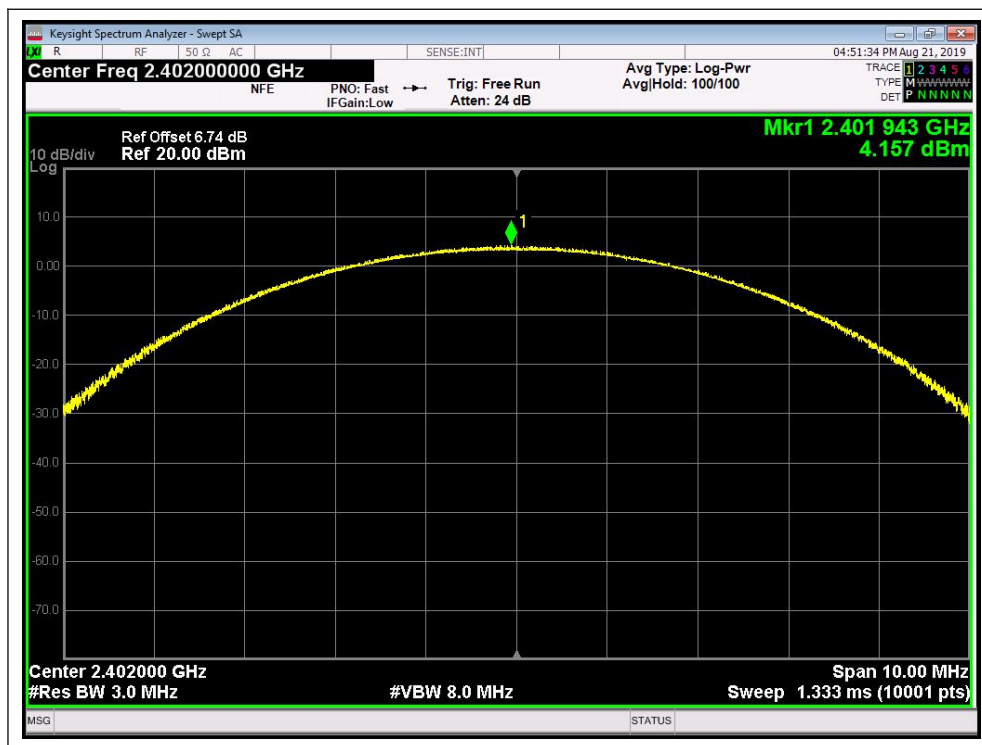B. Test Plots:

(8-DPSK, Channel 0, 2402MHz)

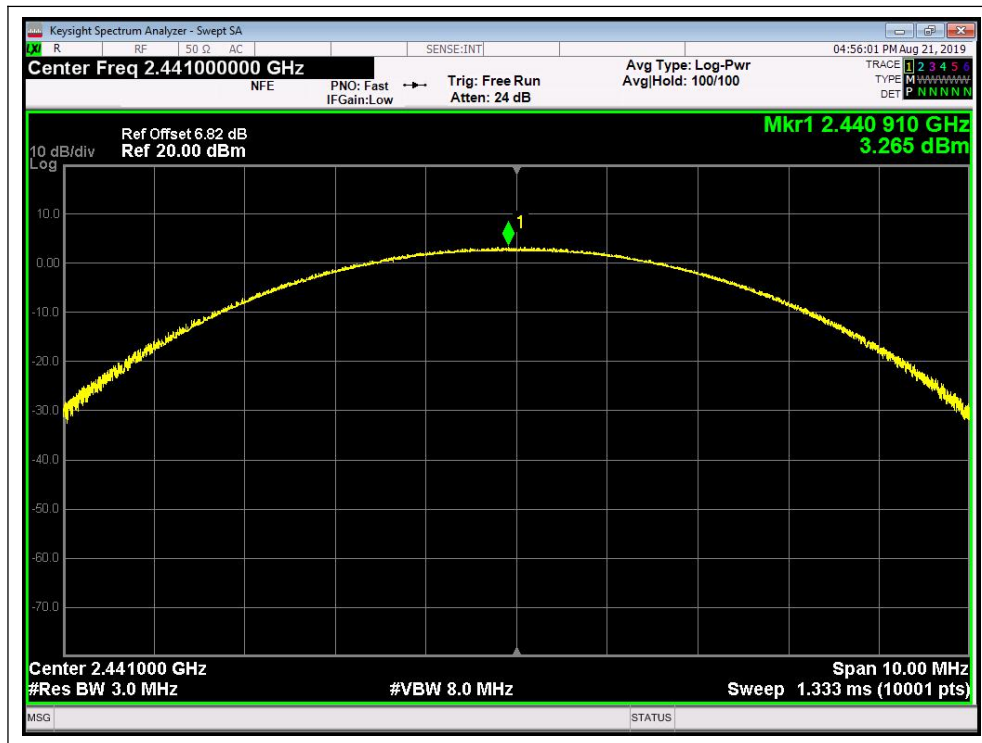

(8-DPSK, Channel 39, 2441MHz)

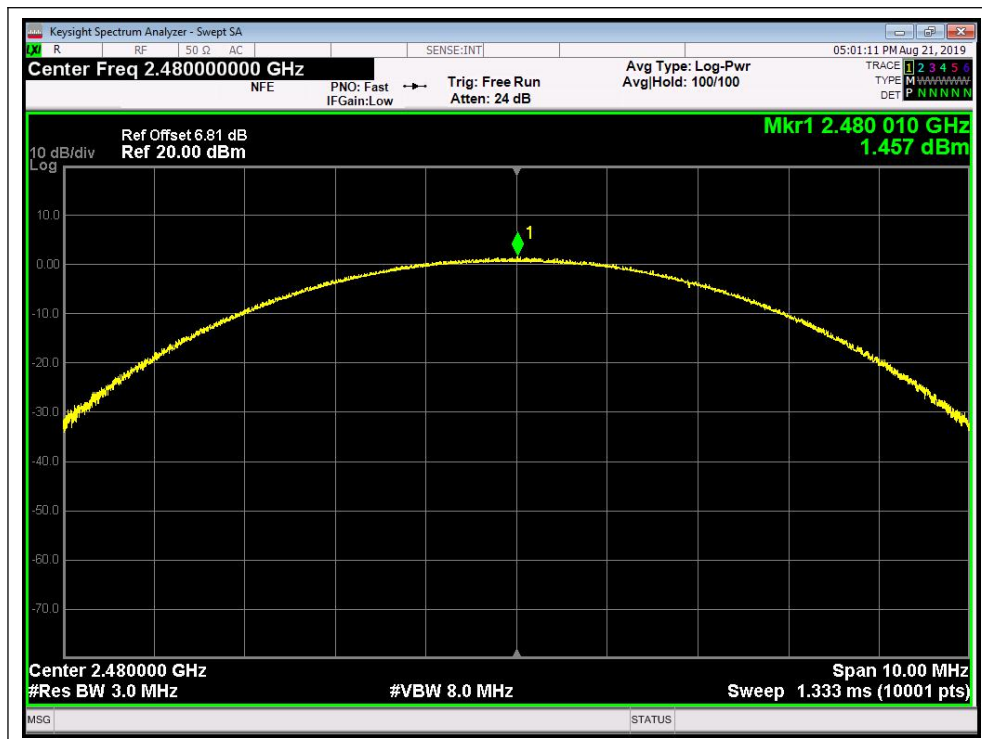

(8-DPSK, Channel 78, 2480MHz)

2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B(4).

2.4.3. Test procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

2.4.4. Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.035	PASS
39	2441	1.036	PASS
78	2480	1.035	PASS


B. Test Plots:

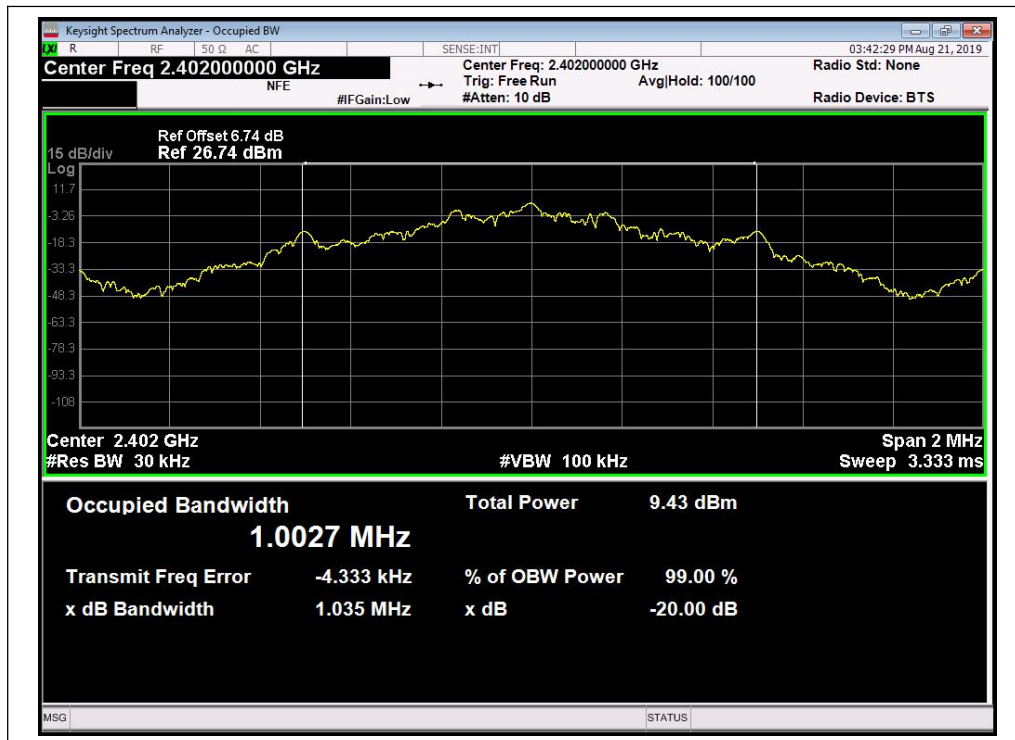

(GFSK, Channel 0, 2402MHz)

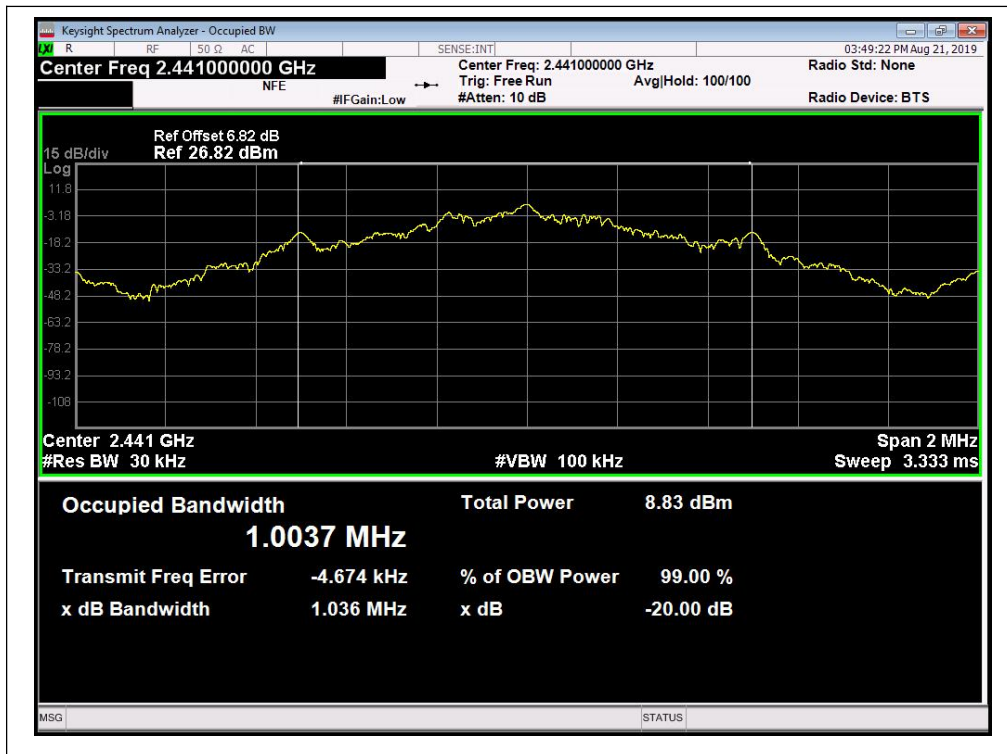

(GFSK, Channel 39, 2441MHz)

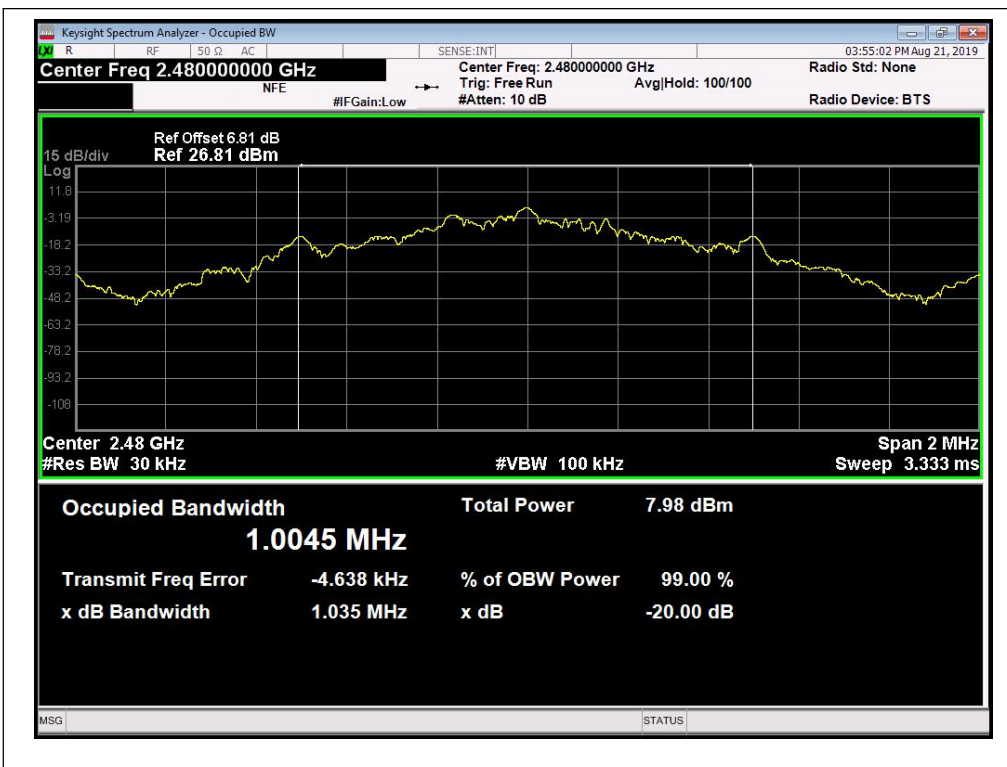


(GFSK, Channel 78, 2480MHz)


 $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.220	PASS
39	2441	1.220	PASS
78	2480	1.256	PASS

B. Test Plots:

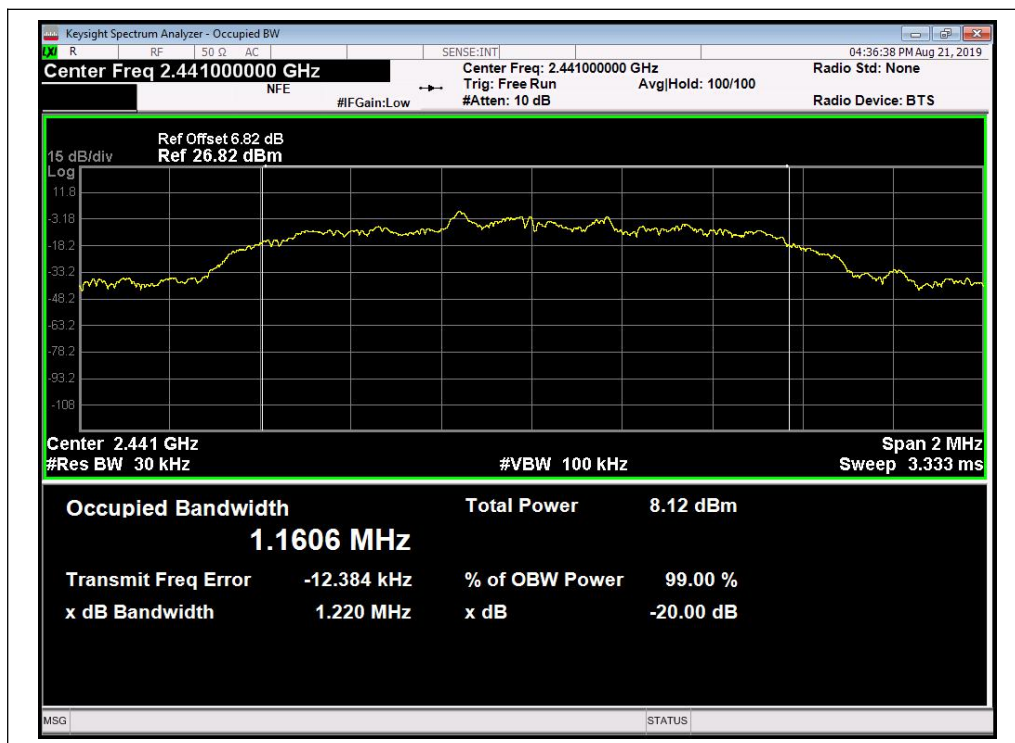 $\pi/4$ -DQPSK, Channel 0, 2402MHz)

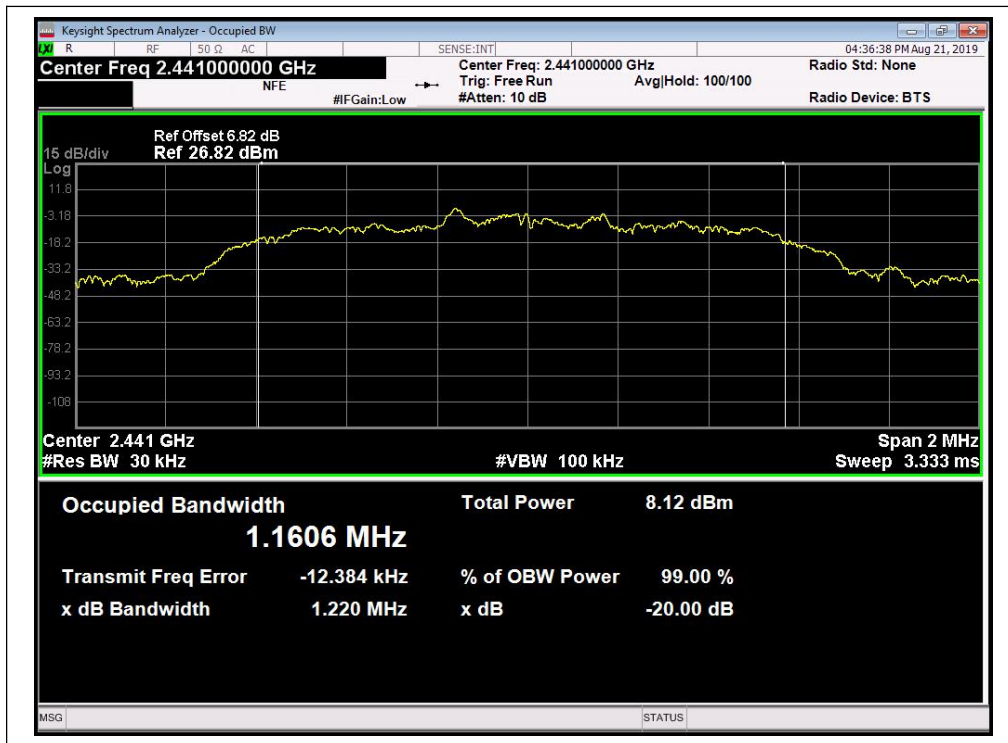


($\pi/4$ -DQPSK, Channel 39, 2441MHz)

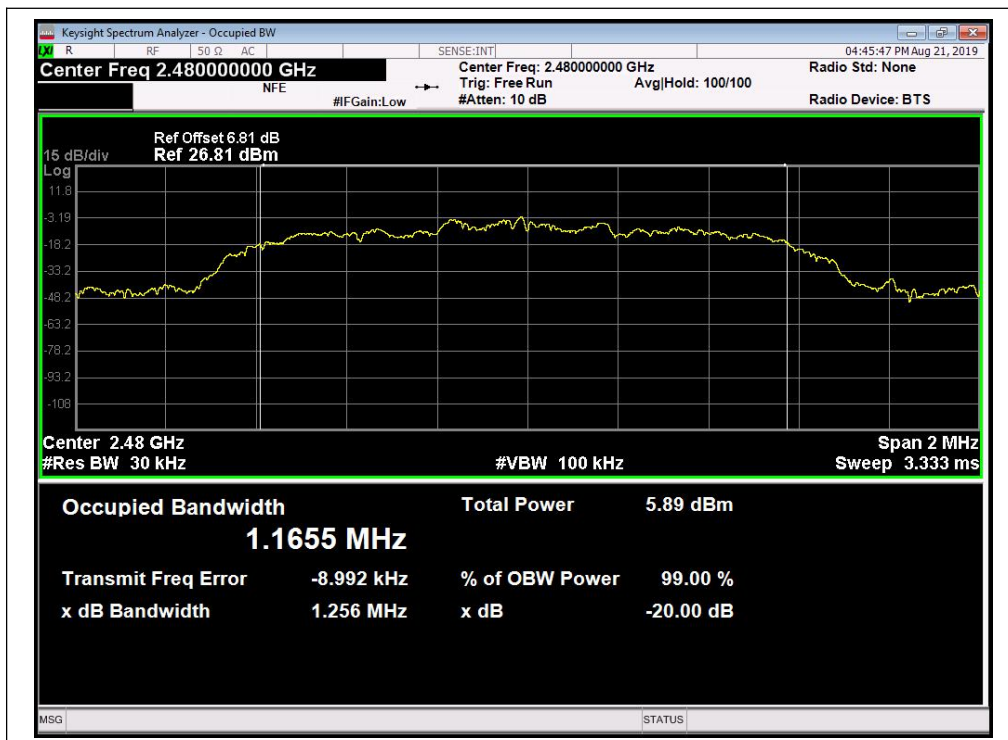


($\pi/4$ -DQPSK, Channel 78, 2480MHz)

**8-DPSK Mode****A. Test Verdict:**


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.215	PASS
39	2441	1.249	PASS
78	2480	1.245	PASS

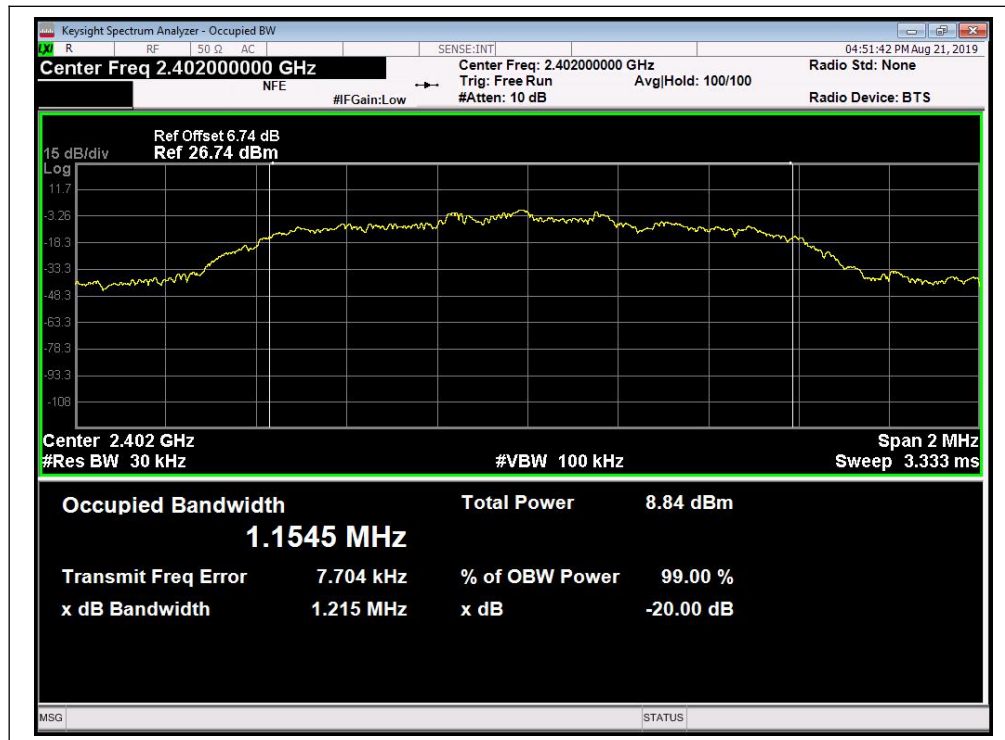B. Test Plots:

(8-DPSK, Channel 0, 2402MHz)

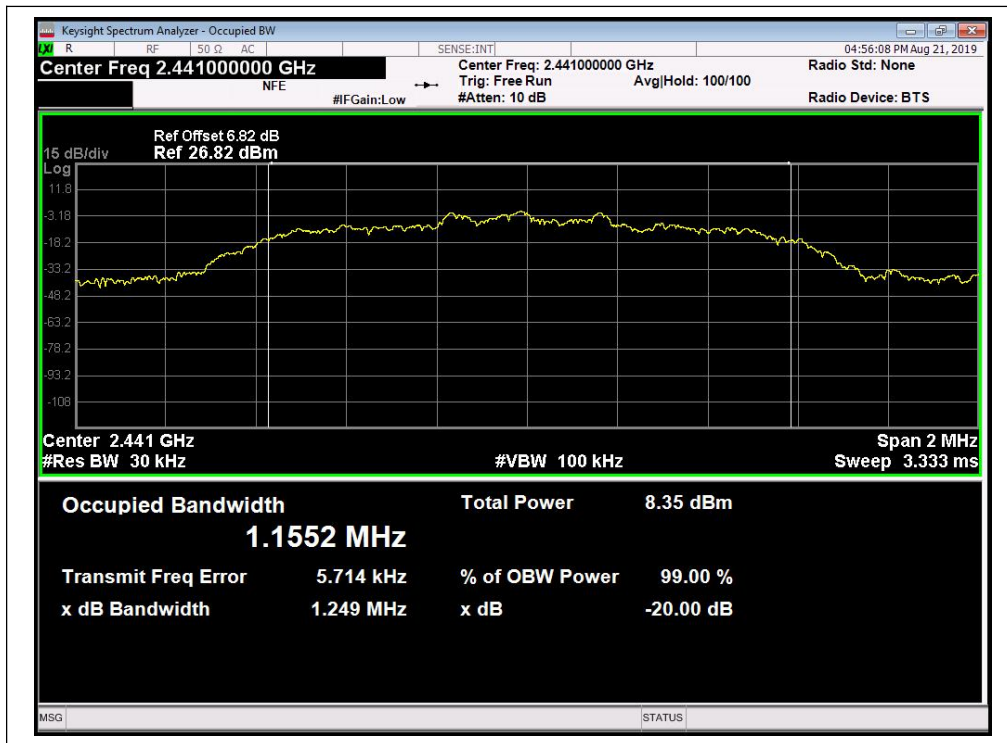

(8-DPSK, Channel 39, 2441MHz)

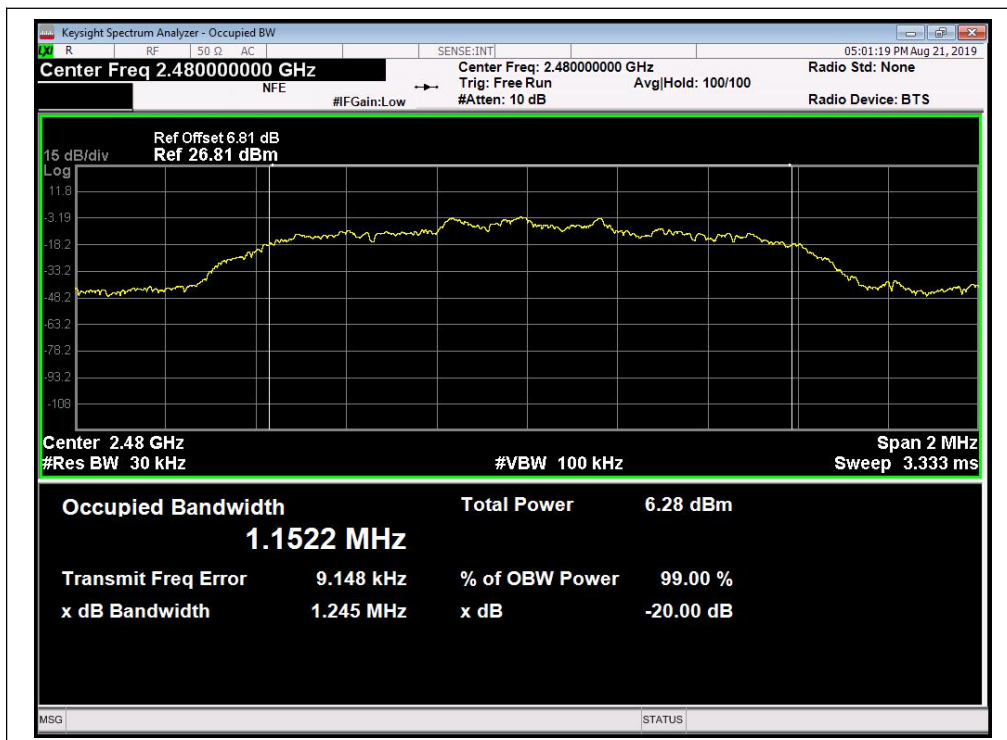

(8-DPSK, Channel 78, 2480MHz)

2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B(4).

2.5.3. Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA mark function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

2.5.4. Test Result


The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASS.

Test Mode	Measured Channel Numbers	Carried Frequency Separation (MHz)	20dB bandwidth (MHz)	Min. Limit ^{Note1} (MHz)	Verdict
GFSK	0 and 1	1.002	1.035	0.690	PASS
	39 and 40	0.999	1.036	0.683	PASS
	77 and 78	1.002	1.035	0.485	PASS
$\pi/4$ -DQPSK	0 and 1	0.978	1.220	0.829	PASS
	39 and 40	0.996	1.220	0.805	PASS
	77 and 78	1.005	1.256	0.837	PASS
8-DPSK	0 and 1	1.014	1.215	0.810	PASS
	39 and 40	1.032	1.249	0.824	PASS
	77 and 78	1.017	1.245	0.830	PASS


Note 1:Min. Limit is equal to the two-thirds of the 20dB bandwidth



Test Plots

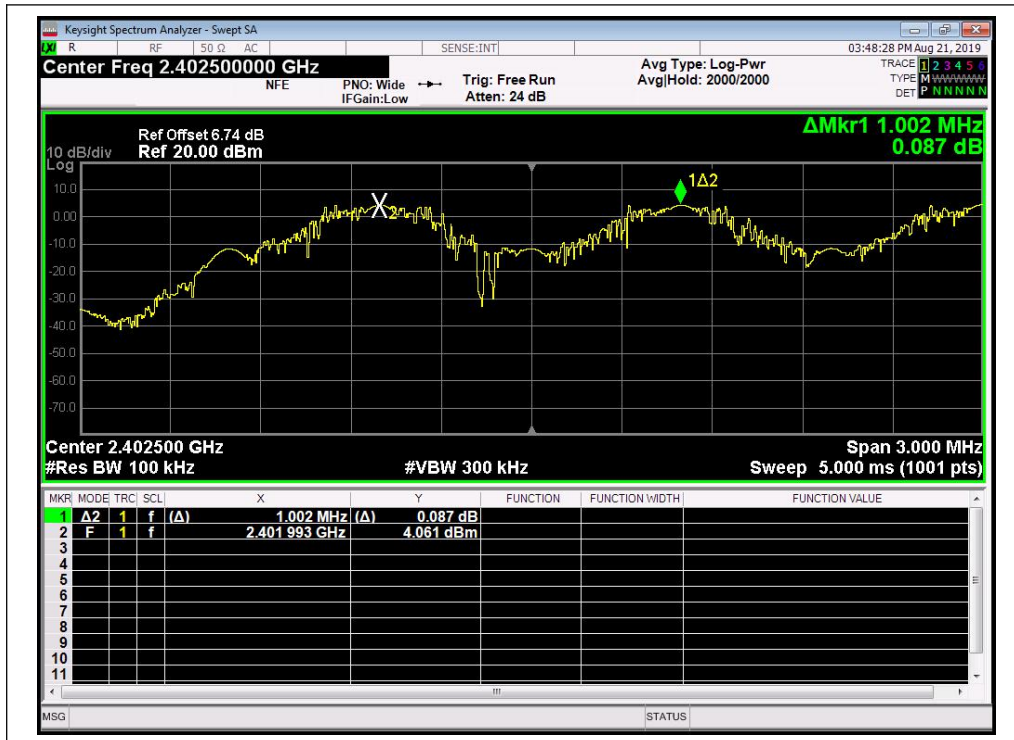

(GFSK, Channel 0 and 1, 2402MHz)

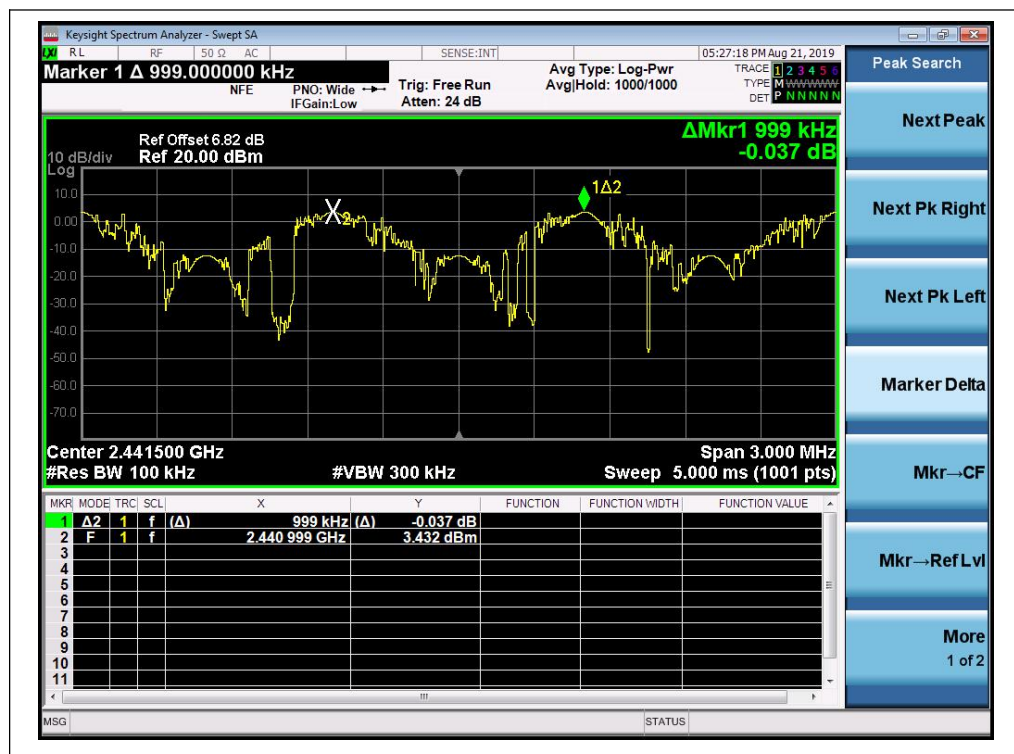


(GFSK, Channel 39 and 40, 2441MHz)



(GFSK, Channel 77 and 78, 2480MHz)




(π/4-DQPSK, Channel 0 and 1, 2402MHz)

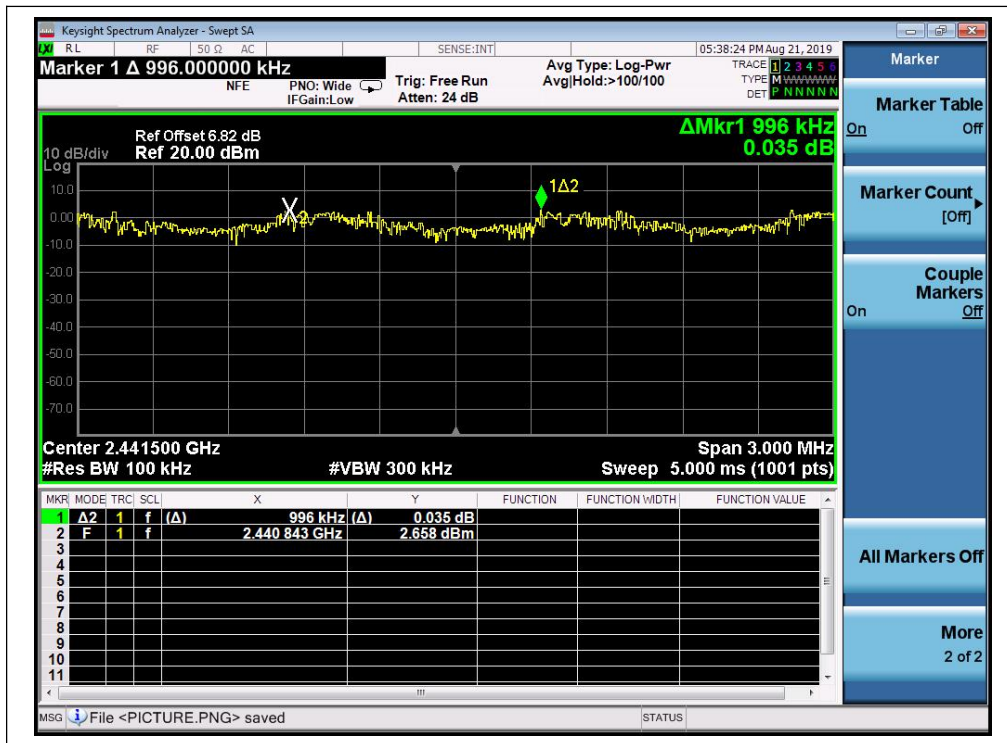
 $(\pi/4)$ -DQPSK, Channel 39 and 40, 2441MHz) $(\pi/4)$ -DQPSK, Channel 77 and 78, 2480MHz)



(8-DPSK, Channel 0 and 1, 2402MHz)

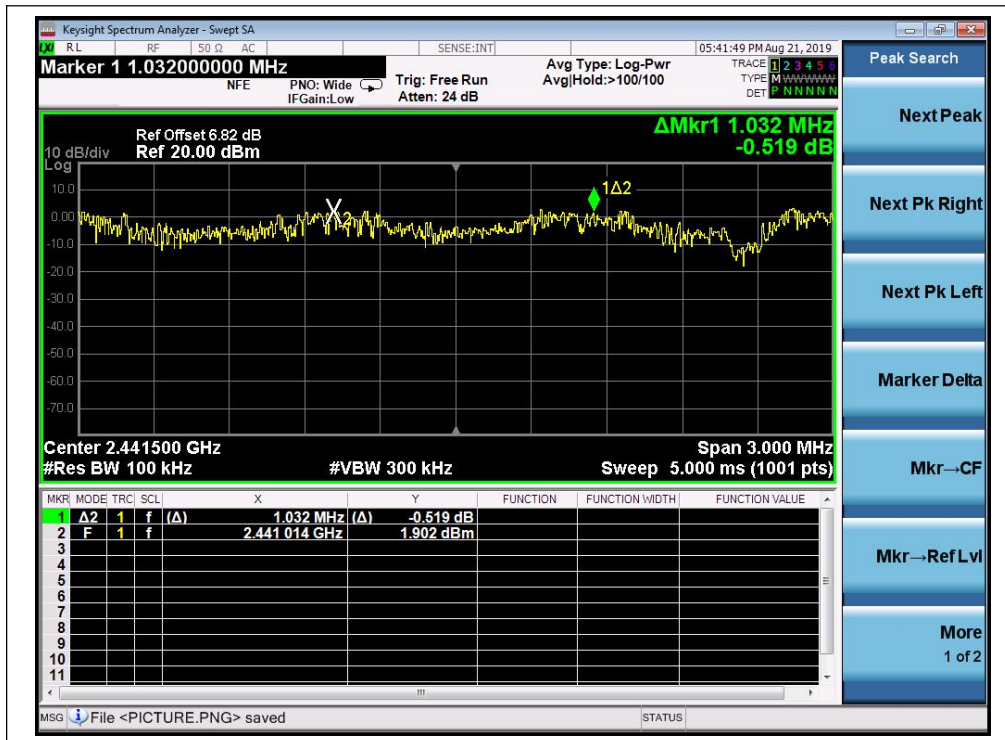

(8-DPSK, Channel 39 and 40, 2441MHz)

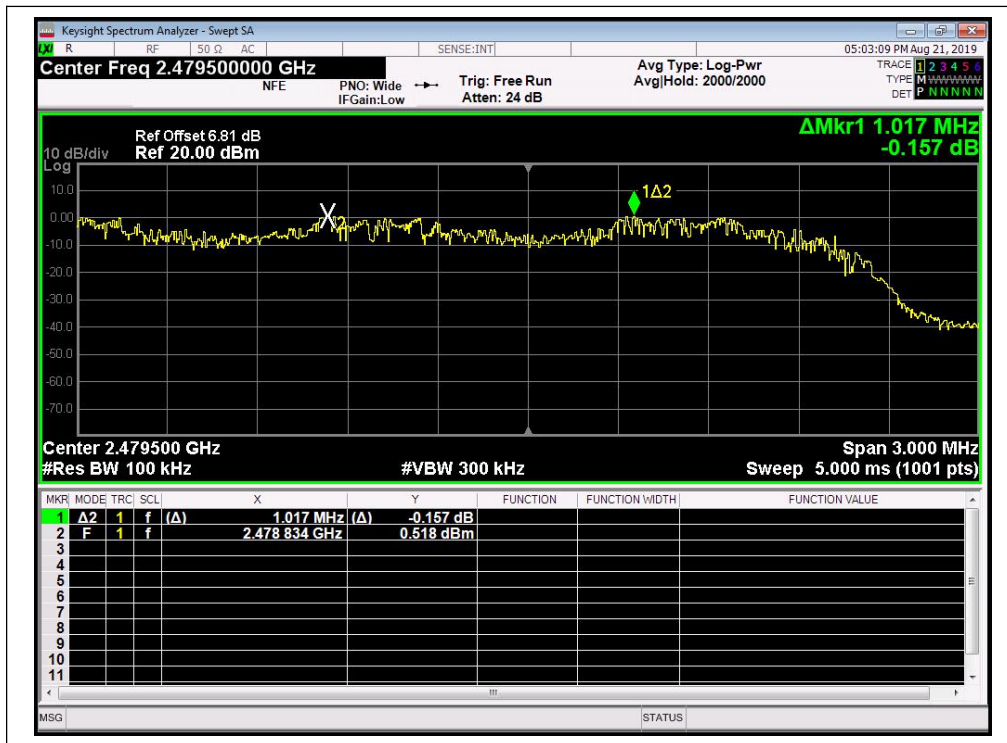

(8-DPSK, Channel 77 and 78, 2480MHz)

2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

The EUT was working in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no.(s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = time slot length * hop rate / number of hopping channels * 31.6s

Hop rate = 1600/s

B. Equipments List:

Please refer ANNEX B(4).

2.6.3. Test Result


For time of occupancy, all of mode were tested separately, we only recorded the worst test result(DH1/2DH1/3DH1) in this report.

GFSK Mode


A. Test Verdict:

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
DH1	2402	0.376	120.320	0.4	PASS
	2441	0.377	120.640		PASS
	2480	0.376	120.320		PASS


B. Test Plots:

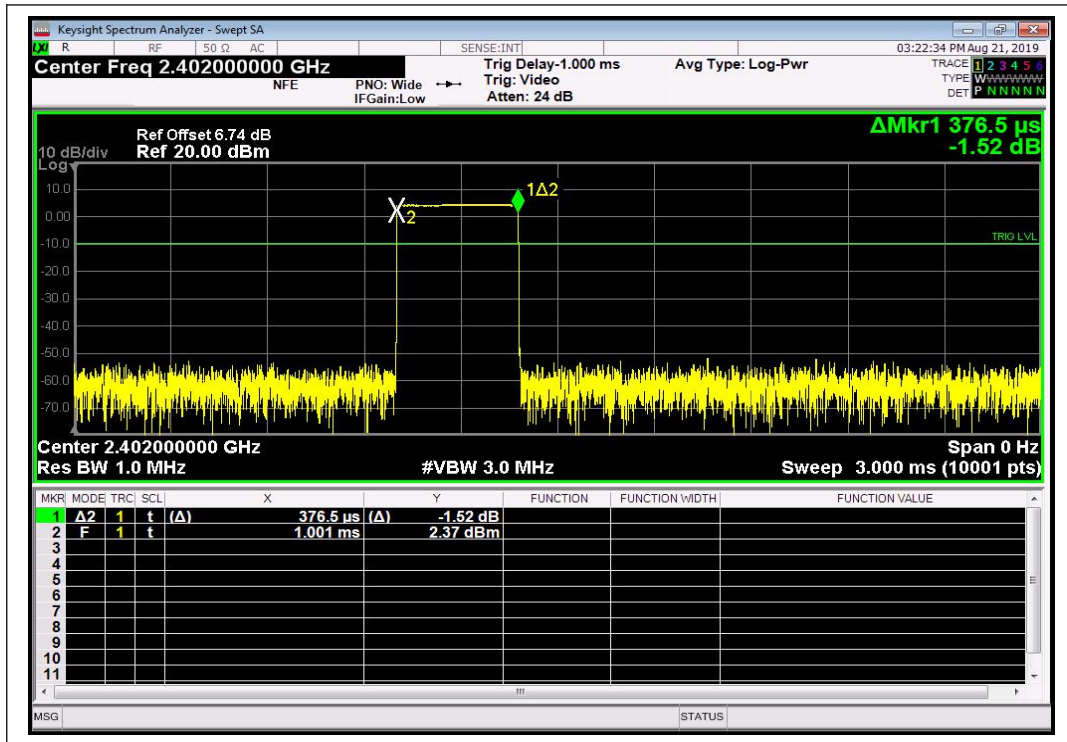

(DH1_2402MHz, GFSK)

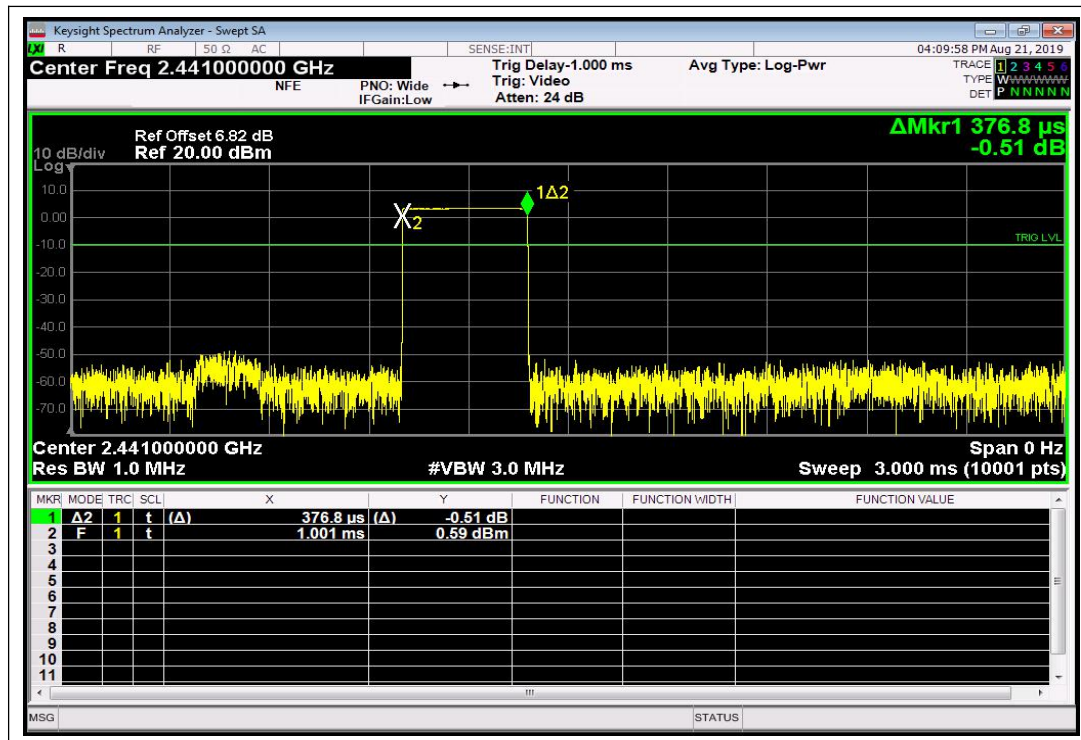

(DH1_2441M, GFSK)

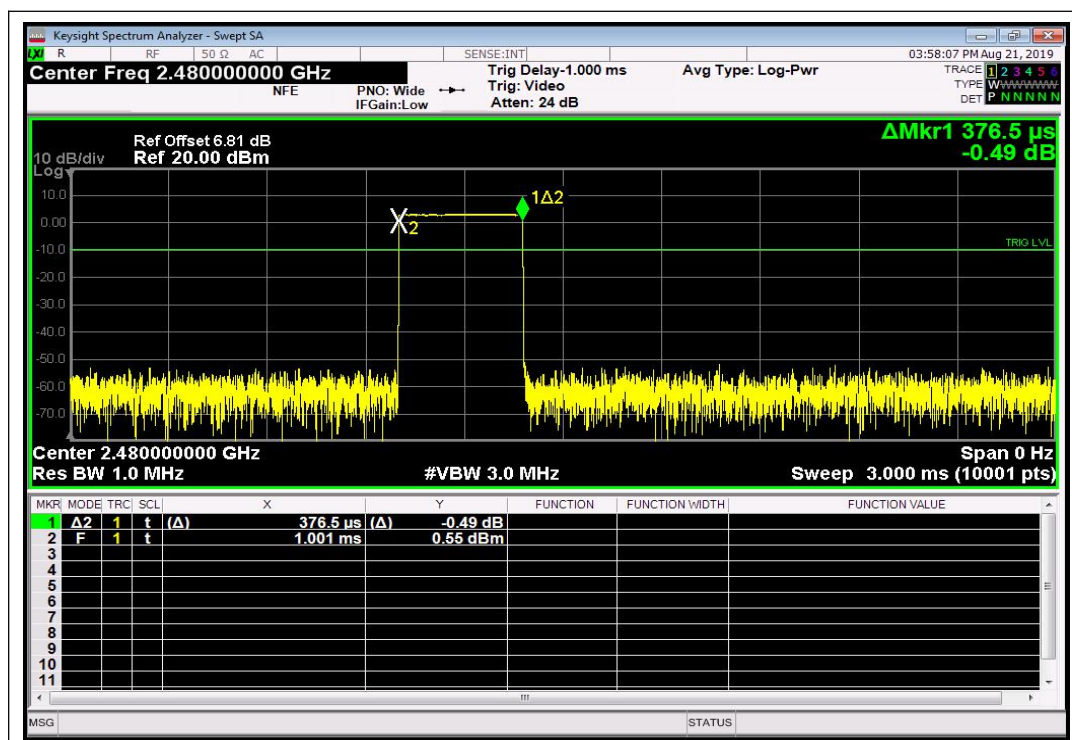

(DH1_2480M, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
2DH1	2402	0.377	120.640	0.4	PASS
	2441	0.384	122.880		PASS
	2480	0.379	121.280		PASS

B. Test Plots:

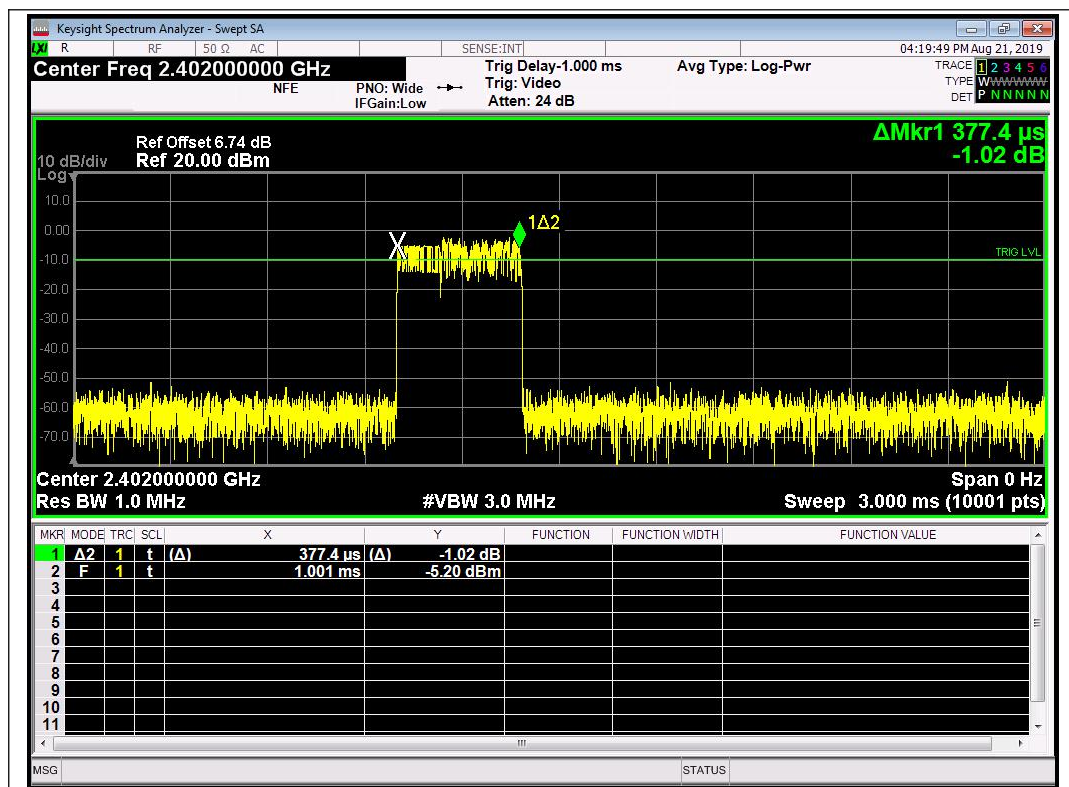

(2DH1_2402M, $\pi/4$ -DQPSK)

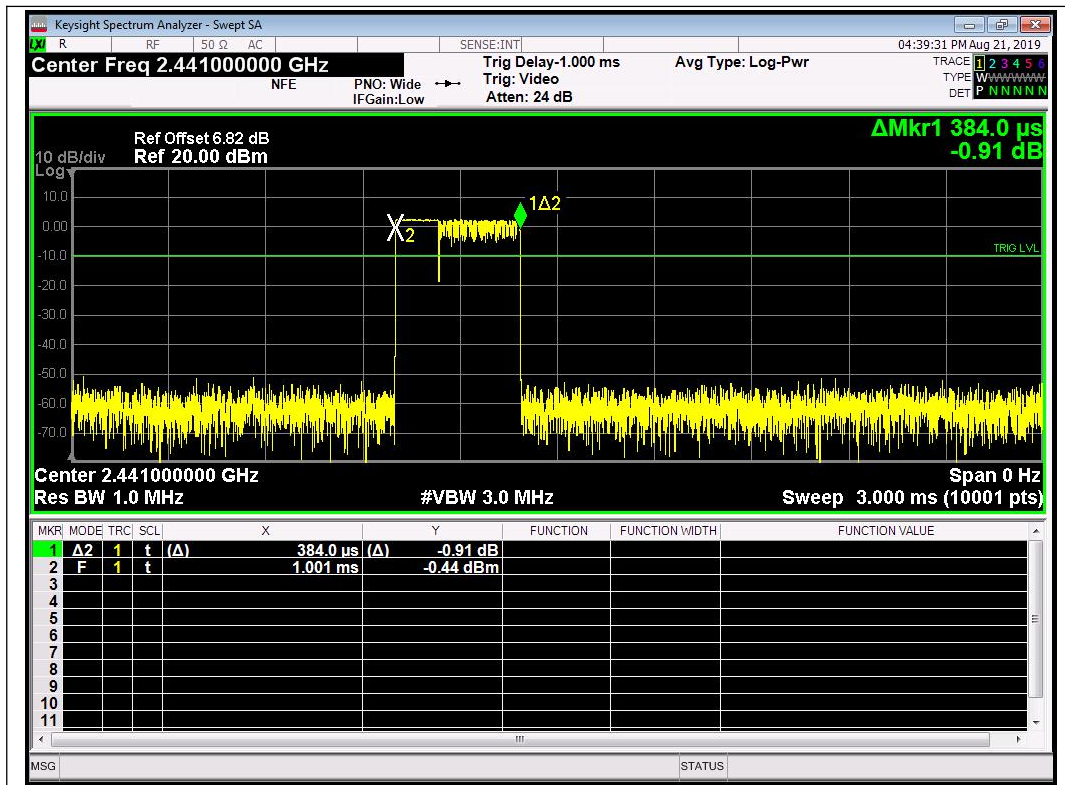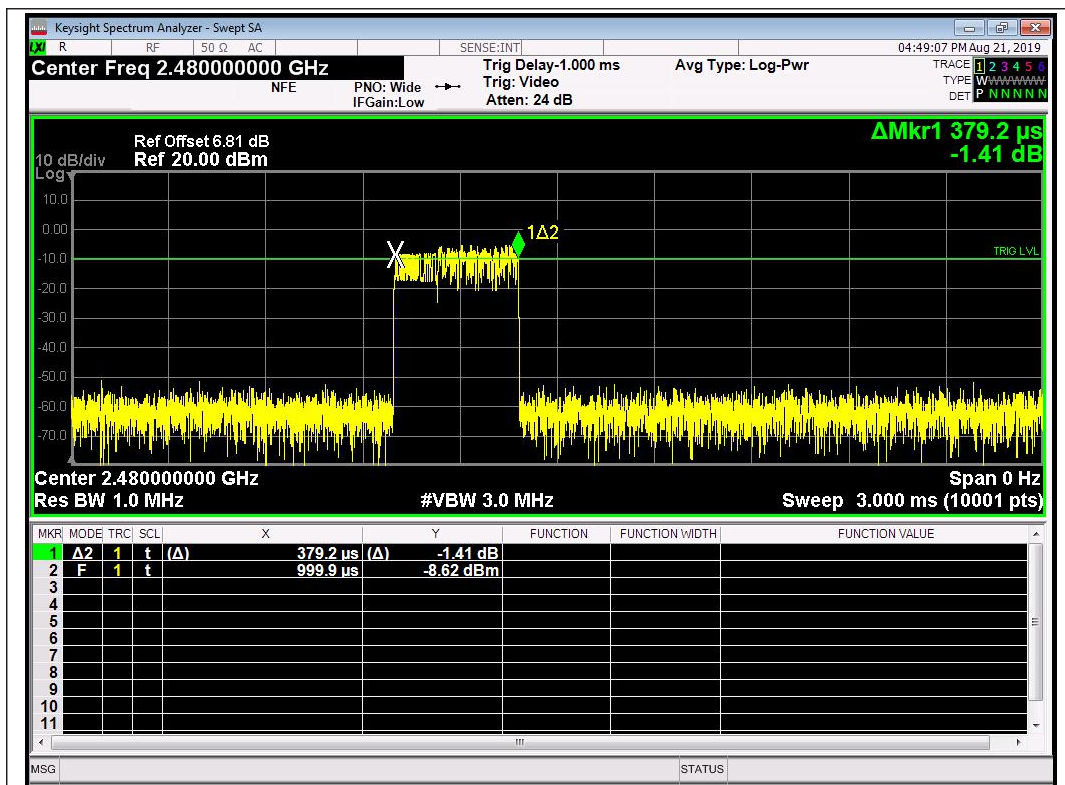
(2DH1_2441M, $\pi/4$ -DQPSK)(2DH1_2480M, $\pi/4$ -DQPSK)

8-DPSK mode


A. Test Verdict:

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
3DH1	2402	0.378	120.960	0.4	PASS
	2441	0.385	123.200		PASS
	2480	0.375	120.000		PASS


B. Test Plots:

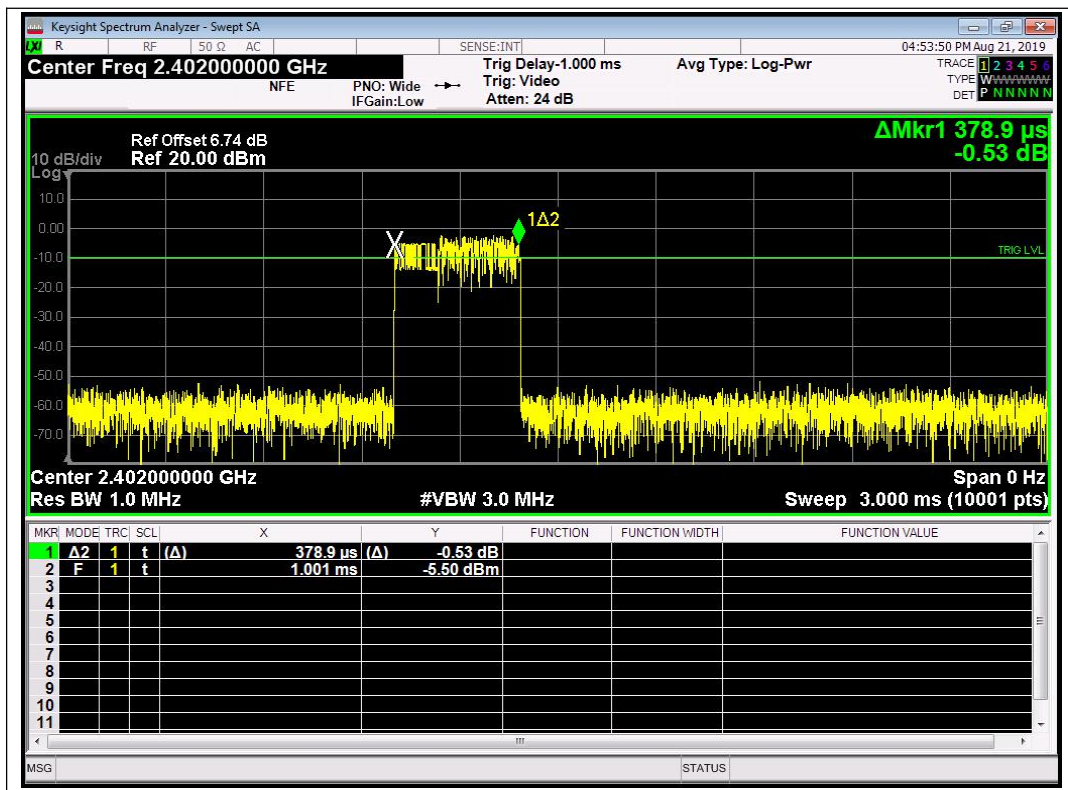

(3DH1_2402M, 8-DQPSK)

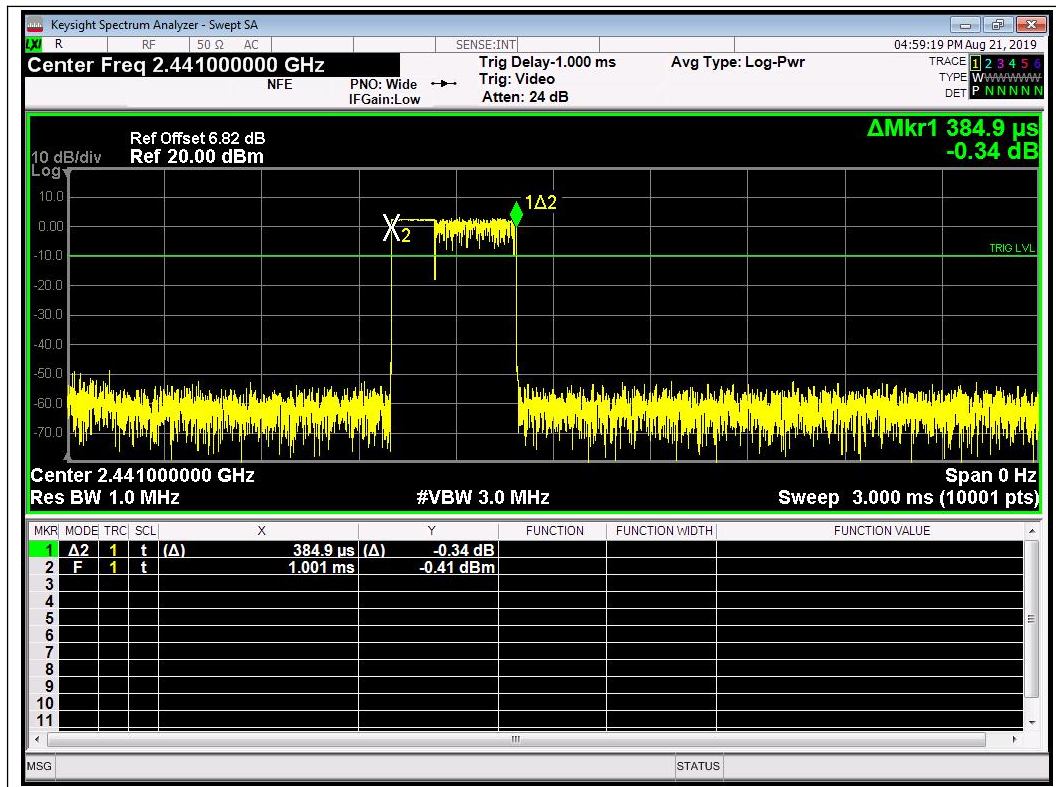

(3DH1_2441M, 8-DQPSK)

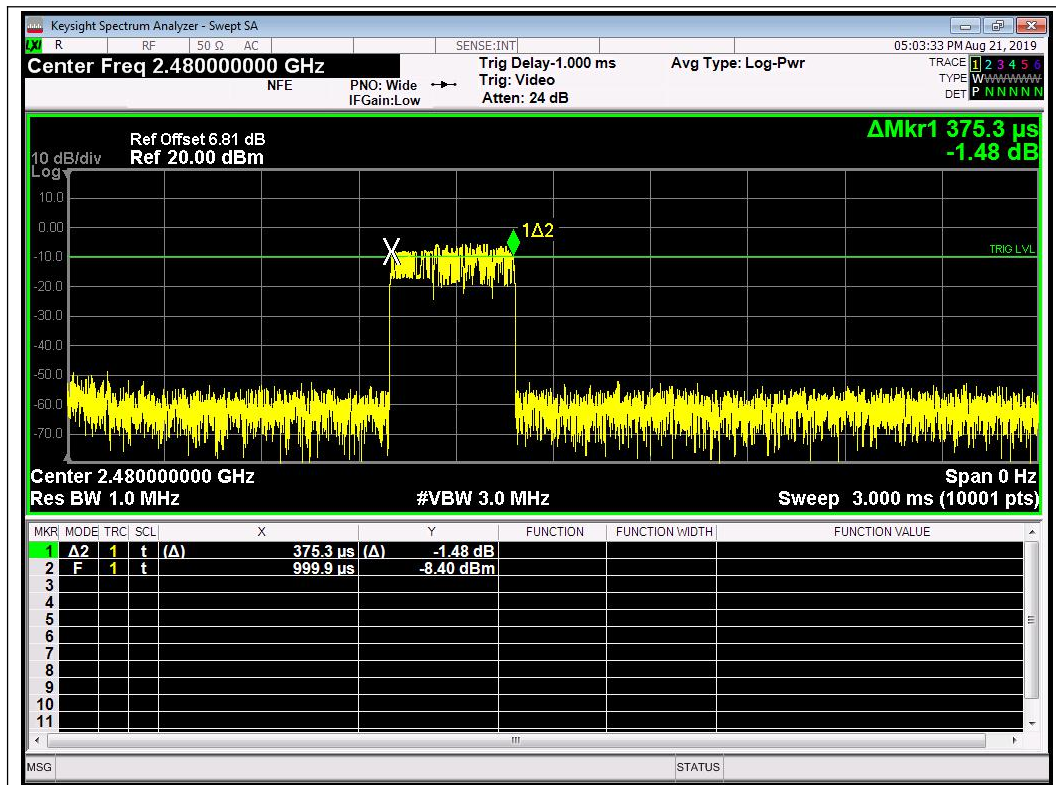

(3DH1_2480M, 8-DQPSK)

2.7. Conducted Spurious Emissions and Band Edge

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX B(4).


2.7.3. Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

GFSK Mode

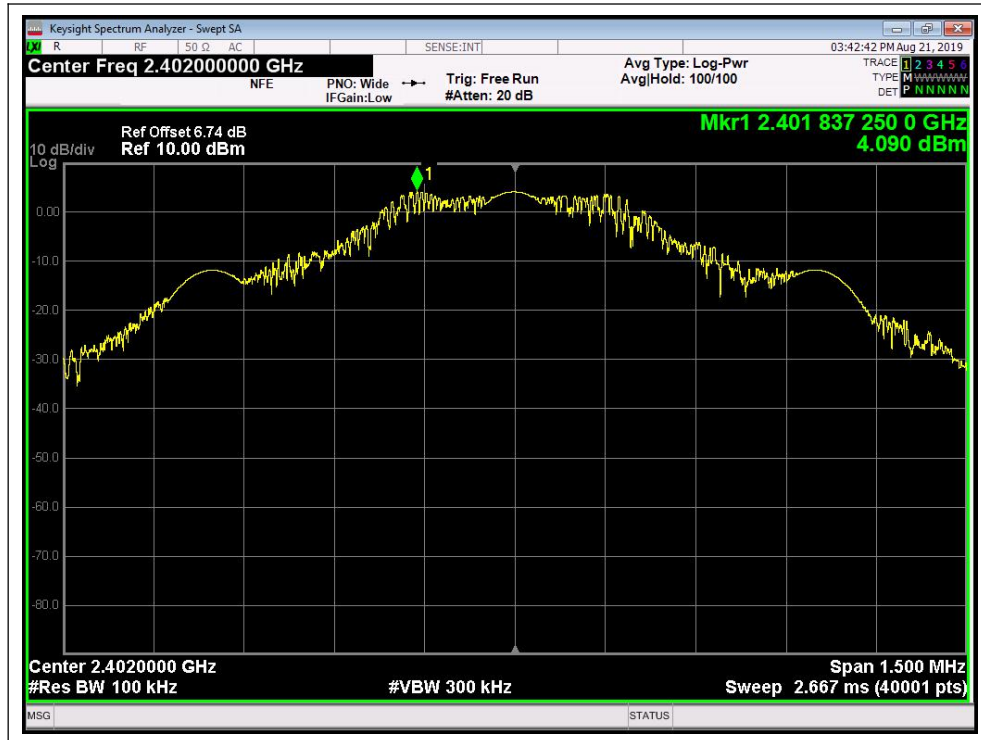

(Channel = 0, GFSK Mode Conducted Spurious Emissions, carrier power)