

# TEST REPORT



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (1) / (47) Pages

## 1. Client

- Name : BNCOM CO.LTD
- Address : 1106, M-Techno Center, 46, Gongdan-ro 140 Beon-gil, Gunpo-si, Gyeonggi-do, 15847, Korea
- Date of Receipt : 2021-04-07

## 2. Manufacturer

- Name : BNCOM CO.LTD
- Address : 1106, M-Techno Center, 46, Gongdan-ro 140 Beon-gil, Gunpo-si, Gyeonggi-do, 15847, Korea

## 3. Use of Report : For FCC Certification

**4. Test Sample / Model:** BLUETOOTH MODULE / BCM-LN200-AS

**5. Date of Test :** 2021-04-09 to 2021-04-23

**6. Test Standard(method) used :** FCC 47 CFR part 15 subpart C 15.247  
ANSI C63.10-2013

**7. Testing Environment:** Temp.: (23 ± 1) °C, Humidity: (48 ± 5) % R.H.

**8. Test Results :** Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by Gwanyong Kim: (Signature)	Technical Manager Young-taek Lee: (Signature)
-------------	--	--

2021-04-30

Republic of KOREA **CTK Co., Ltd.**



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (2) / (47) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2021-04-30	Issued (CTK-2021-01691)	all

*This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.*



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (3) / (47) Pages

## **CONTENTS**

1. General Product Description .....	4
1.1 Client Information .....	4
1.2 Product Information.....	4
1.3 Peripheral Devices .....	4
2. Facility and Accreditations.....	5
2.1 Test Facility .....	5
2.2 Laboratory Accreditations and Listings.....	5
2.3 Calibration Details of Equipment Used for Measurement.....	5
3. Test Specifications .....	6
3.1 Standards .....	6
3.2 Mode of operation during the test .....	6
3.3 Maximum Measurement Uncertainty .....	7
4. Technical Characteristic Test.....	8
4.1 6dB Bandwidth and 99 % Bandwidth.....	8
4.2 Maximum peak Conducted Output Power .....	12
4.3 Power Spectral Density .....	15
4.4 Band Edge & Conducted Spurious emission .....	18
4.5 Radiated Emission .....	25
4.6 AC Conducted Emissions .....	42
5. APPENDIX A – Test Equipment Used For Tests.....	47

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (4) / (47) Pages

## 1. General Product Description

### 1.1 Client Information

<b>Company</b>	BNCOM CO.LTD
<b>Contact Point</b>	1106, M-Techno Center, 46, Gongdan-ro 140 Beon-gil, Gunpo-si, Gyeonggi-do, 15847, Korea
<b>Contact Person</b>	Name : SUNG GON KIM E-mail : sgkim@bncomm.co.kr Tel : +82-31-427-6028 Fax : +82-31-427-8907

### 1.2 Product Information

<b>FCC ID</b>	2APDI-BCM-LN200-AS
<b>Product Description</b>	BLUETOOTH MODULE
<b>Basic model</b>	BCM-LN200-AS
<b>Variant Model name</b>	-
<b>Operating Frequency</b>	2 402 MHz - 2 480 MHz
<b>RF Output Power</b>	1 Mbps : 5.08 dBm (3.22 mW) 2 Mbps : 0.88 dBm (1.23 mW)
<b>Antenna type</b>	PCB Pattern Antenna
<b>Antenna gain</b>	-1.52 dBi
<b>Number of channels</b>	40
<b>Channel Spacing</b>	1 MHz
<b>Type of Modulation</b>	GFSK (Bluetooth 5.2 - LE)
<b>Power Source</b>	DC 3.3 V
<b>Test Software(Version)</b>	nRF Connect V3.6.1
<b>RF Power setting in Test SW</b>	1 Mbps : 4 dBm 2 Mbps : 0 dBm

### 1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R6P
AC/DC Adapter	HP	HSTNN-LA40	7628011101



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (5) / (47) Pages

## 2. Facility and Accreditations

### 2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea.

### 2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

### 2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (6) / (47) Pages

### 3. Test Specifications

#### 3.1 Standards

Section in FCC	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(e)	Transmitter power spectral density	C	
15.247(b)	Maximum peak conducted output power	C	
15.247(d)	Unwanted emission	C	
15.209	Transmitter emission	C	Radiated
15.207(a)	AC Conducted Emission	C	Line Conducted

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013

Note 4: The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013

#### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests. The results are only attached worst cases.

##### Test Frequency

Lowest channel	Middle channel	Highest channel
2 402 MHz	2 440 MHz	2 480 MHz

##### Test mode

Mode	Duty Cycle	Duty Cycle Factor
1 Mbps	48.0 %	3.19 dB
2 Mbps	48.0 %	3.19 dB



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (7) / (47) Pages

### 3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.  
Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L. : Approx. 95%, $k = 2$ )
Power Spectral Density	1.5 dB (C.L. : Approx. 95%, $k = 2$ )
Occupied Bandwidth	0.1 MHz (C.L. : Approx. 95%, $k = 2$ )
Unwanted Emission(conducted)	3.0 dB (C.L. : Approx. 95%, $k = 2$ )
Radiated Emissions ( $f \leq 30$ MHz)	1.5 dB (C.L. : Approx. 95%, $k = 2$ )
Radiated Emissions ( $f \leq 1$ GHz)	4.66 dB (C.L. : Approx. 95%, $k = 2$ )
Radiated Emissions ( $f > 1$ GHz)	4.76 dB (C.L. : Approx. 95%, $k = 2$ )
AC Conducted Emission	1.96 dB $\mu$ V (C.L. : Approx. 95%, $k = 2$ )

#### 4. Technical Characteristic Test

## 4.1 6dB Bandwidth and 99 % Bandwidth

## Test Procedures

KDB 558074 - Section 8.2  
ANSI C63.10-2013 - Section 6.9.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## Test Procedures

ANSI C63.10-2013 - Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

## Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz (6dB Bandwidth)
- b) RBW = 1 % to 5 % of the OBW  
(99 % Bandwidth)
- c) VBW  $\geq 3 \times$  RBW
- d) Detector = peak
- e) Trace mode = Max hold
- f) Sweep = auto couple
- g) Allow trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Limit : 6 dB Bandwidth**

6 dB Bandwidth > 500 kHz

Limit : 99 % Bandwidth

N/A



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (9) / (47) Pages

### Test Data :

Test mode : BLE 1 Mbps

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	99% Bandwidth [MHz]	Result
Lowest	2 402	0.687	1.058	Complies
Middle	2 440	0.687	1.059	
Highest	2 480	0.687	1.062	

Test mode : BLE 2 Mbps

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	99% Bandwidth [MHz]	Result
Lowest	2 402	1.151	2.077	Complies
Middle	2 440	1.156	2.078	
Highest	2 480	1.145	2.081	

See next pages for actual measured spectrum plots.




**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (10) / (47) Pages


### BLE 1 Mbps - Lowest channel (2.402 MHz)

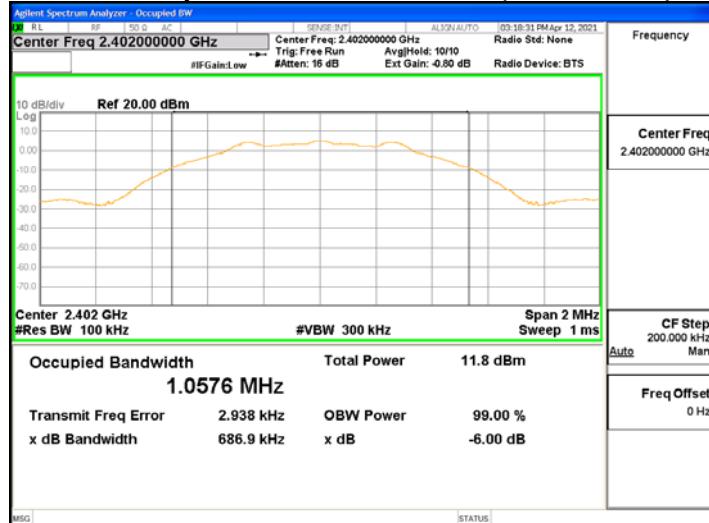

### BLE 1 Mbps - Middle channel (2.440 MHz)

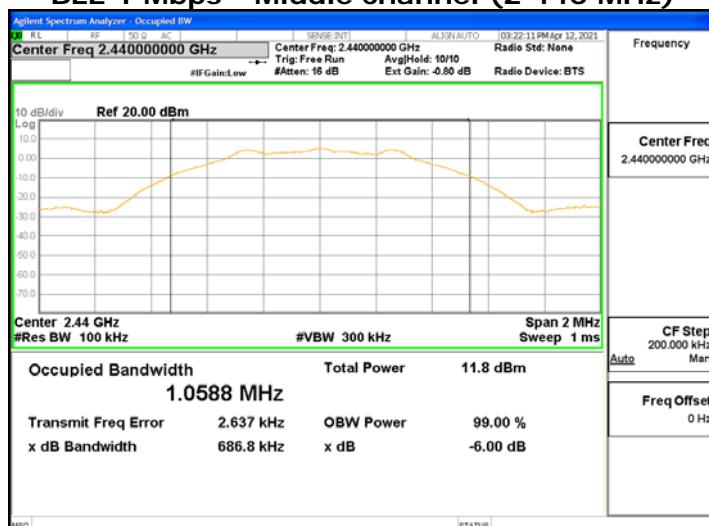

### BLE 1 Mbps - Highest channel (2.480 MHz)

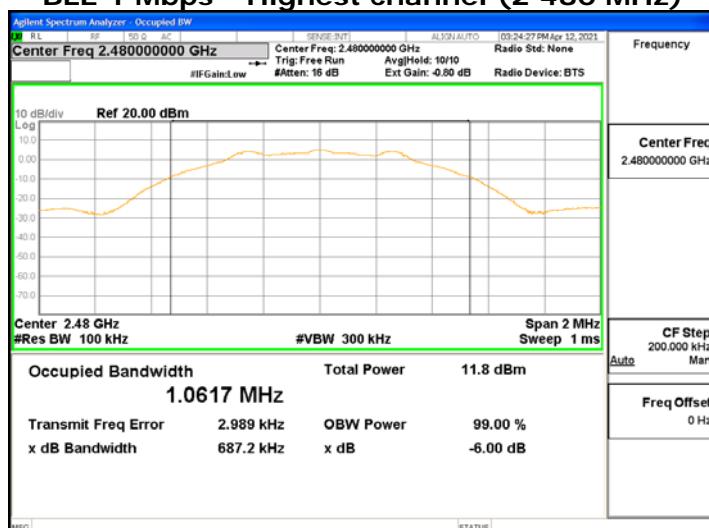




**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (11) / (47) Pages


### BLE 2 Mbps - Lowest channel (2.402 MHz)

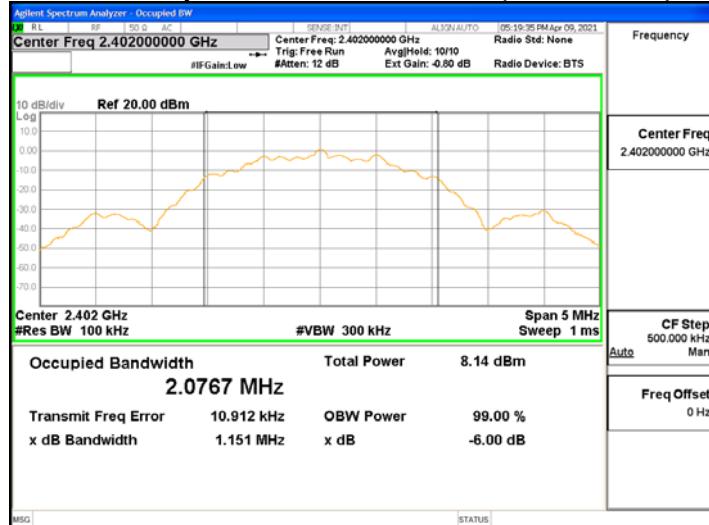

### BLE 2 Mbps - Middle channel (2.440 MHz)

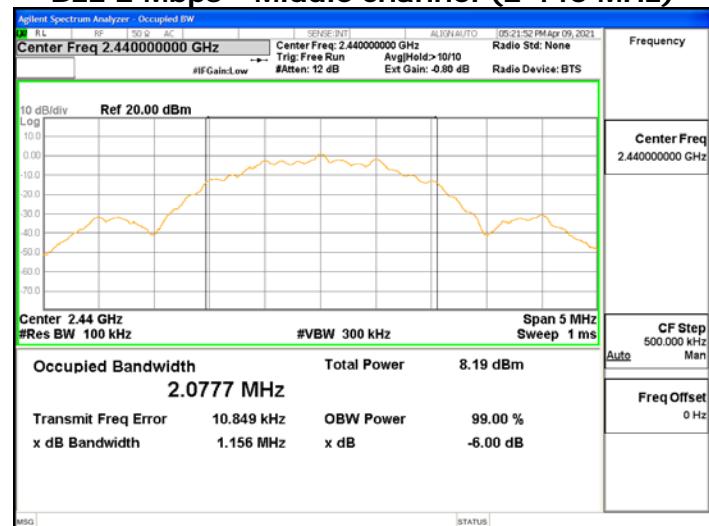

### BLE 2 Mbps - Highest channel (2.480 MHz)

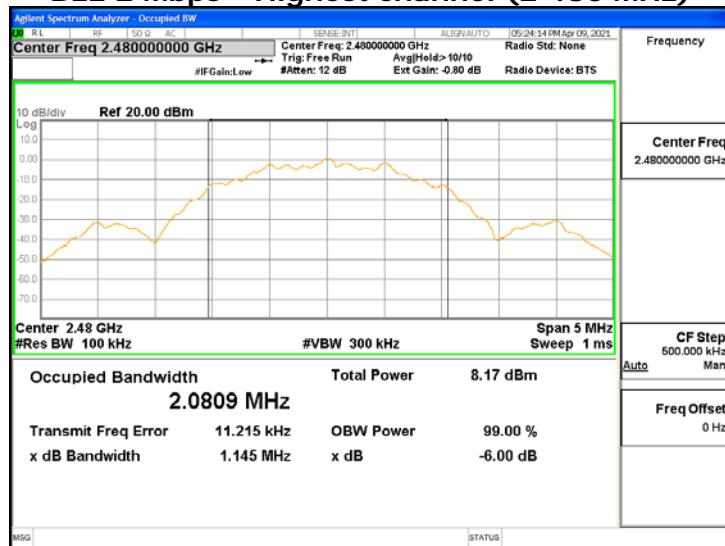



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (12) / (47) Pages

## 4.2 Maximum peak Conducted Output Power

### Test Procedures

KDB 558074 - Section 8.3.1.1

ANSI C63.10-2013 - Section 11.9.1.1

The following procedure can be used when the maximum available RBW of the instrument is greater than the DTS bandwidth:

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW $\geq$ DTS Bandwidth	b) VBW $\geq 3 \times$ RBW
c) span $\geq 3 \times$ RBW	d) Sweep time = auto couple
e) Detector = peak	f) Trace mode= max hold
g) Allow trace to fully stabilize	
h) Use peak marker function to determine the peak amplitude level.	

#### Limit :

Maximum Output Power < 1 W (30 dBm)

#### Test Data :

Test mode : BLE 1 Mbps

Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Lowest	2 402	5.08	30	Complies
Middle	2 440	4.99	30	
Highest	2 480	5.06	30	

Test mode : BLE 2 Mbps

Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Lowest	2 402	0.83	30	Complies
Middle	2 440	0.86	30	
Highest	2 480	0.88	30	

See next pages for actual measured spectrum plots.




**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (13) / (47) Pages


### BLE 1 Mbps - Lowest channel (2.402 MHz)

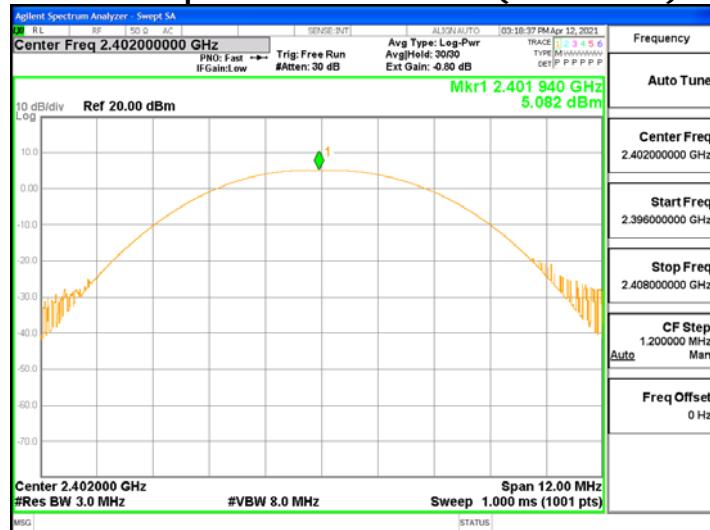


### BLE 1 Mbps - Middle channel (2.440 MHz)

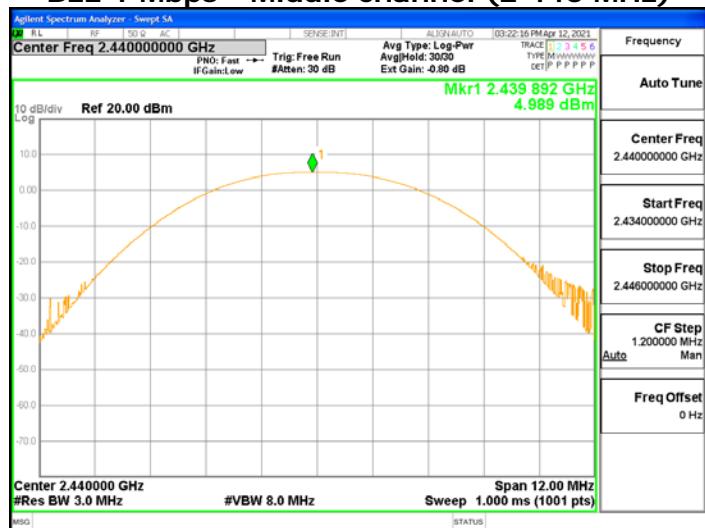


### BLE 1 Mbps - Highest channel (2.480 MHz)

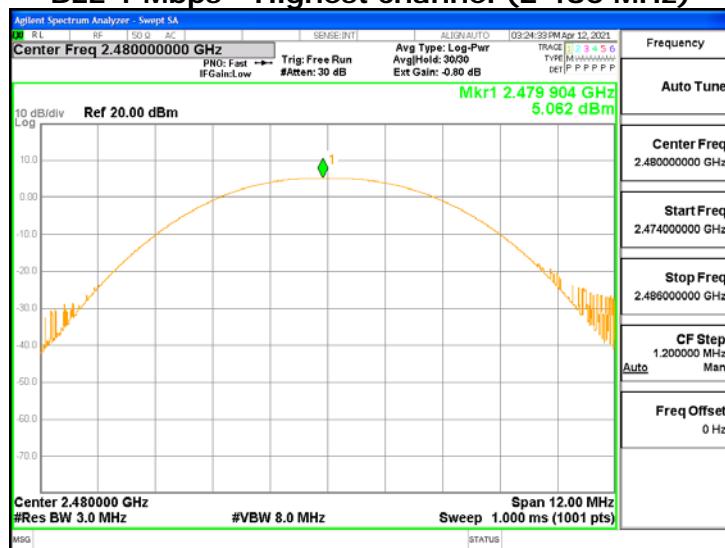


### BLE 2 Mbps - Lowest channel (2.402 MHz)

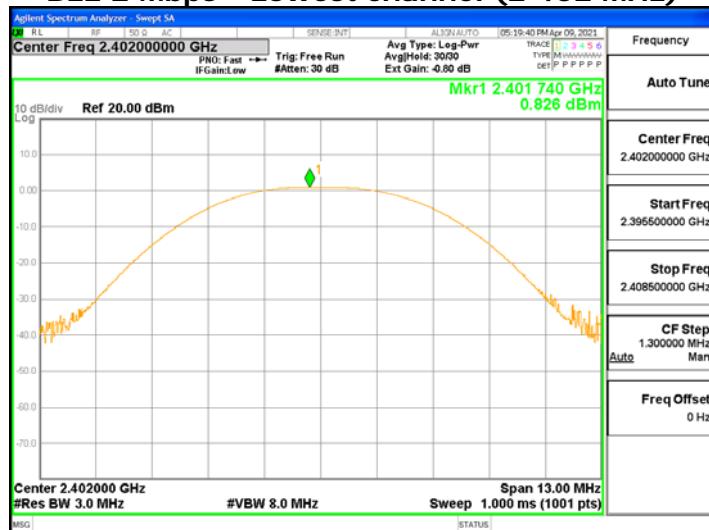

### BLE 2 Mbps - Middle channel (2.440 MHz)

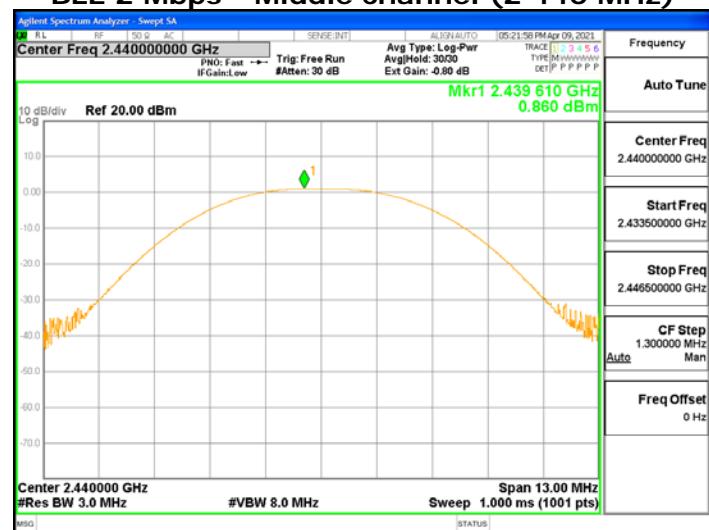

### BLE 2 Mbps - Highest channel (2.480 MHz)

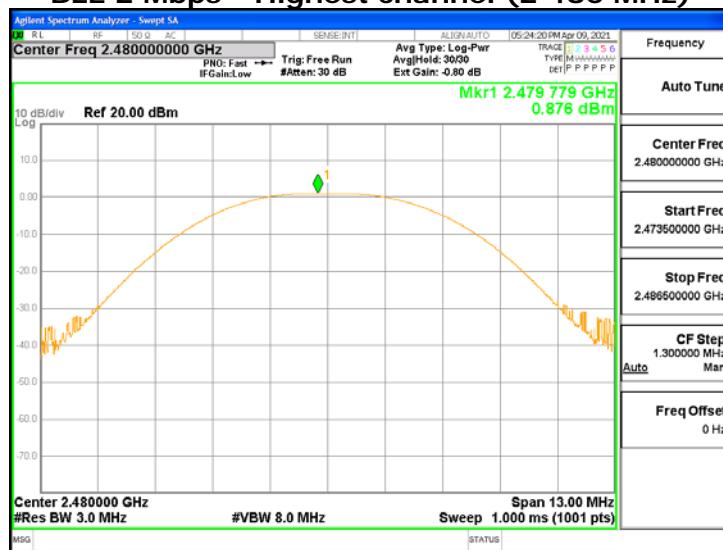



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (15) / (47) Pages

## 4.3 Power Spectral Density

### Test Procedures

KDB 558074 - Section 8.4

ANSI C63.10-2013 - Section 11.10.2

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$	b) VBW $\geq 3 \times \text{RBW}$
c) span $\geq 1.5 \times \text{DTS bandwidth}$	d) Sweep time = auto couple
e) Detector = peak	f) Trace mode= max hold
g) Allow trace to fully stabilize	
h) Use the peak marker function to determine the maximum amplitude level within the RBW.	

#### Limit :

Power Spectral Density < 8 dBm @ 3 kHz BW

#### Test Data :

Test mode : BLE 1 Mbps


Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Lowest	2 402	-10.50	8	Complies
Middle	2 440	-10.12		
Highest	2 480	-10.50		

Test mode : BLE 2 Mbps


Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Lowest	2 402	-17.08	8	Complies
Middle	2 440	-17.17		
Highest	2 480	-17.14		

See next pages for actual measured spectrum plots.


### BLE 1 Mbps - Lowest channel (2.402 MHz)

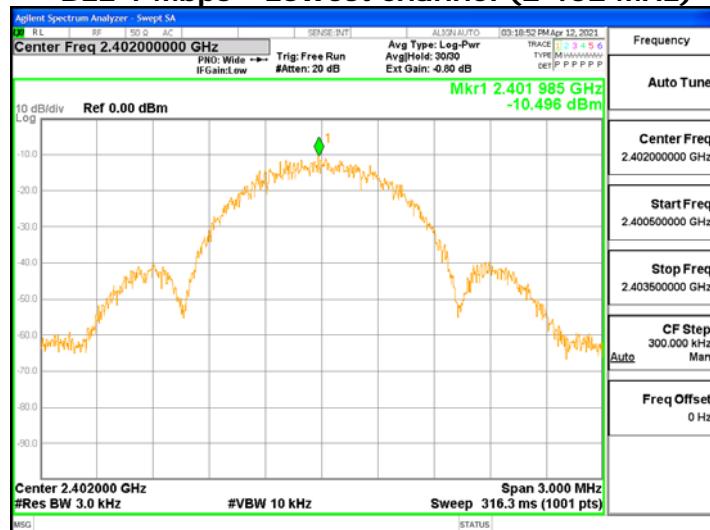


### BLE 1 Mbps - Middle channel (2.440 MHz)

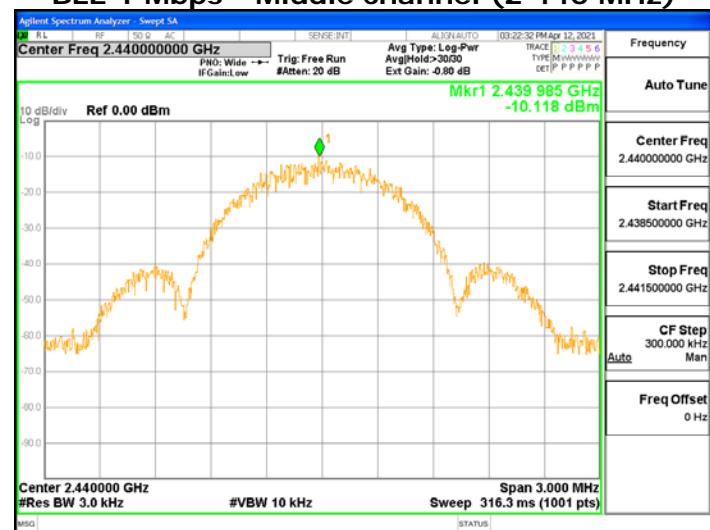


### BLE 1 Mbps - Highest channel (2.480 MHz)

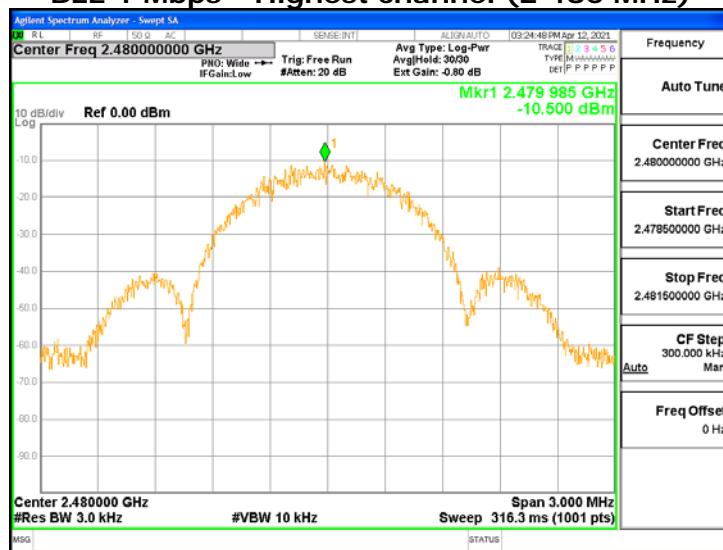


### BLE 2 Mbps - Lowest channel (2.402 MHz)

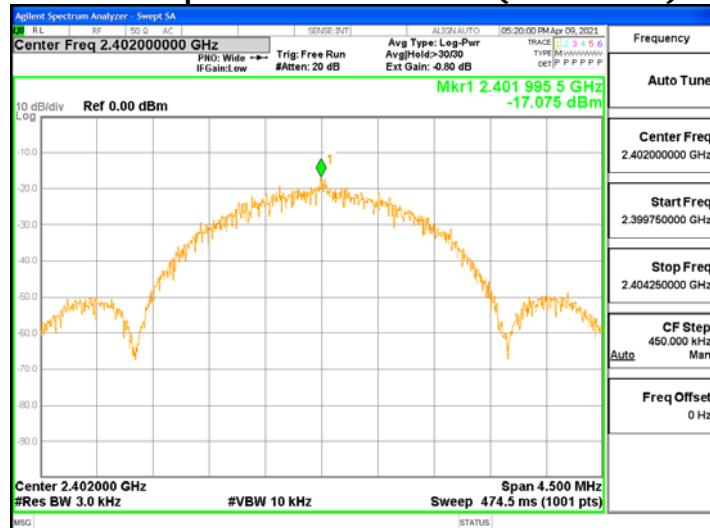

### BLE 2 Mbps - Middle channel (2.440 MHz)

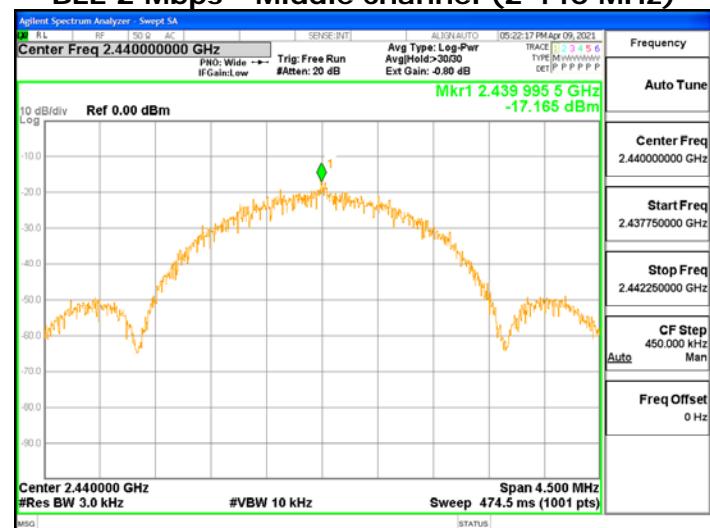

### BLE 2 Mbps - Highest channel (2.480 MHz)

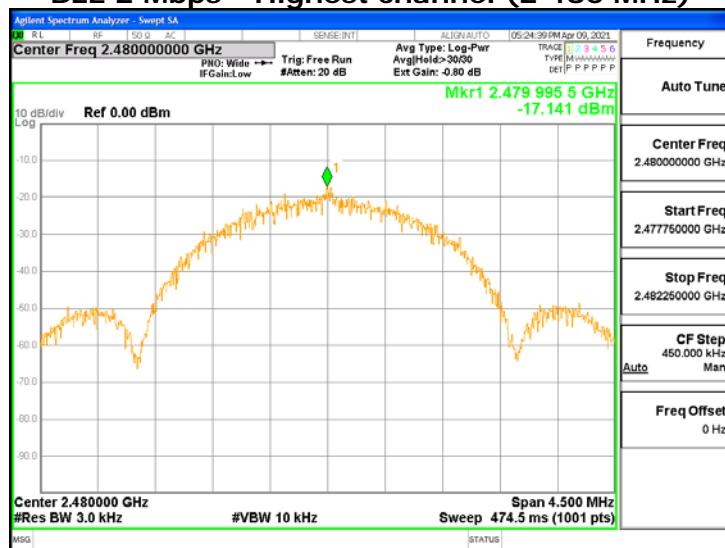



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (18) / (47) Pages

## 4.4 Band Edge & Conducted Spurious emission

### Test Procedures

KDB 558074 - Section 8.5

ANSI C63.10-2013 - Section 11.11.3

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW = 100 kHz	b) VBW $\geq$ 3 x RBW
c) Detector = peak	d) Sweep time = auto couple
e) Trace mode= max hold	
f) Allow trace to fully stabilize	
g) Use the peak marker function to determine the maximum amplitude level.	

#### Limit :

Emission level < 20 dBc

#### **Test results: Complies**

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.





**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (19) / (47) Pages

## Band-edge

### BLE 1 Mbps

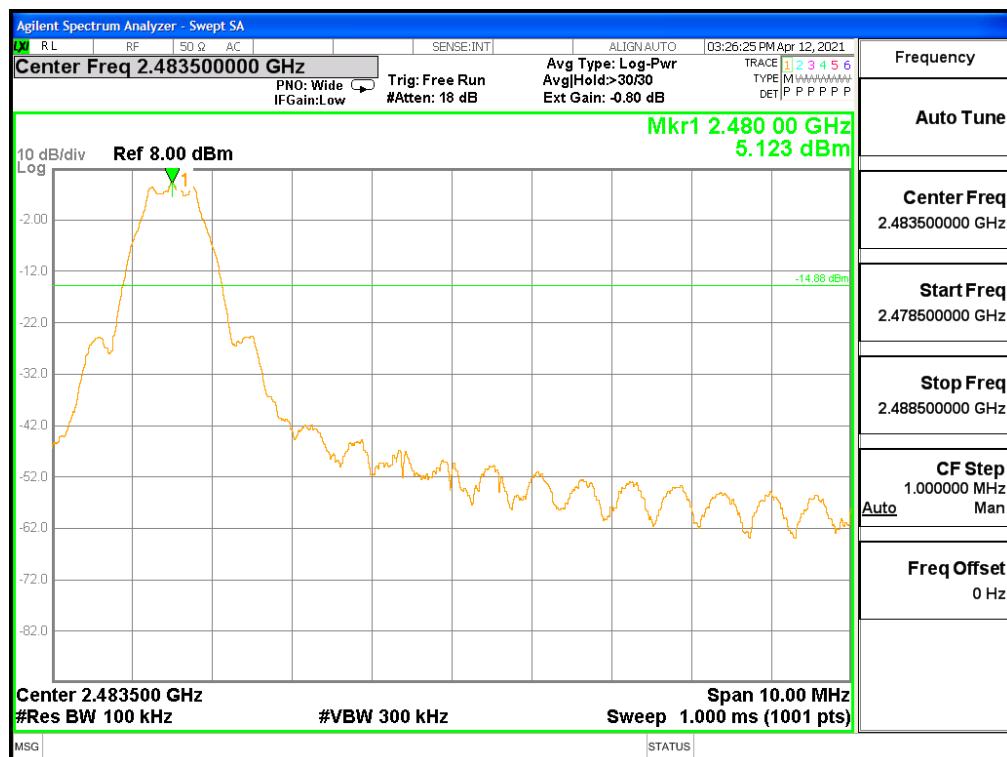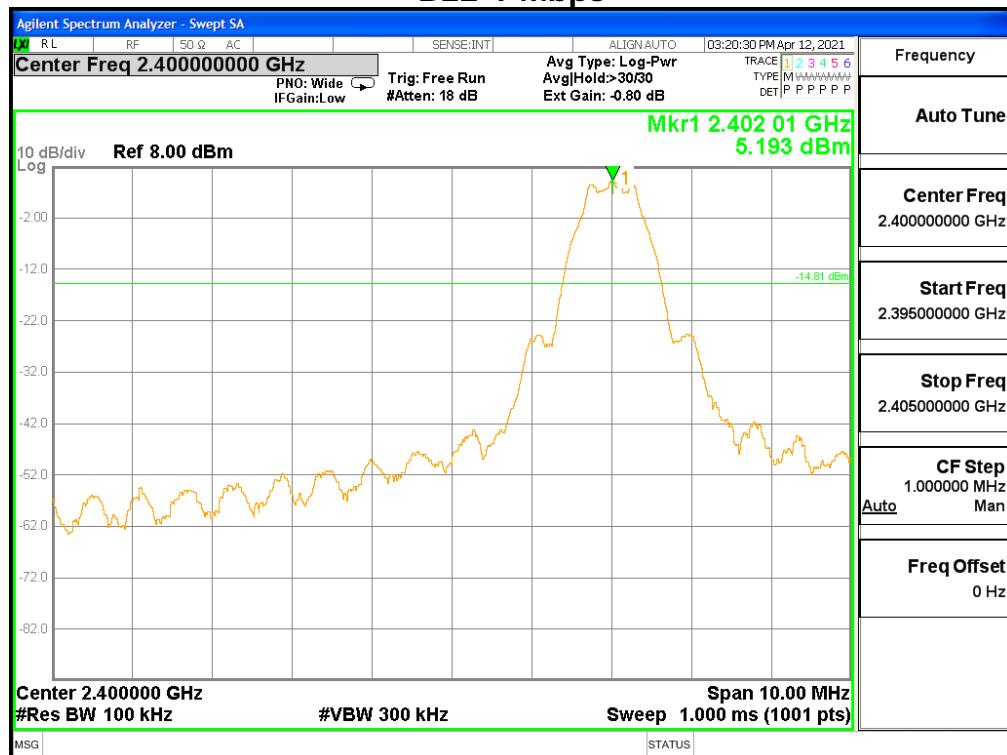





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (20) / (47) Pages

## BLE 2 Mbps

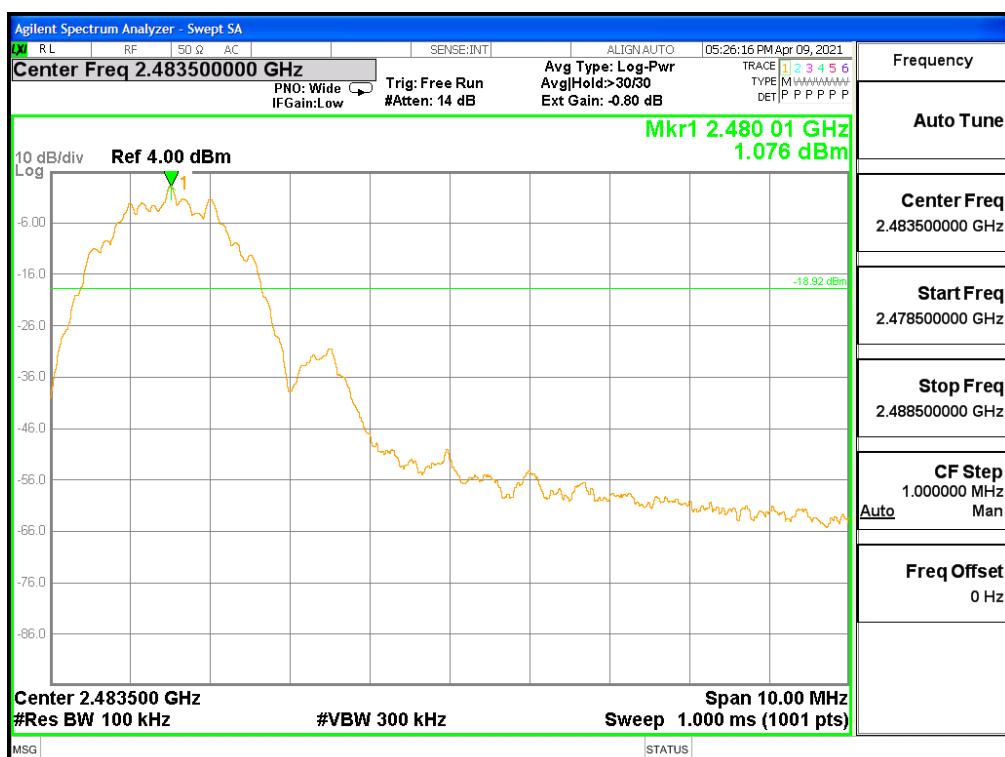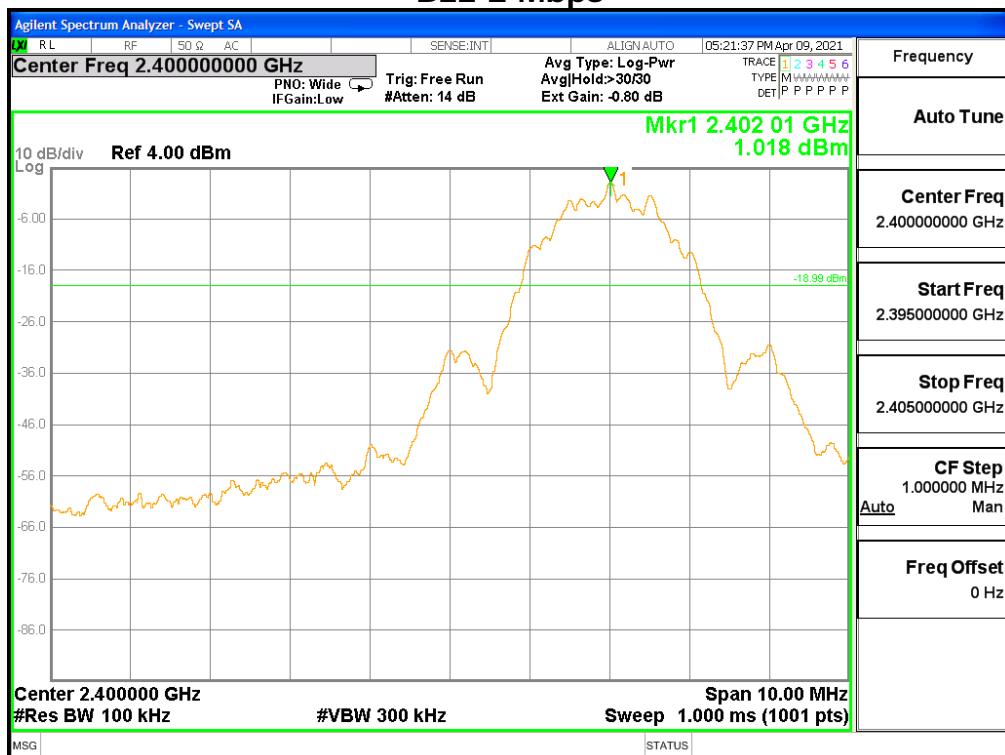




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2021-01691  
Page (21) / (47) Pages

## Conducted Spurious emission

### BLE 1 Mbps - Lowest channel (2 402 MHz)

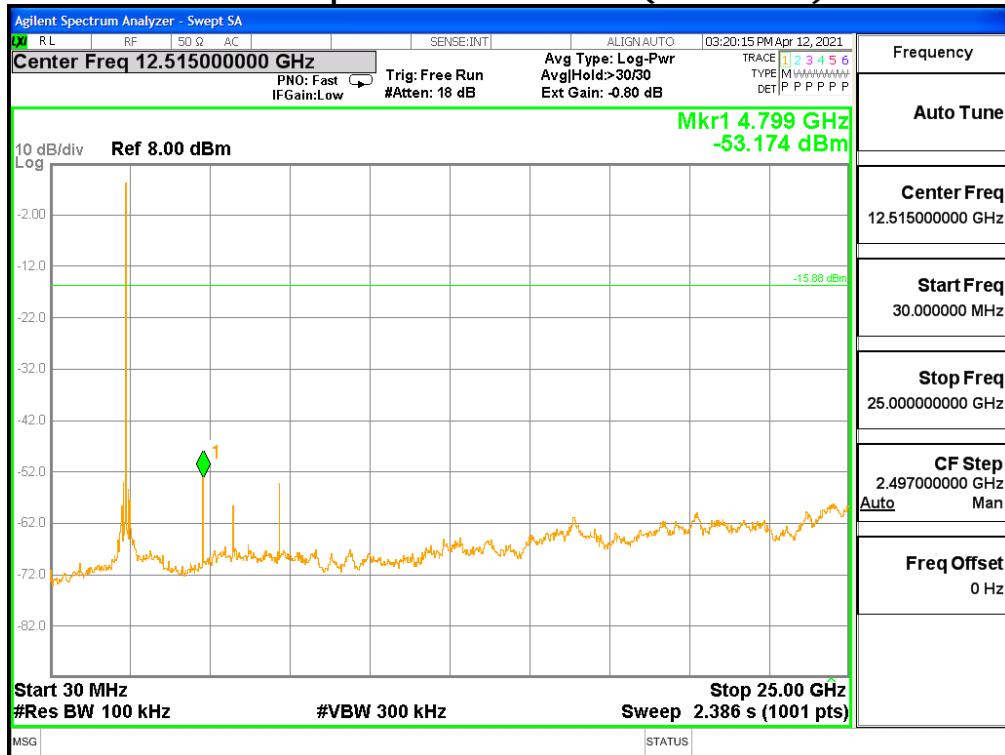

### BLE 1 Mbps - Middle channel (2 440 MHz)

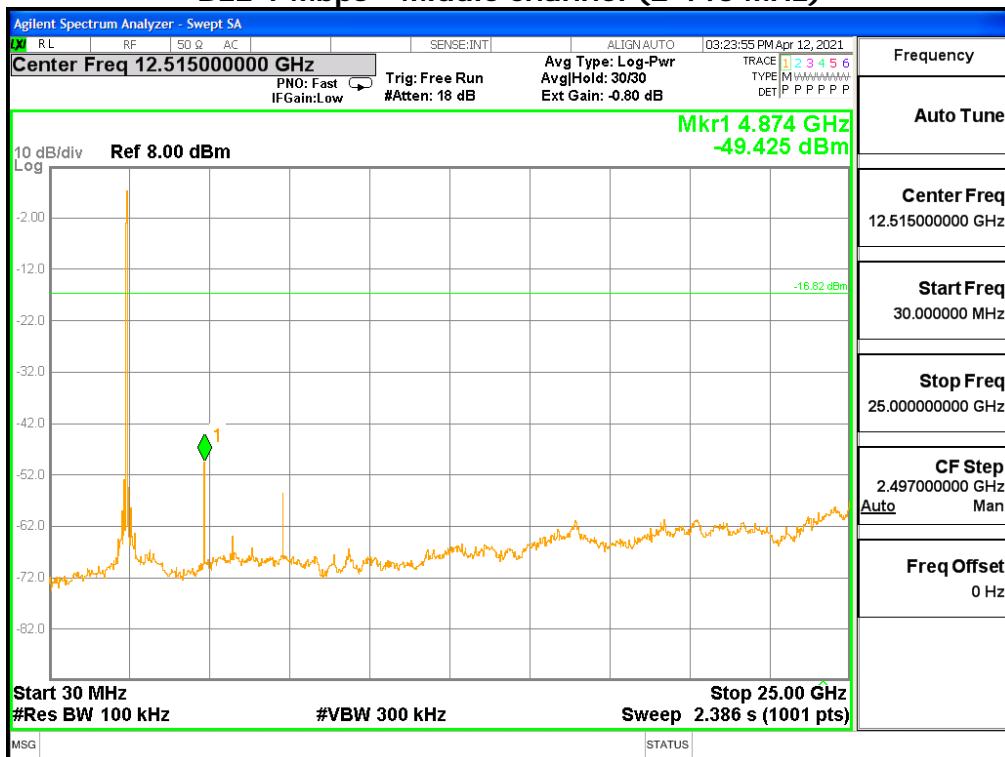




**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (22) / (47) Pages


### BLE 1 Mbps - Highest channel (2 480 MHz)

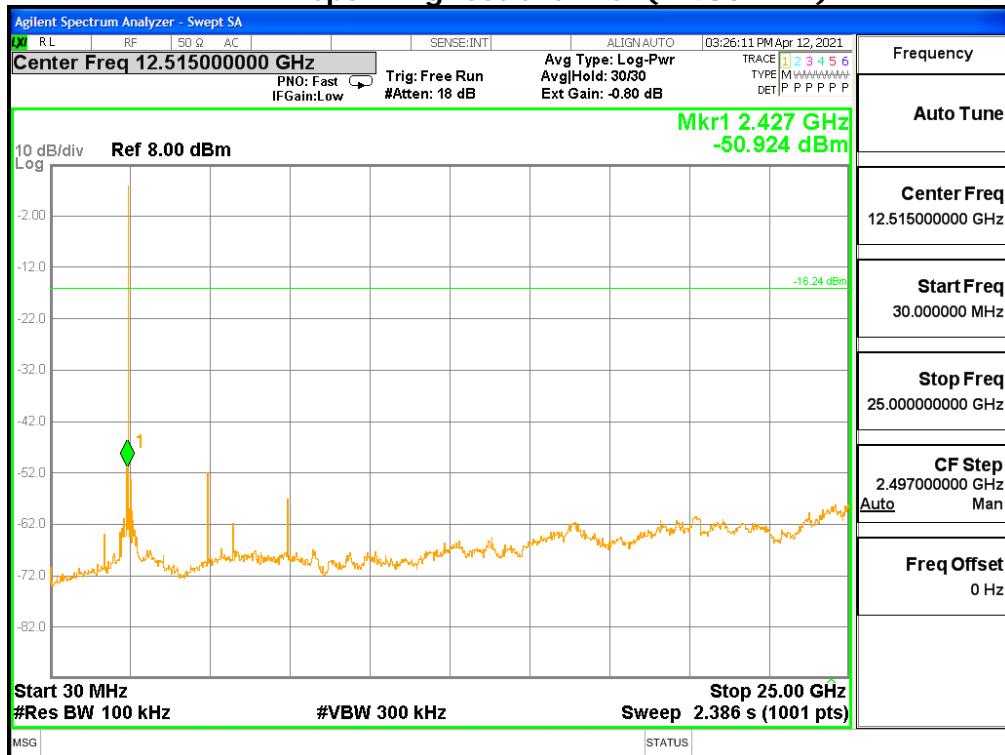

BLE 2 Mbps - Lowest channel (2 402 MHz)

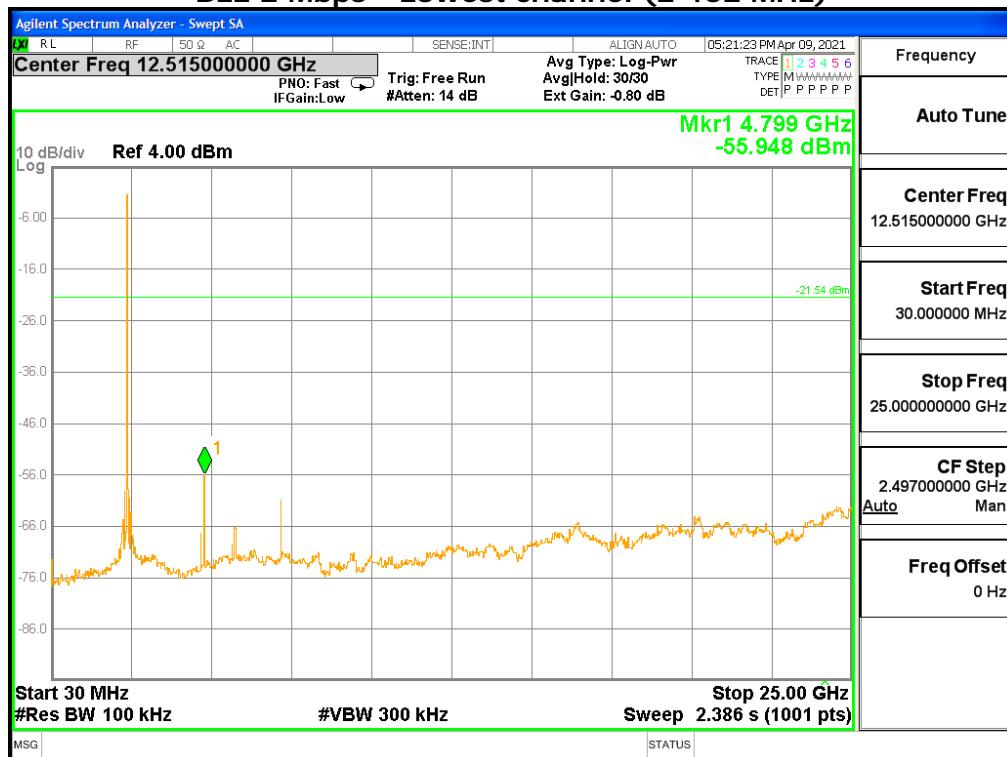

BLE 2 Mbps - Middle channel (2 440 MHz)

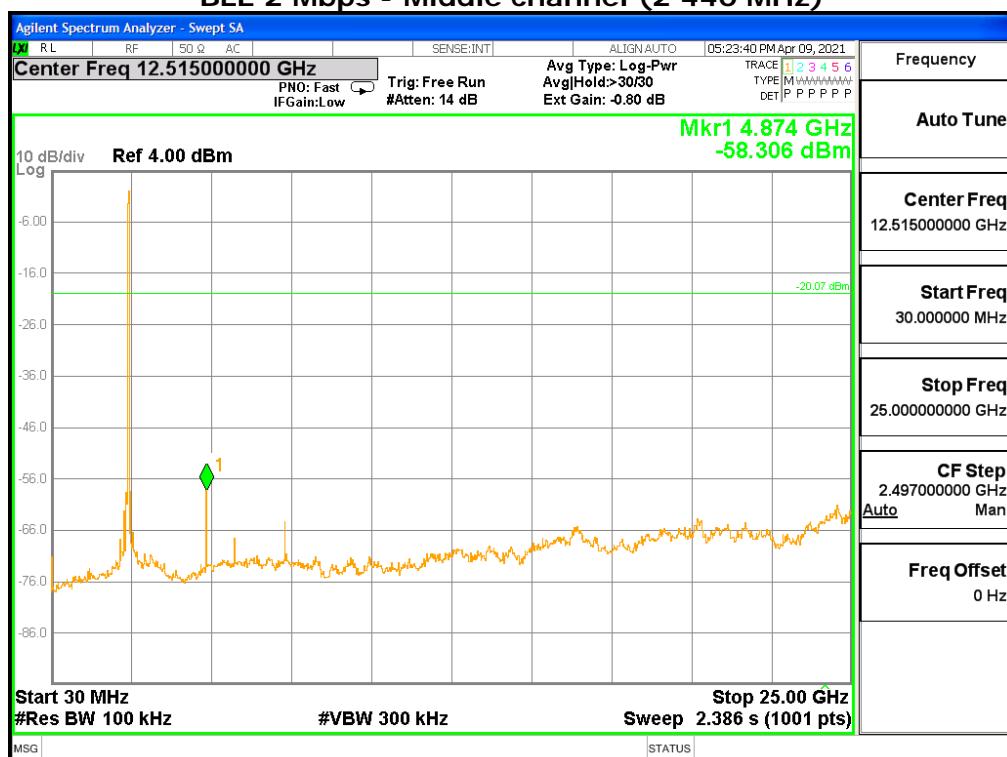




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (24) / (47) Pages

### BLE 2 Mbps - Highest channel (2.480 MHz)

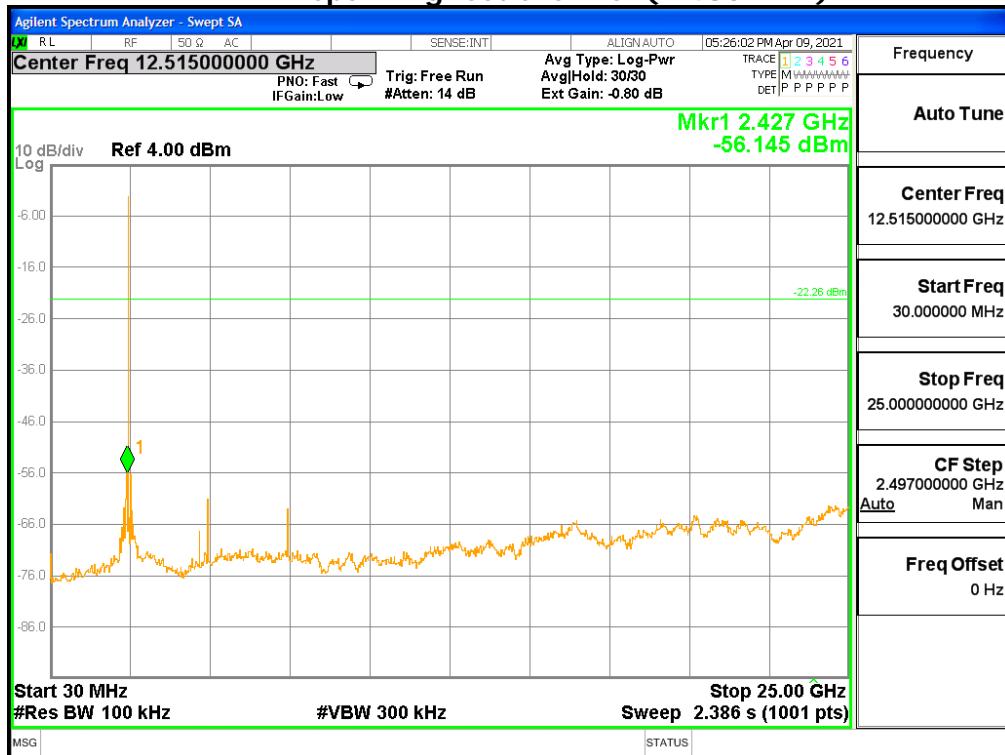



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (25) / (47) Pages

## 4.5 Radiated Emission

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)
- 3 m SAC (test distance : 3 m)

### Test Procedures

KDB 558074 - Section 8.5, 8.6  
ANSI C63.10-2013 - Section 11.11, 11.12

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency rage above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4 m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

### Instrument Settings

Frequency Range = 9 kHz ~ 26.5 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz,  
200 Hz for  $f < 150$  kHz
- b) VBW  $\geq$  RBW
- c) Sweep time = auto couple



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (26) / (47) Pages

**Limit :**

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

**Table 1. Restricted Frequency Bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475- 156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (27) / (47) Pages

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3 m (AV) and 74 dBuV/m@3 m (PK)
- 3) For measurement above 1 GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.

### Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

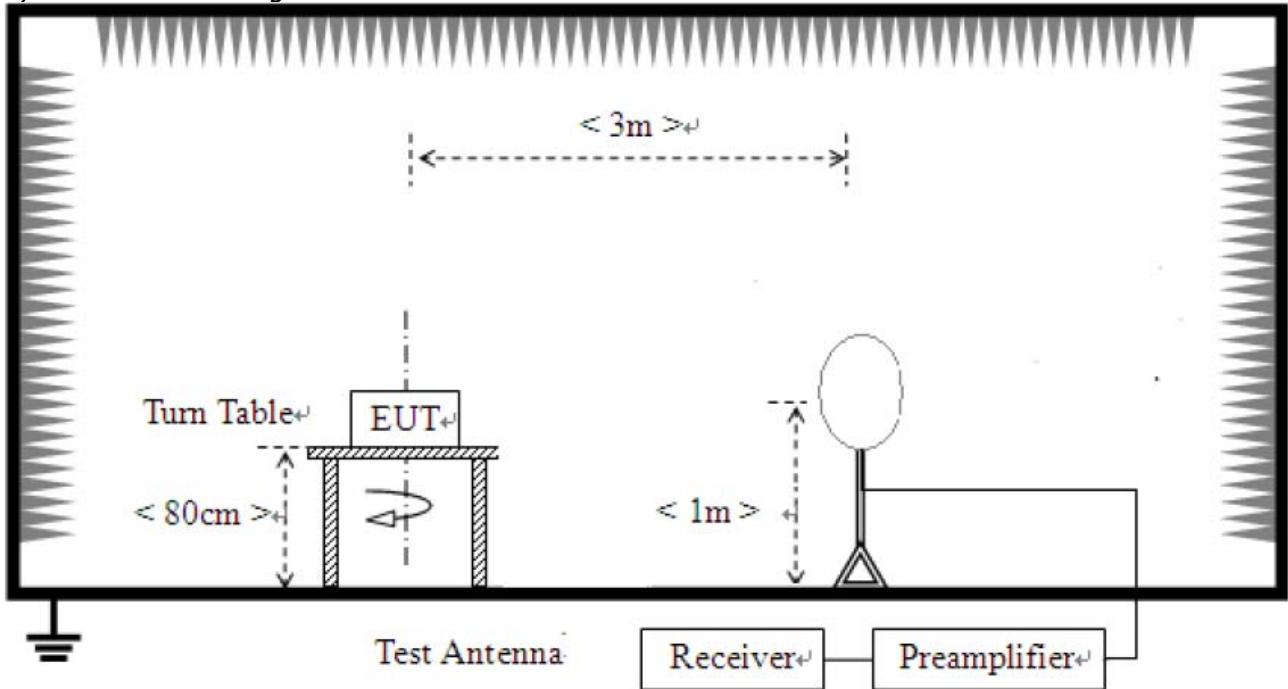

2) For field strength of emissions from 30 MHz to 1 GHz

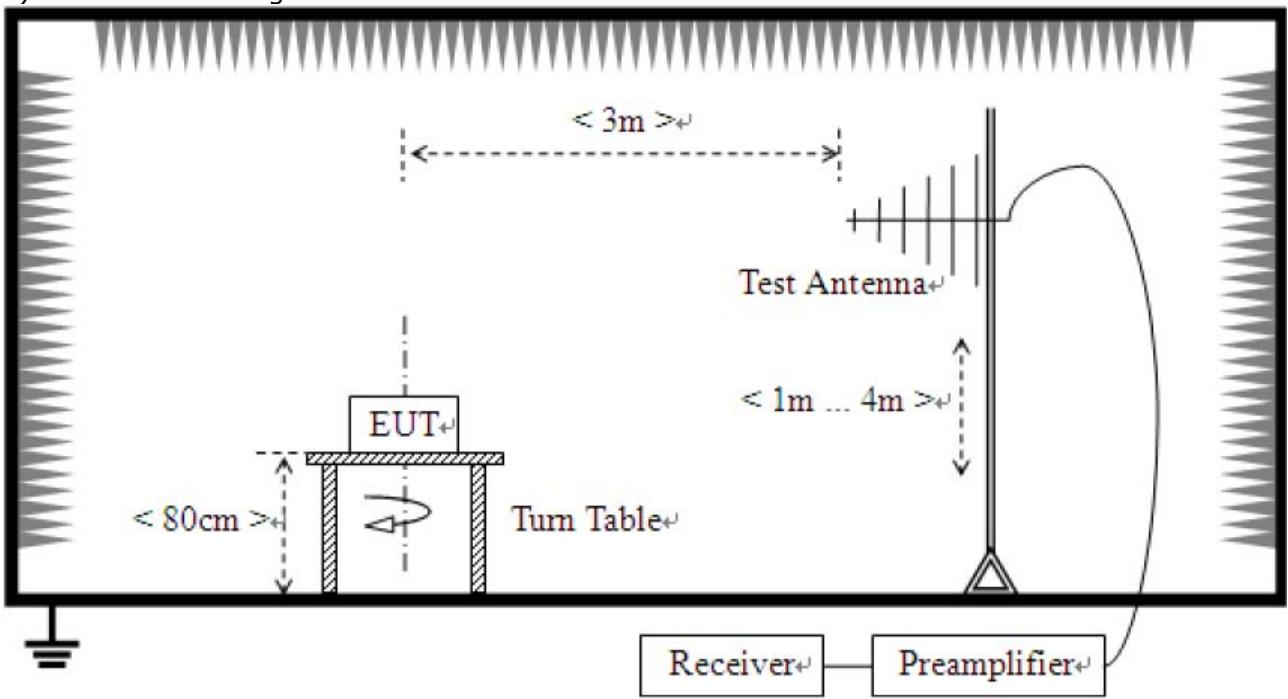

3) For field strength of emissions above 1 GHz

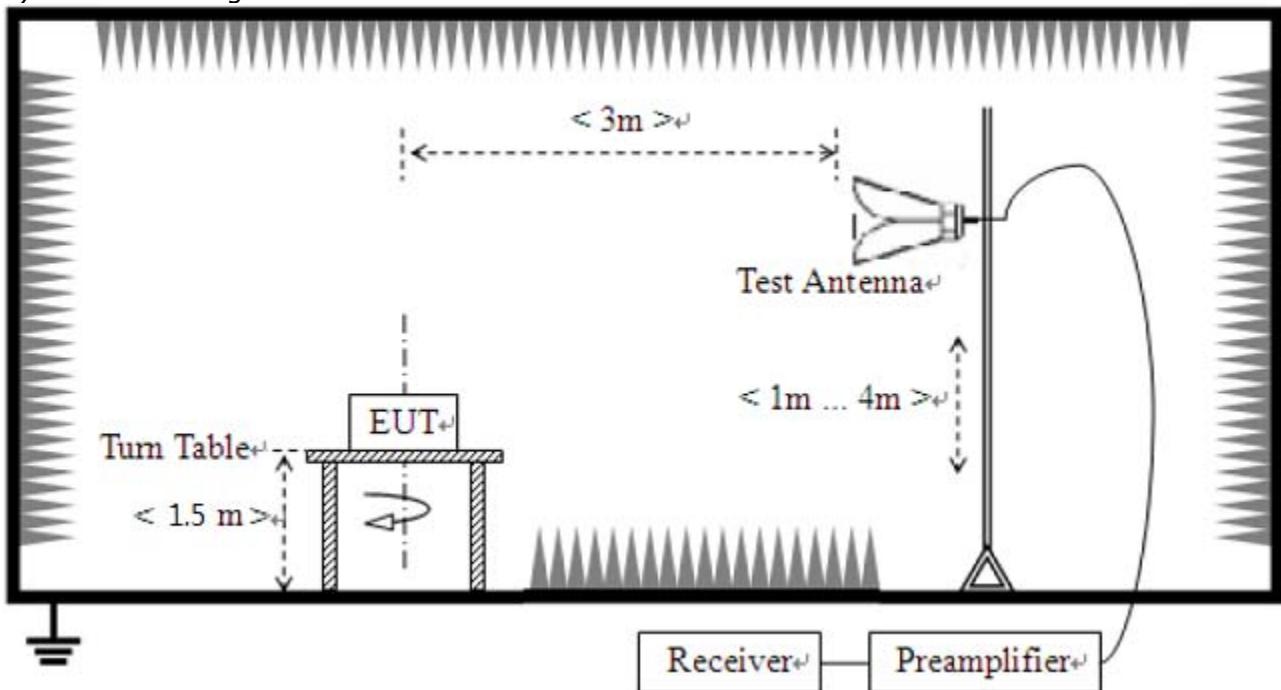



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (30) / (47) Pages

## Test results


### 1) 9 kHz to 30 MHz

Test mode : Transmission status BLE 1 Mbps lowest channel(Worst case)

The requirements are:

Complies

## Test Data

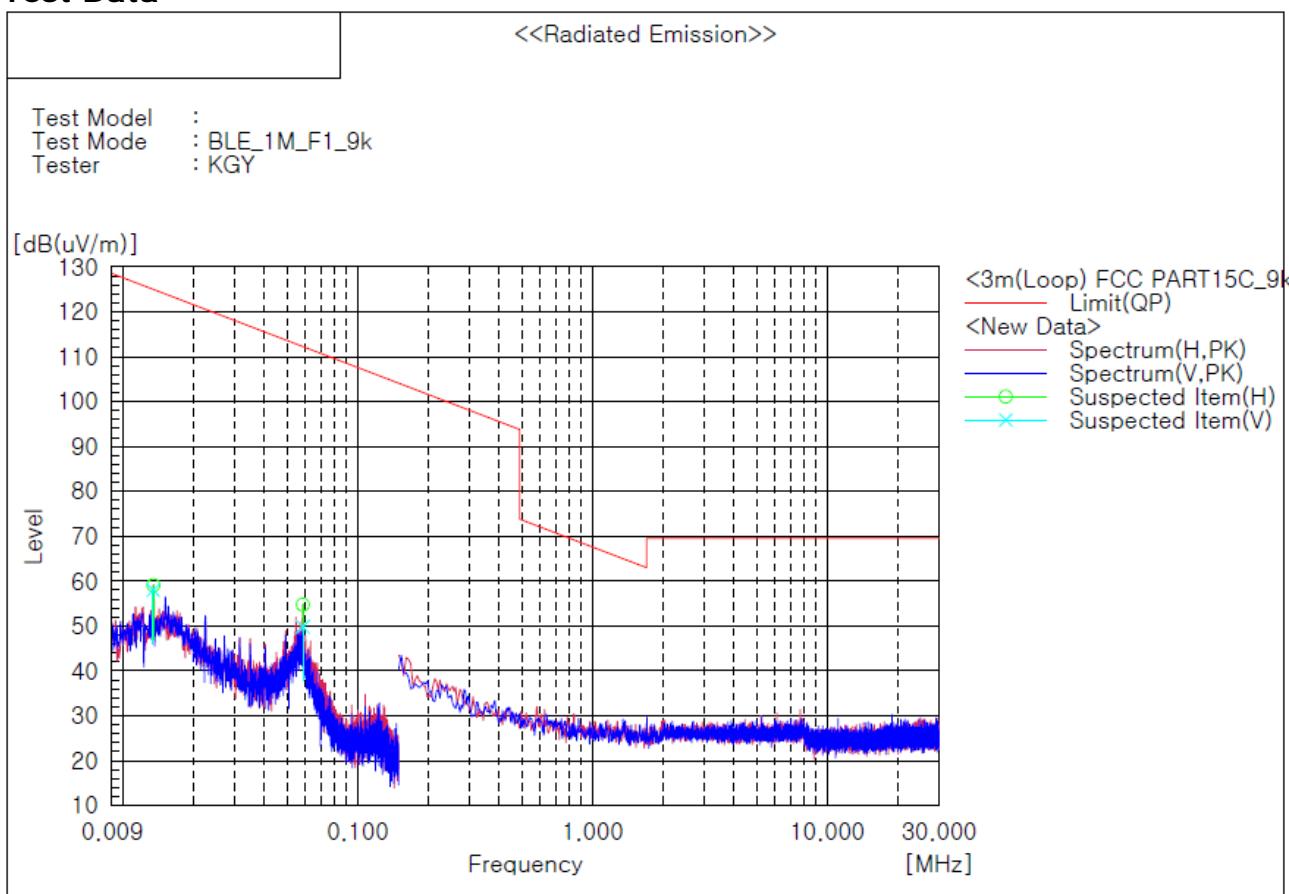

**Result :** There are more than 20 dB of margin compared to the reference value.

### Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
5. This data is the Peak(PK) value.

**Test mode : Transmission status BLE 2 Mbps Highest channel(Worst case)**

The requirements are:

Complies

**Test Data**

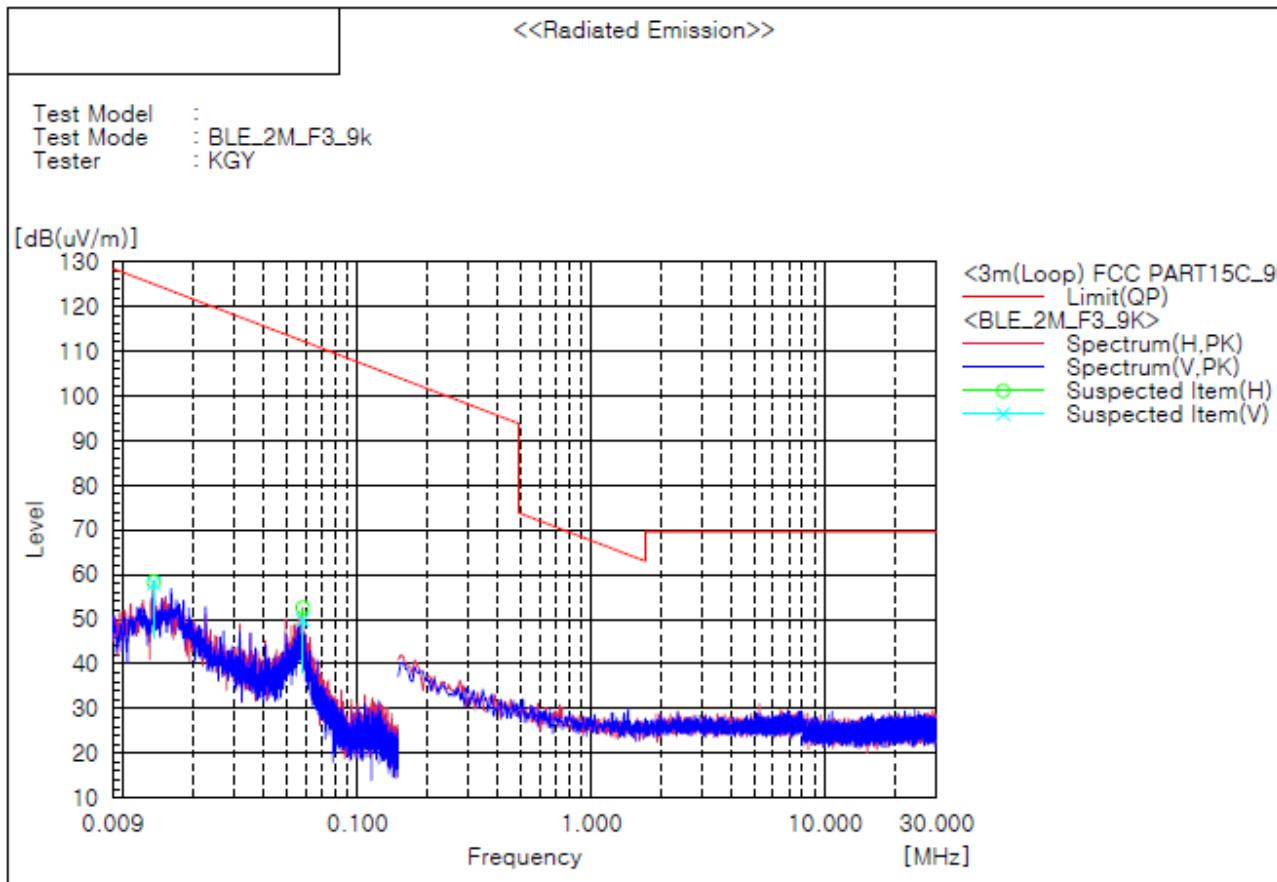

**Result :** There are more than 20 dB of margin compared to the reference value.

**Remark :**

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
5. This data is the Peak(PK) value.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (32) / (47) Pages


## 2) 30 MHz to 1 GHz

**Test mode : Transmission status BLE 1 Mbps lowest channel(Worst case)**

The requirements are:

Complies

### Test Data

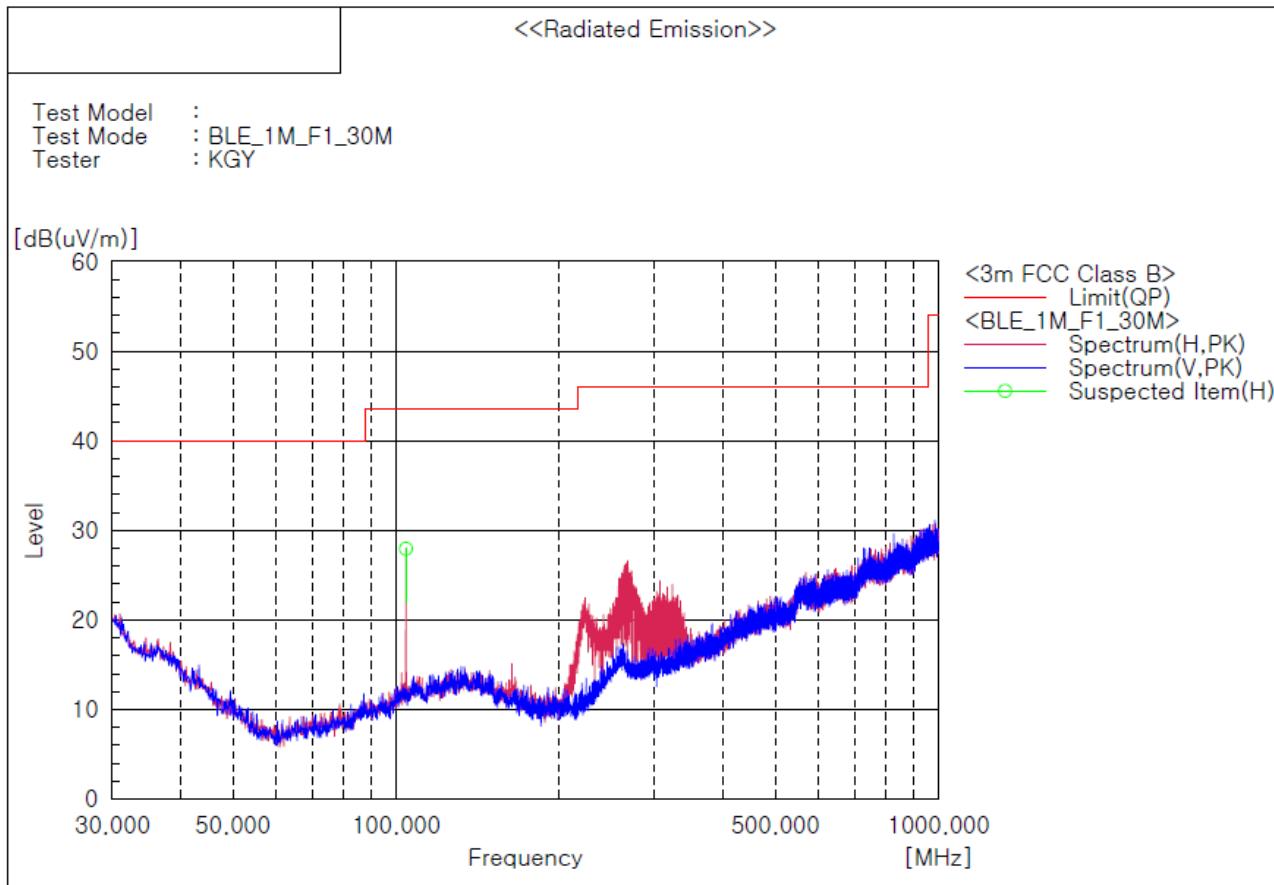

### Spectrum Selection

No.	Frequency (P) [MHz]	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	104.326	H 40.9	-13.0	27.9	43.5	15.6	101.0	303.0

### Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2021-01691  
Page (33) / (47) Pages

### Test mode : Transmission status BLE 2 Mbps Highest channel(Worst case)

The requirements are:

Complies

### Test Data

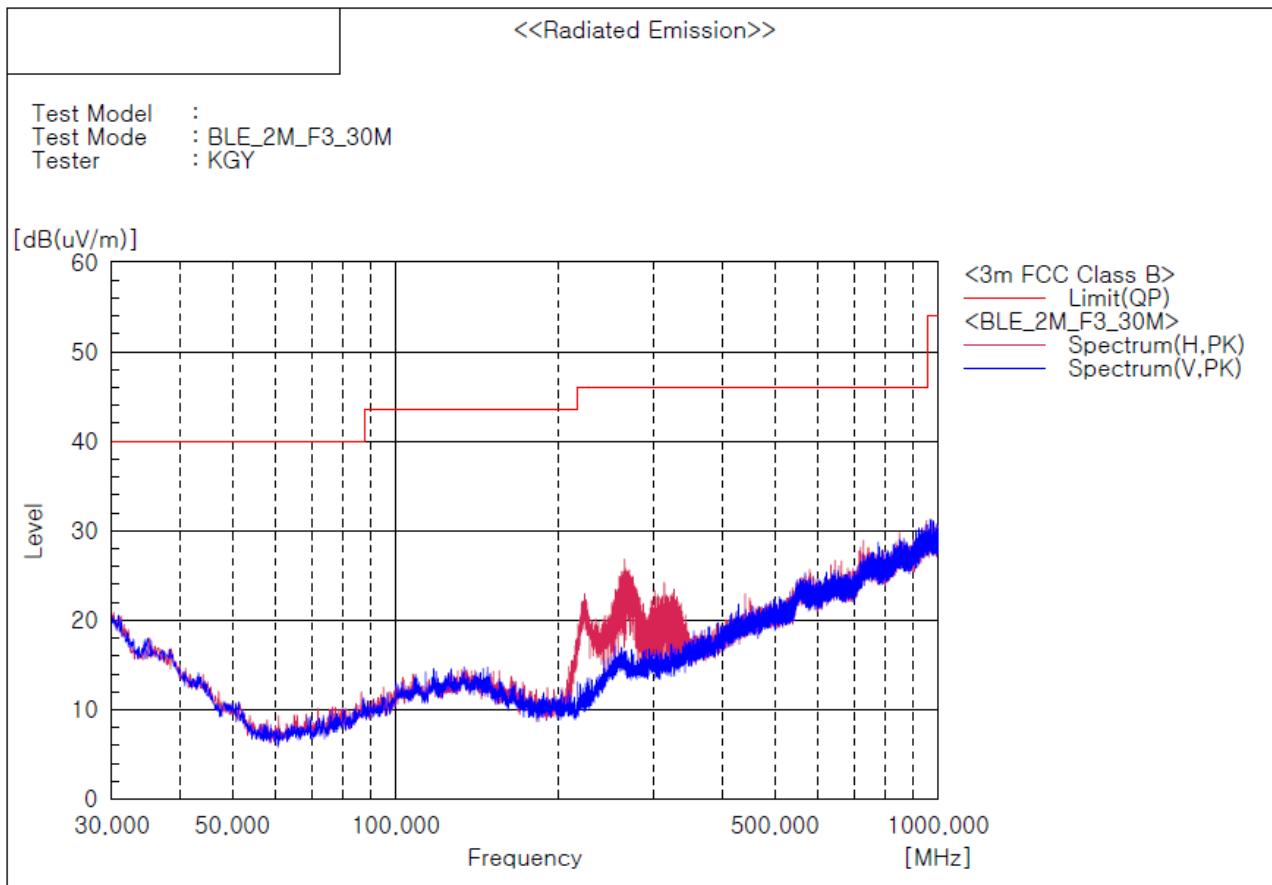

**Result :** There are more than 20 dB of margin compared to the reference value.

#### Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2021-01691  
Page (34) / (47) Pages

### 3) 1 GHz to 18 GHz

**Test mode : Transmission status BLE 1 Mbps lowest channel(Worst case)**

The requirements are:

Complies

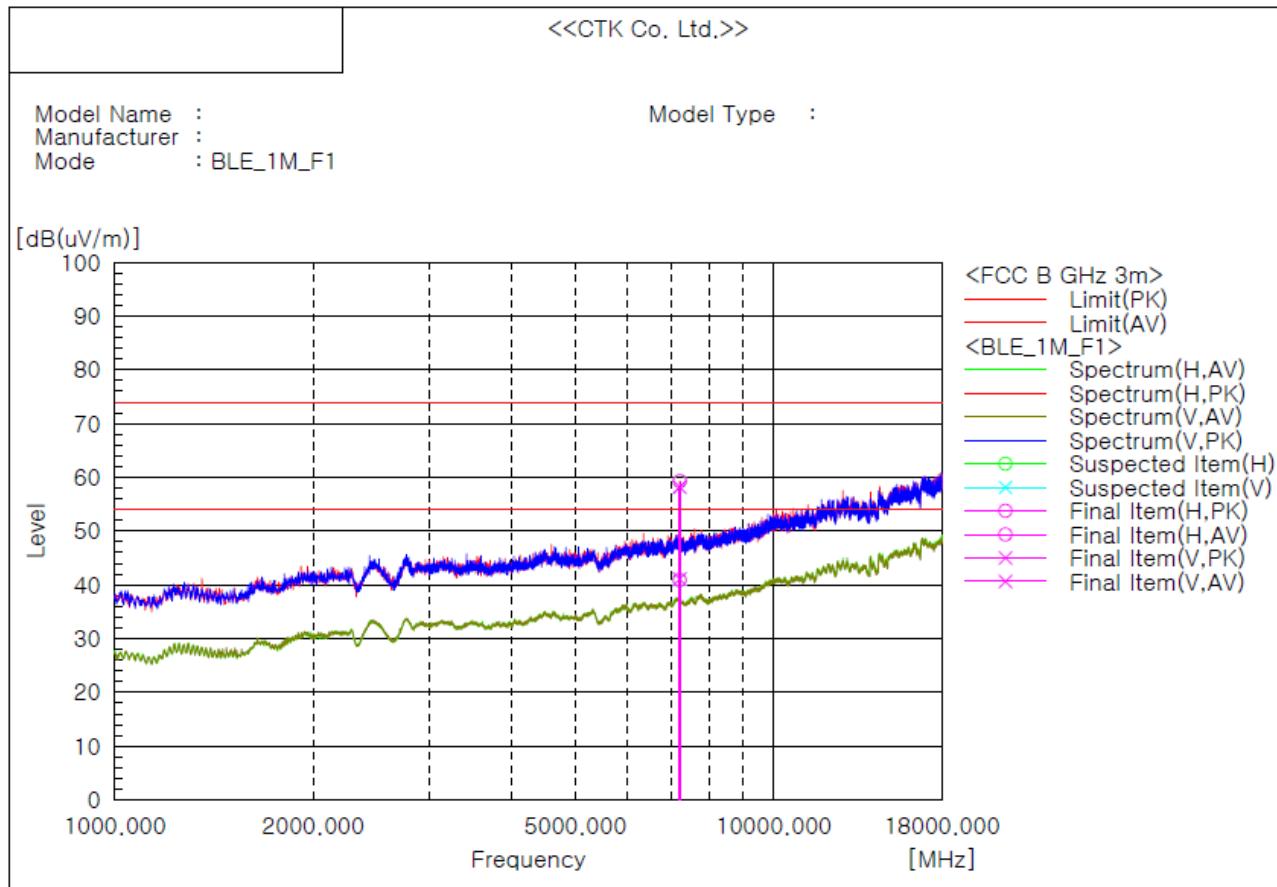

#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(1/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	7205.000	V	54.0	—	4.2	58.2	—	74.0	54.0	15.8	—	99.9	343.1
2	7207.125	H	55.1	—	4.2	59.3	—	74.0	54.0	14.7	—	235.8	128.7
3	7205.000	V	—	36.7	4.2	—	40.9	74.0	54.0	—	13.1	235.8	20.5
4	7205.000	H	—	36.9	4.2	—	41.1	74.0	54.0	—	12.9	99.9	0.0

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (35) / (47) Pages

### Test mode : Transmission status BLE 2 Mbps Highest channel(Worst case)

The requirements are:

Complies

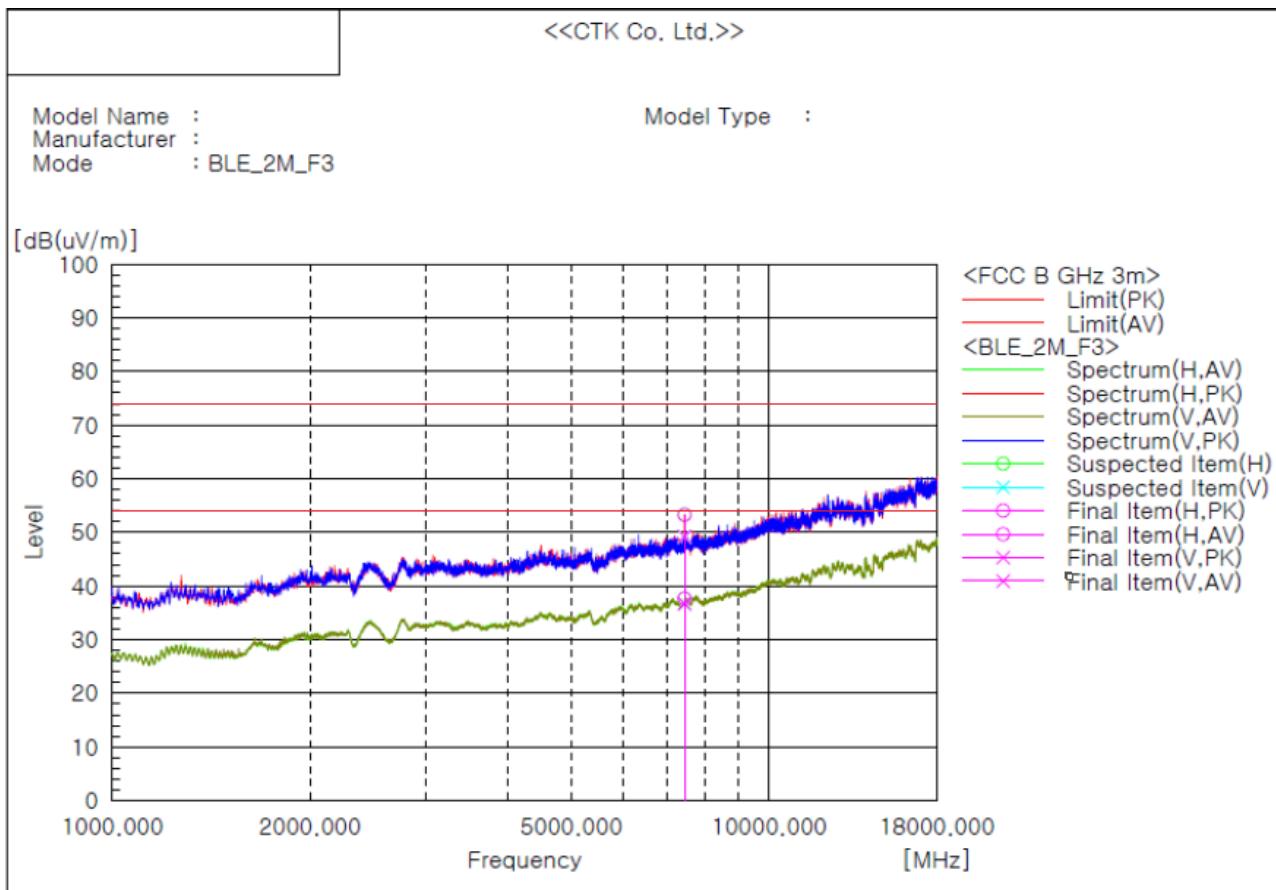

#### Final Result

No.	Frequency (P) [MHz]	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(1/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	7438.749	V 44.7	-----	4.5	49.2	-----	74.0	54.0	24.8	-----	356.1	297.5
2	7440.874	H 48.8	-----	4.5	53.3	-----	74.0	54.0	20.7	-----	236.3	328.3
3	7438.749	H -----	33.2	4.5	-----	37.7	74.0	54.0	-----	16.3	236.3	356.9
4	7440.880	V -----	32.2	4.5	-----	36.7	74.0	54.0	-----	17.3	224.6	355.2

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain


 <b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 <small>The Prime Leader of Global Regulatory Certification</small>	Report No.: CTK-2021-01691 Page (36) / (47) Pages	
--	---	--

#### 4) 18 GHz to 25 GHz

**Test mode : Transmission status BLE 1 Mbps lowest channel(Worst case)**

The requirements are:

Complies

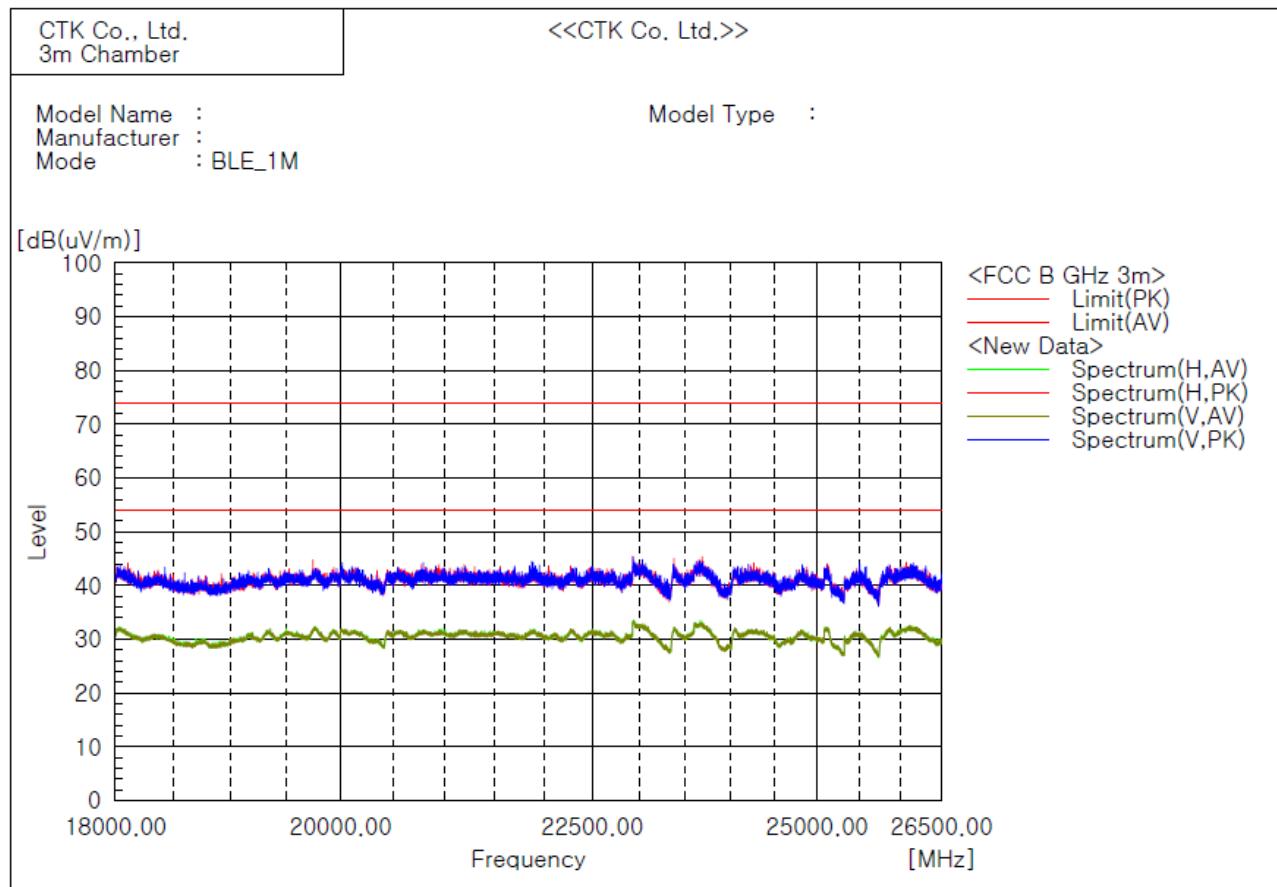

**Result :** There are more than 20 dB of margin compared to the reference value.

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (37) / (47) Pages

### Test mode : Transmission status BLE 2 Mbps Highest channel(Worst case)

The requirements are:

Complies

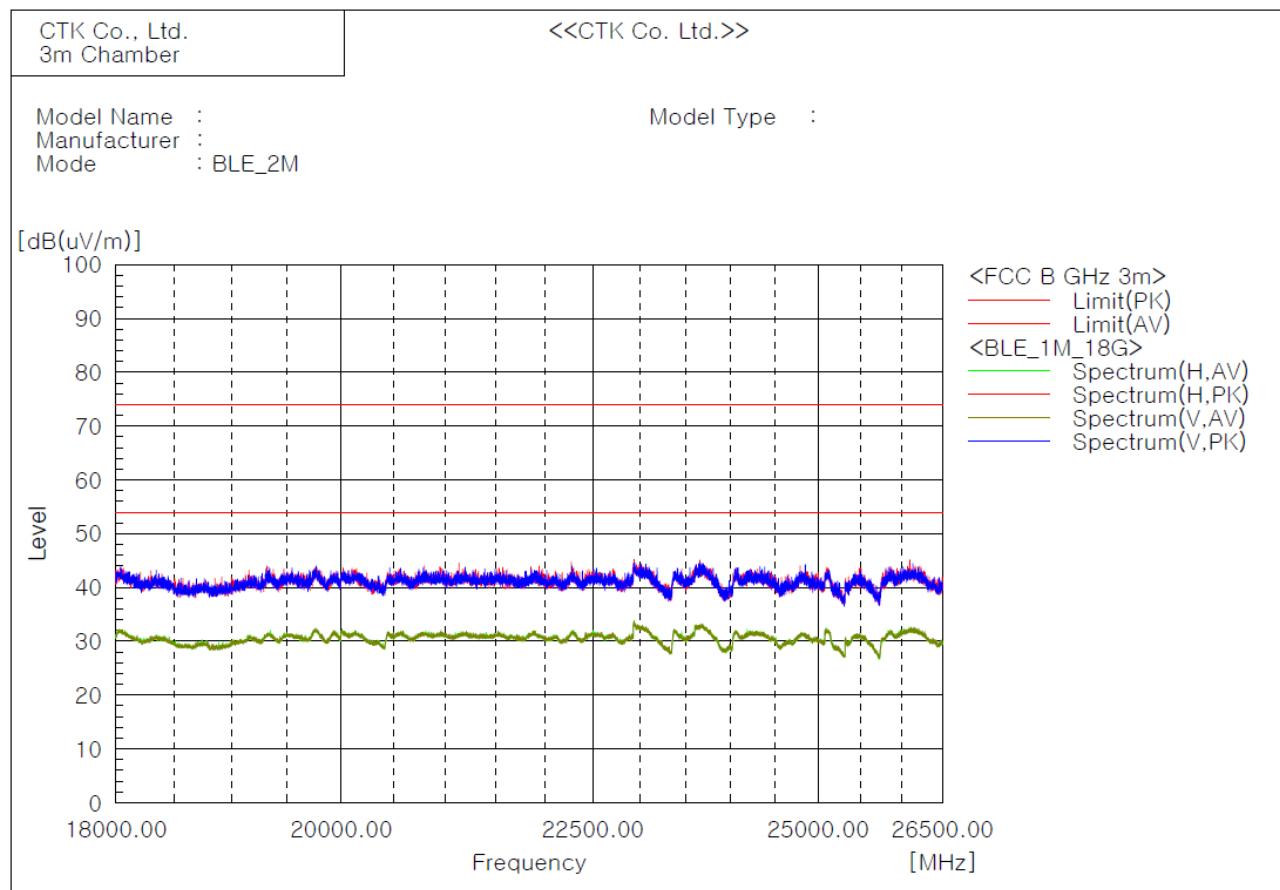

**Result :** There are more than 20 dB of margin compared to the reference value.

#### Remarks


1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (38) / (47) Pages

## 5) Restricted Frequency Bands

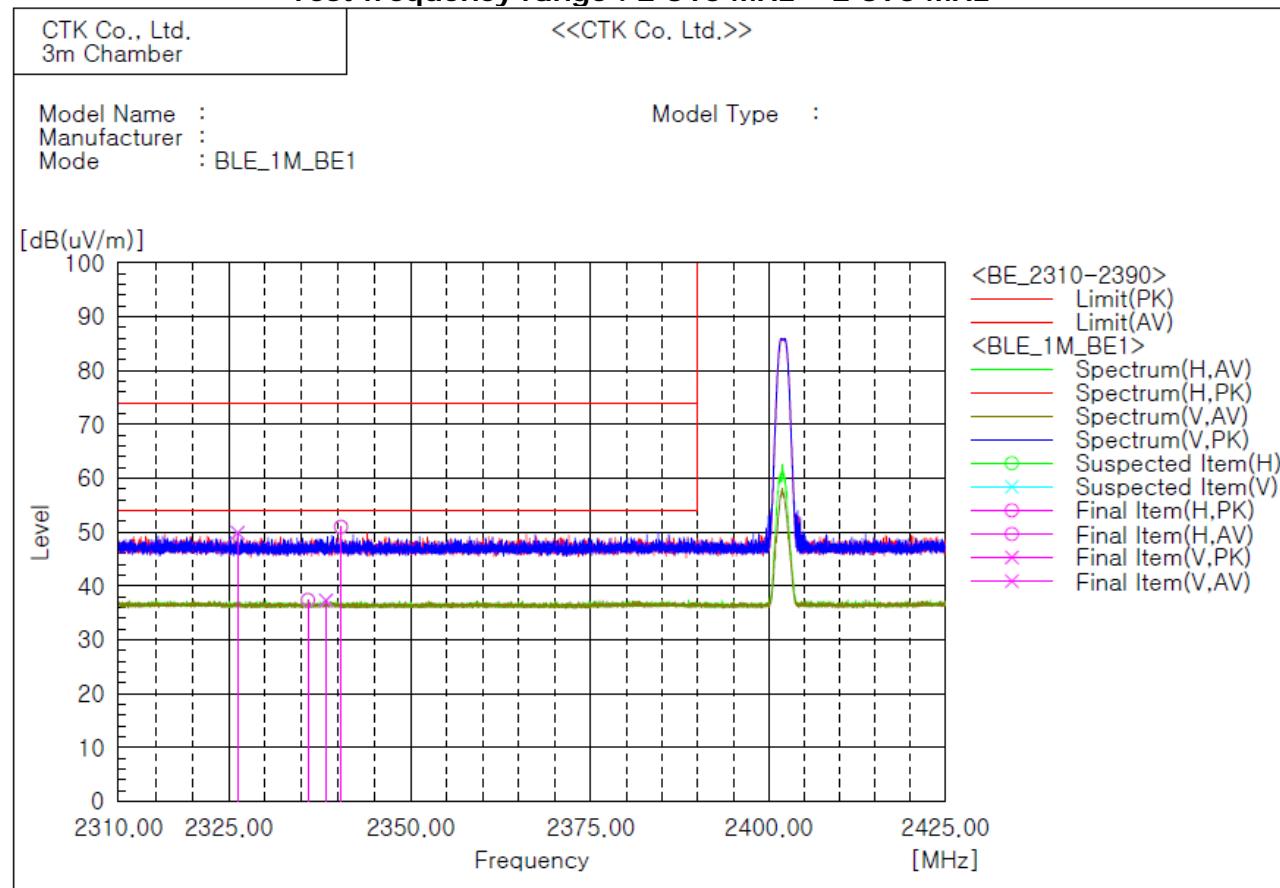
**BLE 1 Mbps****Test frequency range : 2 310 MHz – 2 390 MHz****Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2326.229	V	52.9	—	-3.0	49.9	—	74.0	54.0	24.1	—	344.8	355.0
2	2335.861	H	—	40.4	-3.0	—	37.4	74.0	54.0	—	16.6	356.1	0.0
3	2338.348	V	—	40.3	-3.0	—	37.3	74.0	54.0	—	16.7	99.8	0.0
4	2340.403	H	54.0	—	-3.0	51.0	—	74.0	54.0	23.0	—	356.1	0.0

**Remarks**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**Test frequency range : 2 483.5 MHz – 2 500 MHz**

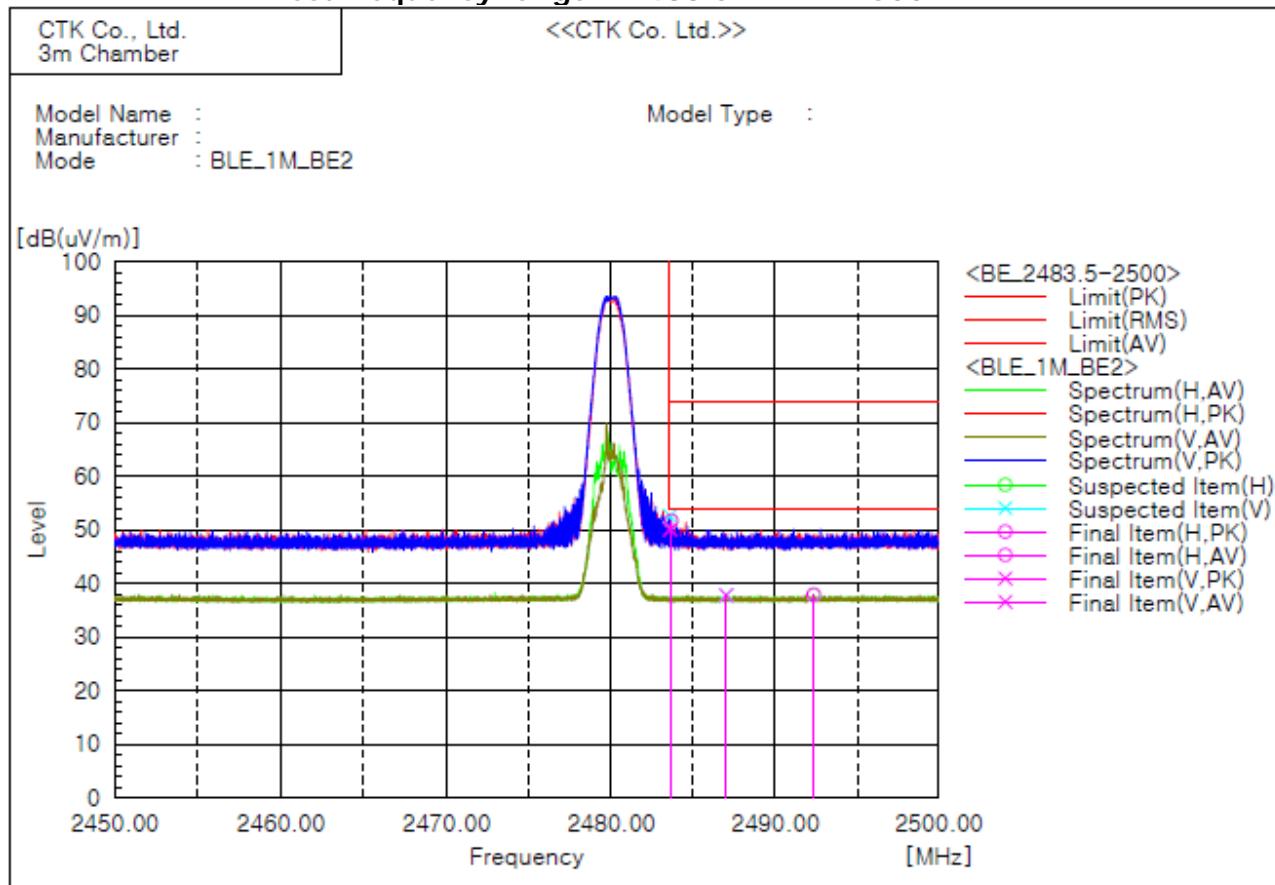

**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.581	V	52.6	-----	-2.5	50.1	-----	74.0	54.0	23.9	-----	346.3	252.3
2	2483.663	H	54.2	-----	-2.5	51.7	-----	74.0	54.0	22.3	-----	99.8	338.3
3	2487.012	V	-----	40.3	-2.5	-----	37.8	74.0	54.0	-----	16.2	346.3	0.0
4	2492.350	H	-----	40.4	-2.5	-----	37.9	74.0	54.0	-----	16.1	99.8	0.0

**Remarks**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (40) / (47) Pages

## BLE 2 Mbps


**Test frequency range : 2 310 MHz – 2 390 MHz**

CTK Co., Ltd.  
3m Chamber

<<CTK Co., Ltd.>>

Model Name :  
Manufacturer :  
Mode : BLE\_2M\_BE1

Model Type :

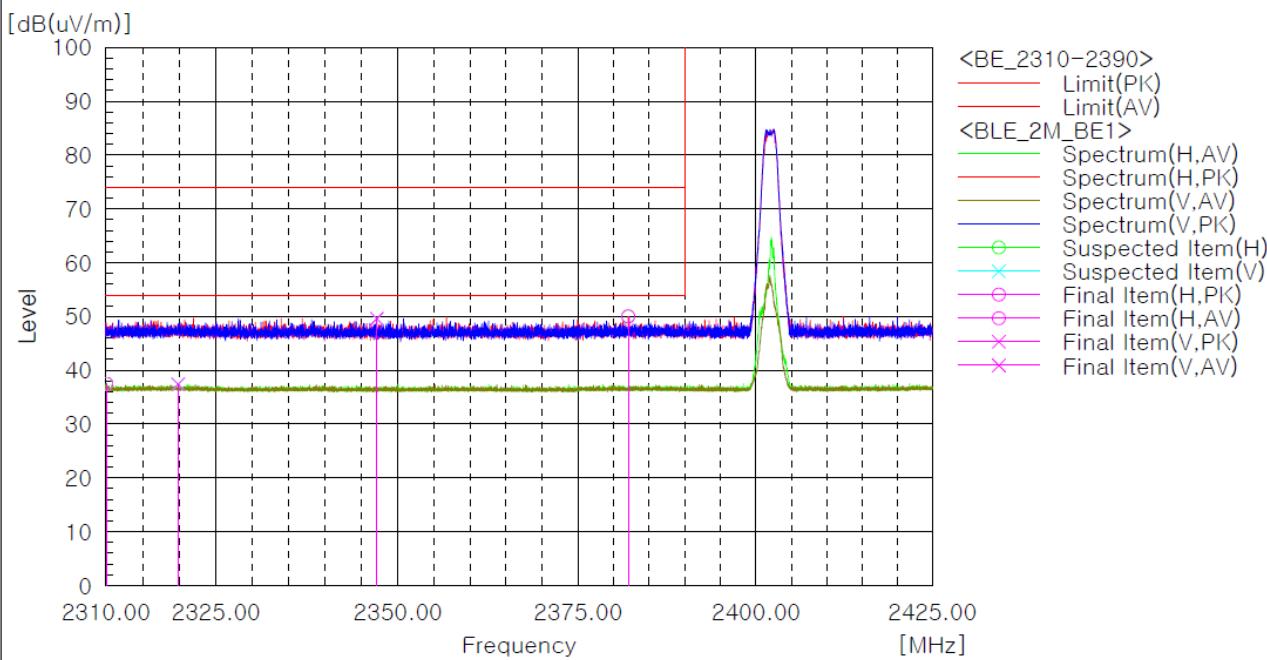

## Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c, f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2310.086	H	—	40.3	-2.8	—	37.5	74.0	54.0	—	16.5	354.9	0.0
2	2319.847	V	—	40.3	-2.9	—	37.4	74.0	54.0	—	16.6	344.5	0.0
3	2347.116	V	52.7	—	-3.1	49.6	—	74.0	54.0	24.4	—	99.8	20.1
4	2382.062	H	53.0	—	-3.0	50.0	—	74.0	54.0	24.0	—	354.9	355.9

## Remarks

**REMARKS**

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (41) / (47) Pages

**Test frequency range : 2 483.5 MHz – 2 500 MHz**

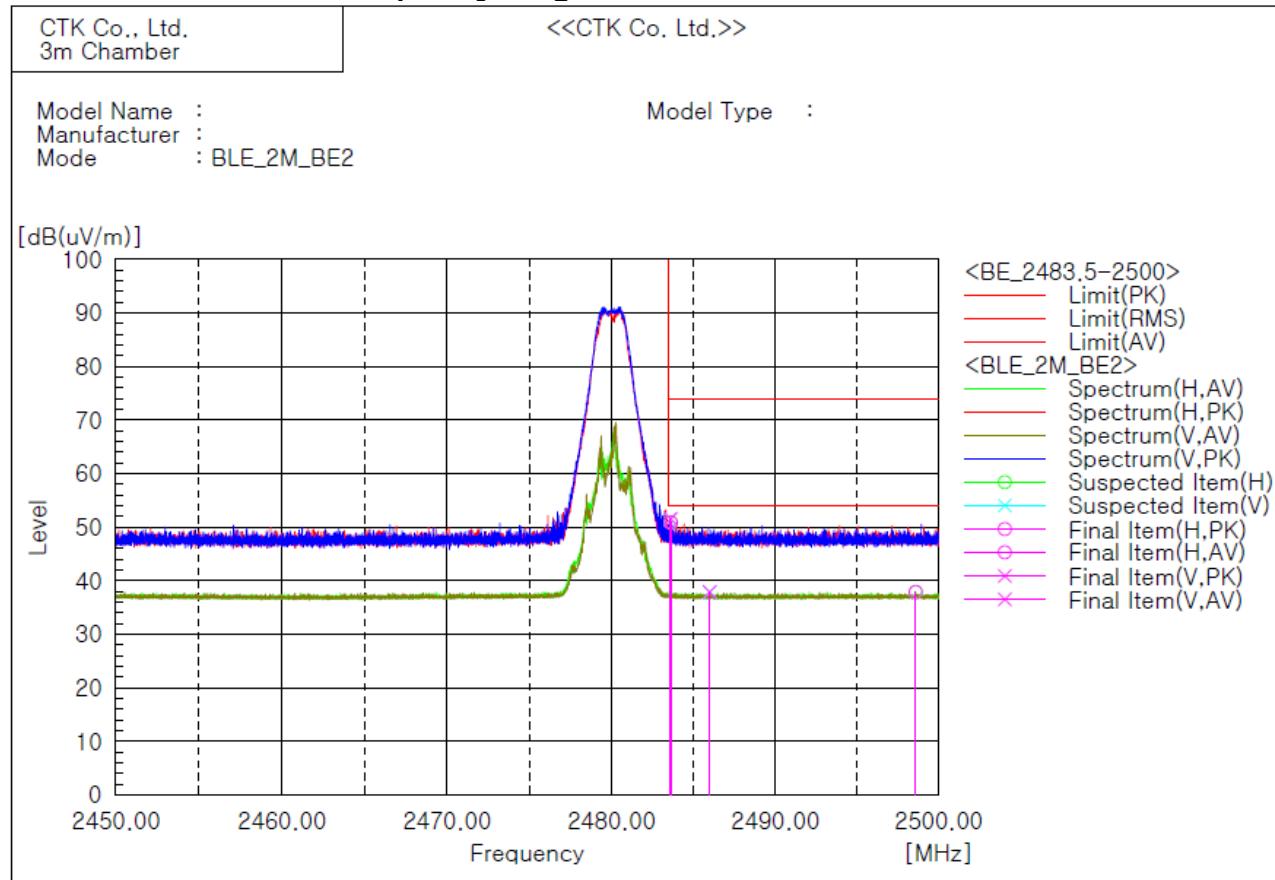

#### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f	Result PK [dB(1/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.606	V	54.1	-----	-2.5	51.6	-----	74.0	54.0	22.4	-----	344.3	278.5
2	2483.625	H	53.4	-----	-2.5	50.9	-----	74.0	54.0	23.1	-----	99.8	321.5
3	2485.994	V	-----	40.4	-2.5	-----	37.9	74.0	54.0	-----	16.1	344.3	359.9
4	2498.600	H	-----	40.4	-2.5	-----	37.9	74.0	54.0	-----	16.1	99.8	359.9

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

 <b>CTK Co., Ltd.</b> <i>The Prime Leader of Global Regulatory Certification</i>	<b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2021-01691 Page (42) / (47) Pages	
---	---	---	--

## 4.6 AC Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

ANSI C63.10-2013 - Section 6.2.2

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4 m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8 m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* The level decreases linearly with the logarithm of the frequency.

\*\* A linear average detector is required.

### Test Results

The requirements are:

Complies



**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (43) / (47) Pages

## Test Data

Test mode : BLE 1 Mbps lowest channel(Worst case)

[LINE]

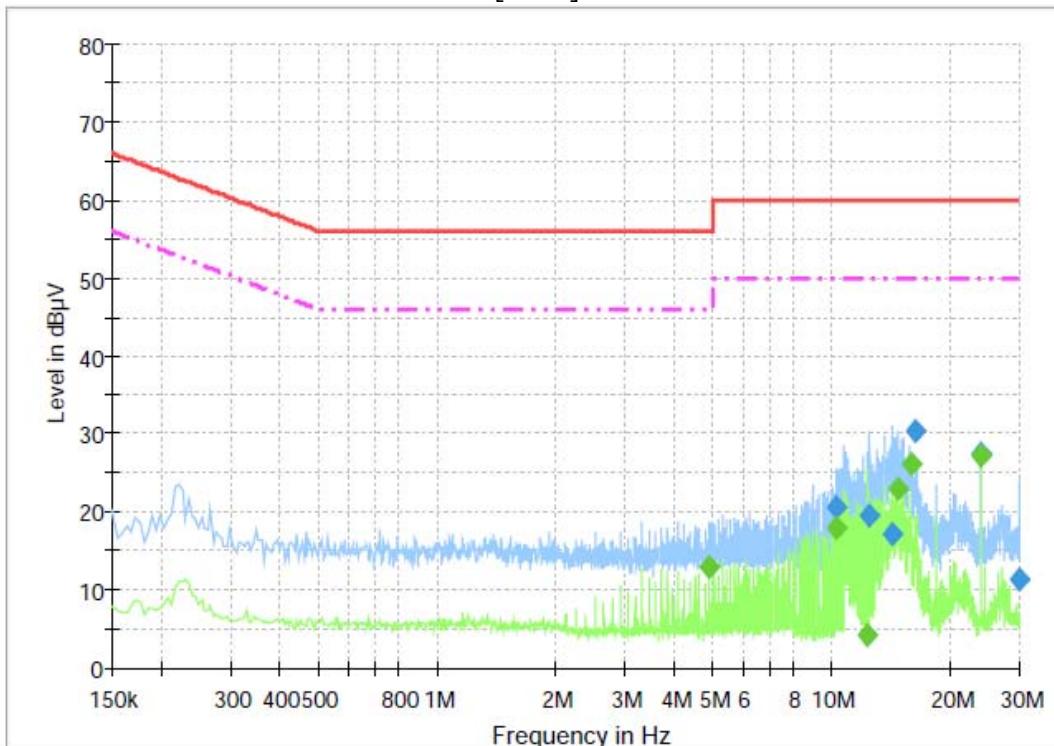


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
10.284000	20.6	1000.0	9.000	On	L1	9.9	39.4	60.0
12.538500	19.4	1000.0	9.000	On	L1	9.9	40.6	60.0
14.334000	17.3	1000.0	9.000	On	L1	9.9	42.7	60.0
16.318500	30.3	1000.0	9.000	On	L1	10.0	29.7	60.0
24.022500	27.5	1000.0	9.000	On	L1	10.1	32.5	60.0
29.998500	11.2	1000.0	9.000	On	L1	10.1	48.8	60.0

## Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
4.911000	13.0	1000.0	9.000	On	L1	9.9	33.0	46.0
10.284000	18.1	1000.0	9.000	On	L1	9.9	31.9	50.0
12.286500	4.3	1000.0	9.000	On	L1	9.9	45.7	50.0
14.797500	23.0	1000.0	9.000	On	L1	9.9	27.0	50.0
15.922500	26.0	1000.0	9.000	On	L1	10.0	24.0	50.0
24.022500	27.3	1000.0	9.000	On	L1	10.1	22.7	50.0

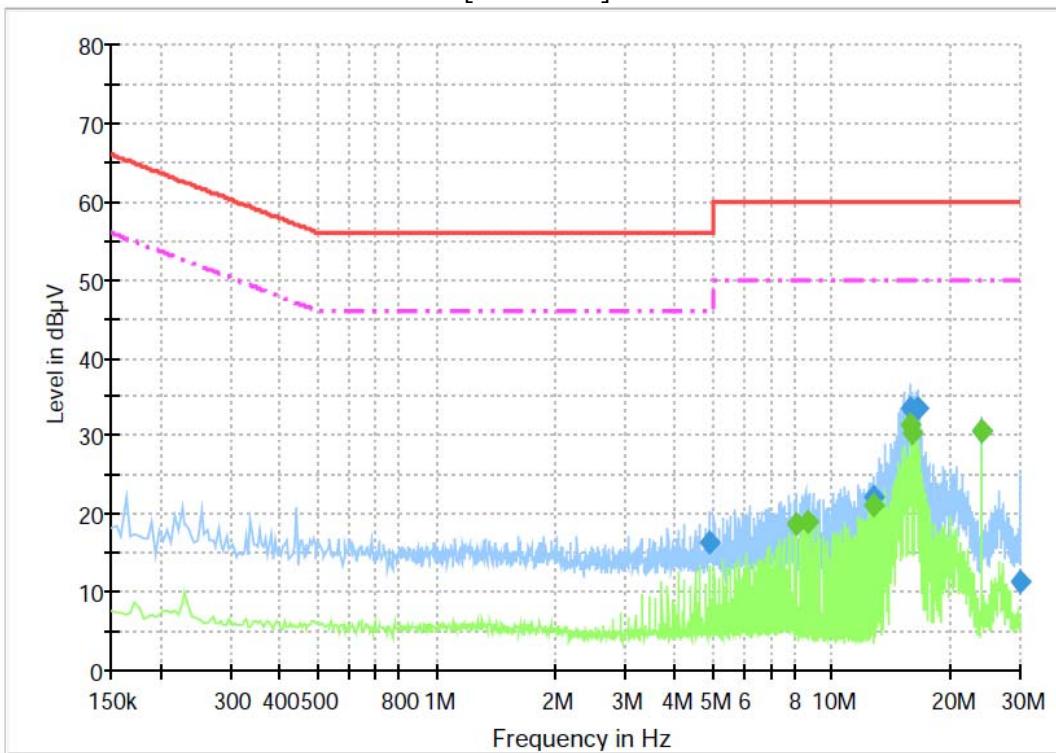**[NEUTRAL]**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.911000	16.4	1000.0	9.000	On	N	9.9	39.6	56.0
12.804000	22.3	1000.0	9.000	On	N	9.9	37.7	60.0
15.855000	33.5	1000.0	9.000	On	N	10.0	26.5	60.0
16.521000	33.4	1000.0	9.000	On	N	10.0	26.6	60.0
24.022500	30.6	1000.0	9.000	On	N	10.1	29.4	60.0
29.985000	11.3	1000.0	9.000	On	N	10.2	48.7	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
8.160000	18.8	1000.0	9.000	On	N	9.8	31.2	50.0
8.691000	19.1	1000.0	9.000	On	N	9.8	30.9	50.0
12.804000	21.1	1000.0	9.000	On	N	9.9	28.9	50.0
15.801000	31.4	1000.0	9.000	On	N	10.0	18.6	50.0
15.990000	30.4	1000.0	9.000	On	N	10.0	19.6	50.0
24.022500	30.6	1000.0	9.000	On	N	10.1	19.4	50.0




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2021-01691  
Page (45) / (47) Pages

Test mode : BLE 2 Mbps Highest channel(Worst case)

[LINE]

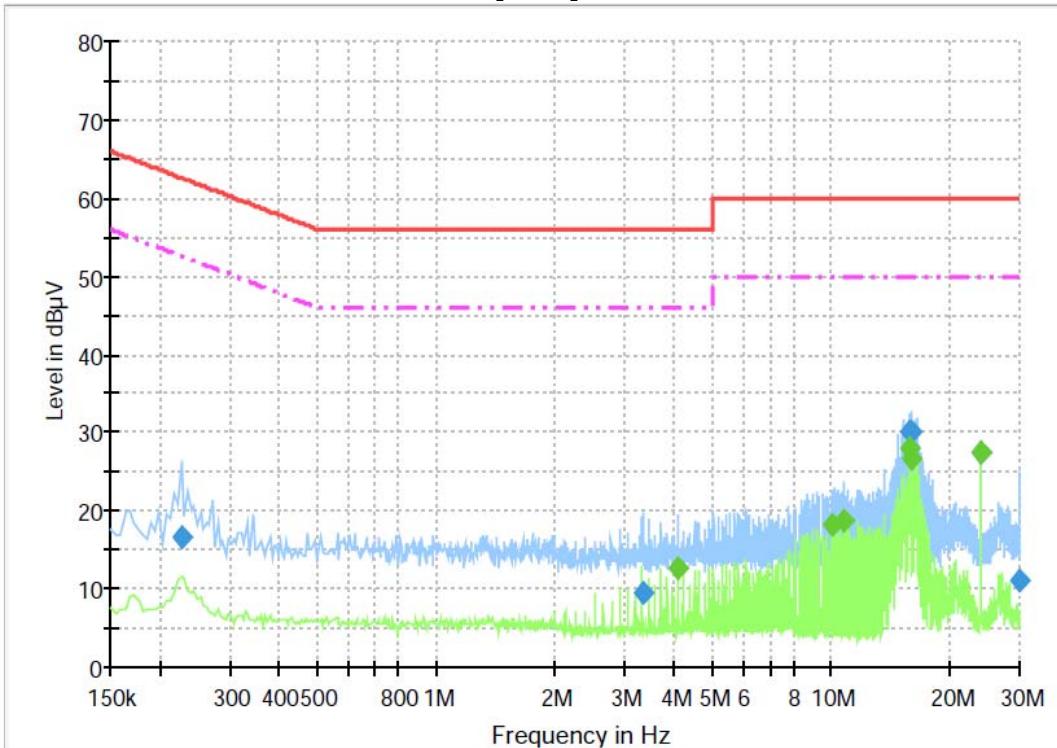


## Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.226500	16.6	1000.0	9.000	On	L1	9.7	46.0	62.6
3.345000	9.4	1000.0	9.000	On	L1	9.8	46.6	56.0
15.859500	30.1	1000.0	9.000	On	L1	10.0	29.9	60.0
15.922500	30.2	1000.0	9.000	On	L1	10.0	29.8	60.0
24.022500	27.6	1000.0	9.000	On	L1	10.1	32.4	60.0
30.000000	11.0	1000.0	9.000	On	L1	10.1	49.0	60.0

## Final Result 2

Frequency (MHz)	CAverage (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
4.114500	12.7	1000.0	9.000	On	L1	9.9	33.3	46.0
10.018500	18.2	1000.0	9.000	On	L1	9.9	31.8	50.0
10.815000	18.8	1000.0	9.000	On	L1	9.9	31.2	50.0
15.801000	28.0	1000.0	9.000	On	L1	10.0	22.0	50.0
15.990000	26.7	1000.0	9.000	On	L1	10.0	23.3	50.0
24.022500	27.4	1000.0	9.000	On	L1	10.1	22.6	50.0

[NEUTRAL]

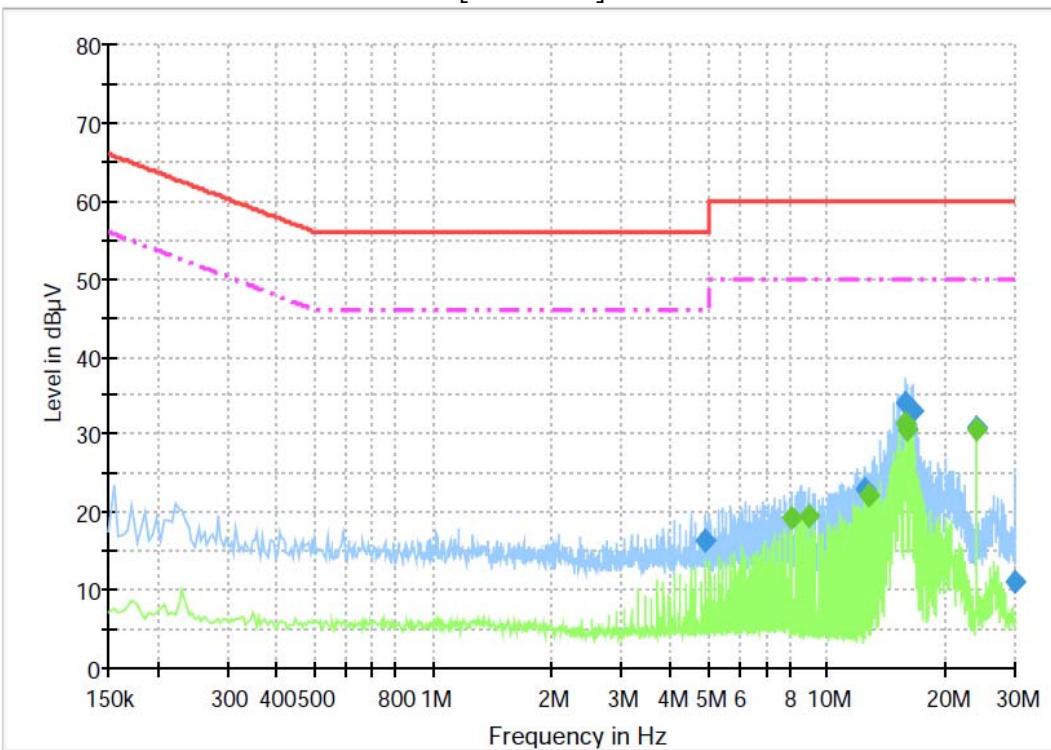

## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
4.911000	16.4	1000.0	9.000	On	N	9.9	39.6	56.0
12.408000	23.1	1000.0	9.000	On	N	9.9	36.9	60.0
15.724500	34.2	1000.0	9.000	On	N	10.0	25.8	60.0
16.521000	33.0	1000.0	9.000	On	N	10.0	27.0	60.0
24.022500	30.9	1000.0	9.000	On	N	10.1	29.1	60.0
29.994000	11.1	1000.0	9.000	On	N	10.2	48.9	60.0

## Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
8.160000	19.2	1000.0	9.000	On	N	9.8	30.8	50.0
8.956500	19.5	1000.0	9.000	On	N	9.8	30.5	50.0
12.804000	22.2	1000.0	9.000	On	N	9.9	27.8	50.0
15.801000	31.5	1000.0	9.000	On	N	10.0	18.5	50.0
15.990000	30.7	1000.0	9.000	On	N	10.0	19.3	50.0
24.022500	30.8	1000.0	9.000	On	N	10.1	19.2	50.0

 <b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501 <small>The Prime Leader of Global Regulatory Certification</small>	Report No.: CTK-2021-01691 Page (47) / (47) Pages	
--	---	--

## 5. APPENDIX A – Test Equipment Used For Tests

	<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal Date</b>	<b>Due Date</b>
1	Signal Analyzer	Agilent	N9020A	MY48011598	2020-10-12	2021-10-12
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2021-04-12	2022-04-12
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2020-10-20	2021-10-20
4	Bilog Antenna	SCHAFFNER	CBL6111C	2551	2021-03-22	2023-03-22
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2020-05-20	2022-05-20
6	6dB Attenuator	BIRD	5W 6dB	1744	2020-12-17	2021-12-17
7	6dB Attenuator	Rohde & Schwarz	DNF	272.4110.50-2	2020-10-23	2021-10-23
8	AMPLIFIER	SONOMA	310	291721	2021-01-22	2022-01-22
9	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2021-01-12	2022-01-12
10	Preamplifier	Agilent	8449B	3008A02011	2020-11-30	2021-11-30
11	Double Ridged Guide Antenna	ETS-Lindgren	3117	00154525	2019-10-14	2021-10-14
12	Horn Antenna	SCHWARZBECK	BBHA9170	00967	2019-06-02	2021-06-02
13	Band Reject Filter	Micro Tronics	BRM50702	G444	2020-10-14	2021-10-14
14	DC Power Supply	HP	E3632A	KR75301278	2020-07-23	2021-07-23
15	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	711196	2021-01-14	2022-01-14
16	Low Noise Amplifier	TESTEK	TK-PA1840H	200115-L	2020-05-29	2021-05-29
17	LISN	Rohde & Schwarz	ENV216	101235	2021-01-12	2022-01-12
18	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2021-01-15	2022-01-15

	<b>Cable</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Check Date</b>
1	RF Cable	Canare Corporation	L-5D2W	N/A	2020-10-20
2	RF Cable	Junkosha Inc.	MWX221	2005S321	2021-04-09
3	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY073/2	2021-02-20
4	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2021-02-20
5	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2021-02-20
6	RF Cable	HUBER+SUHNER	SUCOFLEX 104	N/A	2021-02-20
7	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27573/4	2021-02-20
8	RF Cable	HUBER+SUHNER	SUCOFLEX 106	N/A	2021-02-20
9	RF Cable	HUBER+SUHNER	SUCOFLEX 102	803010/2	2021-02-20
10	RF Cable	HUBER+SUHNER	SUCOFLEX 102	803742/2	2021-02-20
11	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2021-02-20