



REPORT No.: SZ24050210S01

TEST REPORT

APPLICANT : ShangXing Technology (ShenZhen) Co., Ltd.
PRODUCT NAME : Magnetic Portable charger
MODEL NAME : B05; SD09
BRAND NAME : NA
FCC ID : 2APDM-B05
STANDARD(S) : FCC 47 CFR Part 2 (2.1091)
receipt date : 2024-05-24
TEST DATE : 2024-06-18
ISSUE DATE : 2024-07-02



Edited by:

Xie Yiyun

Xie Yiyun (Rapporteur)

Approved by:

Gan Yueming

Gan Yueming (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment under Test (EUT) Description	3
1.3. MPE Results Summary	3
1.4. Photographs of the EUT	4
1.5. Applied Reference Documents	4
2. RF Exposure Requirement	5
2.1. General Information	5
2.2. RF Exposure Limit	5
2.3. Test Information	5
2.4. Measurement Uncertainty (95% confidence levels, k=2)	6
2.5. Test Setup	6
3. Test Equipment List	7
4. RF Exposure Assessment	7
Annex A General Information	9
Annex B Test Setup Photos	

Change History		
Version	Date	Reason for change
1.0	2024-07-02	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	ShangXing Technology (ShenZhen) Co., Ltd.
Applicant Address:	Room 408, 4th Floor, Building 30.Wisdomland Business Park,Guankou 2nd road, Nantou, Nanshan, Shenzhen, China
Manufacturer:	ShangXing Technology (ShenZhen) Co., Ltd.
Manufacturer Address:	Room 408, 4th Floor, Building 30.Wisdomland Business Park,Guankou 2nd road, Nantou, Nanshan, Shenzhen, China

1.2. Equipment under Test (EUT) Description

Product Name:	Magnetic Portable charger
EUT No.:	2#
Hardware Version:	V2.0
Software Version:	V2.0
Frequency Bands:	Wireless charging: 110 kHz ~ 205 kHz
Modulation Mode:	Wireless charging: ASK
Antenna Type:	Wireless charging: Coil Antenna

1.3. MPE Results Summary

Operation Frequency	Highest MPE Summary	
	E-field (V/m)	H-field (A/m)
110 kHz ~ 205 kHz	10.04	0.07

Note:

1. There are two models B05 and SD09 in this report, both of them are different from the model names.
2. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.4. Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

1.5. Applied Reference Documents

Leading reference documents for testing:

Identity	Document Title	Method determination /Remark
FCC 47 CFR Part 2 (2.1091)	Radio Frequency Radiation Exposure Evaluation: mobile devices	No deviation
KDB 680106 D01v04	Equipment Authorization of Wireless Power Transfer Devices	No deviation
Note 1: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.		

2. RF Exposure Requirement

2.1. General Information

For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 20 cm. E-field and H-field strength measurements or numerical modeling may be used to demonstrate compliance.

Measurements should be made from all sides and the top of the primary/client pair, with the 0 cm and 2 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

2.2. RF Exposure Limit

➤ Basic Restrictions Reference levels

Basic Restriction for electric, magnetic and electromagnetic fields (0Hz to 300GHz)

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density


2.3. Test Information

The EUT working at normal charging mode, use the E-Probe measure the H-field Strength, E-field Strength separately.

2.4. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiated Frequency	7×10^8
Uncertainty for test site temperature and humidity	0.6 °C
	3%

2.5. Test Setup

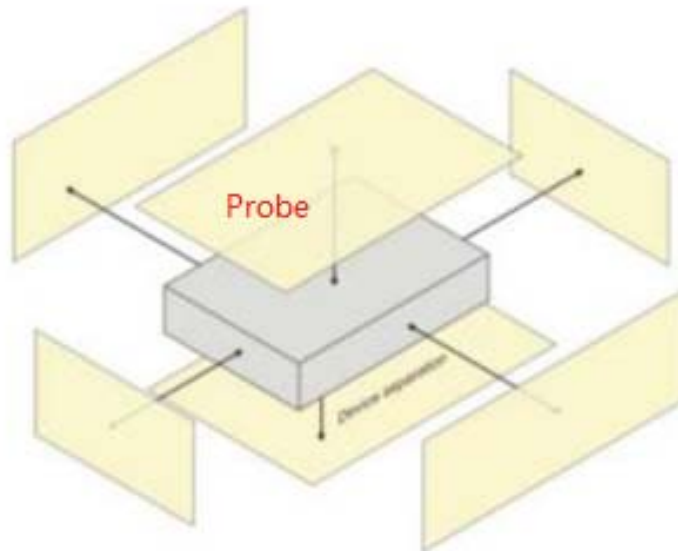



3. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
STT	Broadband Field meter	SEM-600	D-1044	2021.11.15	2024.11.14
STT	Probe	LF-04	I-1044	2021.11.15	2024.11.14
STT	Probe holder	TR-01	N/A	N/A	N/A
STT	Optical fiber line	L=5M	N/A	N/A	N/A

4. RF Exposure Assessment

➤ Environment of Test Condition

Test Date: 2024.06.18
Temperature: 25 ± 2 °C Humidity: 20-60%

➤ E-Field Strength Result

E-field strength result (Test frequency range from 110 kHz ~ 205 kHz)						
Test Loading	Exposure Position	Distance (cm)	E-field Strength (Max. V/m)		Limit 50%(V/m)	Verdict
			Value	30% Dvi		
110 kHz ~ 205 kHz	Front Side	0	7.45	29.80	307	PASS
		2	5.23		307	PASS
	Back Side	0	9.53	28.96	307	PASS
		2	6.77		307	PASS
	Left Side	0	2.54	28.35	307	PASS
		2	1.82		307	PASS
	Right Side	0	2.67	18.35	307	PASS
		2	2.18		307	PASS
	Top Side	0	10.04	15.04	307	PASS
		2	8.53		307	PASS
	Bottom Side	0	5.22	28.16	307	PASS
		2	3.75		307	PASS

➤ **H-Field Strength Result**

H-field strength result (Test frequency range from 110 kHz ~ 205 kHz)						
Test Loading	Exposure Position	Distance (cm)	H-field Strength (Max. A/m)		Limit 50%(A/m)	Verdict
			Value	30% Dvi		
110 kHz ~ 205 kHz	Front Side	0	0.07	30.00	0.815	PASS
		2	0.05		0.815	PASS
	Back Side	0	0.05	20.00	0.815	PASS
		2	0.04		0.815	PASS
	Left Side	0	0.06	26.67	0.815	PASS
		2	0.04		0.815	PASS
	Right Side	0	0.04	25.00	0.815	PASS
		2	0.03		0.815	PASS
	Top Side	0	0.05	24.00	0.815	PASS
		2	0.04		0.815	PASS
	Bottom Side	0	0.02	14.80	0.815	PASS
		2	0.02		0.815	PASS

Note:

1. According to the user manual, output power from each primary coil is less than or equal to 15 watts.
2. According to KDB 680106 D01V04 section 5.2), the E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit.
3. This device designed for typical desktop applications, therefore mobile exposure conditions are applied and client device is placed directly in contact with the transmitter.
4. The difference between distance 0cm and 2cm tests (E- and/or H-field) is not more than 30%.
5. The EUT test photos, please see the Annex B.

➤ **Simultaneous Transmission Consideration**

This device only incorporates a WPT, therefore simultaneous transmission assessment is not required.

➤ **Conclusion:**

According to FCC 47 CFR Part 2(2.1091), this device complies with human exposure basic restrictions.



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

Note:

The main report is end here and the other Annex B will be submitted separately.

***** END OF REPORT *****