

TEST REPORT

Test report no.: 1-7847/19-01-03-B



Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-05.

Applicant

Ets Georges Renault

ZAC de la Lorie

Rue Bobby Sands

44800 Saint Herblain / FRANCE

Contact: Manuel Buton

e-mail: Manuel.Buton@cp.com

Phone: +33 2 40 80 20 40

Manufacturer

ASTEELFLASH DEVELOPPEMENT

43 chemin du Vieux Chêne

38240 MEYLAN / FRANCE

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: UWB Positioning Module

Model name: UWB Positioning Module

FCC ID: 2APE2-TRACKBASE

IC: 24012-TRACKBASE

Frequency: 3100 MHz – 10100 MHz

Technology tested: UWB

Antenna: Integrated antenna

Power supply: 5 V DC by USB, POE

Temperature range: +5°C to +40°C



This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Meheza Walla
Lab Manager
Radio Communications

Test performed:

p.o.

Sebastian Janoschka
Lab Manager
Radio Communications

1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer.....	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Test environment.....	5
5	Test item	5
5.1	General description	5
5.2	Test modes	6
5.3	Additional information.....	6
6	Description of the test setup	7
6.1	Shielded semi anechoic chamber.....	8
6.2	Shielded fully anechoic chamber.....	9
6.3	Radiated measurements > 18 GHz.....	11
7	Sequence of testing	12
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	12
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	13
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz.....	14
7.4	Sequence of testing radiated spurious above 18 GHz.....	15
8	Measurement uncertainty	16
9	Summary of measurement results	17
10	Measurement results.....	18
10.1	10 dB - Bandwidth.....	18
10.2	TX Radiated Emissions.....	22
10.3	Antenna requirements	74
11	Glossary.....	75
12	Document history	76
13	Accreditation Certificate – D-PL-12076-01-05.....Fehler! Textmarke nicht definiert.	

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-7847/19-01-03-A and dated 2020-12-21.

2.2 Application details

Date of receipt of order:	2019-10-25
Date of receipt of test item:	2020-07-01
Start of test:	2020-07-20
End of test:	2020-08-24
Person(s) present during the test:	-/-

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15	2020-09	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

Guidance	Version	Description
KDB 393764 D01	V02	ULTRA-WIDEBAND (UWB) DEVICES FREQUENTLY ASKED QUESTIONS
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

4 Test environment

Temperature :	T_{nom} 26 °C during room temperature tests T_{max} -/- °C during high temperature tests T_{min} -/- °C during low temperature tests
Relative humidity content :	55 %
Barometric pressure :	1021 hpa
Power supply :	V_{nom} 5 V DC by external USB power supply V_{max} -/- V V_{min} -/- V

5 Test item

5.1 General description

Kind of test item :	UWB Positioning Module
Model name :	UWB Positioning Module
HMN :	-/-
PMN :	TRACKING BASE
HVIN :	A
FVIN :	-/-
S/N serial number :	Engineering sample
Hardware status :	Engineering sample with Pcba Tracking base 6159197150
Software status :	N/A
Firmware status :	2.3.23-FCC
Frequency band :	3100 MHz – 10100 MHz
Type of radio transmission : Use of frequency spectrum :	Pulsed
Type of modulation :	BFSK
Number of channels :	6
Antenna :	Integrated antenna
Power supply :	5 V DC by external USB power supply, POE
Temperature range :	+5°C to +40°C

5.2 Test modes

During transmitter tests, the EUT is set for continuous transmission (1 UWB burst every 1 ms)

Channel	Center frequency	Power Setting
1	3500 MHz	20.5 dB
2	4000 MHz	20.5 dB
3	4500 MHz	17.0 dB
4	4000 MHz	22.0 dB
5	6500 MHz	18.0 dB
7	6500 MHz	33.0 dB

All tests were made with 5V USB power supply, as requested by the customer.

5.3 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 1-7847/19-01-01_AnnexA
- 1-7847/19-01-01_AnnexB
- 1-7847/19-01-01_AnnexD

6 Description of the test setup


Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

6.1 Shielded semi anechoic chamber

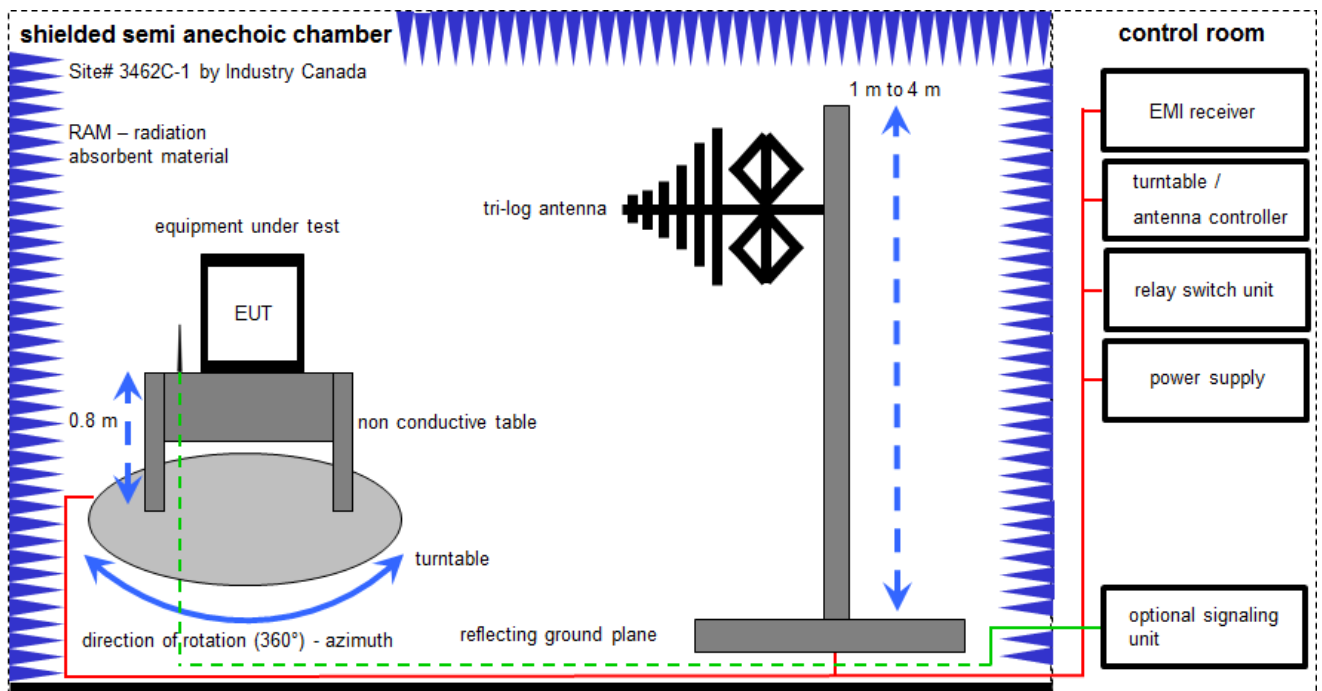

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04466	300000580	ne	-/-	-/-
3	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023		300000551	ne	-/-	-/-
4	A	EMI Test Receiver	ESR3	R&S	102587	300005571	k	16.12.2019	15.12.2020
6	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
7	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
8	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
9	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vKII	19.02.2019	18.02.2021
10	A	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	16.12.2019	15.12.2020

6.2 Shielded fully anechoic chamber

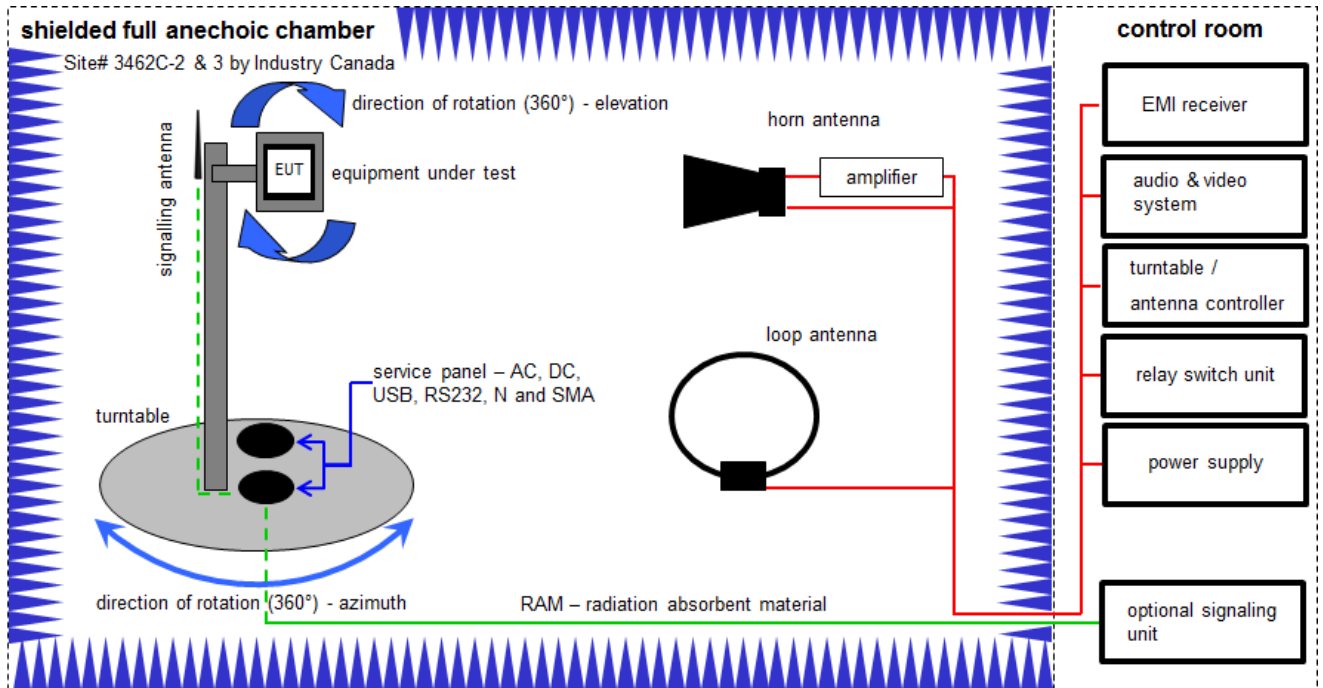

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance;
G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:

$$OP \text{ [dBm]} = -39.0 \text{ [dBm]} + 57.0 \text{ [dB]} - 12.0 \text{ [dBi]} + (-36.0) \text{ [dB]} = -30 \text{ [dBm]} (1 \mu\text{W})$$


Equipment table (Chamber C):

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A,B,C	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2818A03450	300001040	vKI!	12.12.2017	11.12.2020
2	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	13.06.2019	12.06.2021
3	A,B,C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
4	B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vKI!	27.12.2019	26.02.2021
5	A,B,C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
6	A,B,C	Variable isolating transformer	MPL IEC625 Bus Variable isolating transformer	Erfi	91350	300001155	ne	-/-	-/-
7	A,B,C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	11.12.2019	10.12.2020
8	B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
9	B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
10	B	Broadband Amplifier 5-13 GHz	CBLU5135235	CERNEX	22010	300004491	ev	-/-	-/-
11	A,B,C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
12	A,B,C	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO		300004682	ne	-/-	-/-
13	A,B,C	PC	ExOne	F+W		300004703	ne	-/-	-/-
14	B	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-
15	C	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vKI!	19.02.2019	18.02.2021

Equipment table (OTA):

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A,B,C	Power supply GPIB dc power supply, 0-50 Vdc, 0-2 A	6633A	HP	2851A01222	300001530	vKI!	10.12.2019	09.12.2022
2	A,B,C	CTIA-Chamber	CTIA-Chamber AMS 8500	ETS-Lindgren Finland		300003327	ne	-/-	-/-
3	A,B,C	CTIA-Chamber - Positioning Equipment	CTIA-Chamber - Positioning Equipment	EMCO/2		300003328	ne	-/-	-/-
4	A,B,C	Signal- and Spectrum Analyzer	FSW26	R&S	101455	300005697	k	12.12.2019	11.12.2020
5	A,B,C	PC	Precision M4800	DELL	19414201934	300004957	-/-		
6	A,B,C	EMC Software Chamber A	EMC32-MEB	R&S	n.a.	300005477	-/-		
7	A,B,C	RF Amplifier	AMF-7D-01001800-22-10P	MITEQ	n.a.	n.a.	ev		
8	A	Std. Gain Horn Antenna 11.90-18.00 GHz	1824-20	Flann	263	300002471	ev	-/-	-/-
9	B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9709-5290	300000212	ev	-/-	-/-
10	C	Breitband Doppelsteg-Hornantenne 0.5-6 GHz, 300 W	BBHA 9120 E	Schwarzbeck	212	300003214	vKI!	22.06.2018	21.06.2021

6.3 Radiated measurements > 18 GHz

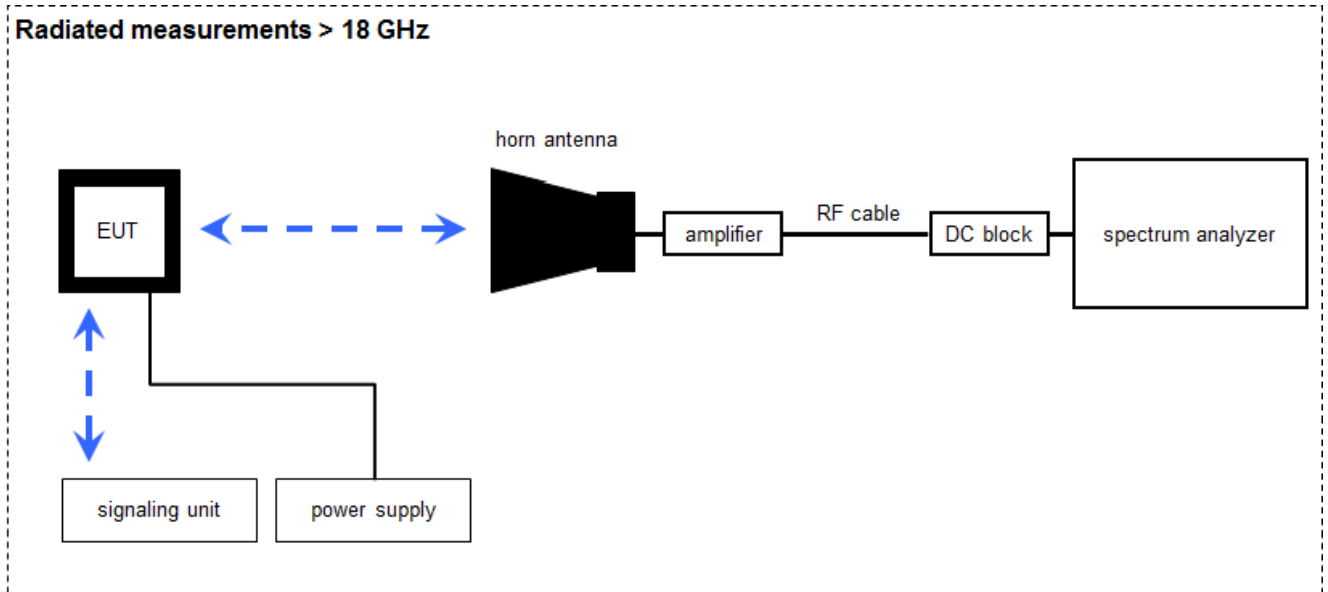

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance;
G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:

$$OP [dBm] = -59.0 [dBm] + 44.0 [dB] - 20.0 [dBi] + 5.0 [dB] = -30 [dBm] (1 \mu W)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No CTC	Kind of Calibration	Last Calibration	Next Calibration
1	A	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	7911	300001751	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda		300000487	ev	-/-	-/-
3	A	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	k	19.02.2019	18.02.2021
4	A	Broadband LNA 18-50 GHz	CBL18503070PN	CERNEX	25240	300004948	ev	-/-	-/-
5	A	Power Supply	LA30/5GA	Zentro	2046	300000711	NK!	-/-	-/-

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

^{*)}Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

8 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.15 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.15 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.15 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.15 dB
	> 7 GHz	± 1.15 dB
	> 18 GHz	± 1.89 dB
	≥ 40 GHz	± 3.12 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

9 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR47 §15.209, §15.517, §15.521	see table	2021-06-30	-/-

Test specification clause	Test case	Temperature conditions	Power source	Pass	Fail	NA	NP	Remark
§15.503	10 dB Bandwidth	Nominal	Nominal	☒	☐	☐	☐	complies
§15.517 §15.209 (c)(d)(e)	TX Radiated Emissions	Nominal	Nominal	☒	☐	☐	☐	complies
§15.521 (b) §§15.203 & 15.204	Antenna requirement	-/-	-/-	☒	☐	☐	☐	complies

Note: NA = Not Applicable; NP = Not Performed

10 Measurement results

10.1 10 dB - Bandwidth

Description:

(a) *UWB bandwidth*. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M .

Measurement:

Measurement parameter	
Detector:	RMS
Video bandwidth:	1 MHz
Resolution bandwidth:	3 MHz
Trace-Mode:	Max Hold

Test Setup: 7.3

Limits:


>500 MHz

Results:


Channel	Lower -10 dB point [MHz]	Higher -10 dB point [MHz]	UWB bandwidth [MHz]	Plot
1	3238.56	3808.26	569.76	1
2	3720.66	4327.36	606.66	2
3	4245.87	4793.57	547.77	3
4	3511.20	4515.70	1004	4
5	6160.73	6767.43	606.73	5
7	5926.88	6952.38	1030	6



Verdict: Compliant

Plot 1:

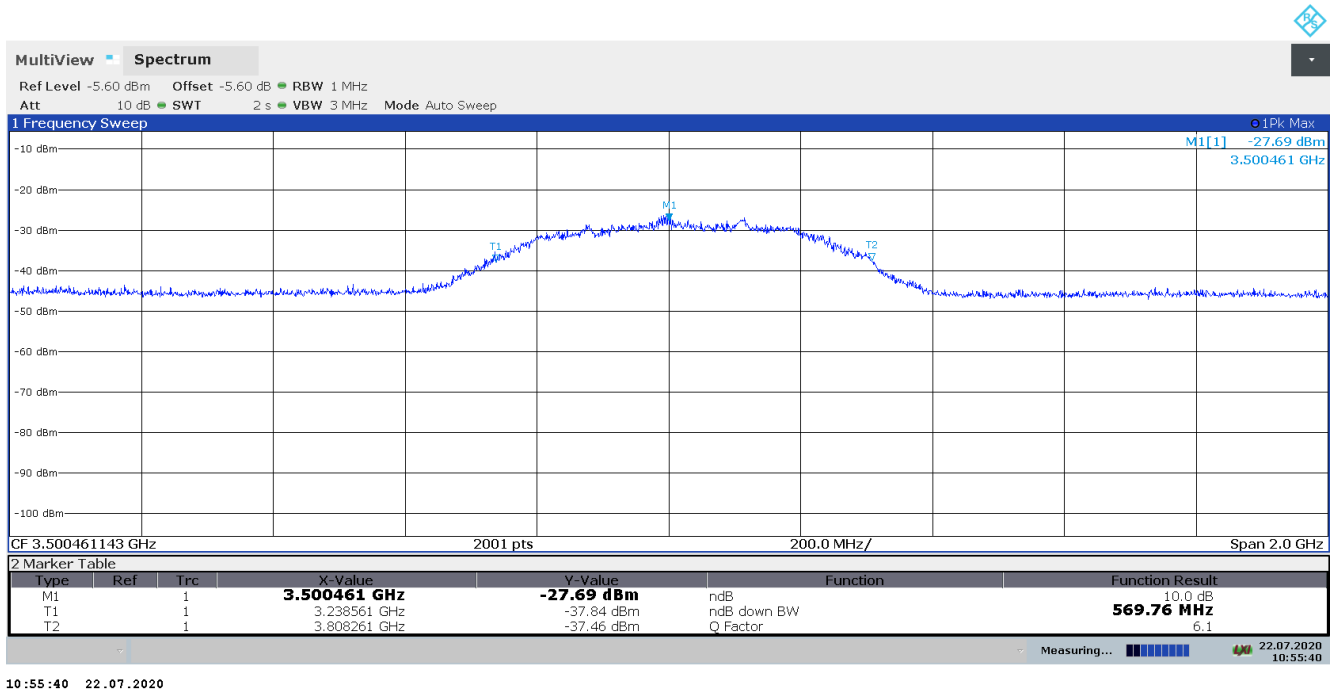


Plot 2:

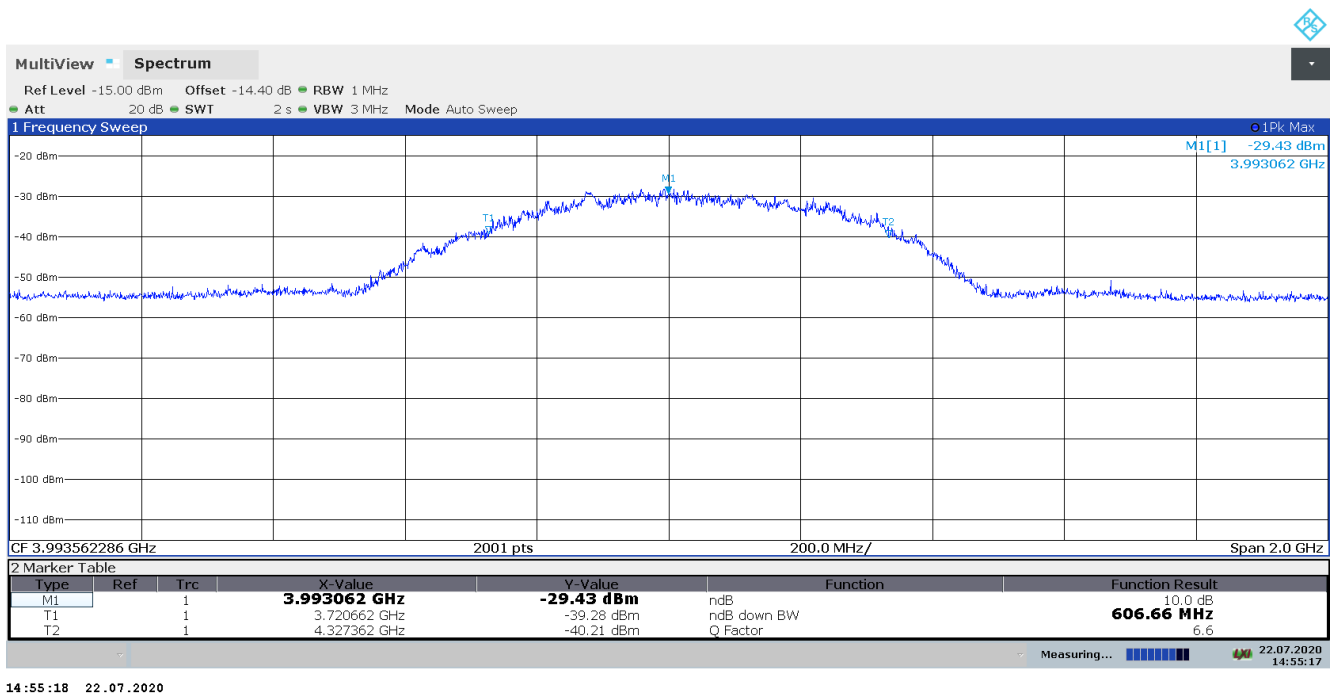


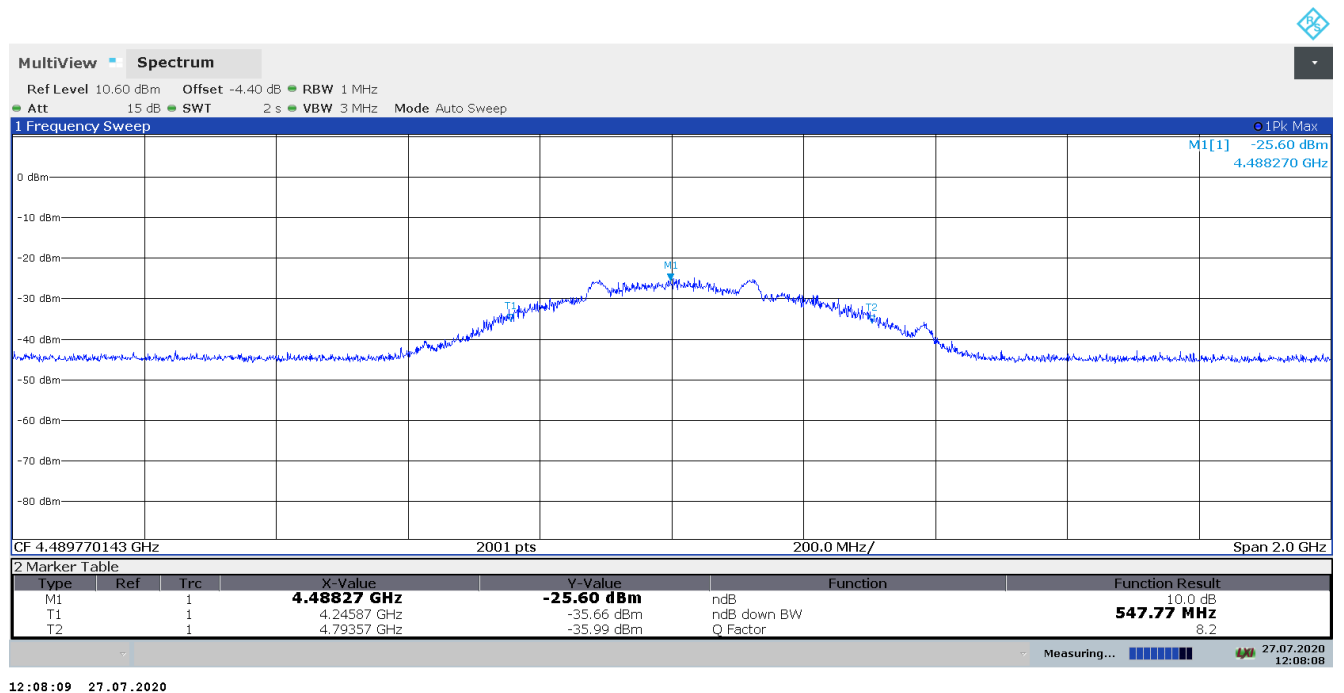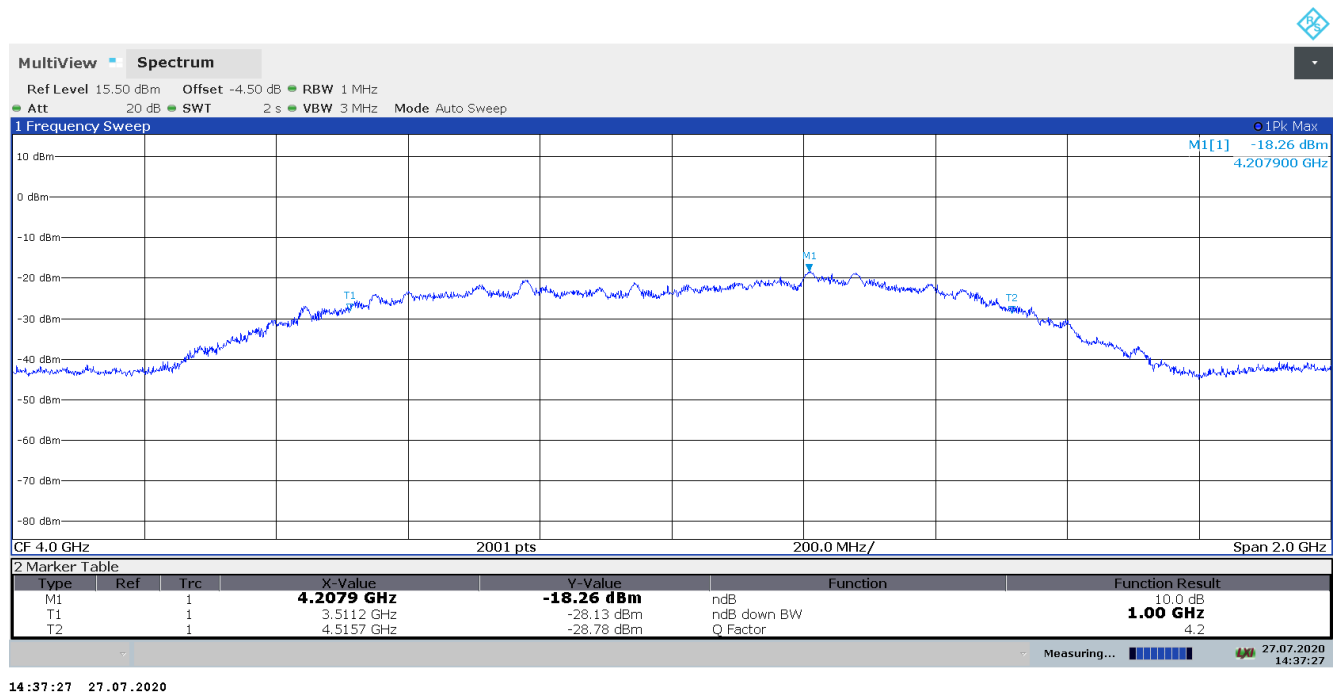Plot 3:**Plot 4:**

Plot 5:

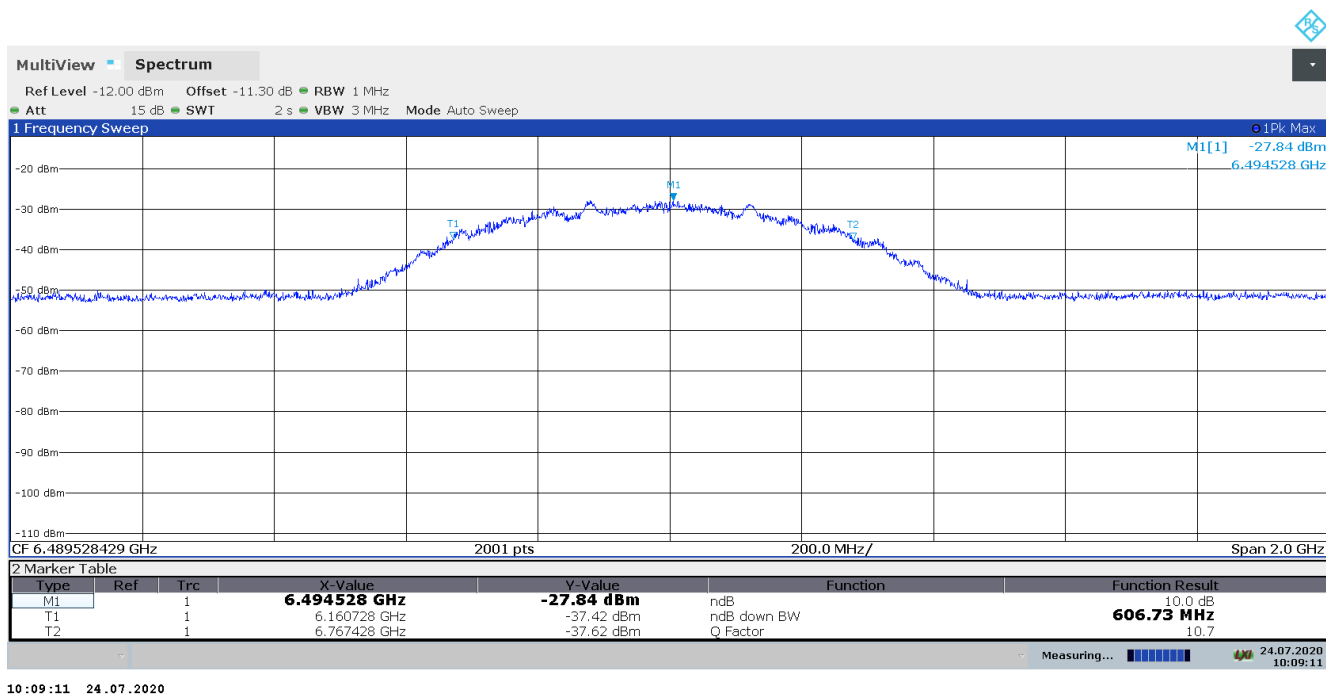

Plot 6:

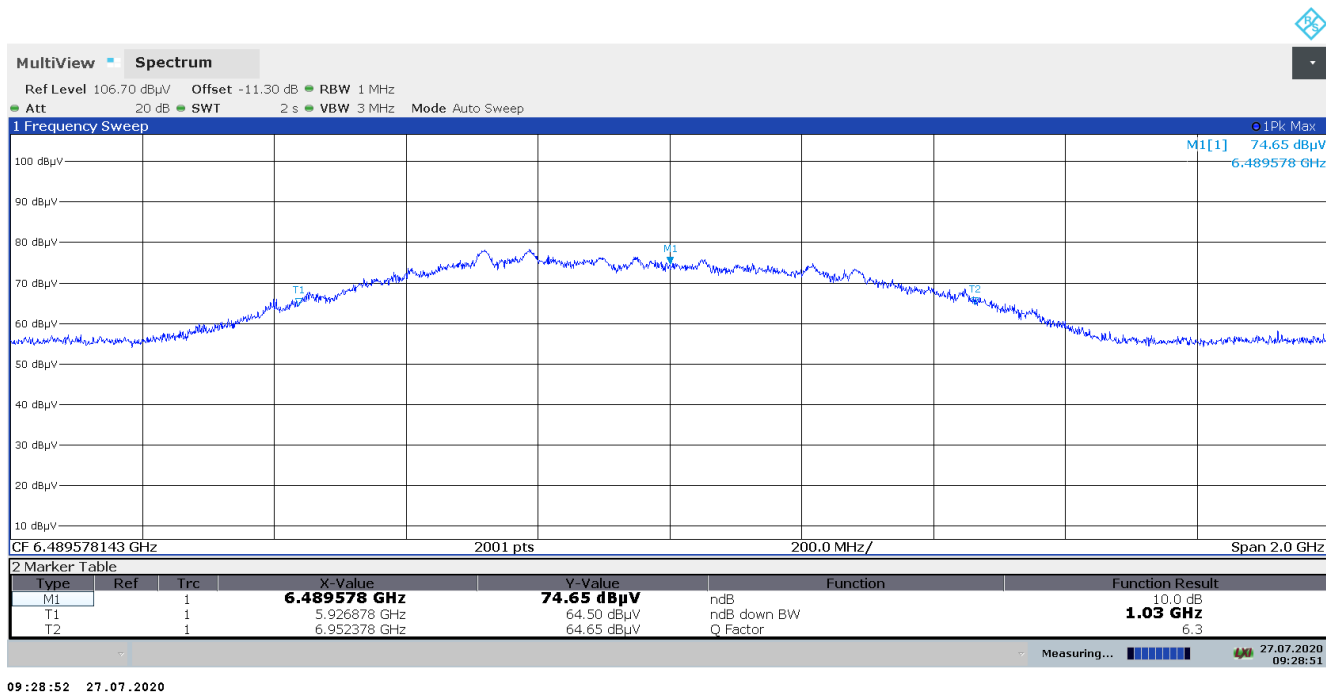

10.2 TX Radiated Emissions

Description:

Measurement of the radiated spurious emissions in transmit mode.

Measurement:

§15.209:

Average Measurement parameter	
Detector:	Peak/QPeak
Sweep time:	1 s
Number of points	8001
Resolution bandwidth:	120kHz
Video bandwidth:	≥ RBW
Trace-Mode:	Max Hold

§15.517 (c):

Average Measurement parameter	
Detector:	RMS
Sweep time:	1 ms/pt
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max Hold

§15.517 (d):

Average Measurement parameter	
Detector:	RMS
Sweep time:	1 ms/pt
Resolution bandwidth:	30 kHz
Video bandwidth:	100 kHz
Trace-Mode:	Max Hold

§15.517 (e):

Peak Measurement parameter	
Detector:	Max Peak
Resolution bandwidth:	50 MHz
Video bandwidth:	80 MHz
Span:	Zero span
Trace-Mode:	Max Hold

UWB-emission-Limits:**§15.517 (c)**

The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following RMS average limits based on measurements using a 1 MHz resolution bandwidth:

Frequency in MHz	EIRP in dBm
960 to 1610	-75.3
1610 to 1990	-53.3
1990 to 3100	-51.3
3100 to 10600	-41.3
Above 10600	-51.3

§15.517 (d)

In addition to the radiated emission limits specified in the table in paragraph (d)(1) of this section, transmitters operating under the provisions of this section shall not exceed the following RMS average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164 to 1240	-85.3
1559 to 1610	-85.3

(e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_m . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

§15.521 (c)

Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in §15.209, rather than the limits specified in this subpart, provided it can be clearly demonstrated that those emissions from the UWB device are due solely to emissions from digital circuitry contained within the transmitter and that the emissions are not intended to be radiated from the transmitter's antenna. Emissions from associated digital devices, as defined in §15.3(k), e.g., emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission, are subject to the limits contained in Subpart B of this part.

§15.521(e)

The frequency at which the highest radiated emission occurs, f_m , must be contained within the UWB bandwidth.

§15.521(g)

When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs, f_m . If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2$. If RBW is greater than 3 MHz, the application for certification filed with the Commission must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.

§15.521(h):

The highest frequency employed in §15.33 to determine the frequency range over which radiated measurements are made shall be based on the center frequency, f_c , unless a higher frequency is generated within the UWB device. For measuring emission levels, the spectrum shall be investigated from the lowest frequency generated in the UWB transmitter, without going below 9 kHz, up to the frequency range shown in §15.33(a) or up to $f_c + 3/(\text{pulse width in seconds})$, whichever is higher. There is no requirement to measure emissions beyond 40 GHz provided f_c is less than 10 GHz; beyond 100 GHz if f_c is at or above 10 GHz and below 30 GHz; or beyond 200 GHz if f_c is at or above 30 GHz.

§15.521 (d)

Within the tables in §§15.509, 15.511, 15.513, 15.515, 15.517, and 15.519, the tighter emission limit applies at the band edges. Radiated emission levels at and below 960 MHz are based on measurements employing a CISPR quasi-peak detector. Radiated emission levels above 960 MHz are based on RMS average measurements over a 1 MHz resolution bandwidth. The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time. Unless otherwise stated, if pulse gating is employed where the transmitter is quiescent for intervals that are long compared to the nominal pulse repetition interval, measurements shall be made with the pulse train gated on. Alternative measurement procedures may be considered by the Commission.

Emission limits below 960 MHz (§15.209):


Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30 (29.5 dB $\mu\text{V/m}$)	30
30 – 88	100 (40 dB $\mu\text{V/m}$)	3
88 – 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 – 960	200 (46 dB $\mu\text{V/m}$)	3
> 960	500 (54 dB $\mu\text{V/m}$)	3

Result:**Measurements of the fundamental emission:**


Channel	Frequency /MHz	Max RMS power in dBm/MHz	Max Peak power in dBm/50 MHz	Plot
1	3500.46	-43.23	-0.98	31, 7
2	3993.56	-43.42	-3.85	32, 8
3	4489.77	-42.08	-0.84	33, 9
4	4265.37	-44.42	-1.06	34, 10
5	6489.53	-42.34	-4.72	35, 11
7	6489.58	-42.99	-5.23	36, 12



Verdict: complies



Plot 7: Channel 1, Peak fundamental emission

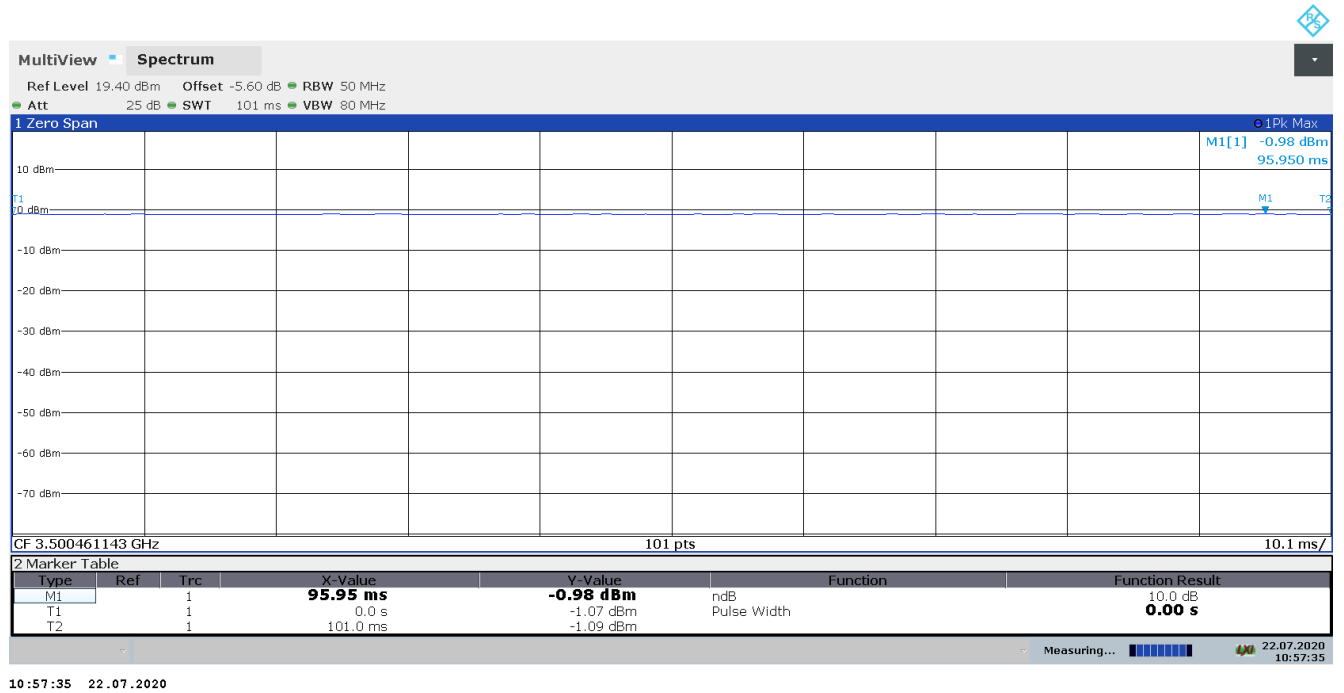


Plot 8: Channel 2, Peak fundamental emission

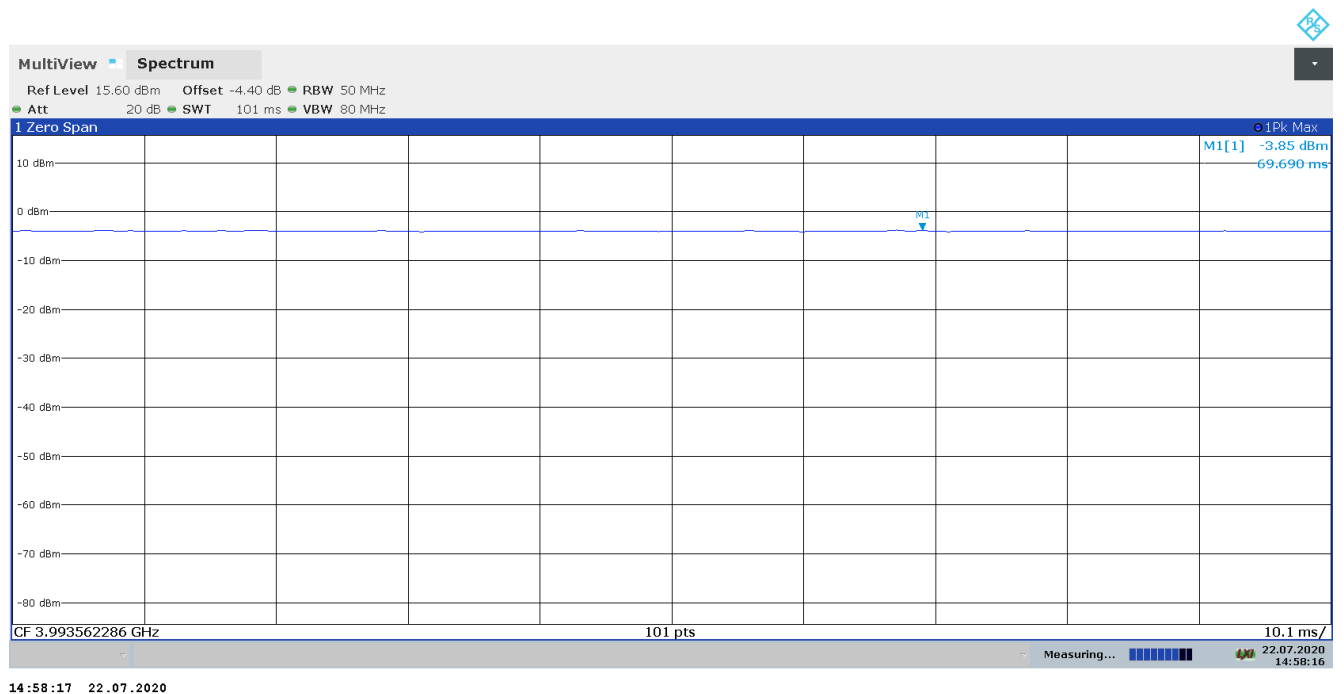

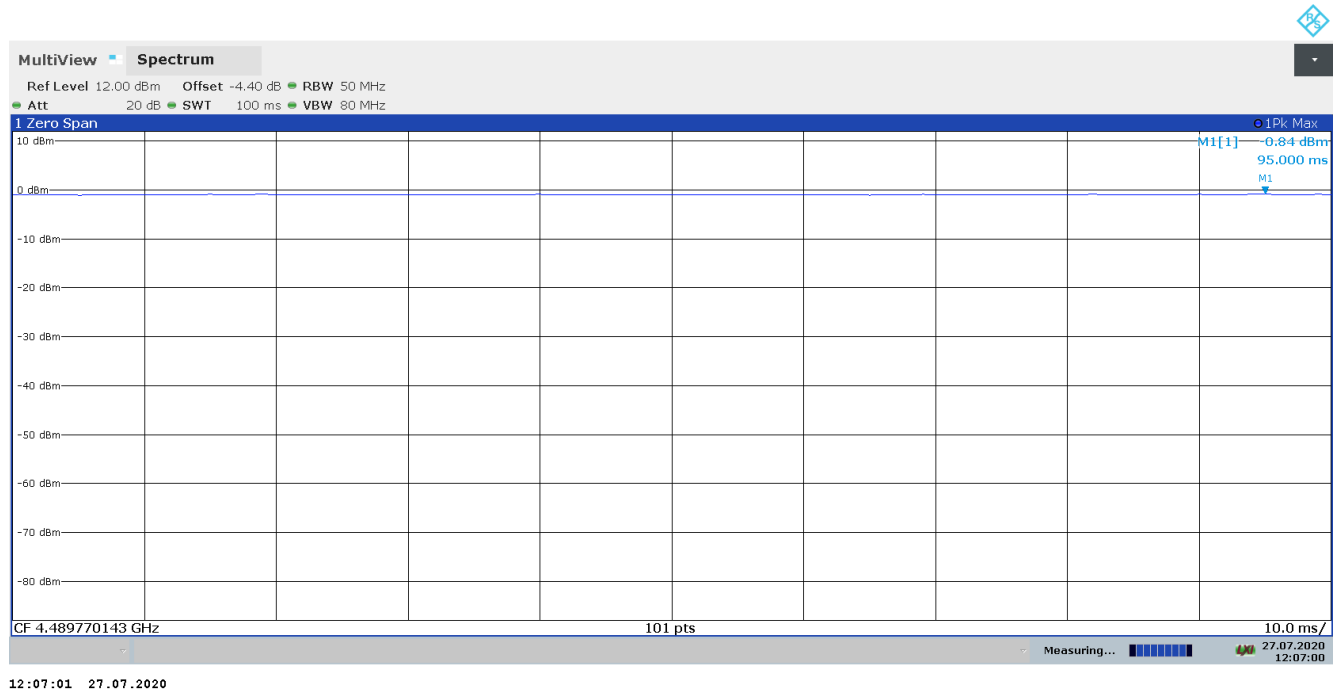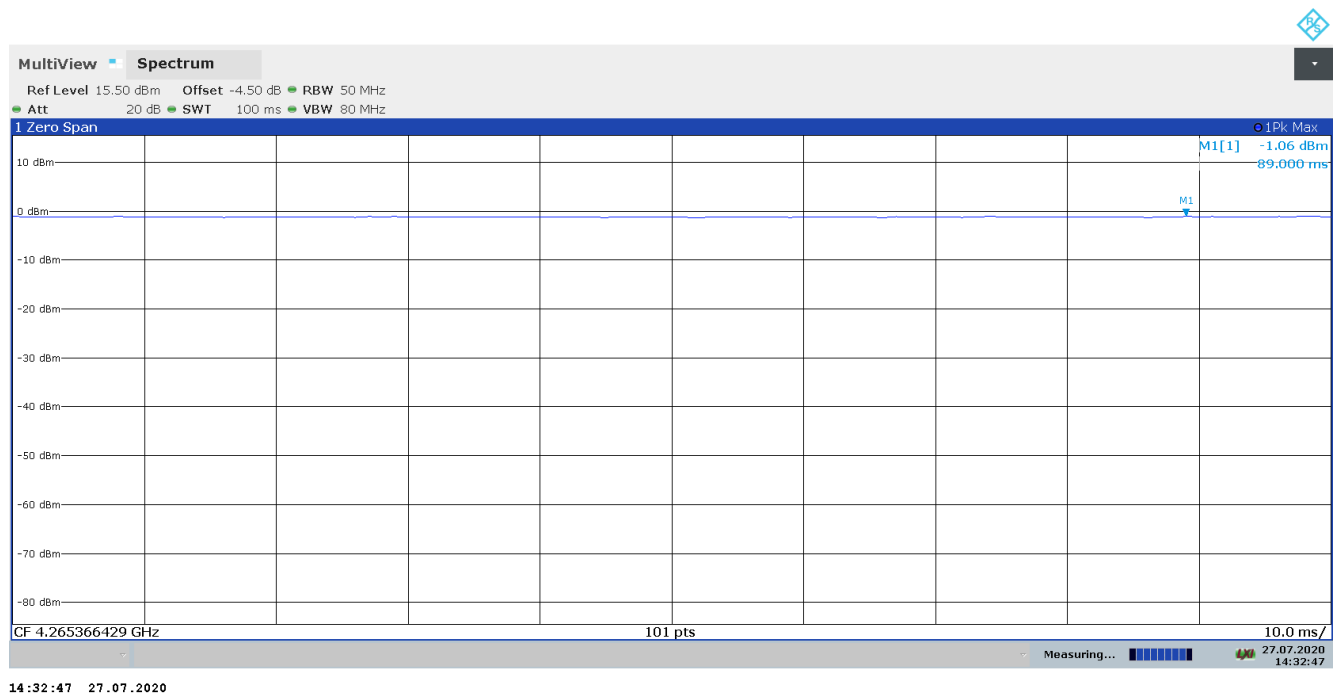
Plot 9: Channel 3, Peak fundamental emission**Plot 10: Channel 4, Peak fundamental emission**

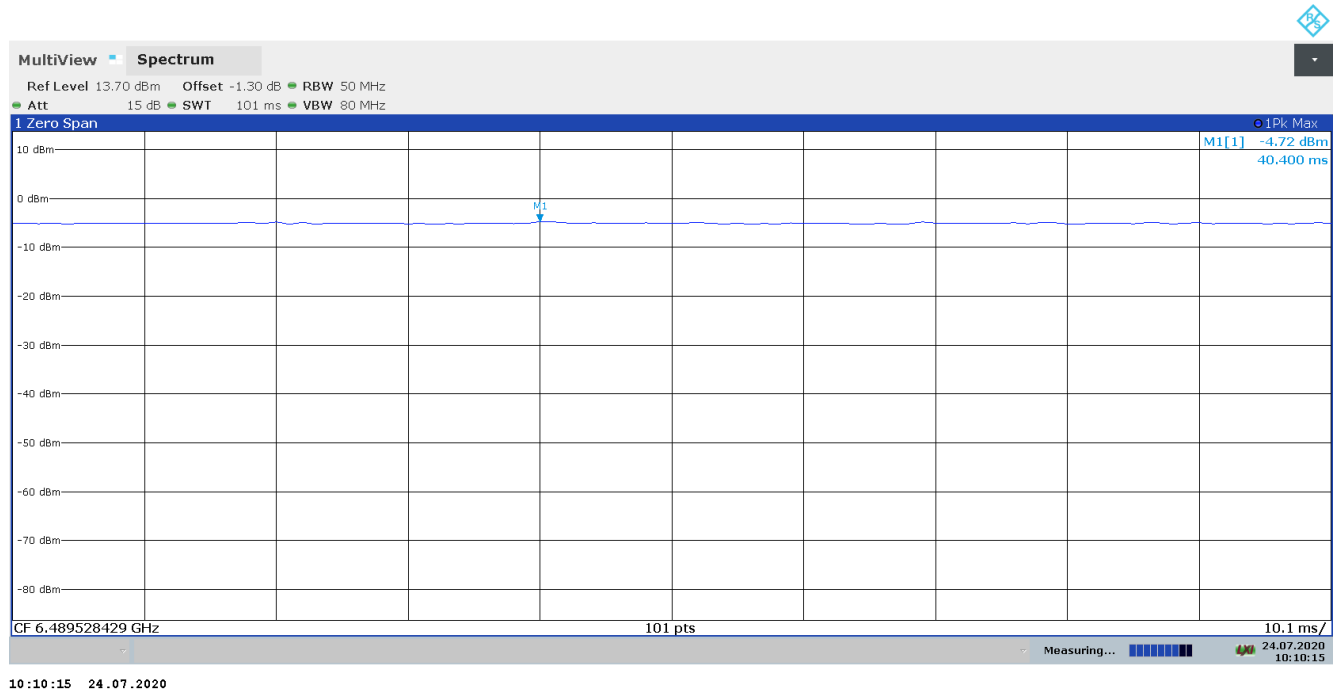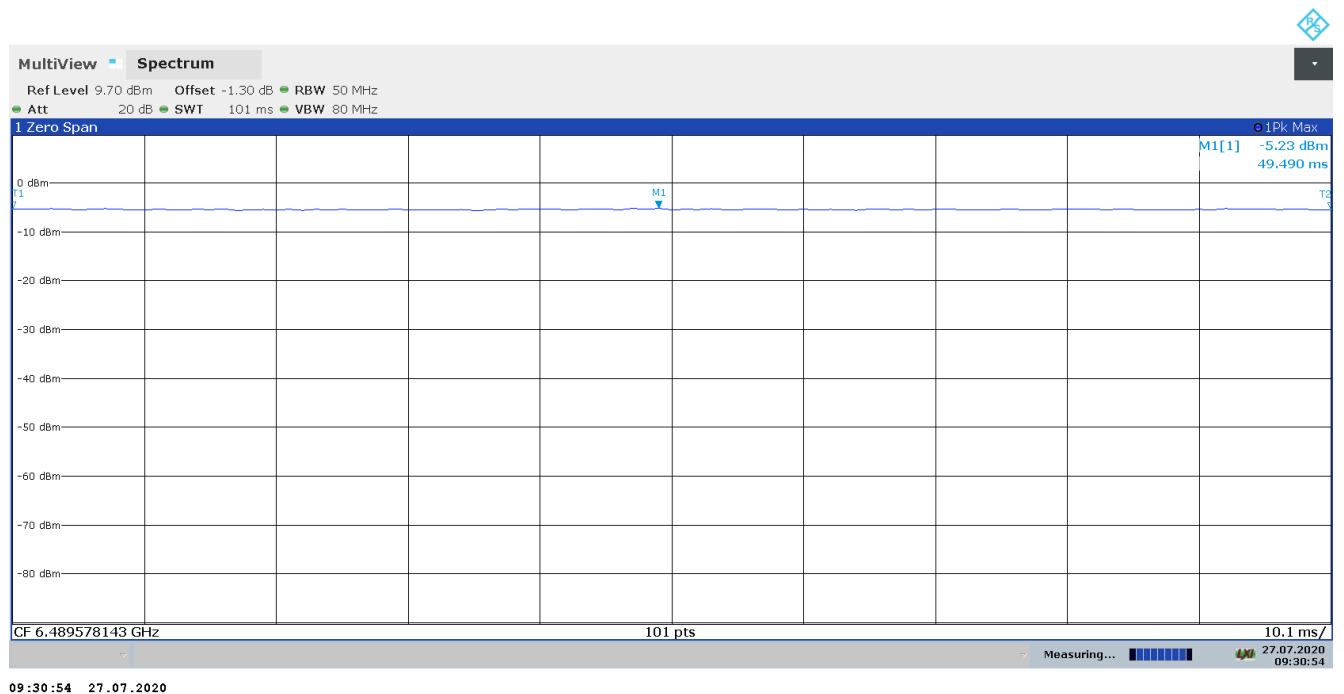Plot 11: Channel 5, Peak fundamental emission**Plot 12: Channel 7, Peak fundamental emission**


Plot 13: Channel 1, 9 kHz to 30 MHz

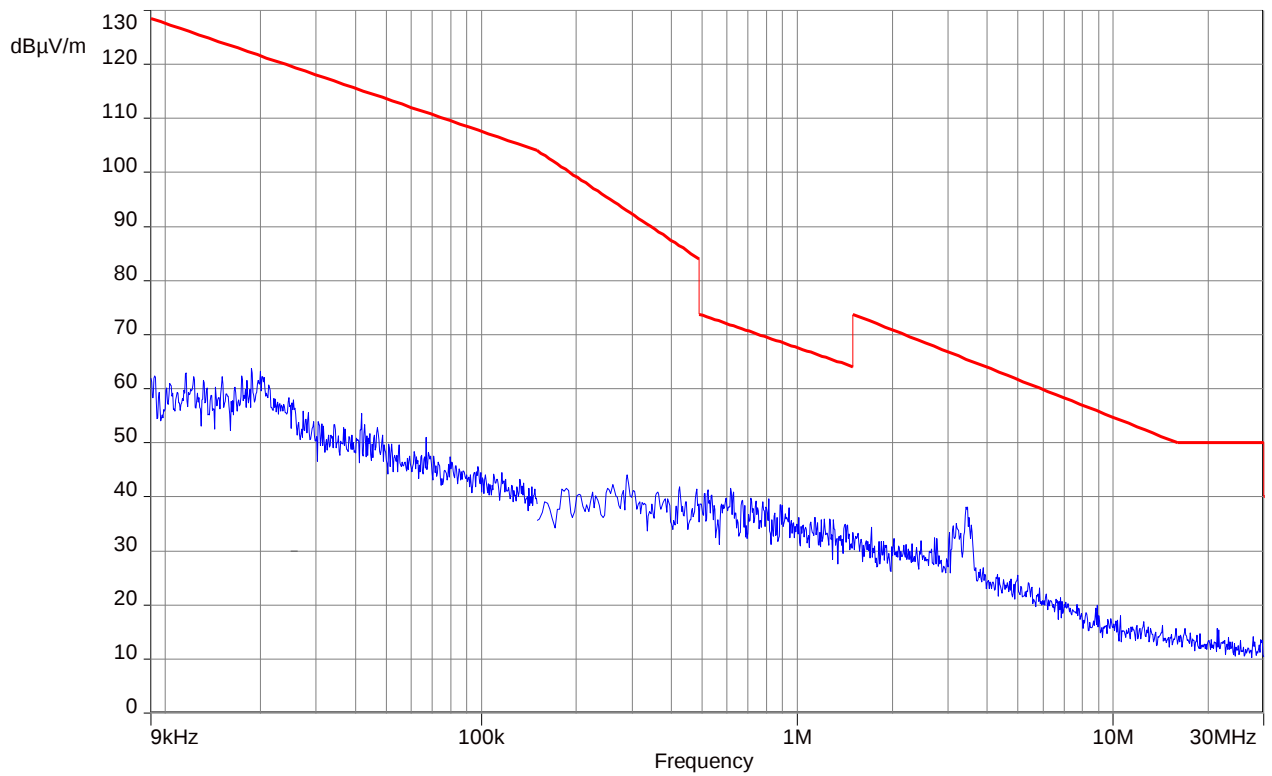


Plot 14: Channel 2, 9 kHz to 30 MHz

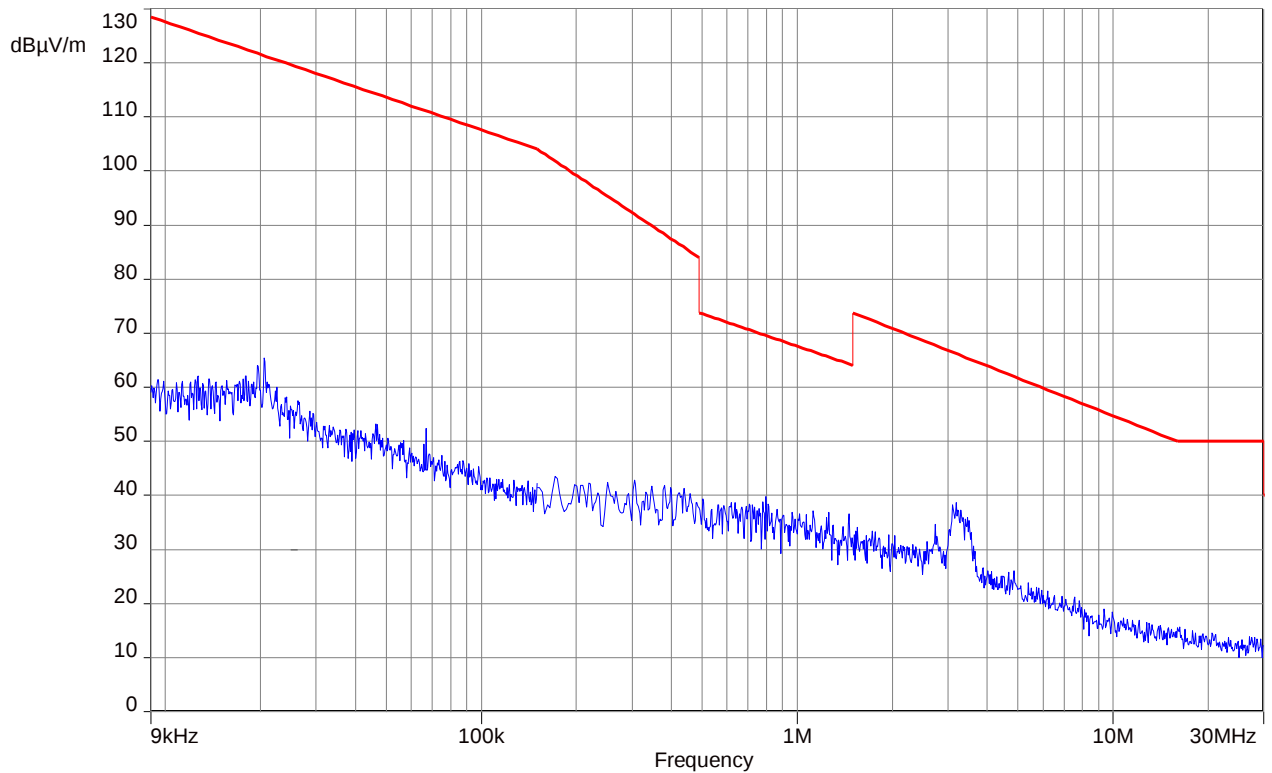


Plot 15: Channel 3, 9 kHz to 30 MHz

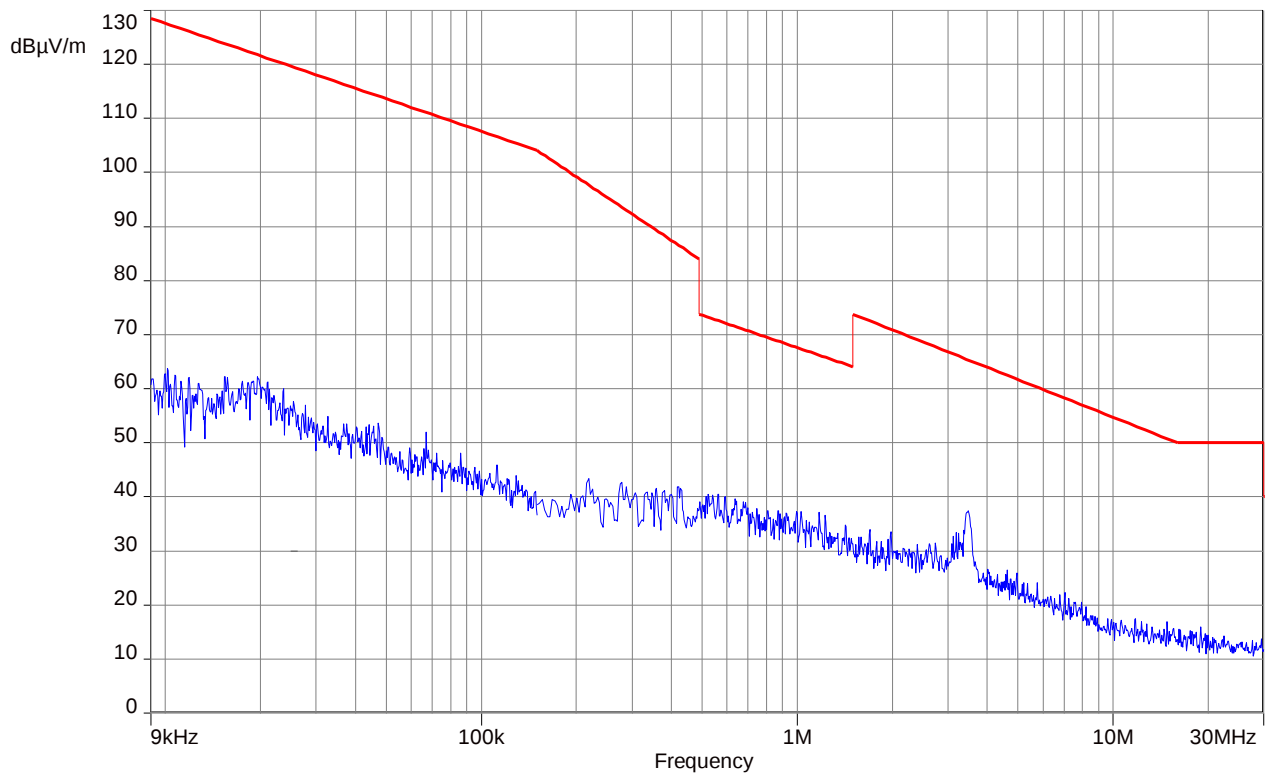


Plot 16: Channel 4, 9 kHz to 30 MHz

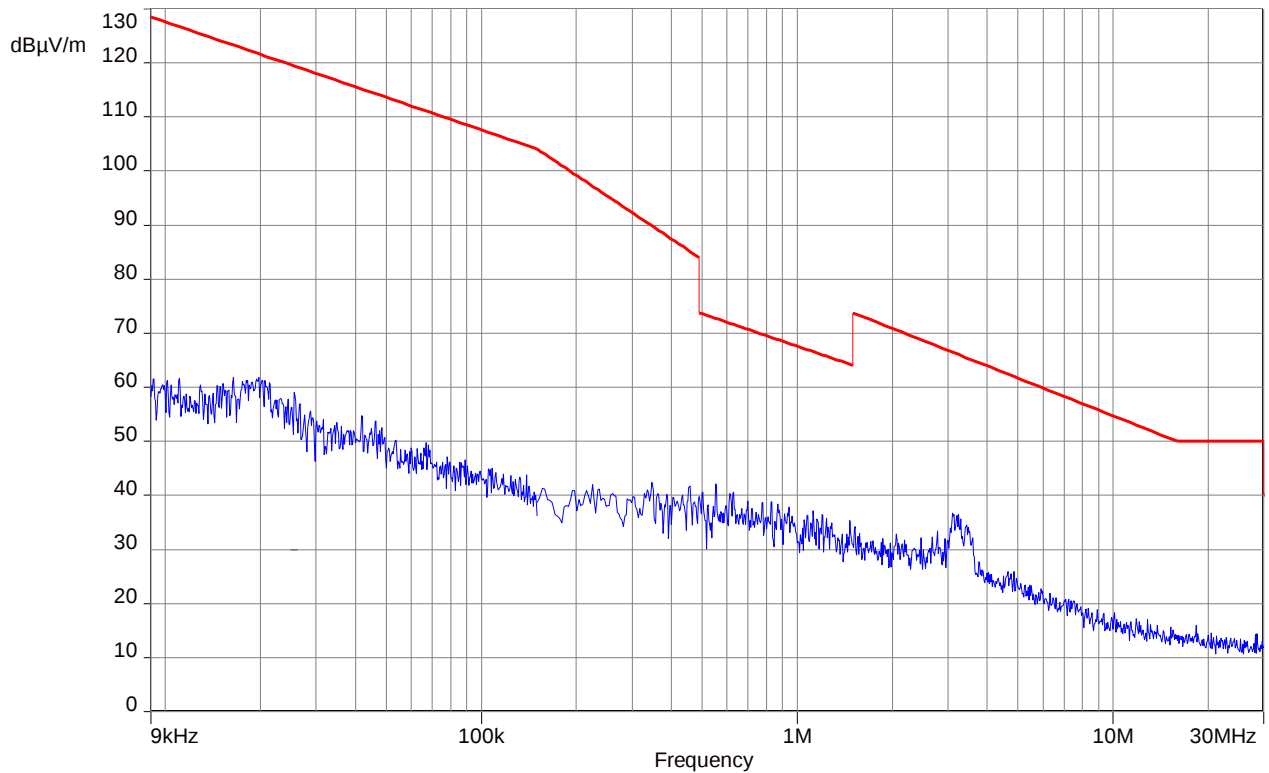


Plot 17: Channel 5, 9 kHz to 30 MHz

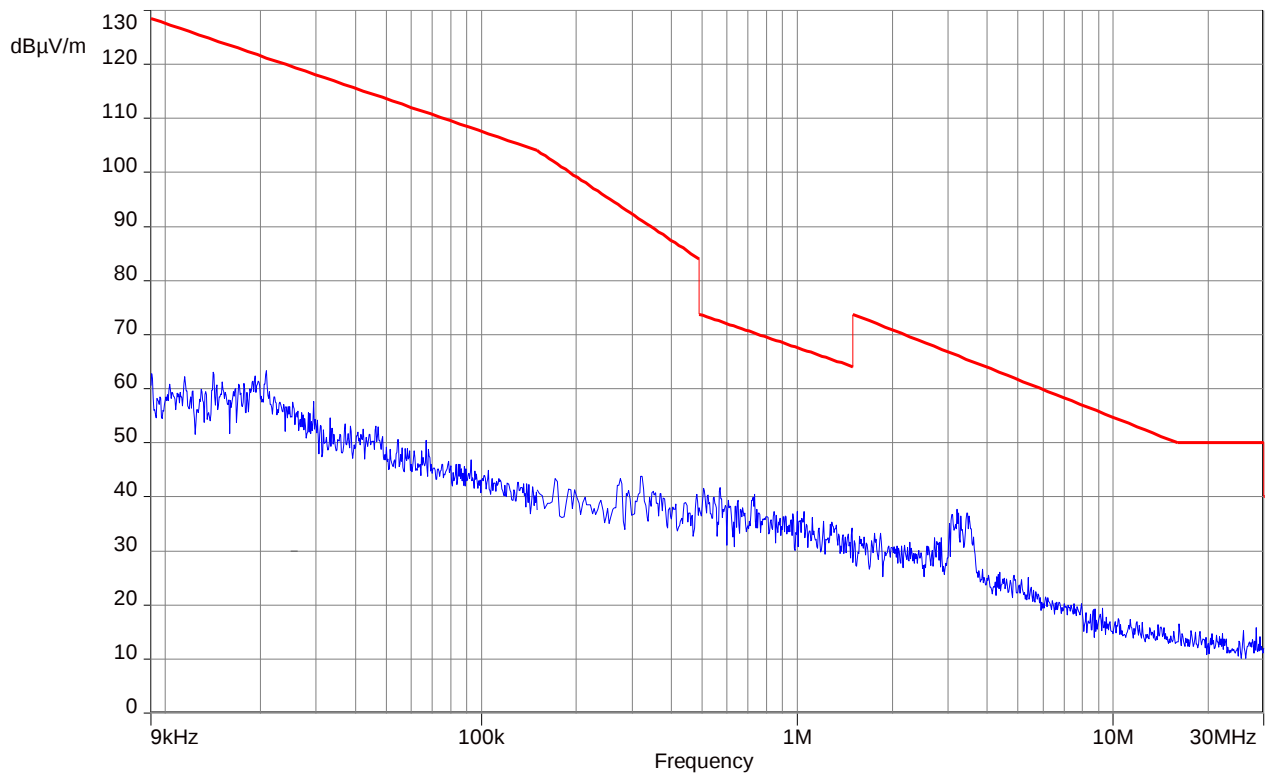

Plot 18: Channel 7, 9 kHz to 30 MHz

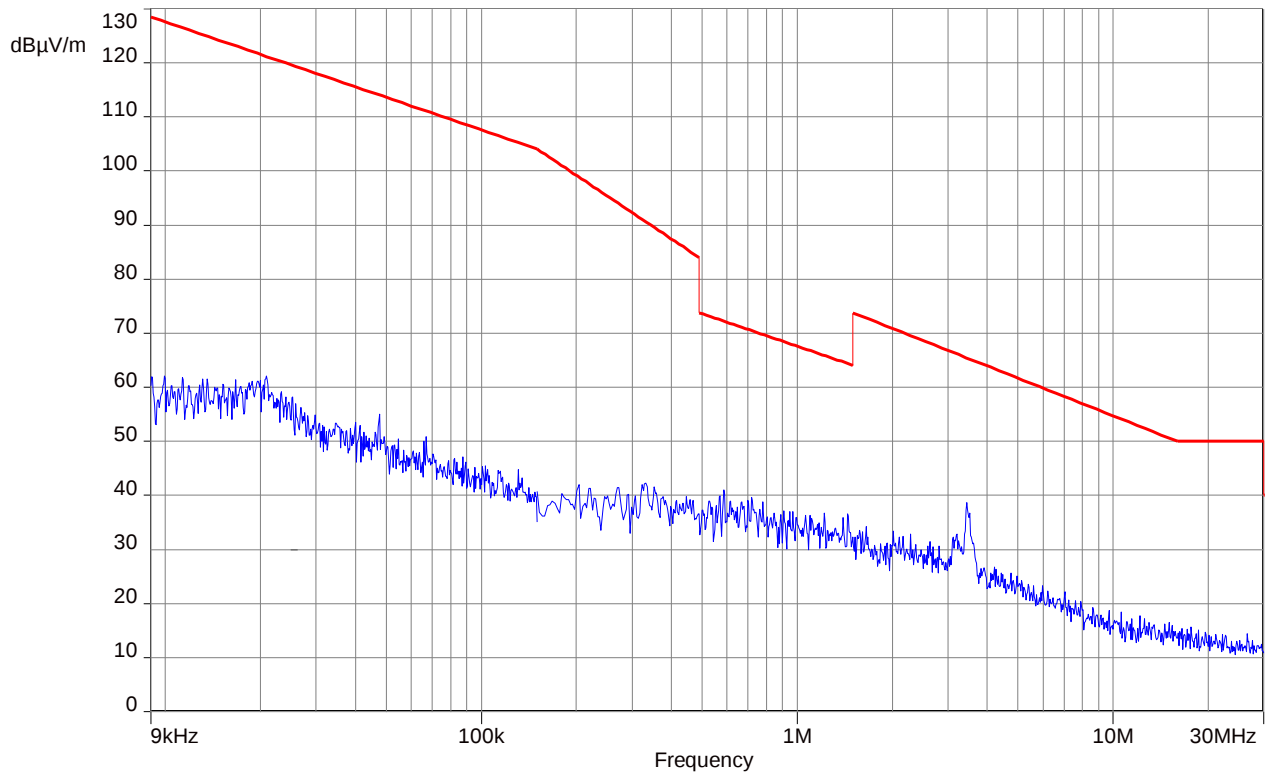


Plot 19: Channel 1, 30 MHz to 1 GHz

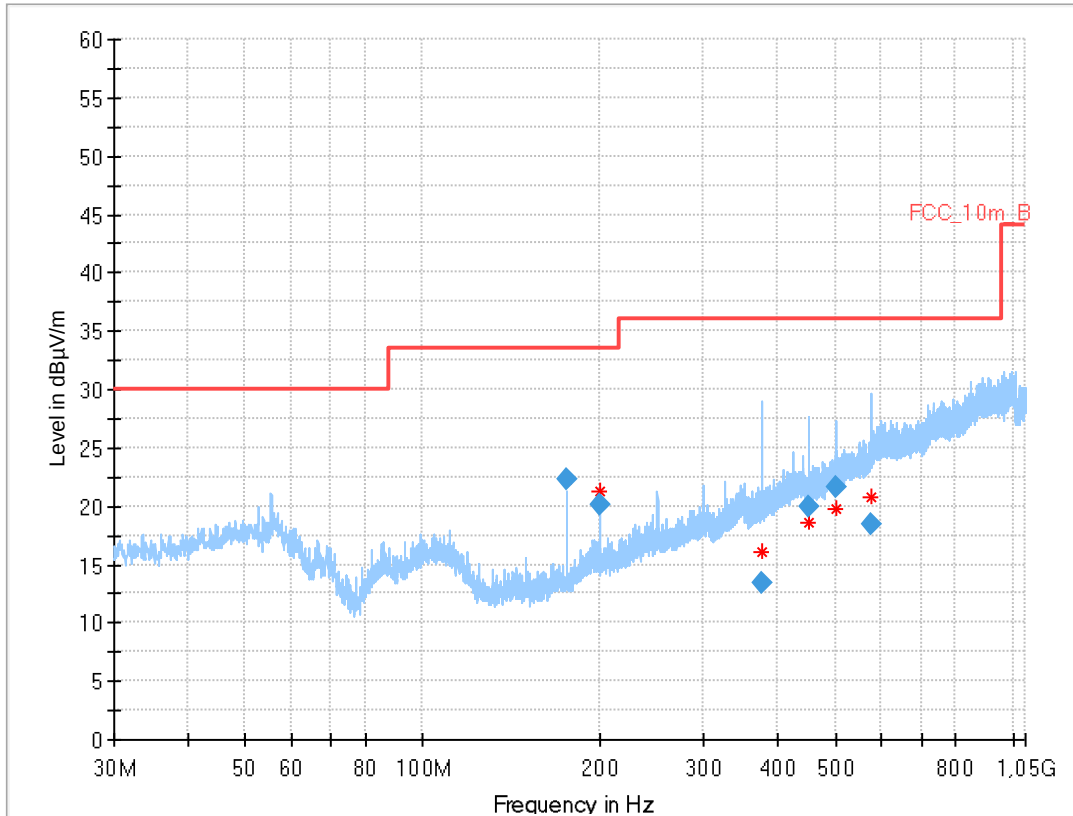

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
174.983	22.24	33.5	11.3	1000	120.0	104.0	V	5	10
199.986	20.14	33.5	13.4	1000	120.0	104.0	V	-22	11
374.957	13.46	36.0	22.5	1000	120.0	125.0	V	-22	16
450.112	20.02	36.0	16.0	1000	120.0	124.0	V	-22	17
500.061	21.54	36.0	14.5	1000	120.0	170.0	V	-22	18
575.044	18.42	36.0	17.6	1000	120.0	170.0	H	67	19


Plot 20: Channel 2, 30 MHz to 1 GHz

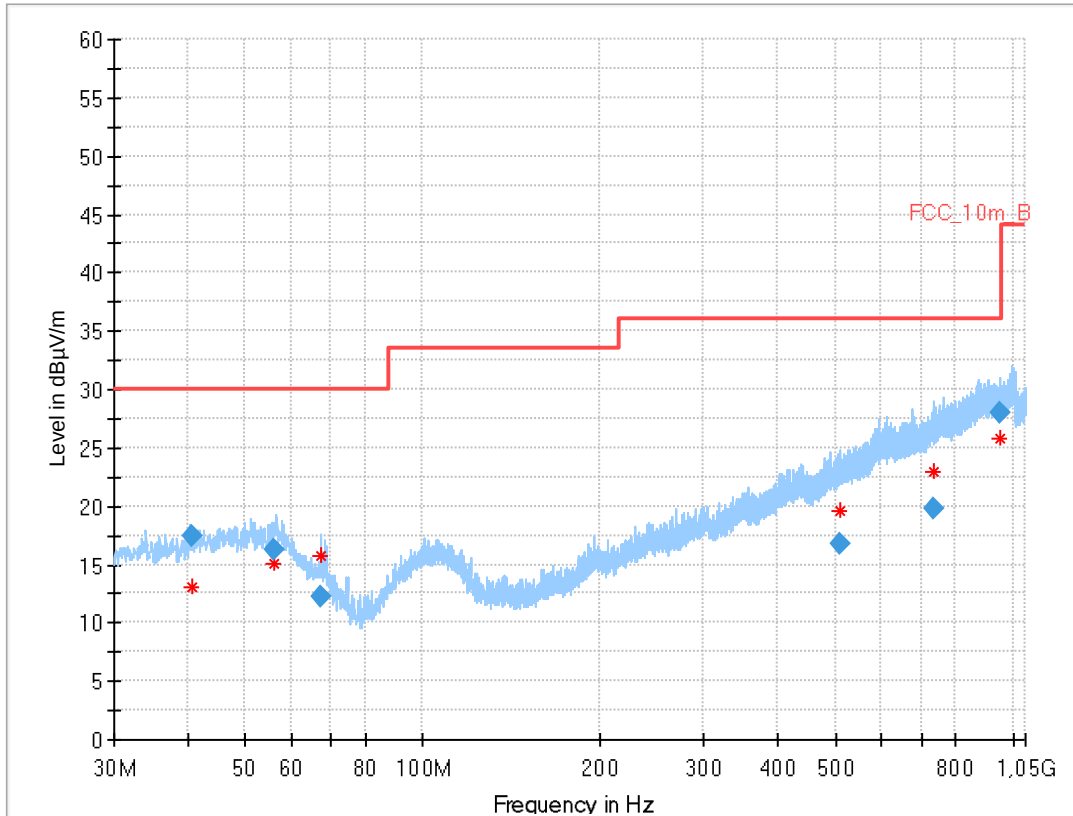

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.633	17.36	30.0	12.6	1000	120.0	128.0	V	157	13
55.914	16.22	30.0	13.8	1000	120.0	170.0	H	97	15
67.057	12.24	30.0	17.8	1000	120.0	115.0	V	247	11
508.675	16.80	36.0	19.2	1000	120.0	144.0	H	83	18
733.307	19.71	36.0	16.3	1000	120.0	101.0	V	247	22
951.789	27.95	36.0	8.1	1000	120.0	170.0	V	1	24


Plot 21: Channel 3, 30 MHz to 1 GHz

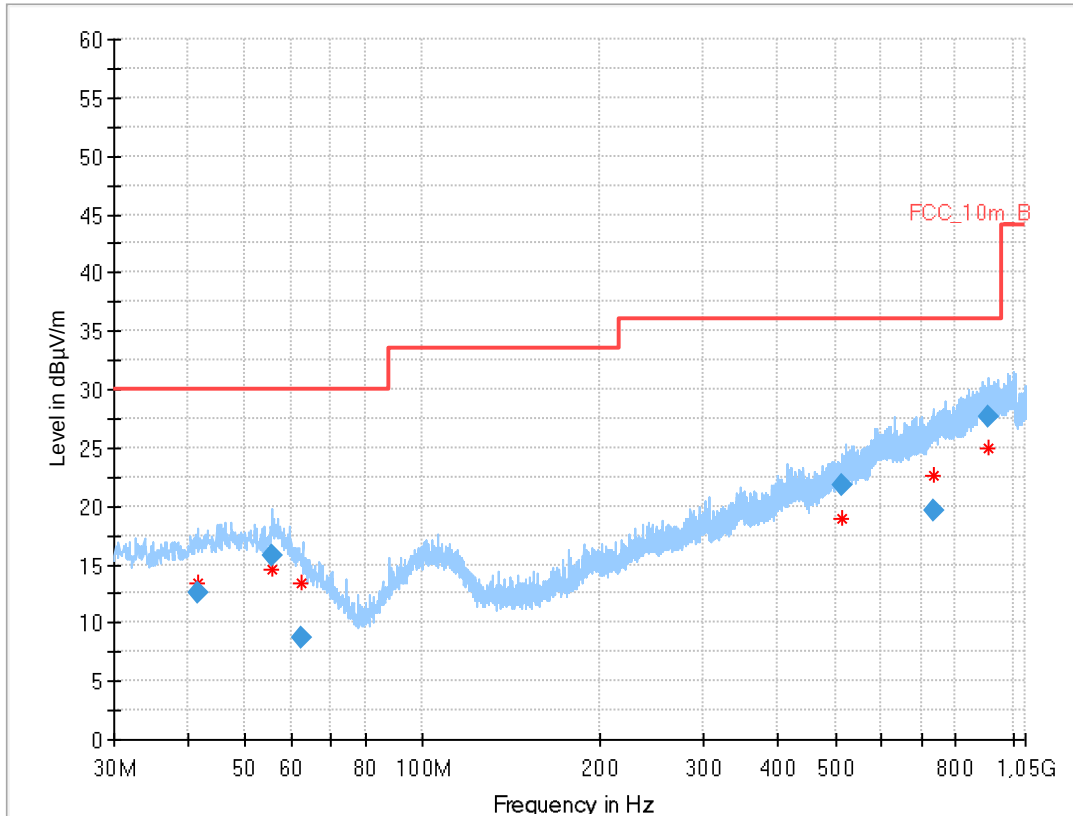

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.531	12.56	30.0	17.4	1000	120.0	151.0	H	-22	14
55.409	15.76	30.0	14.2	1000	120.0	122.0	H	202	15
62.078	8.70	30.0	21.3	1000	120.0	170.0	H	-22	12
512.186	21.85	36.0	14.2	1000	120.0	170.0	H	-16	19
732.946	19.64	36.0	16.4	1000	120.0	102.0	V	67	22
911.298	27.69	36.0	8.3	1000	120.0	170.0	V	202	24

Plot 22: Channel 4, 30 MHz to 1 GHz

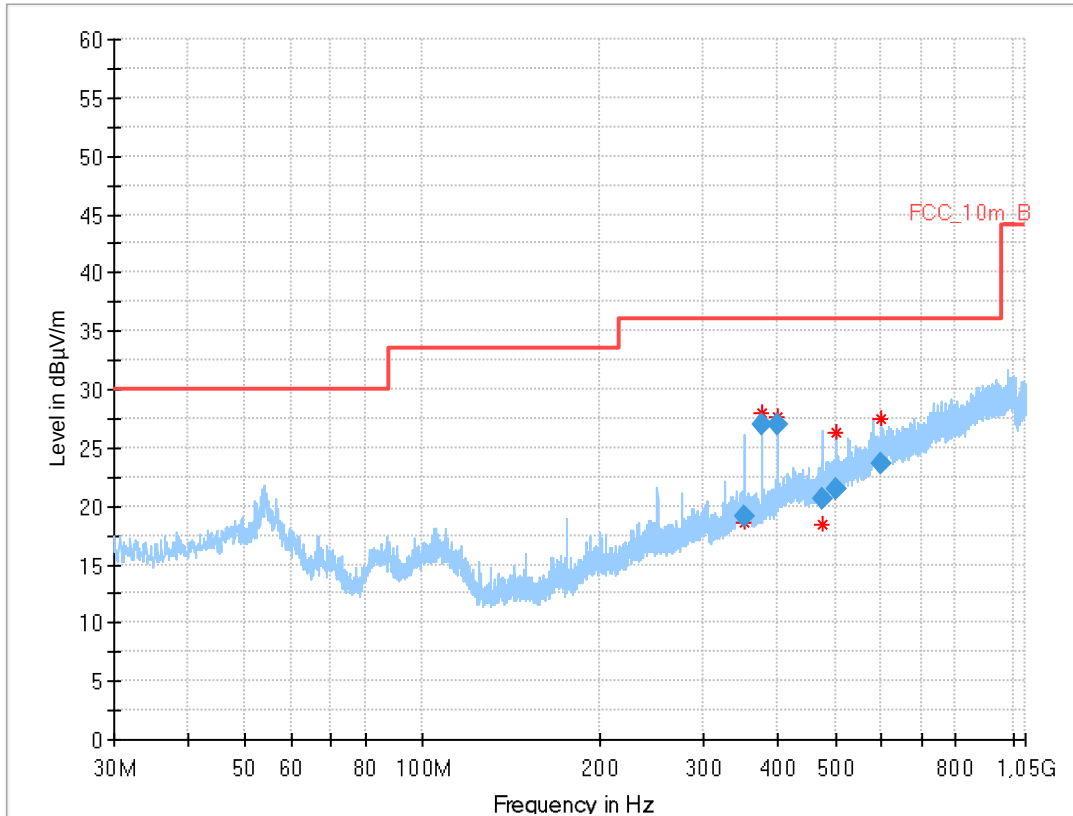


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
349.967	19.12	36.0	16.9	1000	120.0	106.0	V	-22	16
374.966	27.06	36.0	8.9	1000	120.0	98.0	V	-22	16
399.958	26.94	36.0	9.1	1000	120.0	98.0	V	16	17
474.497	20.54	36.0	15.5	1000	120.0	139.0	V	247	18
499.943	21.53	36.0	14.5	1000	120.0	98.0	V	157	18
599.921	23.66	36.0	12.3	1000	120.0	121.0	H	247	20

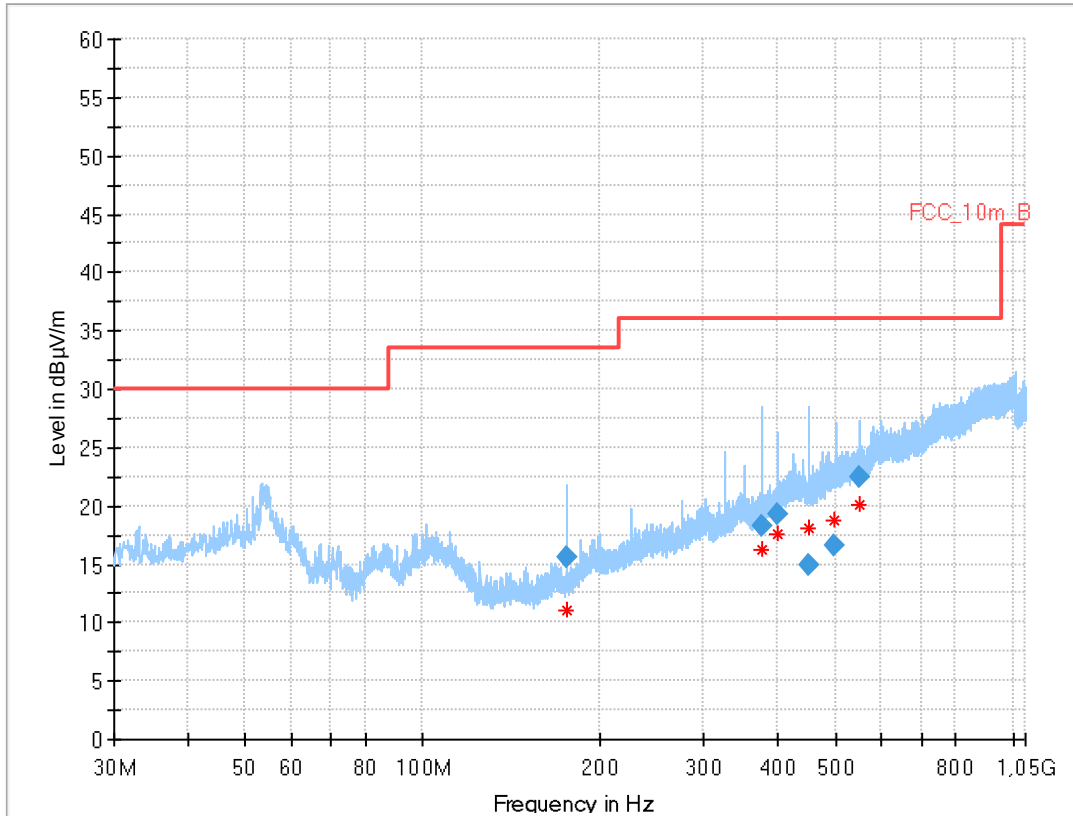Plot 23: Channel 5, 30 MHz to 1 GHz**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
175.451	15.66	33.5	17.8	1000	120.0	122.0	V	-22	10
374.385	18.34	36.0	17.7	1000	120.0	98.0	V	-22	16
399.545	19.19	36.0	16.8	1000	120.0	170.0	V	-22	17
450.407	14.98	36.0	21.0	1000	120.0	105.0	V	-21	17
499.789	16.64	36.0	19.4	1000	120.0	139.0	V	-22	18
549.896	22.45	36.0	13.6	1000	120.0	145.0	V	202	19


Plot 24: Channel 7, 30 MHz to 1 GHz

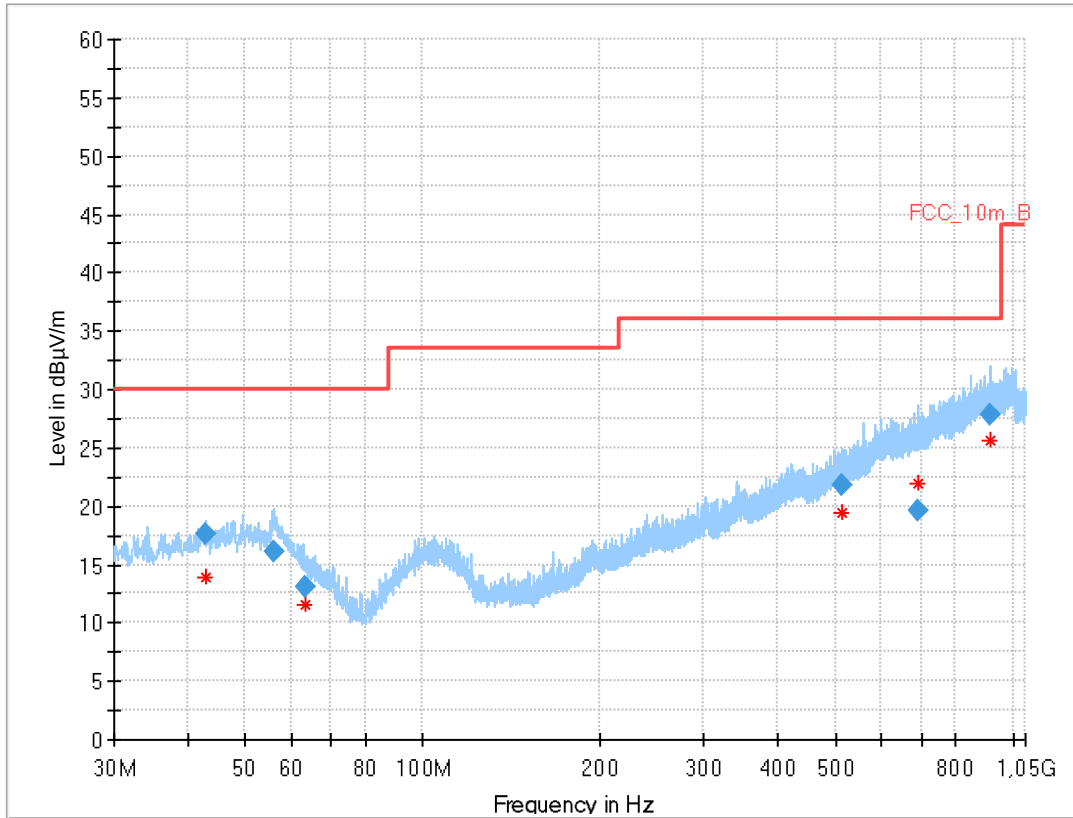

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.754	17.53	30.0	12.5	1000	120.0	170.0	V	247	14
56.033	16.15	30.0	13.9	1000	120.0	130.0	V	112	15
63.071	13.15	30.0	16.9	1000	120.0	98.0	H	157	12
513.467	21.85	36.0	14.2	1000	120.0	170.0	V	157	19
692.394	19.53	36.0	16.5	1000	120.0	137.0	H	82	21
917.005	27.74	36.0	8.3	1000	120.0	106.0	H	252	24


Plot 25: Channel 1, 960 MHz to 3.2 GHz

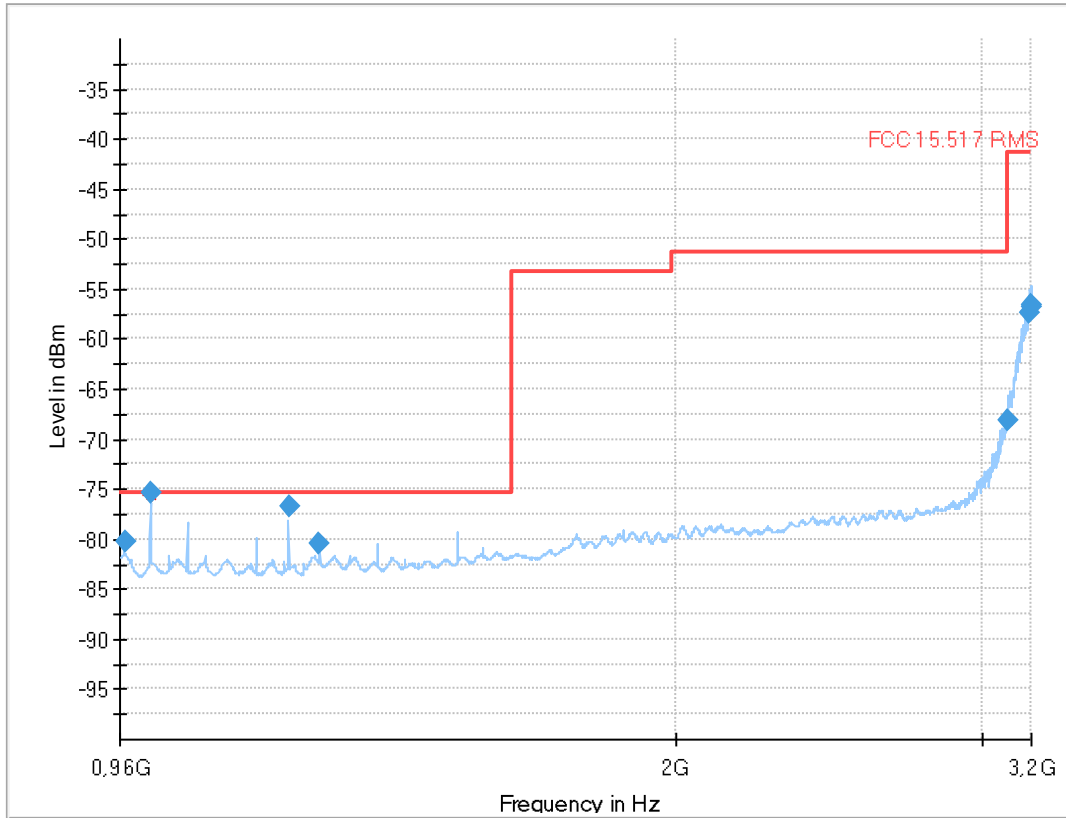

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
966.300667	-80.31	-75.30	5.01	1000.000	V	158.0	39.0	-138.4
999.877333	-75.41	-75.30	0.11	1000.000	V	261.0	57.0	-139.3
1199.847000	-76.78	-75.30	1.48	1000.000	V	184.0	121.0	-139.5
1249.870667	-80.35	-75.30	5.05	1000.000	V	5.0	0.0	-138.5
3099.872667	-68.10	-51.30	16.80	1000.000	V	193.0	1.0	-130.2
3191.446333	-57.28	-41.30	15.98	1000.000	V	193.0	1.0	-129.8
3197.474667	-56.72	-41.30	15.42	1000.000	V	193.0	1.0	-129.8
3198.460667	-56.65	-41.30	15.35	1000.000	V	193.0	1.0	-129.8


Plot 26: Channel 2, 960 MHz to 3.2 GHz

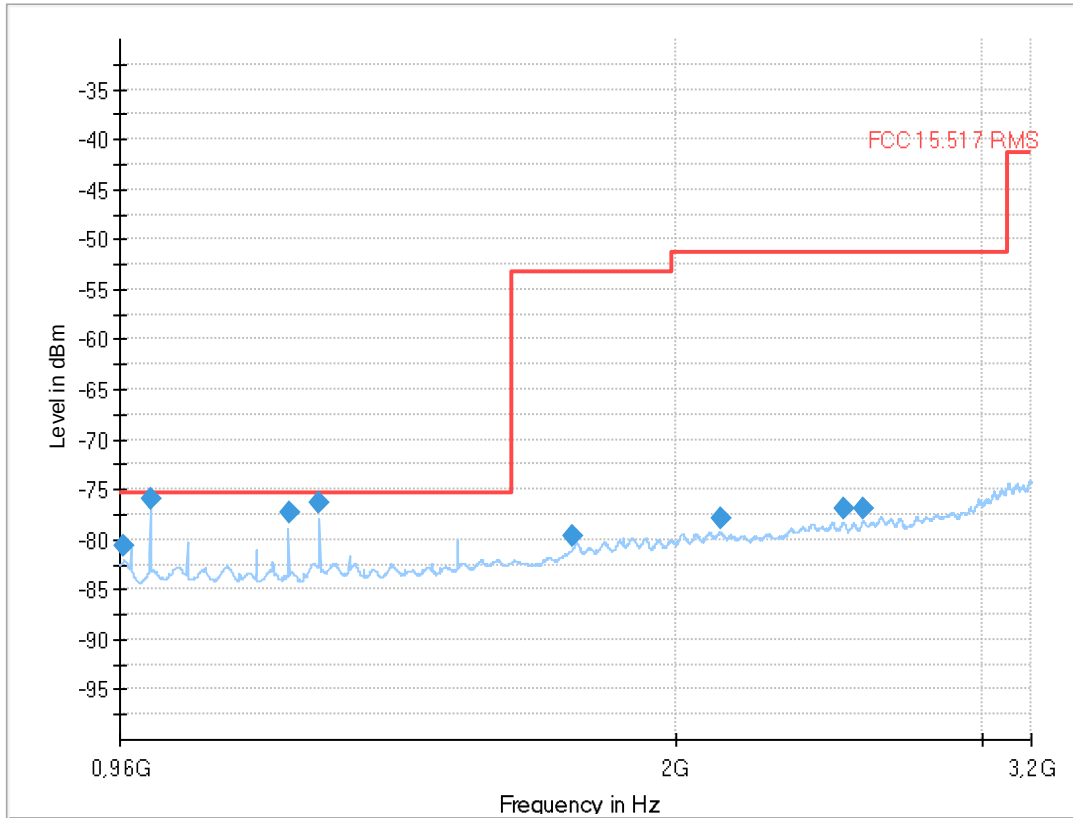

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
965.379333	-80.74	-75.30	5.44	1000.000	V	135.0	72.0	-138.4
999.898333	-75.86	-75.30	0.56	1000.000	V	271.0	60.0	-139.3
1199.855000	-77.28	-75.30	1.98	1000.000	V	189.0	112.0	-139.5
1249.882667	-76.34	-75.30	1.04	1000.000	V	234.0	143.0	-138.5
1745.635667	-79.61	-53.30	26.31	1000.000	V	26.0	45.0	-136.4
2122.777333	-77.83	-51.30	26.53	1000.000	V	239.0	21.0	-135.1
2495.932333	-76.92	-51.30	25.62	1000.000	H	132.0	105.0	-133.9
2561.357000	-76.99	-51.30	25.69	1000.000	V	1.0	15.0	-134.1


Plot 27: Channel 3, 960 MHz to 3.2 GHz

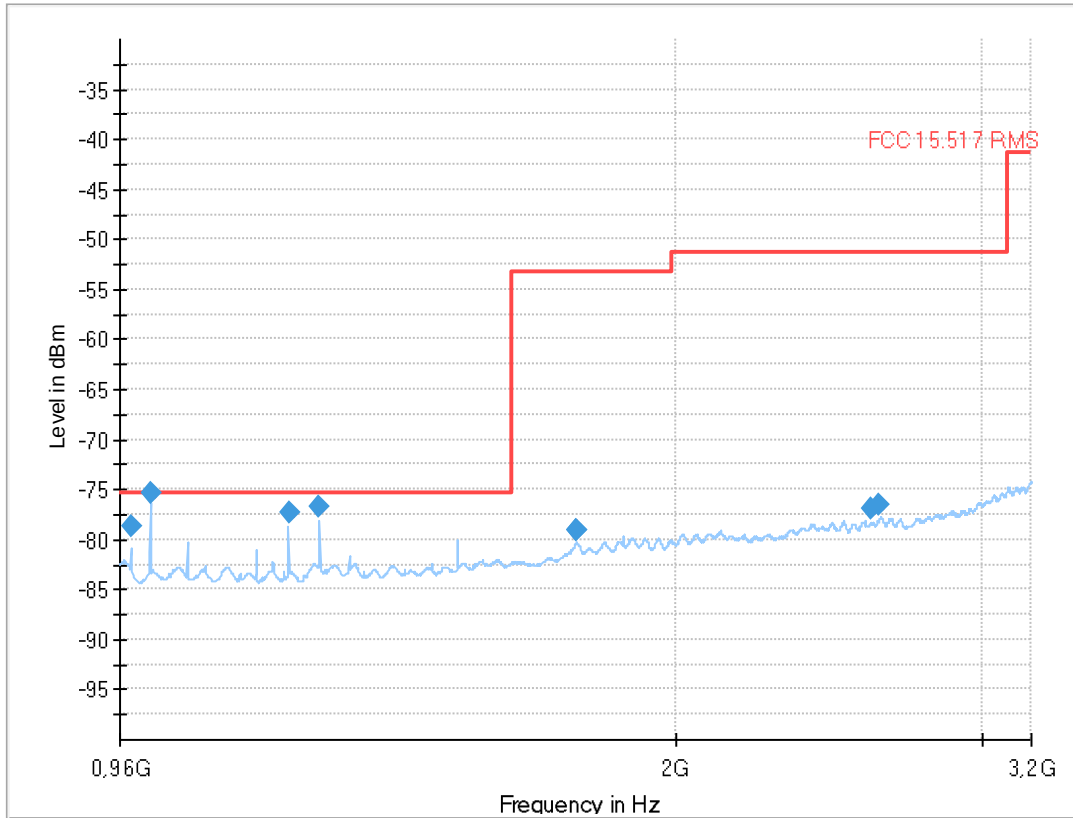

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
974.949667	-78.61	-75.30	3.31	1000.000	V	264.0	66.0	-139.2
999.904333	-75.41	-75.30	0.11	1000.000	V	261.0	69.0	-139.3
1199.949000	-77.41	-75.30	2.11	1000.000	V	185.0	108.0	-139.5
1249.909667	-76.68	-75.30	1.38	1000.000	V	192.0	131.0	-138.5
1754.298000	-79.06	-53.30	25.76	1000.000	H	288.0	78.0	-136.3
1754.398333	-79.09	-53.30	25.79	1000.000	V	271.0	93.0	-136.3
2587.987333	-77.00	-51.30	25.70	1000.000	H	136.0	6.0	-134.0
2618.855000	-76.56	-51.30	25.26	1000.000	H	-2.0	0.0	-133.2


Plot 28: Channel 4, 960 MHz to 3.2 GHz

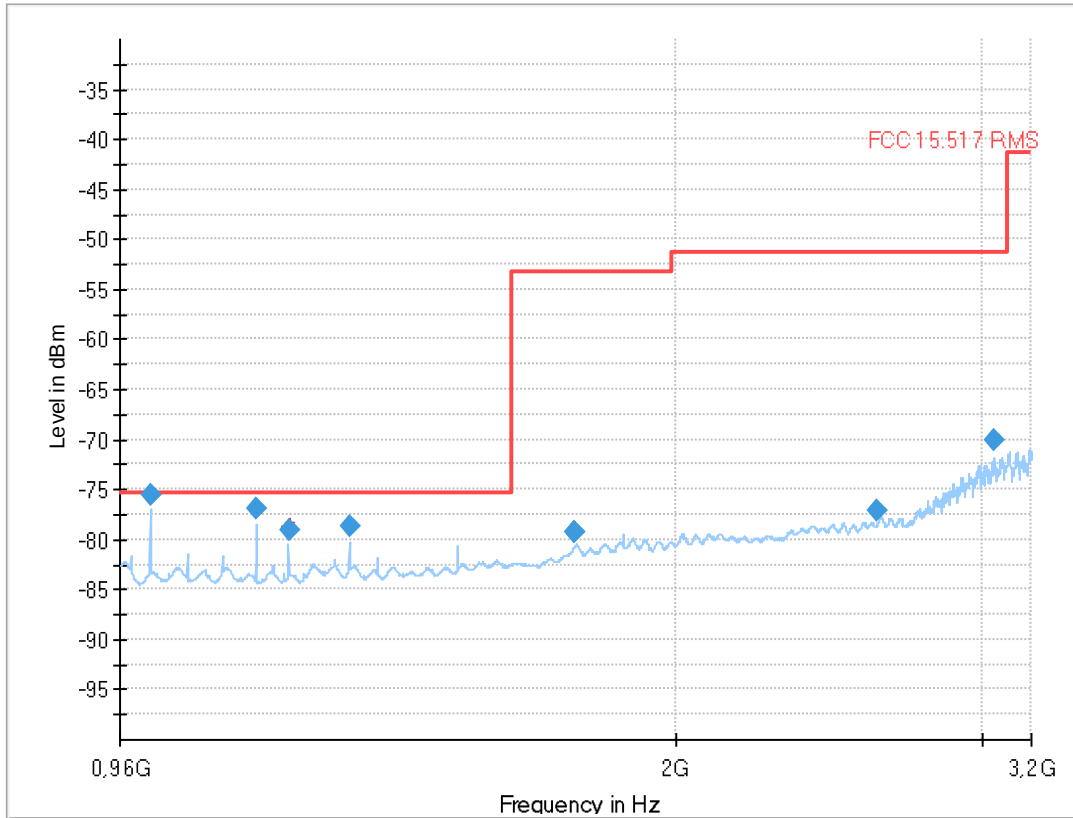

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
999.900333	-75.56	-75.30	0.26	1000.000	V	266.0	60.0	-139.3
1149.929333	-76.88	-75.30	1.58	1000.000	V	200.0	110.0	-139.8
1199.876000	-79.00	-75.30	3.70	1000.000	V	188.0	129.0	-139.5
1299.851333	-78.75	-75.30	3.45	1000.000	V	327.0	165.0	-138.8
1749.683333	-79.26	-53.30	25.96	1000.000	H	170.0	105.0	-136.4
1752.697333	-79.21	-53.30	25.91	1000.000	V	281.0	45.0	-136.3
2610.236667	-77.20	-51.30	25.90	1000.000	H	0.0	15.0	-133.3
3043.532667	-70.00	-51.30	18.70	1000.000	V	140.0	163.0	-131.1


Plot 29: Channel 5, 960 MHz to 3.2 GHz

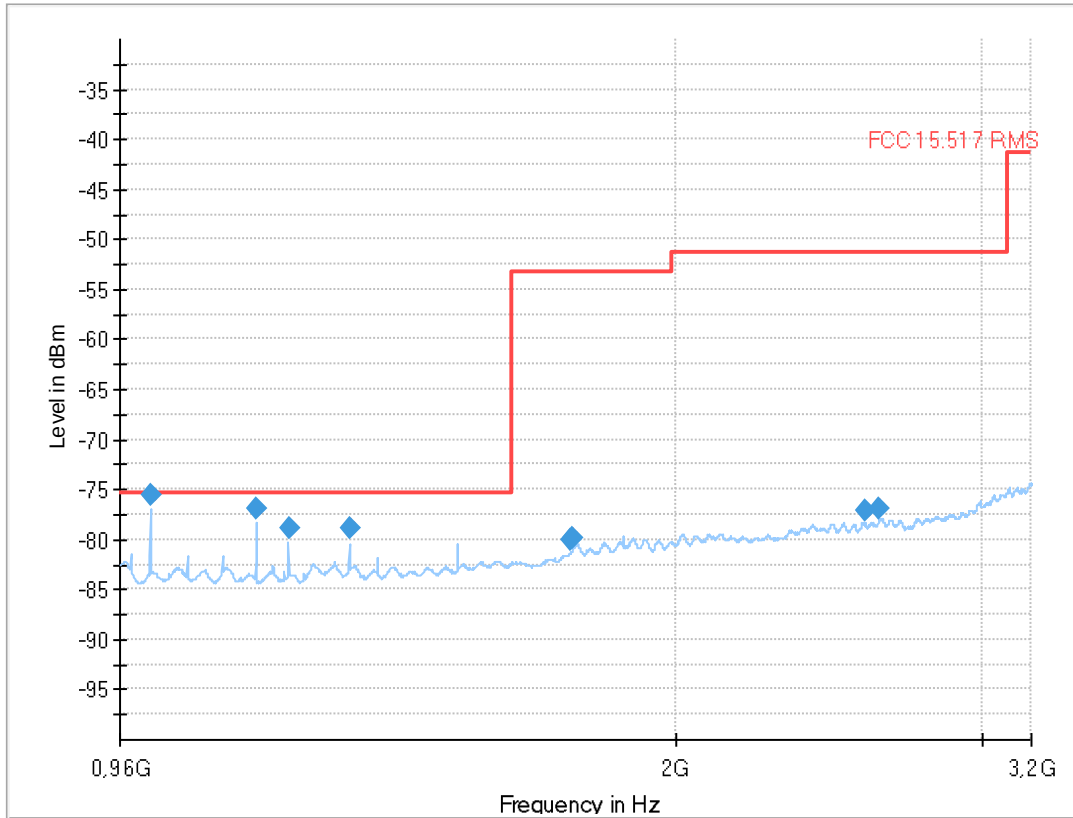

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
999.897333	-75.60	-75.30	0.30	1000.000	V	265.0	66.0	-139.3
1149.854333	-76.85	-75.30	1.55	1000.000	V	193.0	107.0	-139.8
1199.909000	-78.88	-75.30	3.58	1000.000	V	184.0	117.0	-139.5
1299.902333	-78.86	-75.30	3.56	1000.000	V	188.0	135.0	-138.8
1739.573333	-80.04	-53.30	26.74	1000.000	V	75.0	0.0	-136.6
1743.961333	-79.80	-53.30	26.50	1000.000	H	21.0	38.0	-136.5
2567.779667	-77.04	-51.30	25.74	1000.000	H	5.0	35.0	-134.1
2616.284667	-76.90	-51.30	25.60	1000.000	H	28.0	75.0	-133.2


Plot 30: Channel 7, 960 MHz to 3.2 GHz

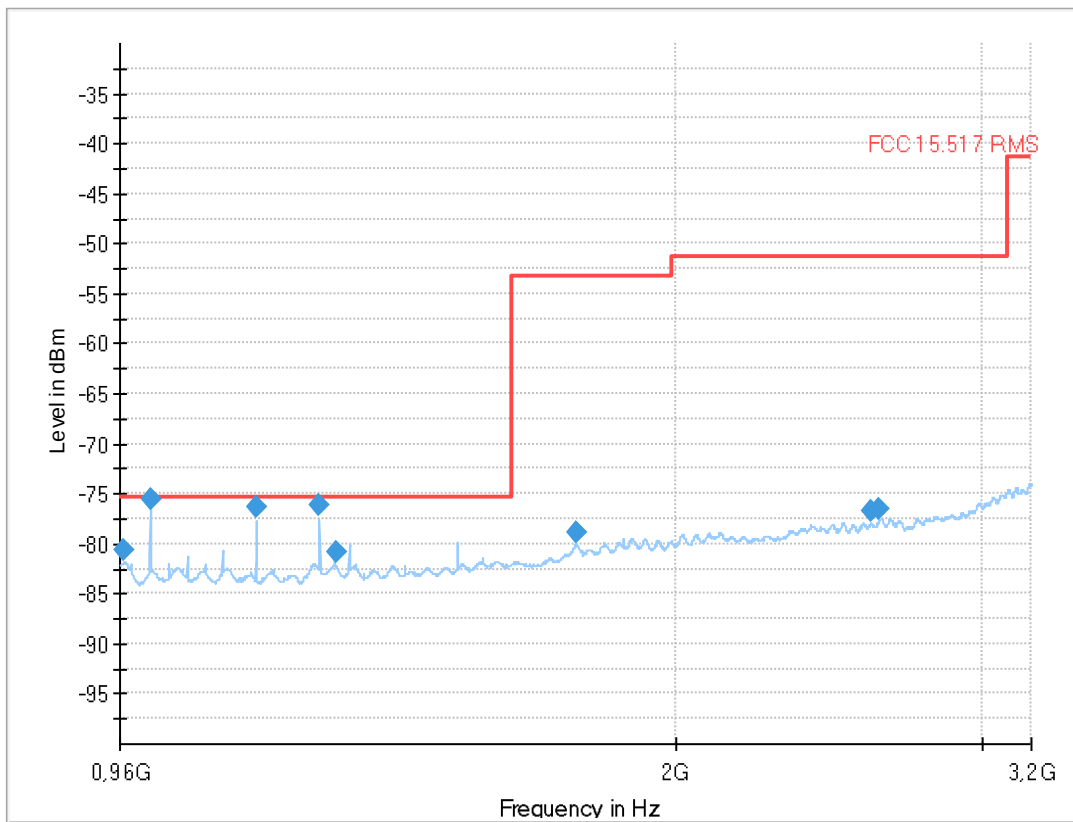

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
964.439667	-80.70	-75.30	5.40	1000.000	V	148.0	15.0	-138.4
999.944333	-75.54	-75.30	0.24	1000.000	V	244.0	45.0	-139.3
1149.913333	-76.25	-75.30	0.95	1000.000	V	271.0	65.0	-139.8
1249.885667	-76.13	-75.30	0.83	1000.000	V	256.0	140.0	-138.5
1277.006333	-80.93	-75.30	5.63	1000.000	H	322.0	36.0	-138.6
1753.553333	-78.86	-53.30	25.56	1000.000	V	12.0	3.0	-136.3
2592.395000	-76.78	-51.30	25.48	1000.000	H	28.0	11.0	-133.8
2614.598667	-76.62	-51.30	25.32	1000.000	V	204.0	26.0	-133.2


Plot 31: Channel 1, 3.1 GHz to 10.1 GHz

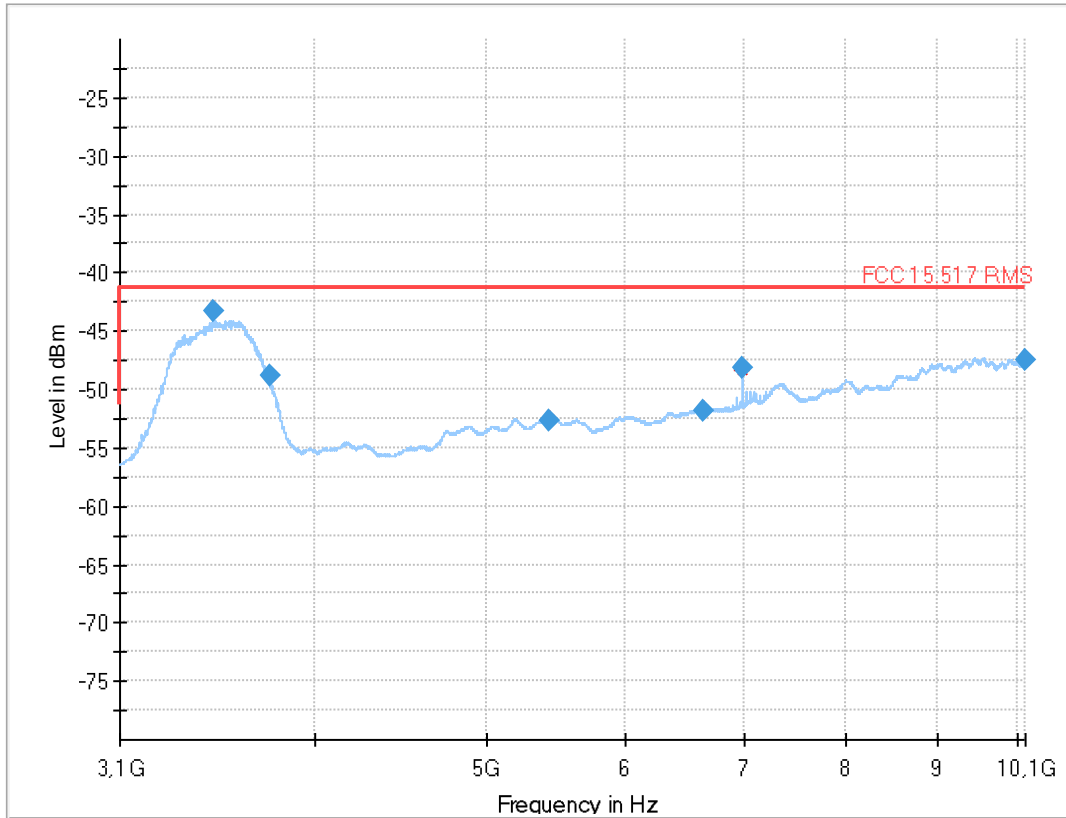

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3500.461143	-43.23	-41.30	1.93	1000.000	H	175.0	96.0	-112.6
3775.154857	-48.82	-41.30	7.52	1000.000	H	175.0	86.0	-110.8
5432.942429	-52.63	-41.30	11.33	1000.000	V	60.0	10.0	-108.9
6643.756286	-51.78	-41.30	10.48	1000.000	V	179.0	119.0	-108.1
6988.813143	-48.23	-41.30	6.93	1000.000	V	347.0	147.0	-107.9
10092.461286	-47.54	-41.30	6.24	1000.000	V	325.0	5.0	-104.6


Plot 32: Channel 2, 3.1 GHz to 10.1 GHz

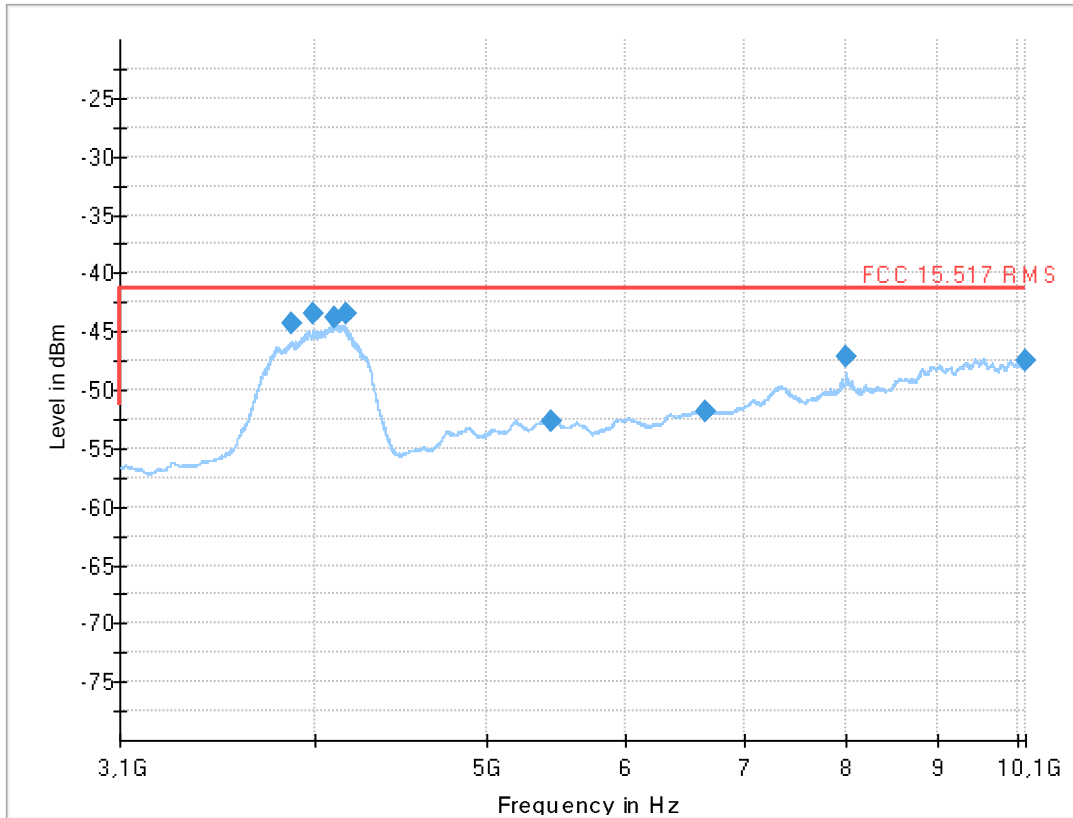

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3882.913857	-44.24	-41.30	2.94	1000.000	V	270.0	0.0	-111.2
3993.562286	-43.42	-41.30	2.12	1000.000	V	278.0	0.0	-111.4
4101.277286	-43.81	-41.30	2.51	1000.000	V	276.0	0.0	-111.5
4162.583286	-43.48	-41.30	2.18	1000.000	V	265.0	0.0	-111.1
5435.925714	-52.69	-41.30	11.39	1000.000	V	299.0	27.0	-108.9
6655.896857	-51.77	-41.30	10.47	1000.000	H	355.0	15.0	-107.9
7987.138000	-47.21	-41.30	5.91	1000.000	V	70.0	17.0	-106.0
10097.525571	-47.56	-41.30	6.26	1000.000	H	245.0	145.0	-104.6


Plot 33: Channel 3, 3.1 GHz to 10.1 GHz

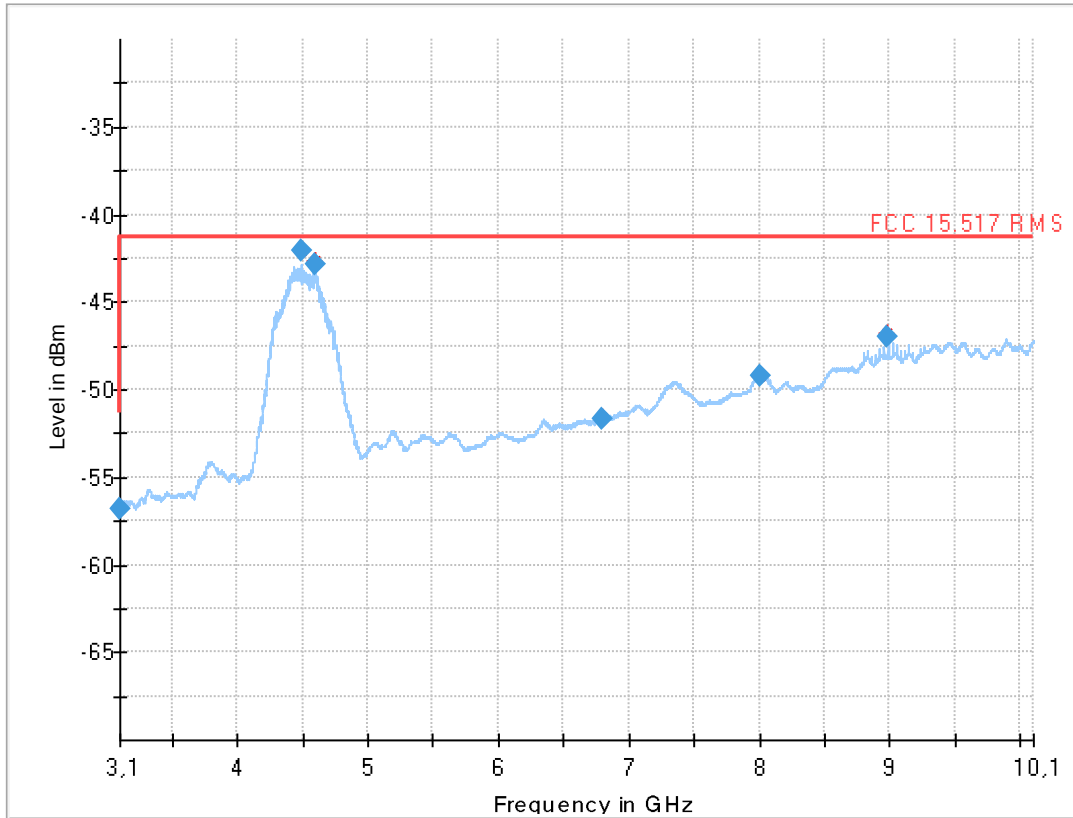

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3100.000429	-56.81	-51.30	5.51	1000.000	H	55.0	135.0	-113.4
4489.770143	-42.08	-41.30	0.78	1000.000	V	66.0	20.0	-111.4
4597.423857	-42.80	-41.30	1.50	1000.000	V	66.0	17.0	-111.0
6796.391429	-51.73	-41.30	10.43	1000.000	V	195.0	42.0	-108.1
8010.941857	-49.27	-41.30	7.97	1000.000	H	115.0	133.0	-106.0
8985.551286	-46.98	-41.30	5.68	1000.000	V	73.0	1.0	-104.9


Plot 34: Channel 4, 3.1 GHz to 10.1 GHz

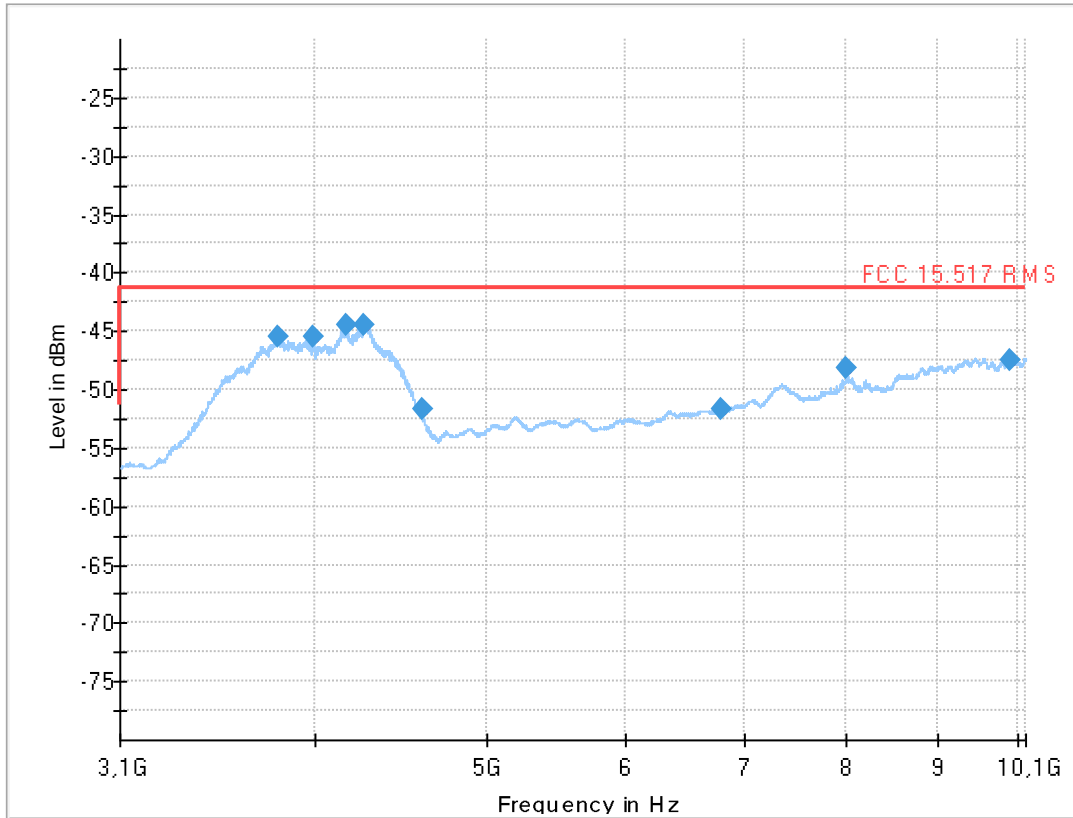

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3806.427714	-45.45	-41.30	4.15	1000.000	V	271.0	11.0	-110.8
3993.526286	-45.46	-41.30	4.16	1000.000	V	279.0	0.0	-111.4
4159.731571	-44.54	-41.30	3.24	1000.000	V	67.0	3.0	-111.1
4265.366429	-44.42	-41.30	3.12	1000.000	V	69.0	3.0	-111.5
4596.363429	-51.62	-41.30	10.32	1000.000	V	75.0	15.0	-111.0
6791.308286	-51.72	-41.30	10.42	1000.000	H	225.0	108.0	-108.1
7987.248714	-48.16	-41.30	6.86	1000.000	H	178.0	80.0	-106.0
9894.335714	-47.50	-41.30	6.20	1000.000	V	91.0	39.0	-104.2


Plot 35: Channel 5, 3.1 GHz to 10.1 GHz

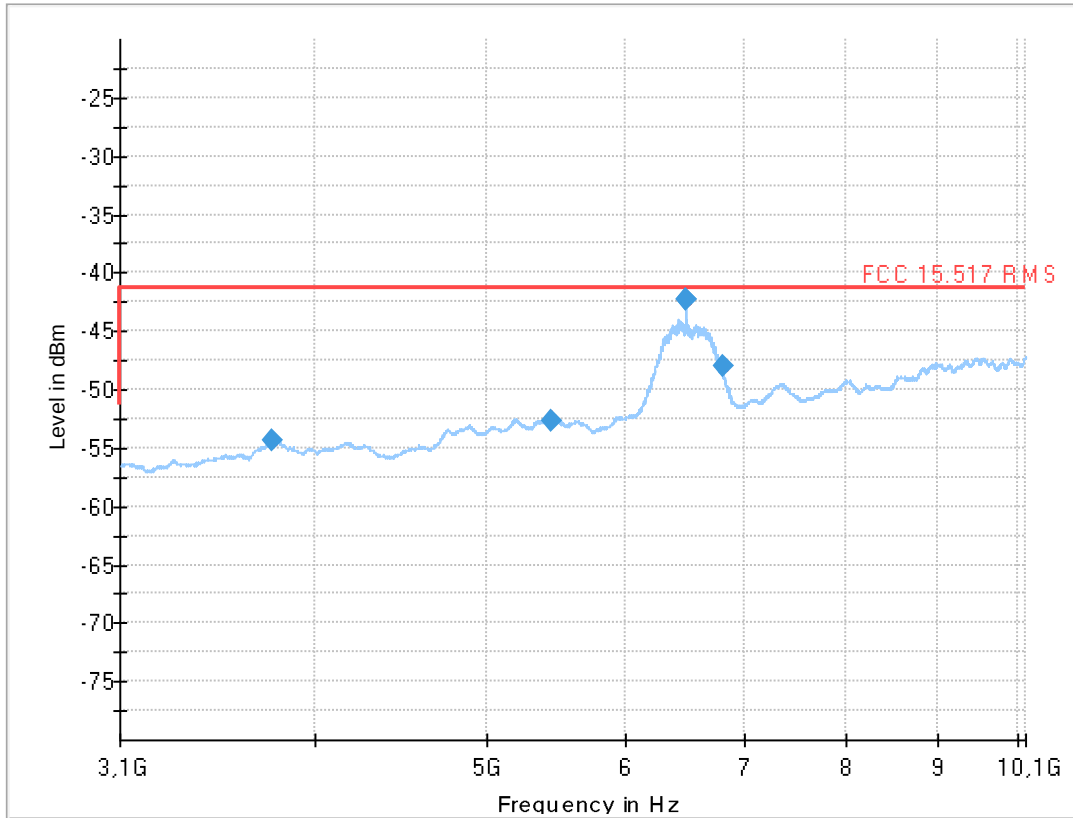

Final Result


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3099.162143	-56.74	-51.30	5.44	1000.000	V	231.0	45.0	-113.4
3777.883143	-54.42	-41.30	13.12	1000.000	V	235.0	15.0	-110.8
5435.091429	-52.68	-41.30	11.38	1000.000	V	275.0	149.0	-108.9
6489.528429	-42.27	-41.30	0.97	1000.000	H	210.0	144.0	-108.3
6489.549857	-42.34	-41.30	1.04	1000.000	H	210.0	147.0	-108.3
6814.623714	-48.04	-41.30	6.74	1000.000	V	71.0	12.0	-108.0
10100.010286	-47.49	-41.30	6.19	1000.000	V	125.0	10.0	-104.6

Plot 36: Channel 7, 3.1 GHz to 10.1 GHz

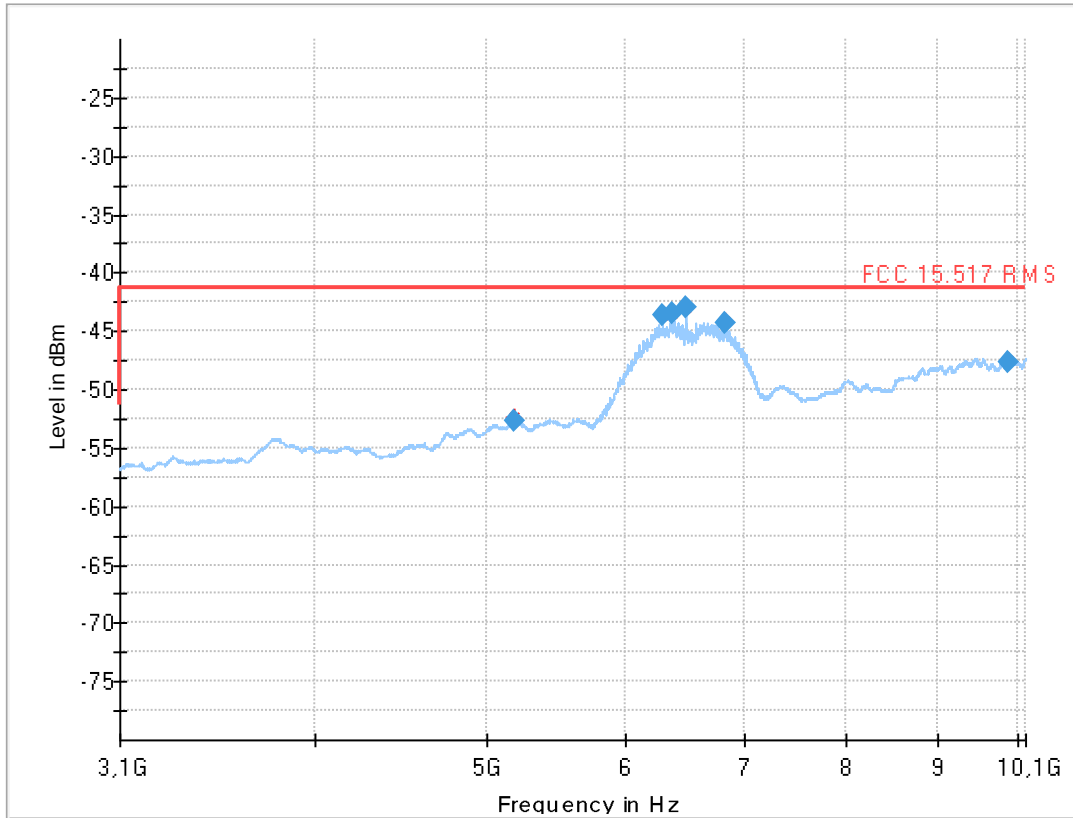


Final Result


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
5188.517571	-52.60	-41.30	11.30	1000.000	V	185.0	0.0	-108.7
6293.260143	-43.55	-41.30	2.25	1000.000	H	210.0	141.0	-108.6
6379.000429	-43.49	-41.30	2.19	1000.000	H	211.0	143.0	-108.1
6489.578143	-42.99	-41.30	1.69	1000.000	H	179.0	112.0	-108.3
6821.766000	-44.34	-41.30	3.04	1000.000	V	77.0	22.0	-108.0
9882.173143	-47.61	-41.30	6.31	1000.000	V	155.0	2.0	-104.2

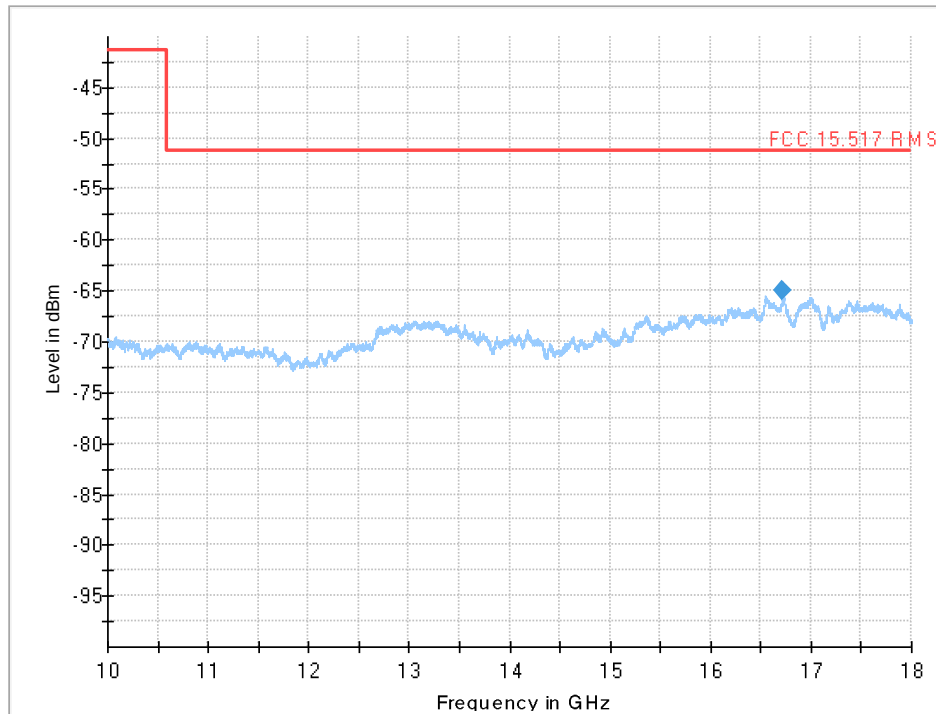Plot 37: Channel 1, 10 GHz to 18 GHz**Final Result**


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
16722.458750	-64.97	-51.30	13.67	1000.000	V	334.0	112.0	-122.3

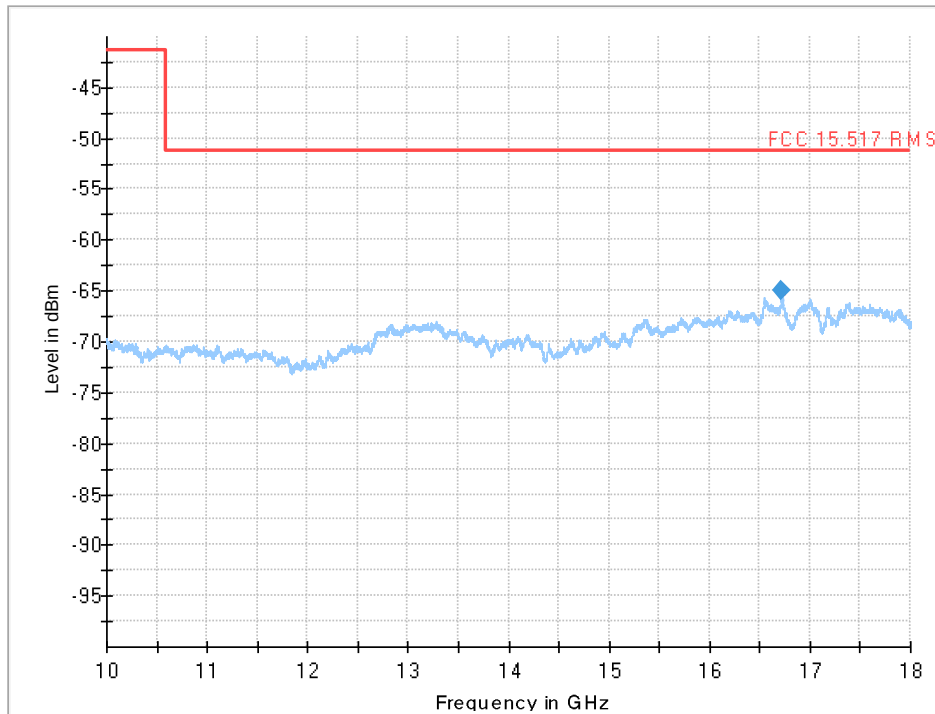Plot 38: Channel 2, 10 GHz to 18 GHz**Final Result**


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
16722.653750	-65.05	-51.30	13.75	1000.000	H	31.0	15.0	-122.3

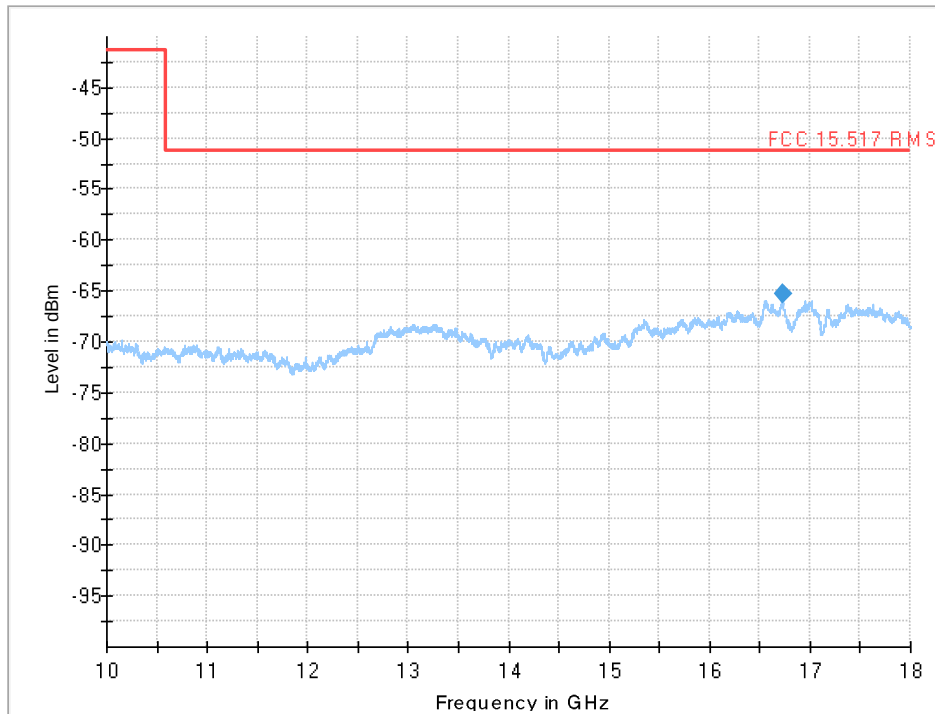Plot 39: Channel 3, 10 GHz to 18 GHz

Final Result

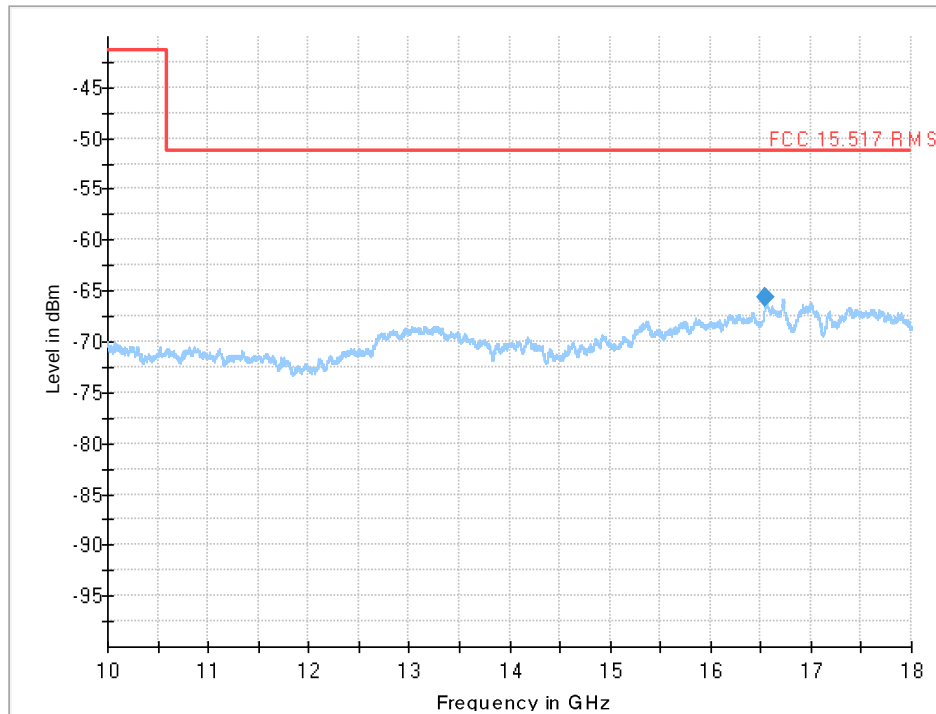
Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
16725.542500	-65.35	-51.30	14.05	1000.000	V	20.0	89.0	-122.3

Plot 40: Channel 4, 10 GHz to 18 GHz**Final Result**

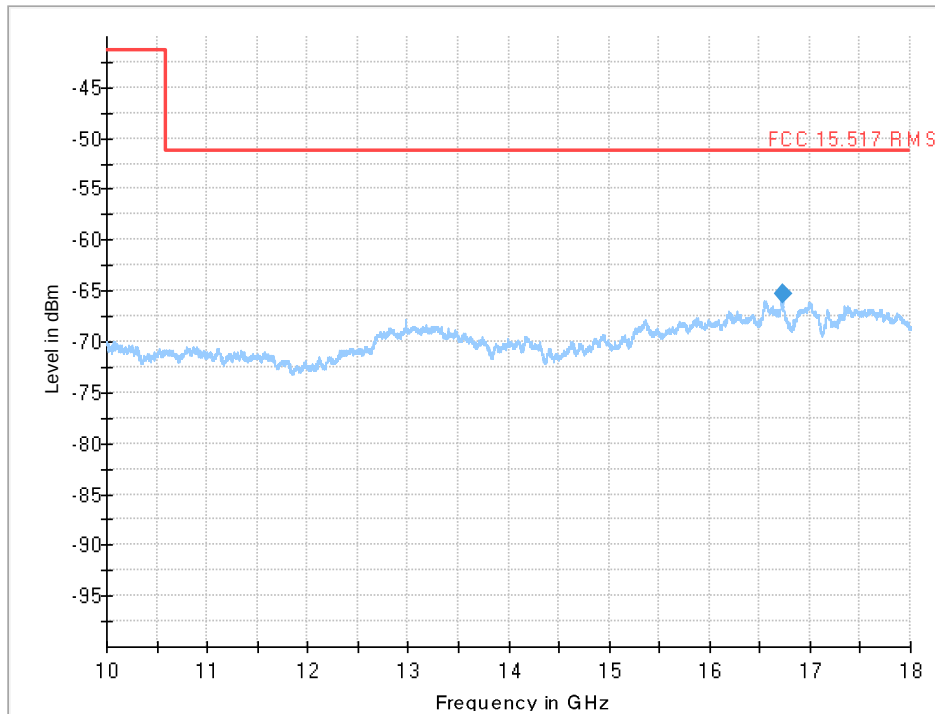
Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
16553.053750	-65.60	-51.30	14.30	1000.000	H	284.0	75.0	-121.6

Plot 41: Channel 5, 10 GHz to 18 GHz**Final Result**


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
16724.575000	-65.33	-51.30	14.03	1000.000	H	207.0	96.0	-122.3

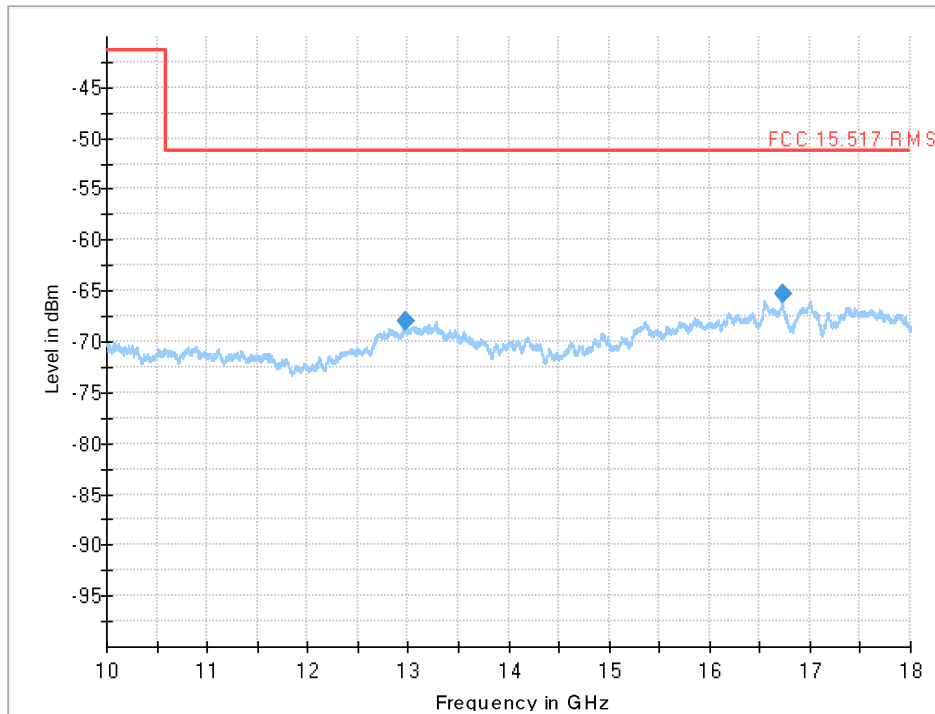Plot 42: Channel 7, 10 GHz to 18 GHz**Final Result**


Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
12979.161250	-67.93	-51.30	16.63	1000.000	H	329.0	1.0	-125.0
16723.198750	-65.33	-51.30	14.03	1000.000	H	77.0	76.0	-122.3

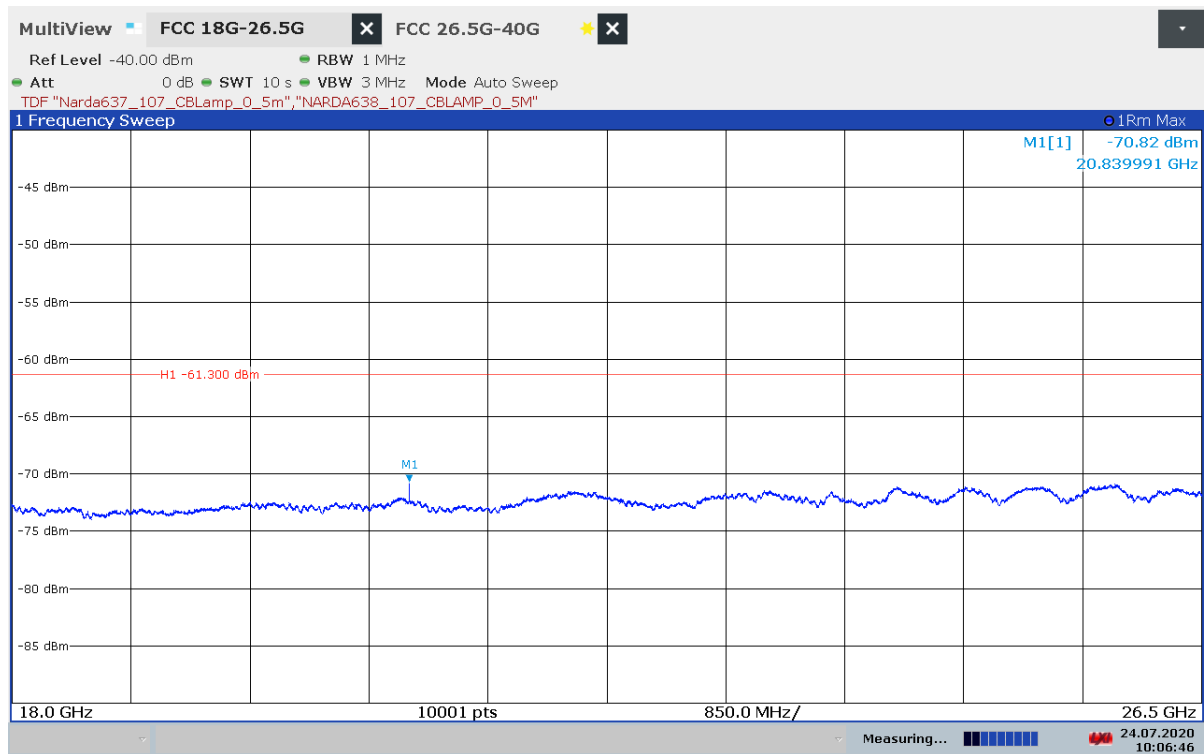Plot 43: Max Hold on Channel 1, 18 GHz to 26.5 GHz


10:06:47 24.07.2020

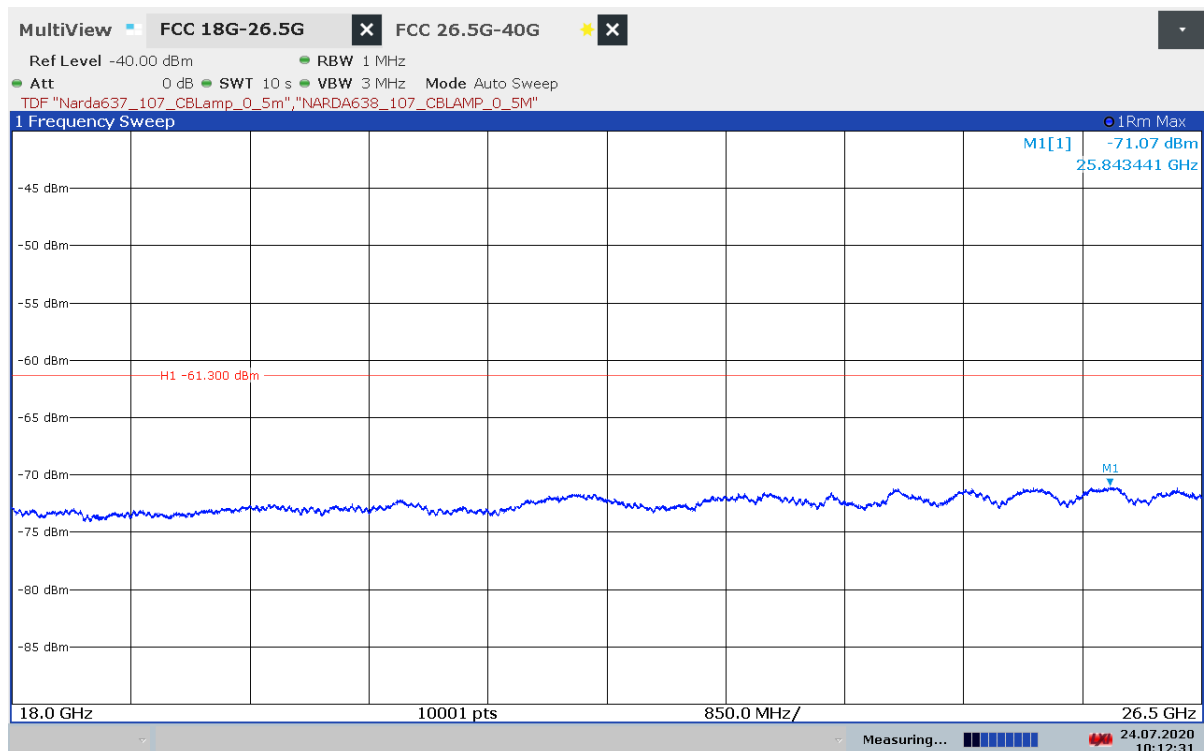Plot 44: Max Hold on Channel 2, 18 GHz to 26.5 GHz


10:12:32 24.07.2020

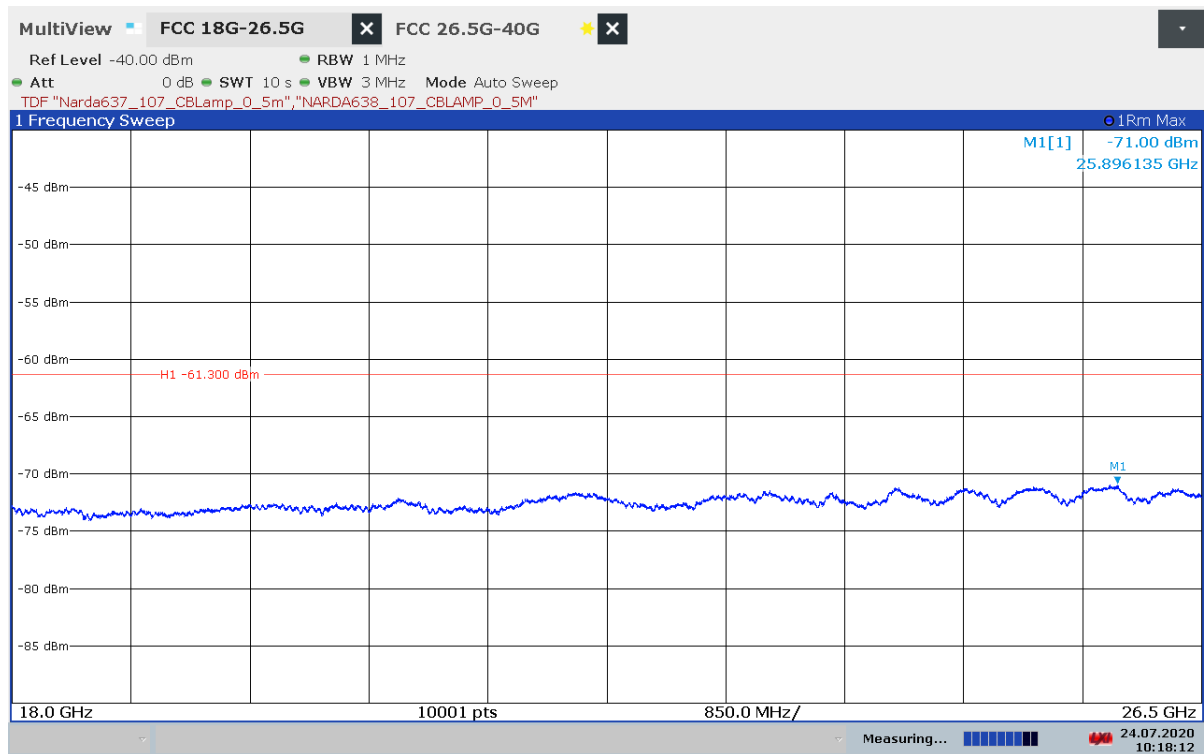Plot 45: Max Hold on Channel 3, 18 GHz to 26.5 GHz


10:18:13 24.07.2020

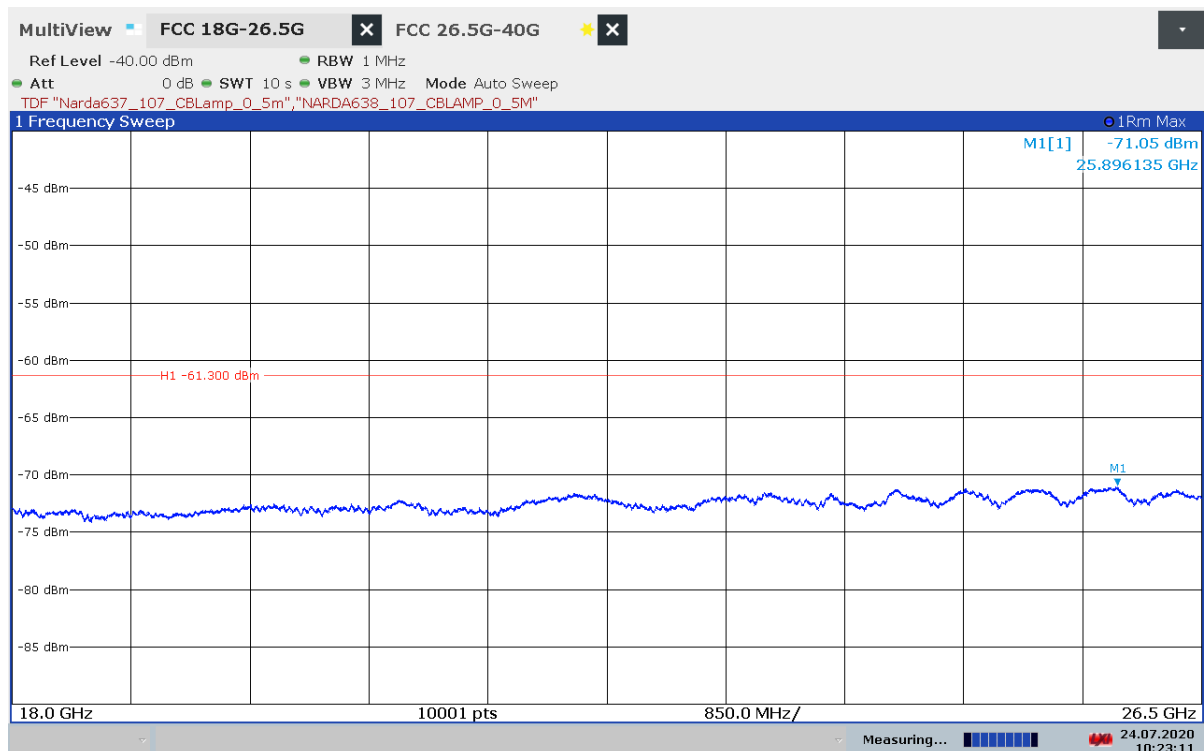Plot 46: Max Hold on Channel 4, 18 GHz to 26.5 GHz


10:23:12 24.07.2020

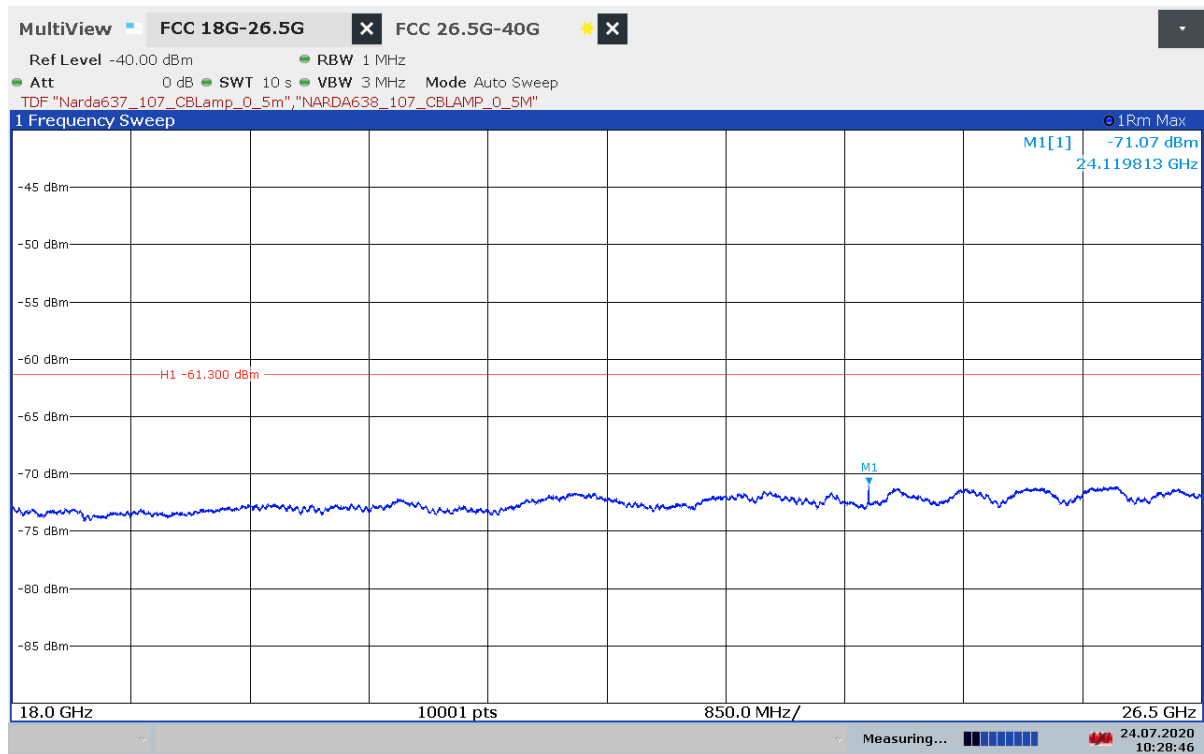Plot 47: Max Hold on Channel 5, 18 GHz to 26.5 GHz


10:28:47 24.07.2020

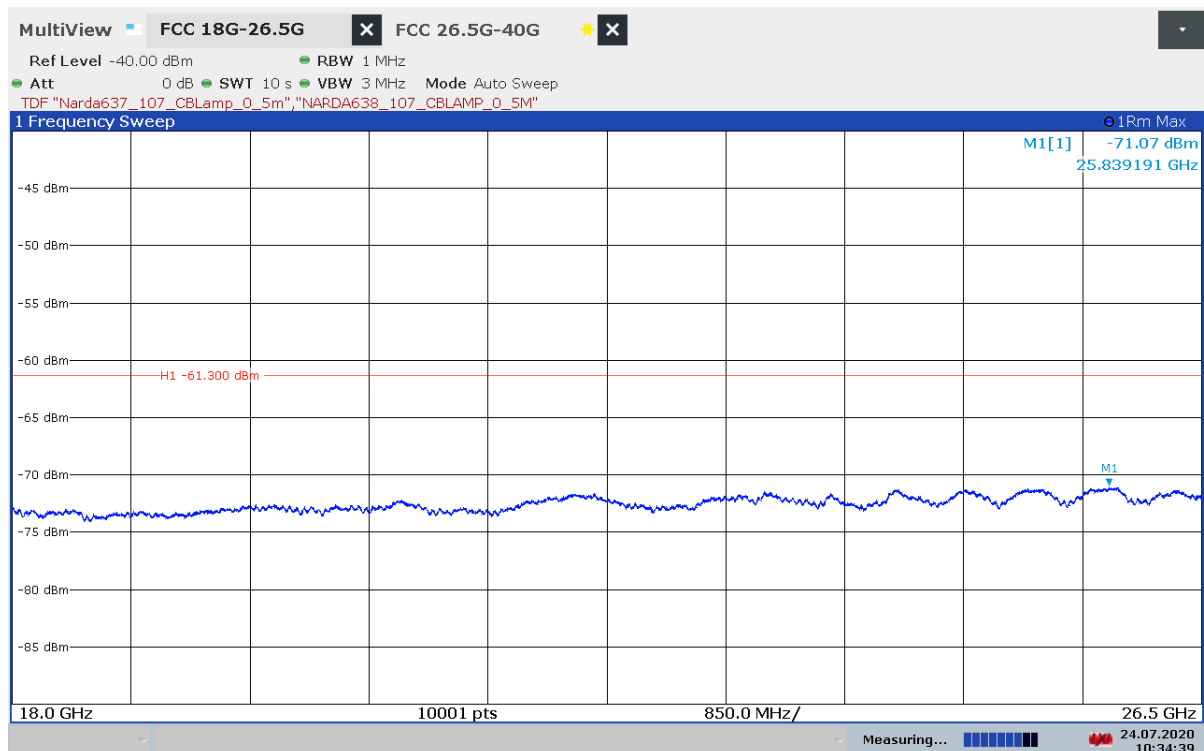Plot 48: Max Hold on Channel 7, 18 GHz to 26.5 GHz


10:34:40 24.07.2020

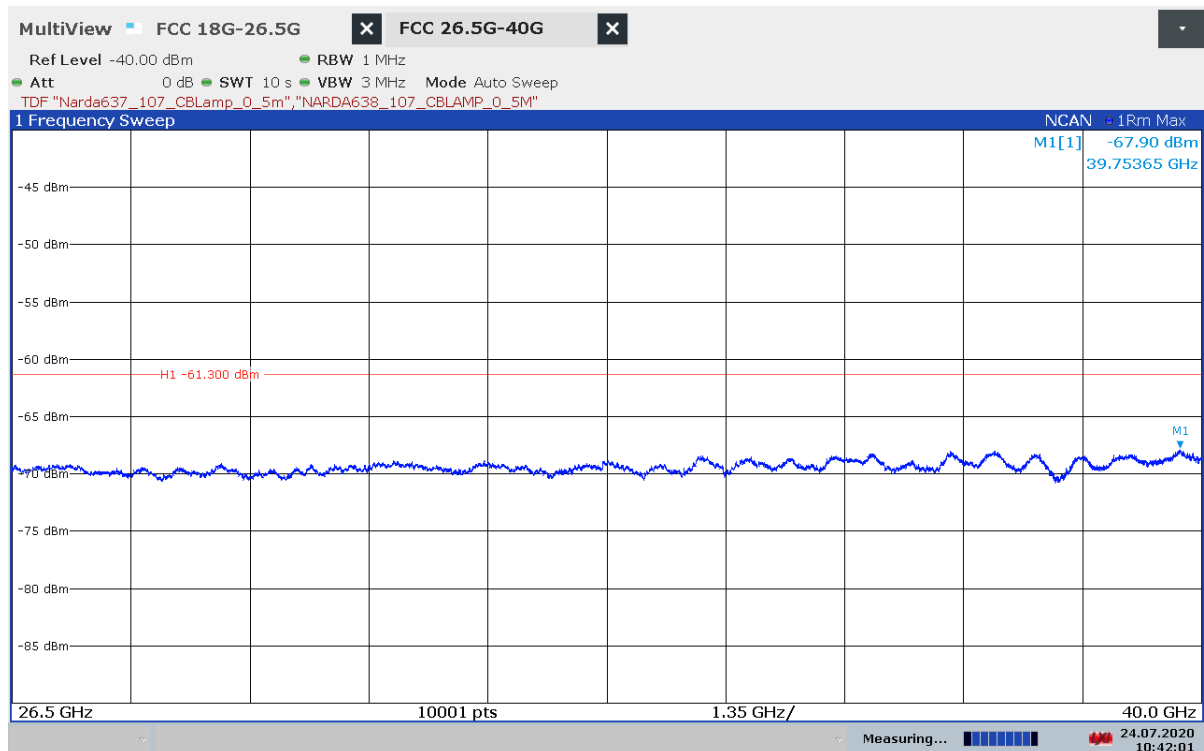Plot 49: Max Hold on Channel 1, 26.5 GHz to 40.0 GHz


10:42:02 24.07.2020

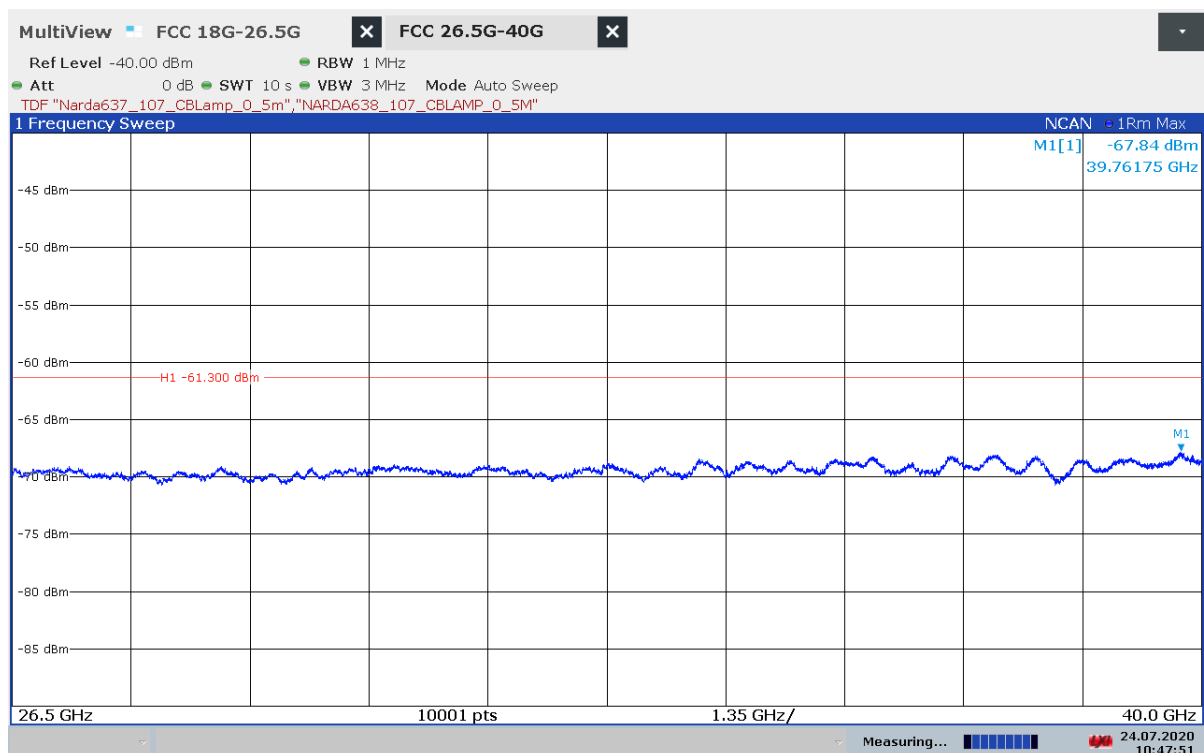Plot 50: Max Hold on Channel 2, 26.5 GHz to 40.0 GHz

10:47:52 24.07.2020

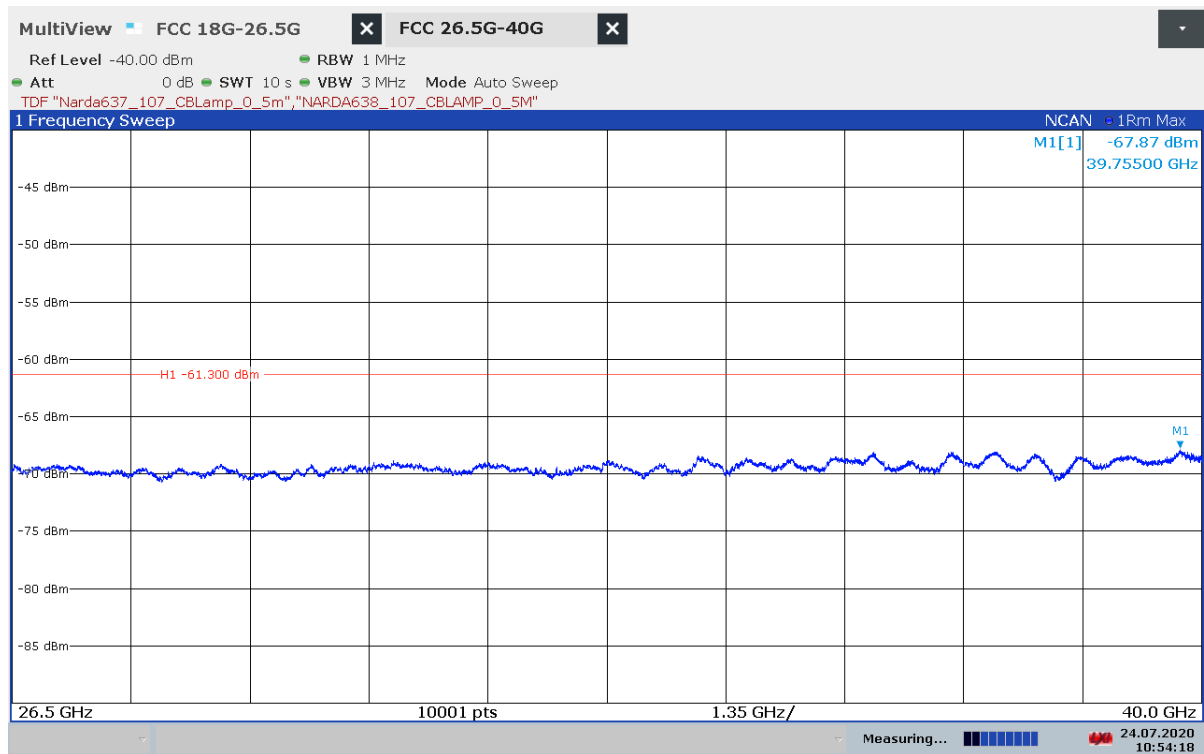
Plot 51: Max Hold on Channel 3, 26.5 GHz to 40.0 GHz

10:54:19 24.07.2020

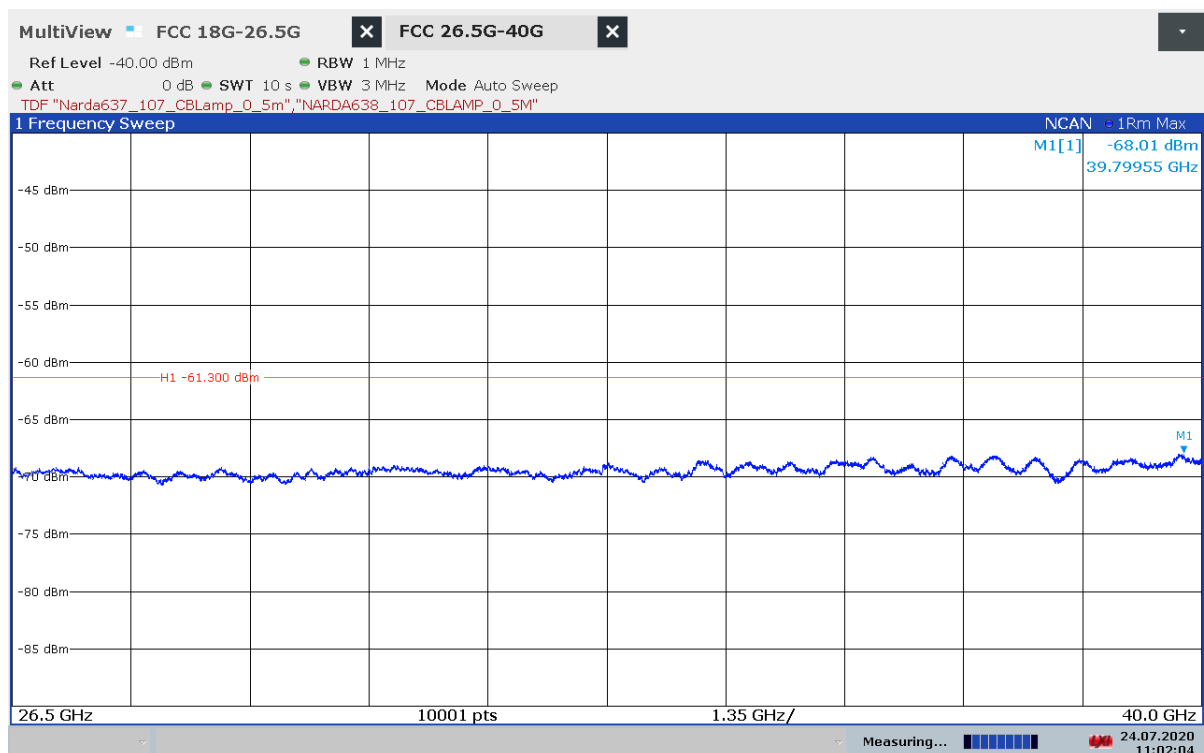Plot 52: Max Hold on Channel 4, 26.5 GHz to 40.0 GHz


11:02:05 24.07.2020

Plot 53: Max Hold on Channel 5, 26.5 GHz to 40.0 GHz

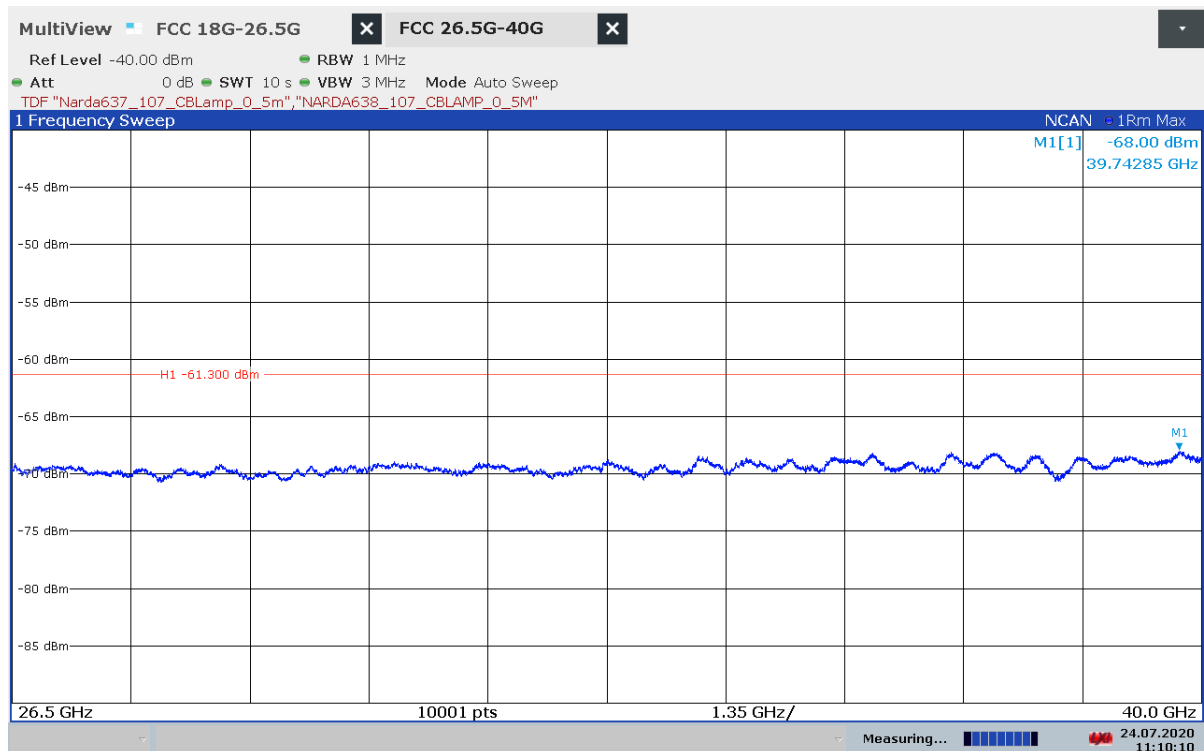


11:10:10 24.07.2020

Plot 54: Max Hold on Channel 7, 26.5 GHz to 40.0 GHz

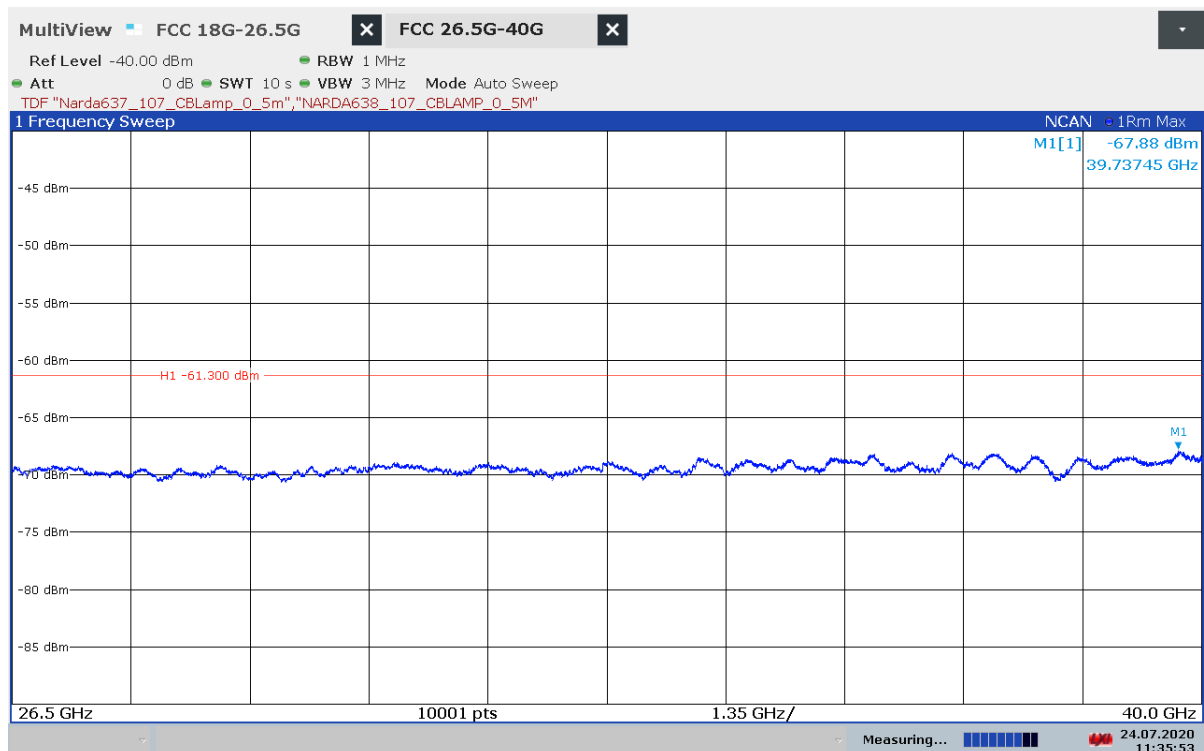

11:35:53 24.07.2020


Plot 55: Channel 1, 15.517 (d)

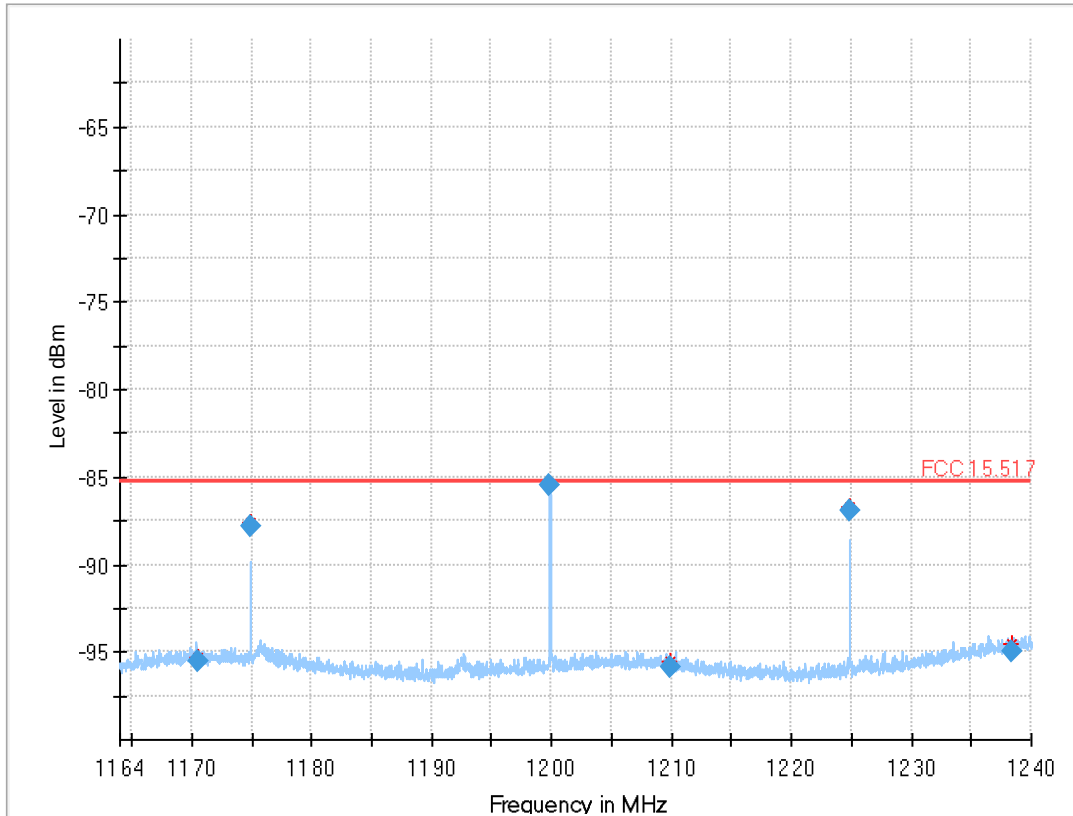

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1170.556697	-95.51	-85.30	10.21	30.000	V	5.0	45.0	-139.5
1174.886120	-87.86	-85.30	2.56	30.000	V	190.0	120.0	-139.4
1199.883070	-85.53	-85.30	0.23	30.000	V	189.0	121.0	-139.5
1209.878667	-95.90	-85.30	10.60	30.000	H	5.0	45.0	-139.5
1224.881623	-86.90	-85.30	1.60	30.000	V	273.0	160.0	-139.1
1238.429317	-94.99	-85.30	9.69	30.000	H	0.0	80.0	-138.7


Plot 56: Channel 1, 15.517 (d)

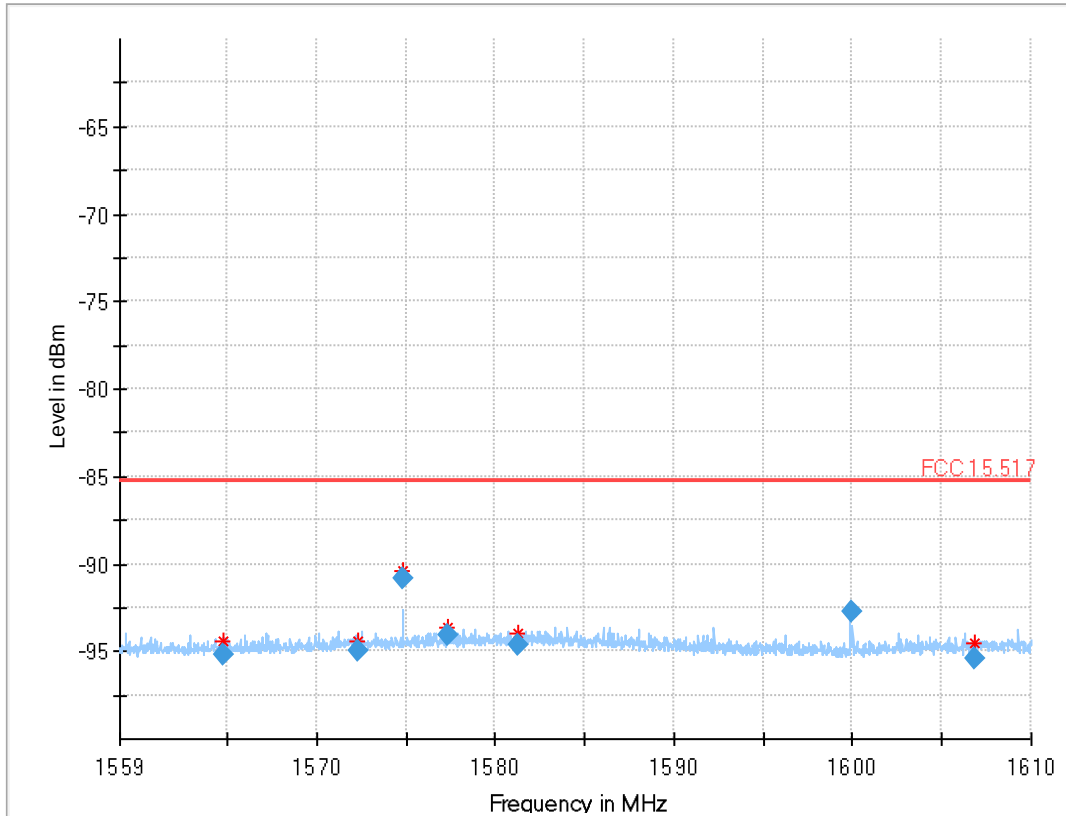

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1564.783550	-95.23	-85.30	9.93	30.000	V	2.0	99.0	-137.8
1572.334820	-94.99	-85.30	9.69	30.000	V	-4.0	34.0	-137.8
1574.847425	-90.81	-85.30	5.51	30.000	V	252.0	31.0	-137.8
1577.363510	-94.04	-85.30	8.74	30.000	V	5.0	15.0	-137.8
1581.267785	-94.68	-85.30	9.38	30.000	V	5.0	27.0	-137.7
1599.996845	-92.76	-85.30	7.46	30.000	H	6.0	165.0	-137.9
1606.834790	-95.44	-85.30	10.14	30.000	V	5.0	92.0	-137.9


Plot 57: Channel 2, 15.517 (d)

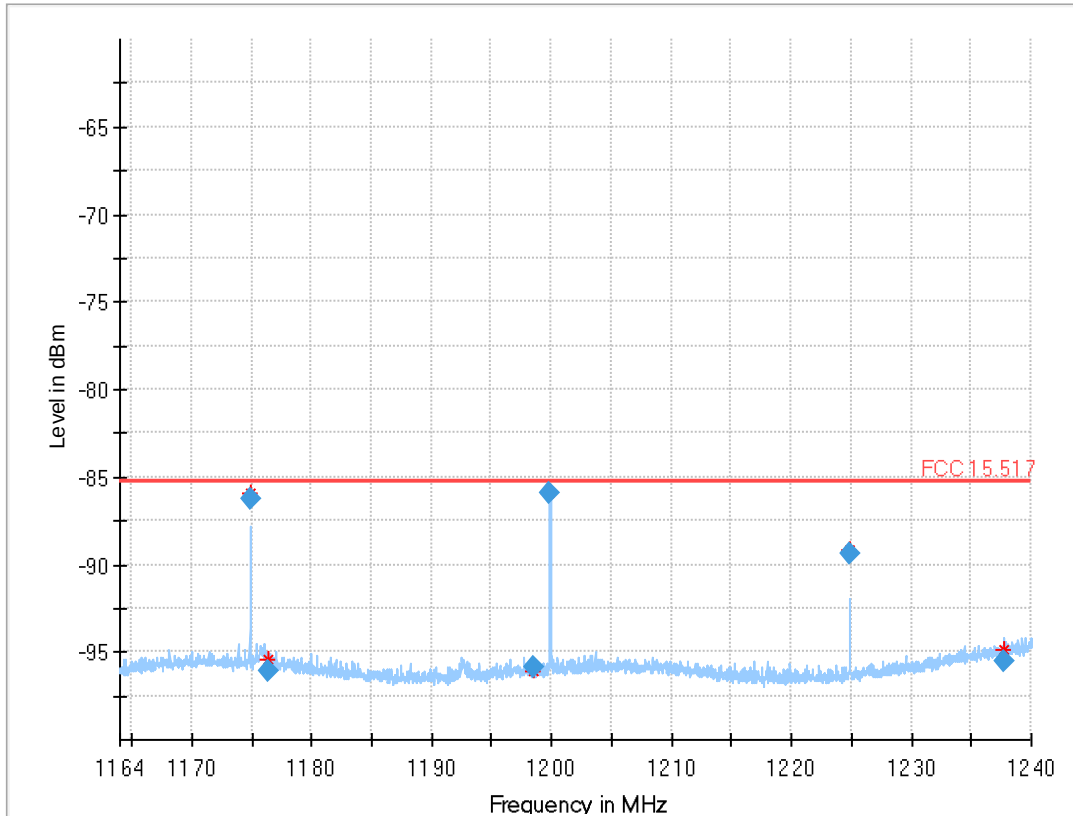

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1174.882550	-86.28	-85.30	0.98	30.000	V	202.0	123.0	-139.4
1176.343560	-96.11	-85.30	10.81	30.000	V	-3.0	15.0	-139.3
1198.510707	-95.92	-85.30	10.62	30.000	H	5.0	66.0	-139.5
1199.882800	-85.97	-85.30	0.67	30.000	V	190.0	121.0	-139.5
1224.880333	-89.36	-85.30	4.06	30.000	V	236.0	160.0	-139.1
1237.642543	-95.53	-85.30	10.23	30.000	H	-1.0	72.0	-138.8


Plot 58: Channel 2, 15.517 (d)

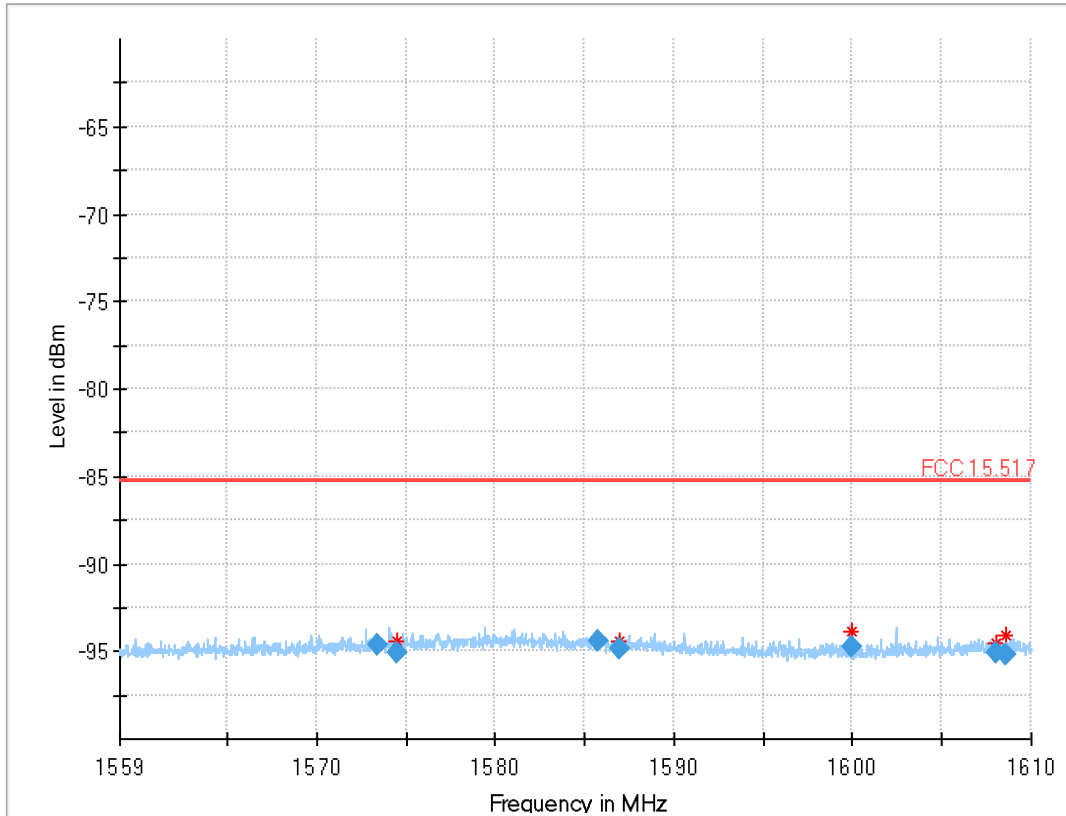

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1573.392545	-94.69	-85.30	9.39	30.000	H	12.0	94.0	-137.8
1574.496200	-95.04	-85.30	9.74	30.000	H	-5.0	22.0	-137.8
1585.794110	-94.43	-85.30	9.13	30.000	H	5.0	45.0	-137.7
1586.999315	-94.85	-85.30	9.55	30.000	H	-3.0	135.0	-137.7
1599.983165	-94.77	-85.30	9.47	30.000	H	212.0	27.0	-137.9
1608.014675	-95.10	-85.30	9.80	30.000	H	5.0	27.0	-138.0
1608.578495	-95.17	-85.30	9.87	30.000	V	5.0	2.0	-138.0


Plot 59: Channel 3, 15.517 (d)

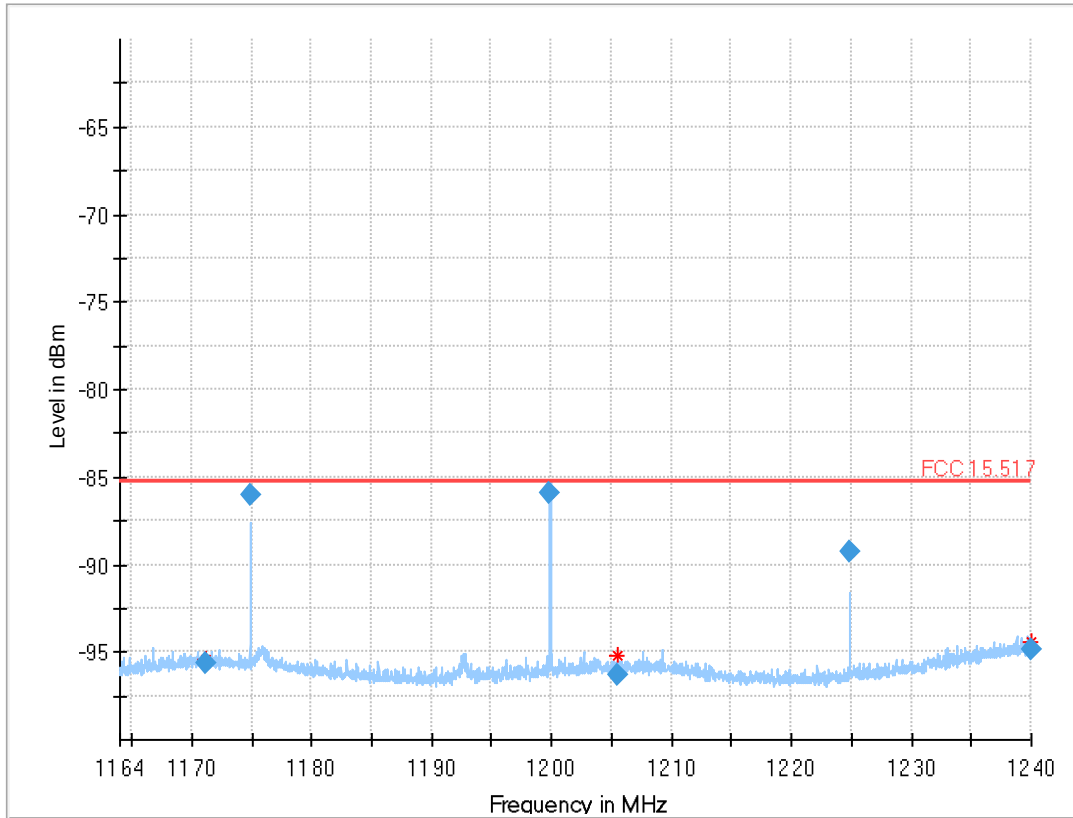

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1171.239453	-95.69	-85.30	10.39	30.000	V	5.0	82.0	-139.5
1174.885370	-86.07	-85.30	0.77	30.000	V	198.0	108.0	-139.4
1199.882350	-85.87	-85.30	0.57	30.000	V	190.0	110.0	-139.5
1205.493780	-96.35	-85.30	11.05	30.000	V	0.0	147.0	-139.5
1224.879253	-89.31	-85.30	4.01	30.000	V	276.0	165.0	-139.1
1239.948643	-94.91	-85.30	9.61	30.000	V	0.0	155.0	-138.7


Plot 60: Channel 3, 15.517 (d)

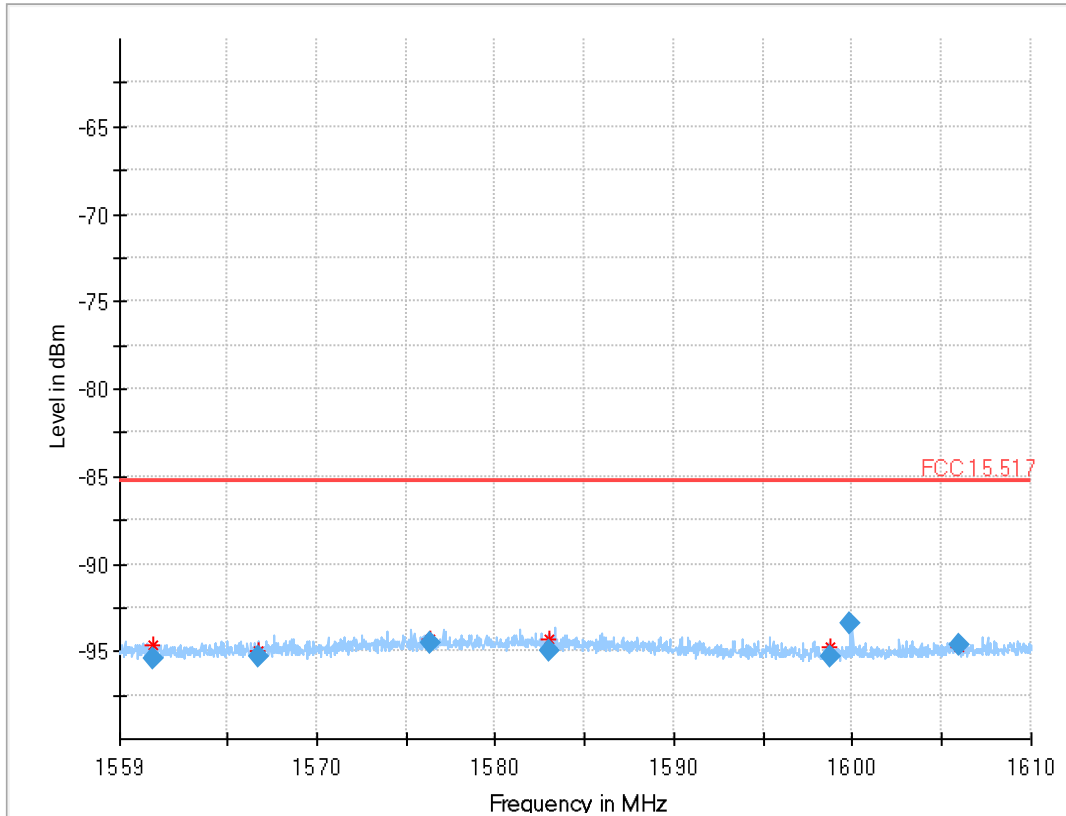

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1560.841745	-95.47	-85.30	10.17	30.000	H	2.0	75.0	-137.9
1566.773090	-95.29	-85.30	9.99	30.000	V	-4.0	18.0	-137.8
1576.332995	-94.58	-85.30	9.28	30.000	V	-1.0	31.0	-137.8
1583.014415	-94.92	-85.30	9.62	30.000	H	0.0	54.0	-137.7
1598.740445	-95.34	-85.30	10.04	30.000	V	3.0	36.0	-137.9
1599.838850	-93.43	-85.30	8.13	30.000	V	181.0	1.0	-137.9
1605.912065	-94.66	-85.30	9.36	30.000	V	5.0	130.0	-137.9


Plot 61: Channel 4, 15.517 (d)

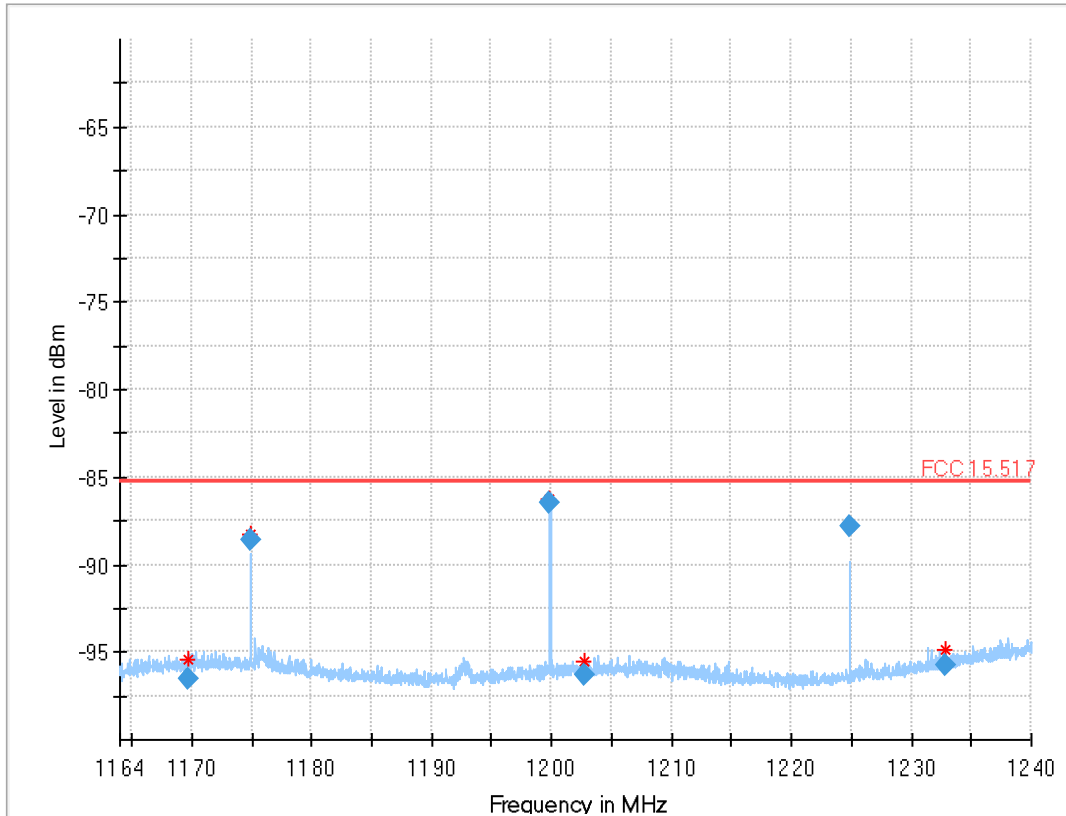

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1169.747620	-96.51	-85.30	11.21	30.000	H	-4.0	105.0	-139.5
1174.881710	-88.59	-85.30	3.29	30.000	V	251.0	131.0	-139.4
1199.882860	-86.48	-85.30	1.18	30.000	V	234.0	150.0	-139.5
1202.775613	-96.31	-85.30	11.01	30.000	V	5.0	165.0	-139.5
1224.878520	-87.86	-85.30	2.56	30.000	V	197.0	113.0	-139.1
1232.759153	-95.74	-85.30	10.44	30.000	H	5.0	108.0	-138.9


Plot 62: Channel 4, 15.517 (d)

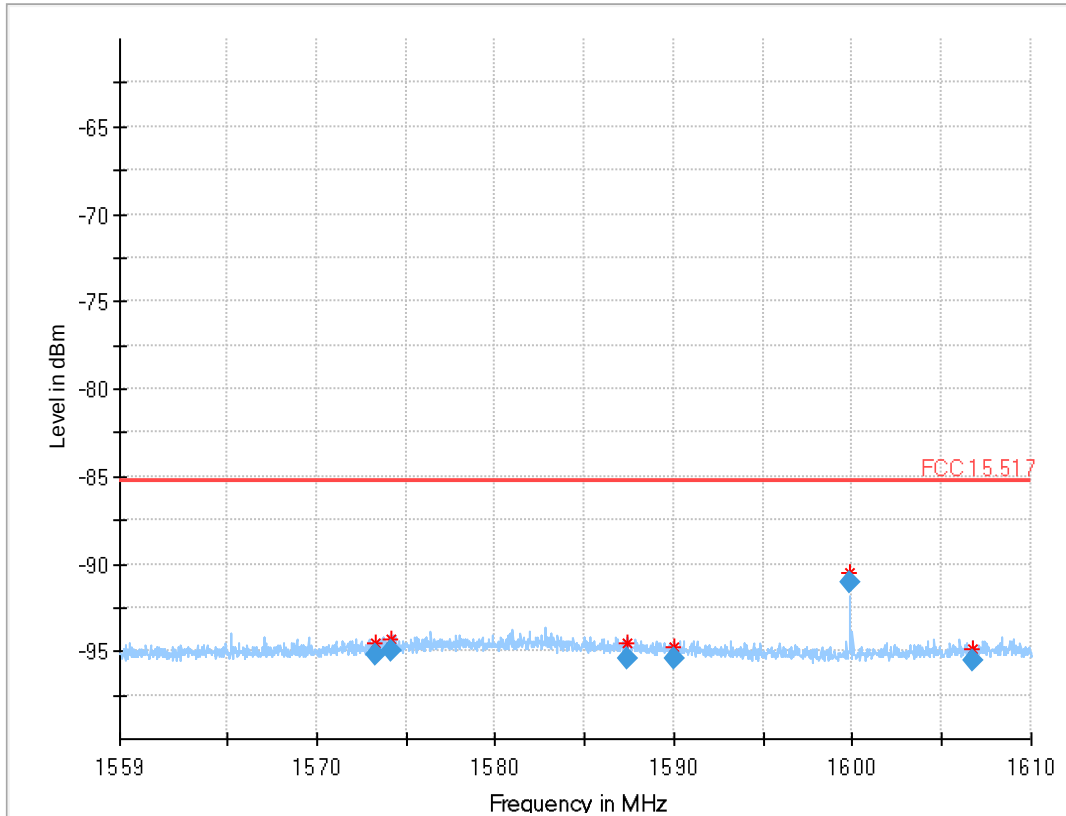

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1573.255490	-95.24	-85.30	9.94	30.000	V	-4.0	57.0	-137.8
1574.155655	-95.01	-85.30	9.71	30.000	V	2.0	78.0	-137.8
1587.397385	-95.38	-85.30	10.08	30.000	H	-2.0	149.0	-137.8
1590.049025	-95.42	-85.30	10.12	30.000	V	-2.0	140.0	-137.8
1599.845555	-91.01	-85.30	5.71	30.000	V	158.0	15.0	-137.9
1606.760750	-95.54	-85.30	10.24	30.000	H	0.0	144.0	-137.9


Plot 63: Channel 5, 15.517 (d)

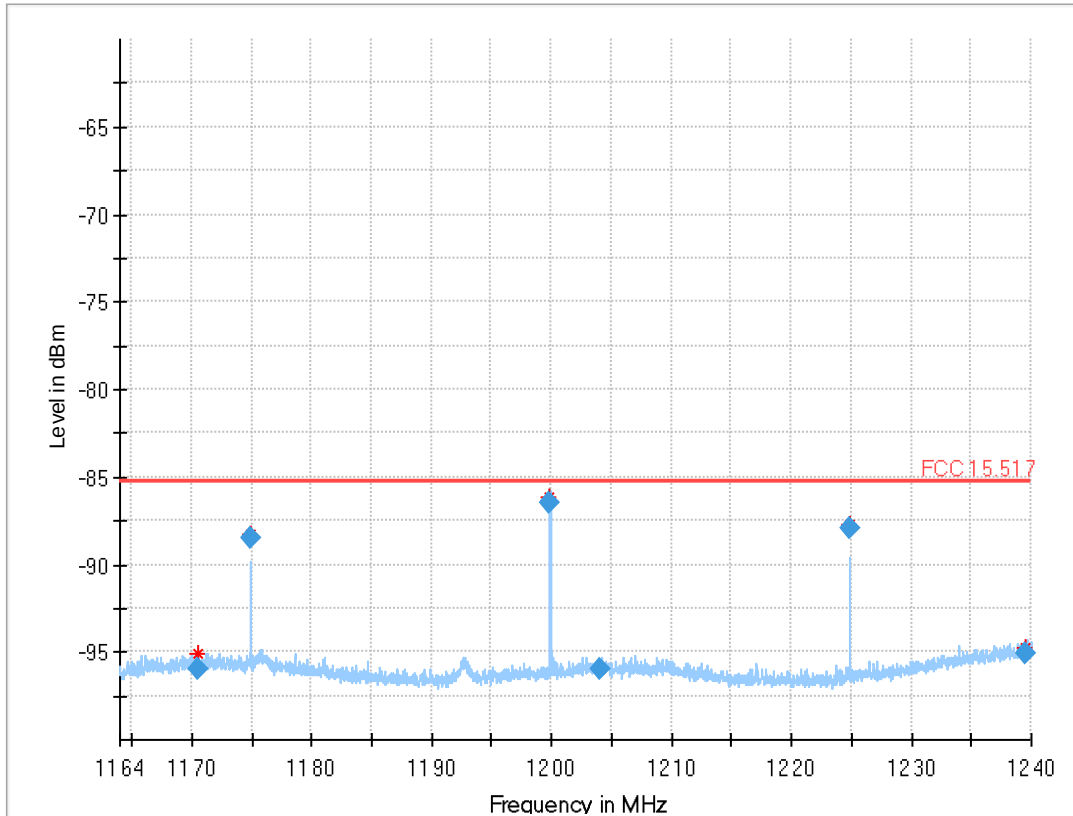

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1170.569267	-95.93	-85.30	10.63	30.000	V	-4.0	66.0	-139.5
1174.884560	-88.44	-85.30	3.14	30.000	V	248.0	135.0	-139.4
1199.879260	-86.47	-85.30	1.17	30.000	V	234.0	156.0	-139.5
1204.097343	-95.93	-85.30	10.63	30.000	V	0.0	15.0	-139.5
1224.874950	-87.89	-85.30	2.59	30.000	V	224.0	151.0	-139.1
1239.551997	-95.06	-85.30	9.76	30.000	H	-4.0	105.0	-138.7


Plot 64: Channel 5, 15.517 (d)

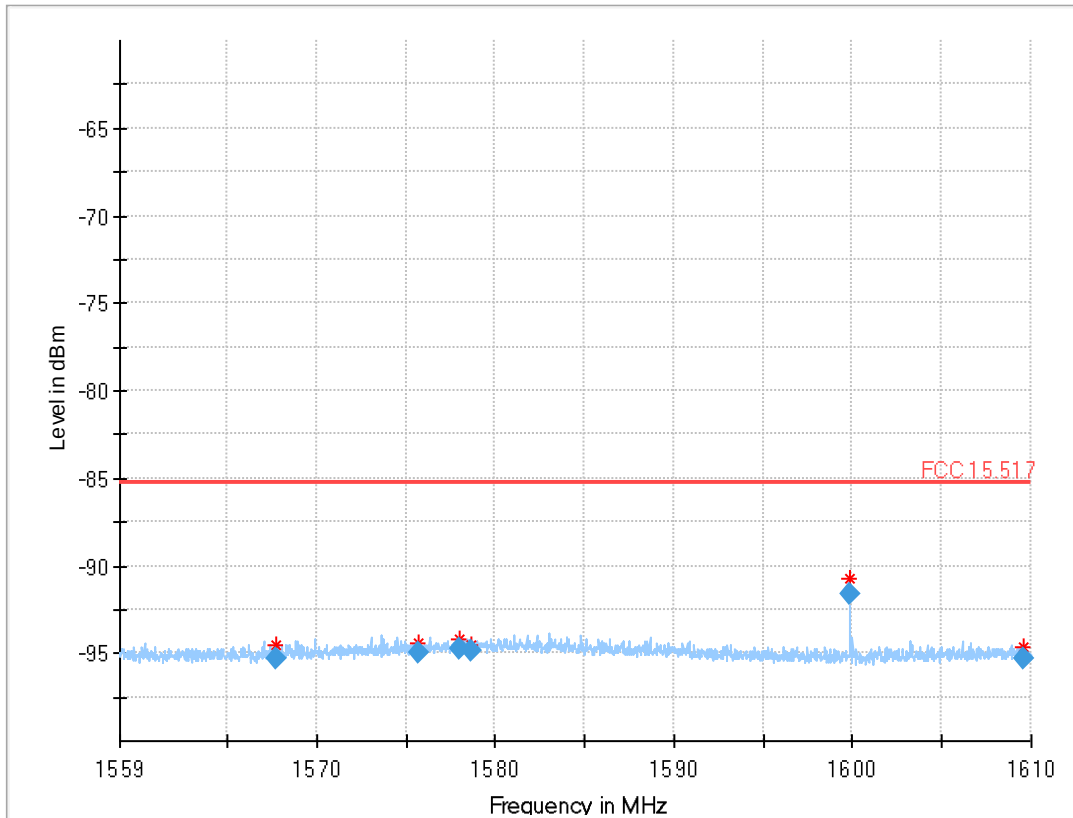

Final_Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1567.696670	-95.27	-85.30	9.97	30.000	H	1.0	12.0	-137.8
1575.677750	-94.96	-85.30	9.66	30.000	H	5.0	15.0	-137.8
1578.036335	-94.72	-85.30	9.42	30.000	H	0.0	57.0	-137.8
1578.699590	-94.85	-85.30	9.55	30.000	H	-2.0	76.0	-137.8
1599.842090	-91.61	-85.30	6.31	30.000	V	148.0	15.0	-137.9
1609.524050	-95.27	-85.30	9.97	30.000	H	-5.0	125.0	-138.0


Plot 65: Channel 7, 15.517 (d)

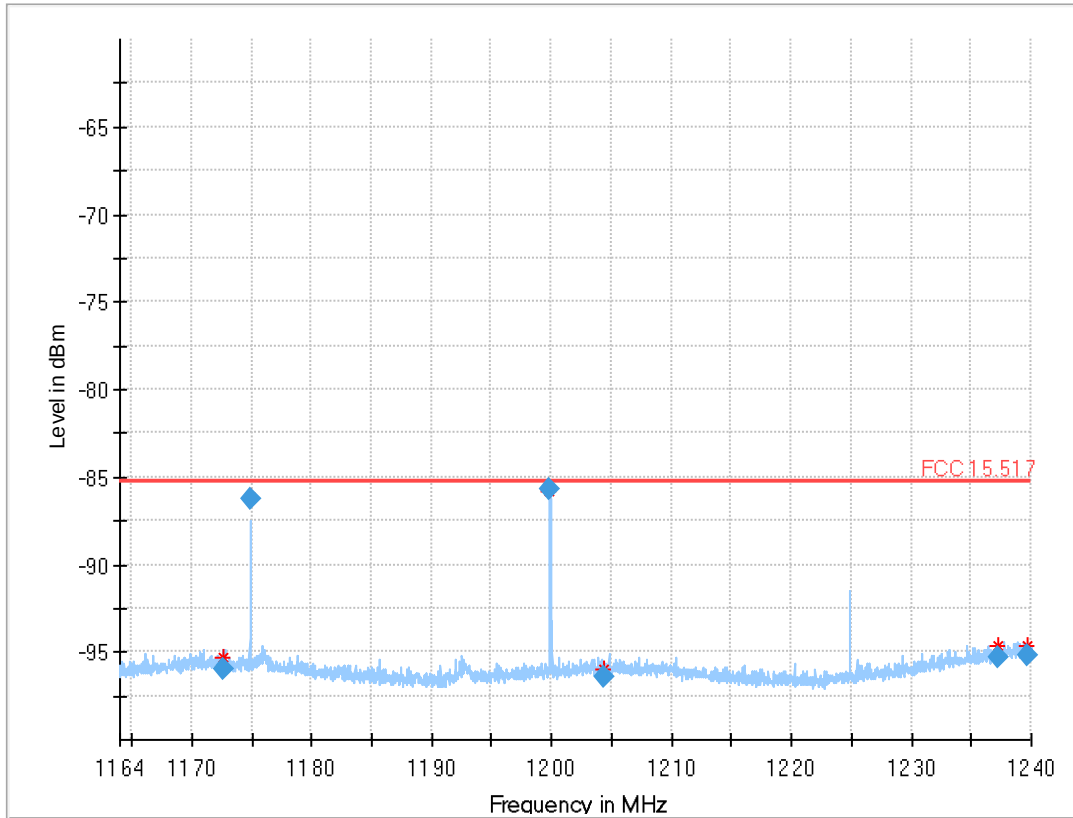

Final Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1172.609027	-95.98	-85.30	10.68	30.000	V	5.0	165.0	-139.4
1174.882940	-86.23	-85.30	0.93	30.000	V	180.0	110.0	-139.4
1199.880190	-85.75	-85.30	0.45	30.000	V	176.0	115.0	-139.5
1204.295823	-96.41	-85.30	11.11	30.000	V	1.0	45.0	-139.5
1237.240767	-95.36	-85.30	10.06	30.000	H	0.0	75.0	-138.8
1239.642587	-95.23	-85.30	9.93	30.000	V	5.0	165.0	-138.7

Plot 66: Channel 7, 15.517 (d)

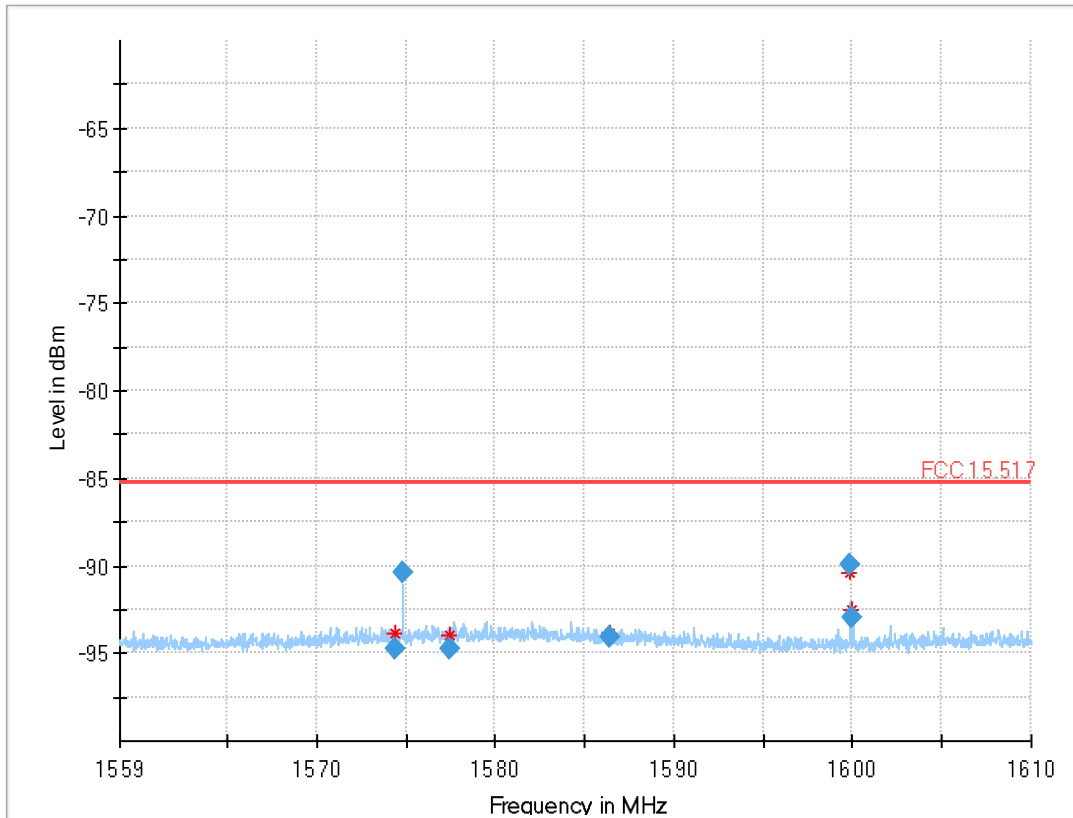

Final_Result

Frequency (MHz)	RMS (dBm)	Limit (dBm)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1574.421590	-94.71	-85.30	9.41	30.000	V	-2.0	57.0	-137.8
1574.857850	-90.36	-85.30	5.06	30.000	V	349.0	0.0	-137.8
1577.473265	-94.78	-85.30	9.48	30.000	H	-3.0	2.0	-137.8
1586.388260	-94.03	-85.30	8.73	30.000	V	315.0	33.0	-137.7
1599.852920	-89.99	-85.30	4.69	30.000	V	-4.0	15.0	-137.9
1600.006025	-92.96	-85.30	7.66	30.000	H	355.0	135.0	-137.9

10.3 Antenna requirements

Description:

§15.521(b)

Manufacturers and users are reminded of the provisions of §§15.203 and 15.204.

Integrated patch antenna.

Verdict: Compliant

11 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

12 Document history

Version	Applied changes	Date of release
-/-	Initial release	2020-09-30
A	FCC ID corrected, Date of FCC CFR 15 release added	2020-12-21
B	ISED data and kind of test item/model name updated, ISED accreditation added	2021-06-30

13 Accreditation Certificate – D-PL-12076-01-04

first page	last page
 Deutsche Akkreditierungsstelle GmbH Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition Accreditation  The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages. Registration number of the certificate: D-PL-12076-01-04 Frankfurt am Main, 09.06.2020 by order of  Jörg Egner Head of Division The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes overleaf.	Deutsche Akkreditierungsstelle GmbH Office Berlin Spittelmarkt 10 10117 Berlin Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main Office Braunschweig Bundesallee 100 38116 Braunschweig The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf. No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS. The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations. The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu

Note: The current certificate annex is published on the websites (link see below).

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-04.pdf>
<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-04e.pdf>

or

https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-04_Canada_TCEMC.pdf

14 Accreditation Certificate – D-PL-12076-01-05

first page	last page
 Deutsche Akkreditierungsstelle GmbH Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition Accreditation  The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (FCC Requirements) The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages. Registration number of the certificate: D-PL-12076-01-05 Frankfurt am Main, 09.06.2020 by order  Head of Division The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes attached.	Deutsche Akkreditierungsstelle GmbH Office Berlin Spittelmarkt 10 10117 Berlin Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main Office Braunschweig Bundesallee 100 38116 Braunschweig The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf. No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS. The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations. The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu

Note: The current certificate annex is published on the websites (link see below).

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05.pdf>
<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05e.pdf>

or

https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05_TCB_USA.pdf

END OF TEST REPORT