

Test Report

Report No.: MTi240621003-01E1

Date of issue: 2024-07-12

Applicant: Electronic Silk Road (Shenzhen) Tech Co., Ltd

Product name: ESR Geo Digital Pencil

Model(s): 6C005

FCC ID: 2APEW-6C005

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.cn>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Environmental Conditions	7
1.4	Description of support units	7
1.5	Measurement uncertainty	7
2	Summary of Test Result	8
3	Test Facilities and accreditations	9
3.1	Test laboratory	9
4	List of test equipment	10
5	Evaluation Results (Evaluation)	11
5.1	Antenna requirement	11
6	Radio Spectrum Matter Test Results (RF)	12
6.1	Occupied Bandwidth	12
6.2	Maximum Conducted Output Power	13
6.3	Power Spectral Density	14
6.4	RF conducted spurious emissions and band edge measurement	15
6.5	Band edge emissions (Radiated)	16
6.6	Radiated emissions (below 1GHz)	21
6.7	Radiated emissions (above 1GHz)	27
	Photographs of the test setup	34
	Photographs of the EUT	35
	Appendix A: DTS Bandwidth	36
	Appendix B: Maximum conducted output power	41
	Appendix C: Maximum power spectral density	46
	Appendix D: Band edge measurements	51
	Appendix E: Conducted Spurious Emission	54
	Appendix F: Duty Cycle	66

Test Result Certification	
Applicant:	Electronic Silk Road (Shenzhen) Tech Co., Ltd
Address:	Room 1601, Building 1D, Creative City, Liu Xian Avenue, Nan Shan District, Shenzhen, Guangdong, China
Manufacturer:	Electronic Silk Road (Shenzhen) Tech Co., Ltd
Address:	Room 1601, Building 1D, Creative City, Liu Xian Avenue, Nan Shan District, Shenzhen, Guangdong, China
Product description	
Product name:	ESR Geo Digital Pencil
Trade mark:	ESR
Model name:	6C005
Series Model(s):	N/A
Standards:	47 CFR Part 15.247
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2024-06-26 to 2024-06-28
Test result:	Pass

Test Engineer	:	<i>Maleah Deng</i>
		(Maleah Deng)
Reviewed By	:	<i>David. Lee</i>
		(David Lee)
Approved By	:	<i>Leon Chen</i>
		(Leon Chen)

1 General Description

1.1 Description of the EUT

Product name:	ESR Geo Digital Pencil
Model name:	6C005
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: DC 5V 200mA Battery: DC 3.7V 125mAh
Accessories:	Cable: USB-C to USB-C cable 30cm
Hardware version:	V4c
Software version:	V1.7.0
Test sample(s) number:	MTi240621003-01S1001
RF specification	
Bluetooth version:	V5.3
Operating frequency range:	2402MHz to 2480MHz
Channel number:	40
Modulation type:	GFSK
Antenna(s) type:	PCB Antenna
Antenna(s) gain:	Ant1:-0.08dBi; Ant2:-0.08dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-GFSK-1M(Ant1)
Mode2	TX-GFSK-2M(Ant1)
Mode3	TX-GFSK-1M(Ant2)
Mode4	TX-GFSK-2M(Ant2)

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474

7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Test Channel List

Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
2402	2440	2480

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:

For power setting, refer to below table.

Test Software: Mode	Lekit		
	2402MHz	2440MHz	2480MHz
Ant1-1M	3F	3F	3F
Ant1-2M	3F	3F	3F
Ant2-1M	3F	3F	3F
Ant2-2M	3F	3F	3F

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/

Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	N/A
3	Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
4	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
6	RF conducted spurious emissions and band edge measurement	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
9	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

Notes:

- 1.N/A means not applicable.
- 2.Since the EUT power by DC supply, therefore AC power line conducted emissions test is not required.

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2024-03-20	2025-03-19
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2024-03-21	2025-03-20
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2024-03-20	2025-03-19
Occupied Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in non-restricted frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2024-03-20	2025-03-19
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2024-03-21	2025-03-20
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2024-03-21	2025-03-20
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2024-03-21	2025-03-20
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2024-03-21	2025-03-20
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2024-03-21	2025-03-20
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2024-03-20	2025-03-19
9	DC Power Supply	Agilent	E3632A	MY40027695	2024-03-21	2025-03-20
Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2024-03-20	2025-03-19
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2024-03-21	2025-03-20
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2023-06-17	2025-06-16
7	Pre-amplifier	Space-Dtronics	EWLAN1840 G	210405001	2024-03-21	2025-03-20
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2025-03-22
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2024-03-20	2025-03-19

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

5.1.1 Conclusion:

The antenna of the EUT is permanently attached. The EUT complies with the requirement of FCC PART 15.203.
--

6 Radio Spectrum Matter Test Results (RF)


6.1 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW \geq [3 × RBW]. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.1.2 Test Setup Diagram:

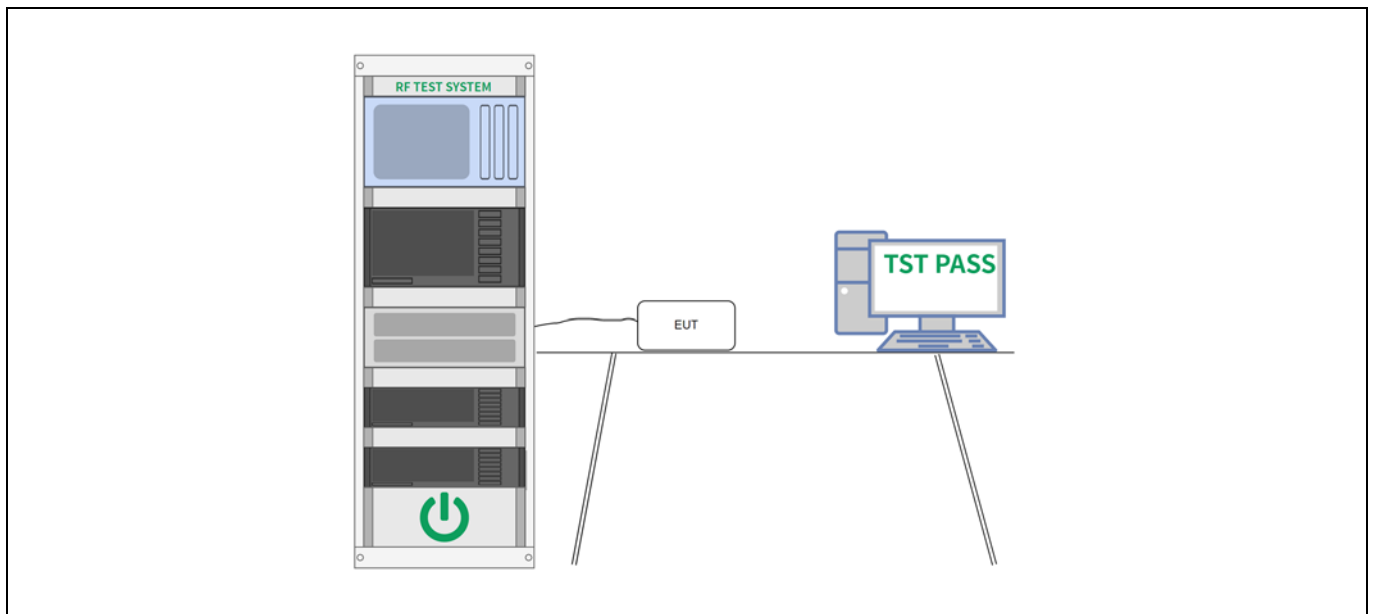

6.1.3 Test Data:

Please Refer to Appendix for Details.


6.2 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.2.2 Test Setup Diagram:

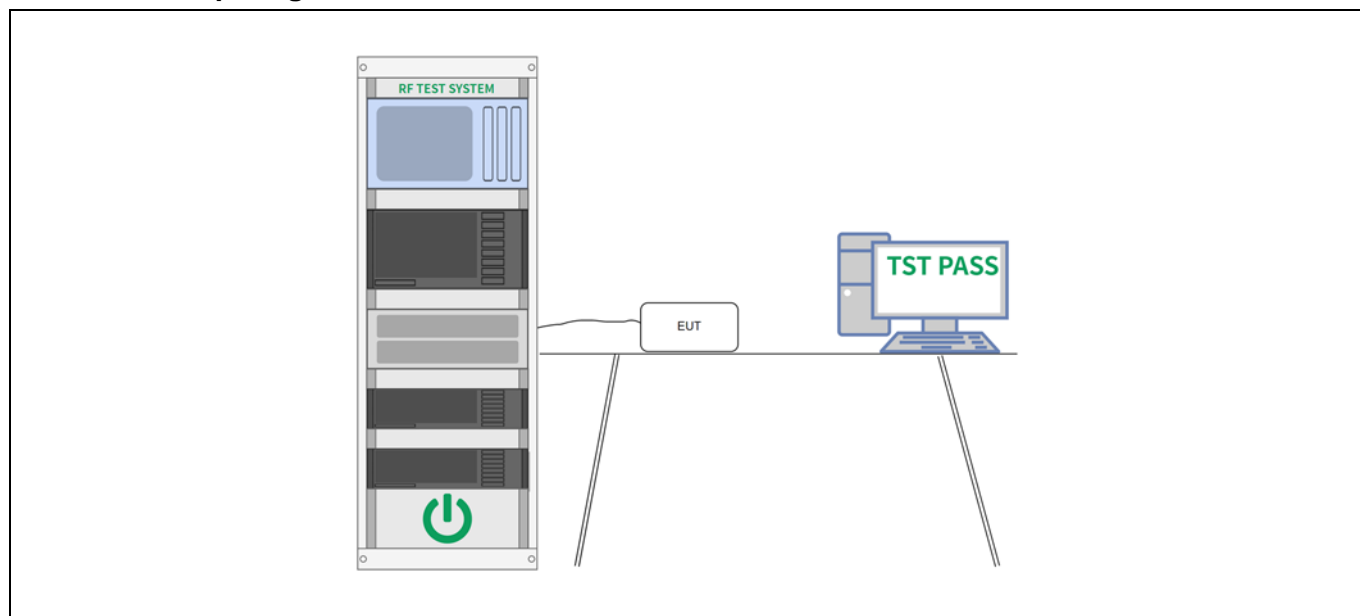

6.2.3 Test Data:

Please Refer to Appendix for Details.


6.3 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.3.2 Test Setup Diagram:

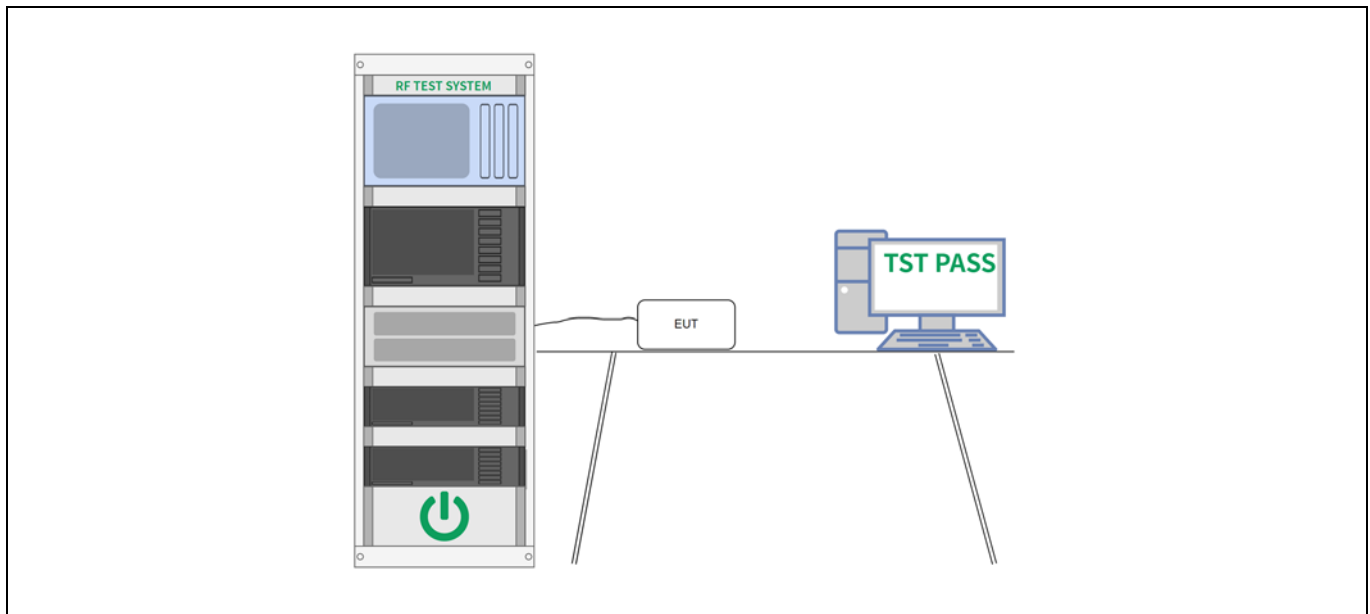

6.3.3 Test Data:


Please Refer to Appendix for Details.

6.4 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

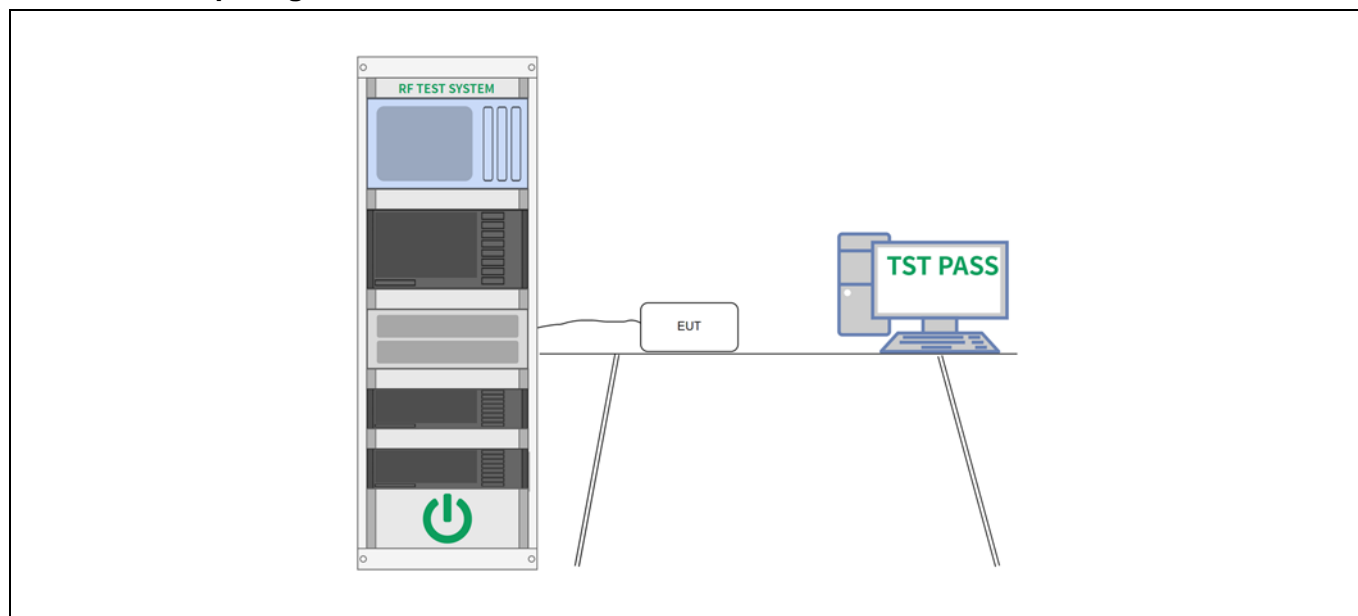6.4.2 Test Setup Diagram:

6.4.3 Test Data:


Please Refer to Appendix for Details.

6.5 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.10.5.2		

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.36 °C	Humidity:	49.1 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1, Mode3) is recorded in the report				
Note:	The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.				

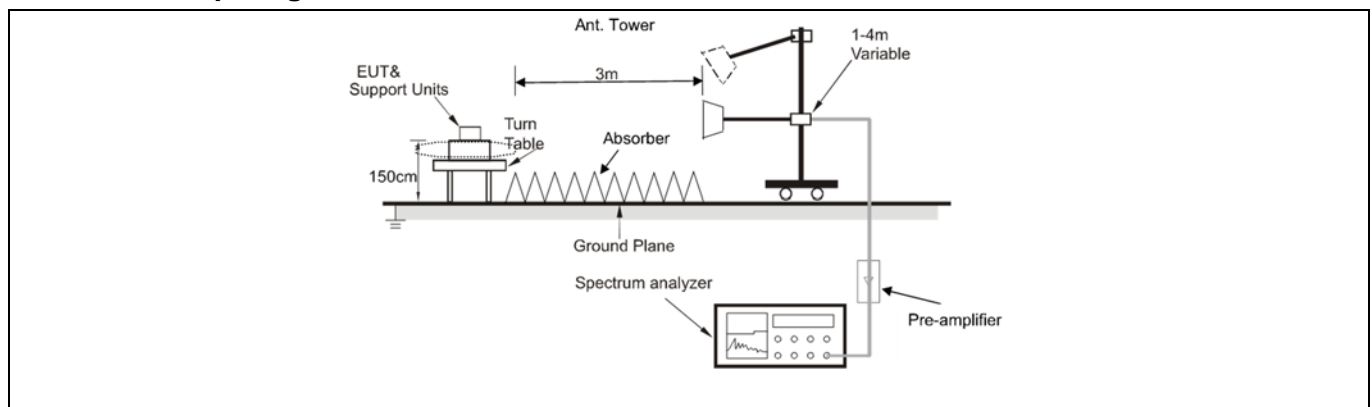6.5.2 Test Setup Diagram:


6.5.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	42.49	-12.92	29.57	54.00	-24.43	AVG
2		2310.010	53.13	-12.92	40.21	74.00	-33.79	peak
3		2390.000	56.82	-12.49	44.33	74.00	-29.67	peak
4	*	2390.000	42.35	-12.49	29.86	54.00	-24.14	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	53.16	-12.92	40.24	74.00	-33.76	peak
2		2310.000	42.78	-12.92	29.86	54.00	-24.14	AVG
3		2390.000	52.95	-12.49	40.46	74.00	-33.54	peak
4	*	2390.000	42.53	-12.49	30.04	54.00	-23.96	AVG

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	62.57	-12.50	50.07	74.00	-23.93	peak
2	*	2483.500	45.02	-12.50	32.52	54.00	-21.48	AVG
3		2500.000	54.21	-12.41	41.80	74.00	-32.20	peak
4		2500.000	42.50	-12.41	30.09	54.00	-23.91	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	54.23	-12.50	41.73	74.00	-32.27	peak
2	*	2483.500	43.20	-12.50	30.70	54.00	-23.30	AVG
3		2500.000	53.27	-12.41	40.86	74.00	-33.14	peak
4		2500.000	42.39	-12.41	29.98	54.00	-24.02	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	52.24	-12.92	39.32	74.00	-34.68	peak
2		2310.000	42.52	-12.92	29.60	54.00	-24.40	AVG
3		2390.000	57.10	-12.49	44.61	74.00	-29.39	peak
4	*	2390.000	42.35	-12.49	29.86	54.00	-24.14	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	53.21	-12.92	40.29	74.00	-33.71	peak
2		2310.000	42.46	-12.92	29.54	54.00	-24.46	AVG
3		2390.000	52.07	-12.49	39.58	74.00	-34.42	peak
4	*	2390.000	42.24	-12.49	29.75	54.00	-24.25	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	63.45	-12.50	50.95	74.00	-23.05	peak
2	*	2483.500	45.55	-12.50	33.05	54.00	-20.95	AVG
3		2500.000	53.14	-12.41	40.73	74.00	-33.27	peak
4		2500.000	42.35	-12.41	29.94	54.00	-24.06	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: H


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	54.77	-12.50	42.27	74.00	-31.73	peak
2	*	2483.500	43.33	-12.50	30.83	54.00	-23.17	AVG
3		2500.000	52.88	-12.41	40.47	74.00	-33.53	peak
4		2500.000	42.34	-12.41	29.93	54.00	-24.07	AVG


6.6 Radiated emissions (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.6.1 E.U.T. Operation:


Operating Environment:					
Temperature:	15.9 °C	Humidity:	49.1 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1, Mode3) is recorded in the report				
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.					

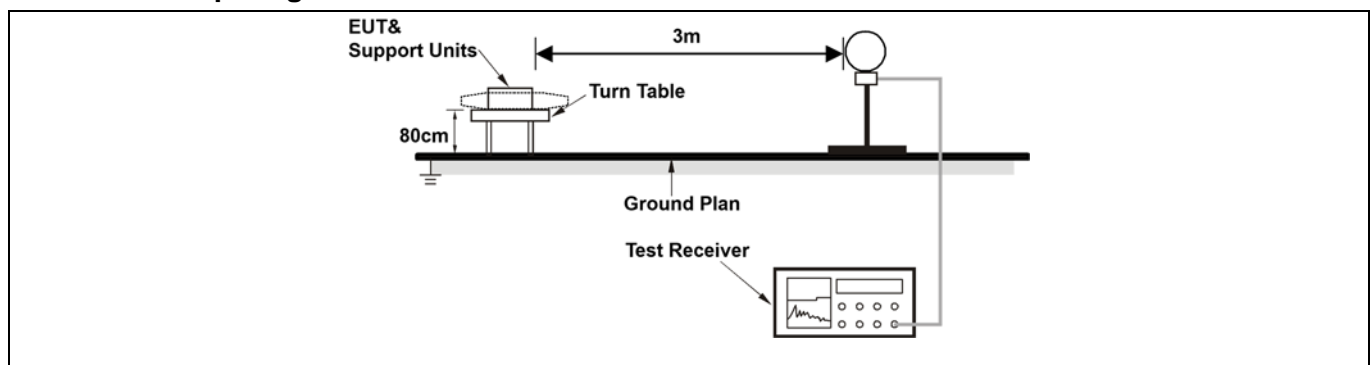6.6.2 Test Setup Diagram:

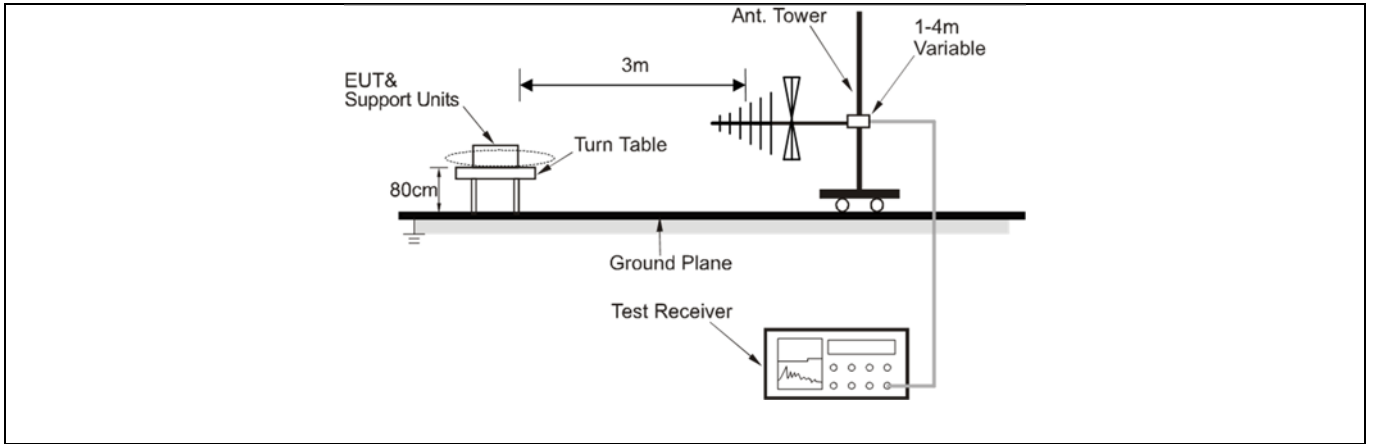


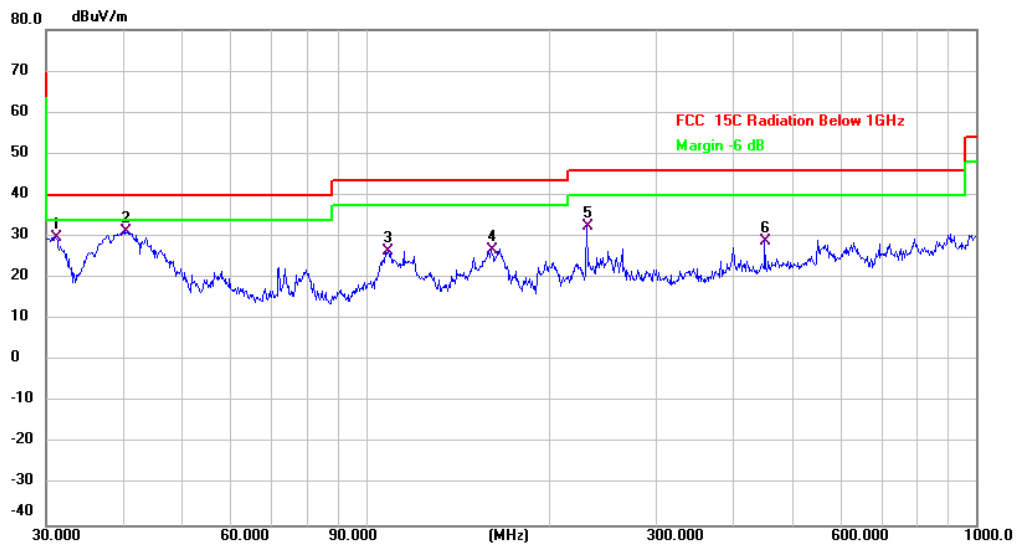
6.6.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: H

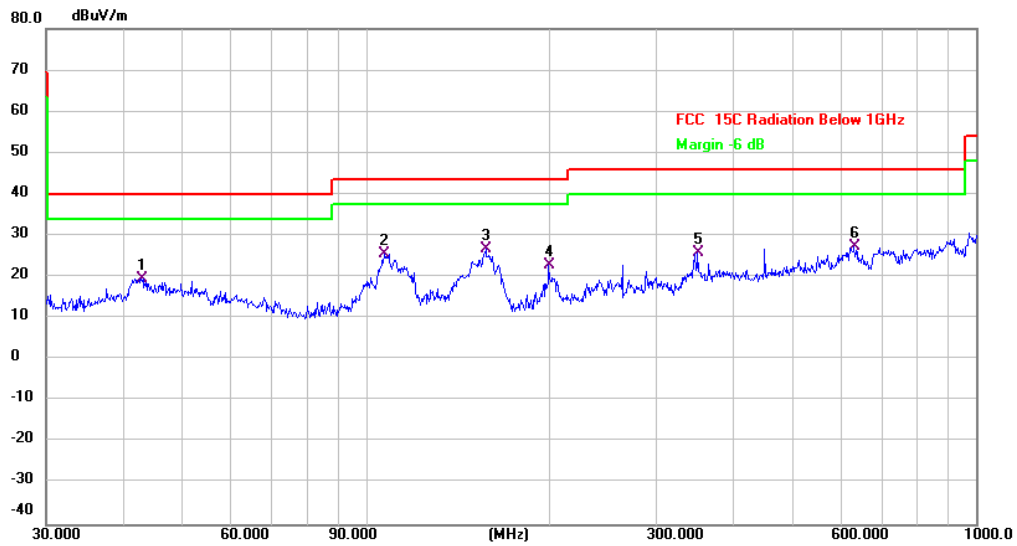


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		42.8998	27.38	-7.68	19.70	40.00	-20.30	QP	
2		107.1337	32.75	-7.06	25.69	43.50	-17.81	QP	
3	*	157.0074	37.04	-10.40	26.64	43.50	-16.86	QP	
4		199.9856	28.90	-6.11	22.79	43.50	-20.71	QP	
5		350.4768	30.79	-4.91	25.88	46.00	-20.12	QP	
6		631.6884	26.99	0.23	27.22	46.00	-18.78	QP	

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.0706	40.44	-10.62	29.82	40.00	-10.18	QP	
2	*	40.4172	39.60	-8.48	31.12	40.00	-8.88	QP	
3		108.6470	33.64	-7.31	26.33	43.50	-17.17	QP	
4		160.3456	37.51	-10.85	26.66	43.50	-16.84	QP	
5		230.9068	39.87	-7.31	32.56	46.00	-13.44	QP	
6		451.1350	32.93	-4.18	28.75	46.00	-17.25	QP	

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: H

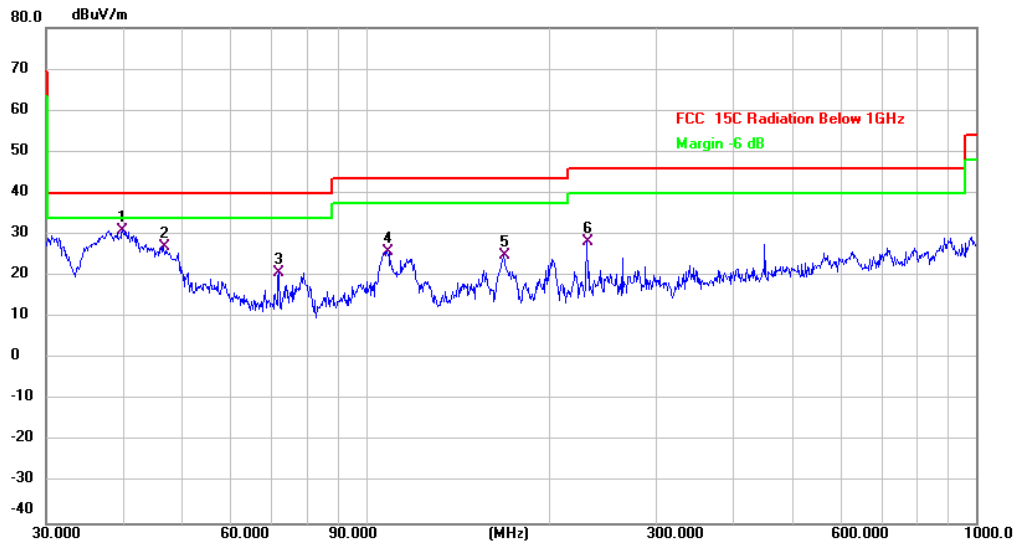

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	39.9942	39.67	-8.65	31.02	40.00	-8.98	QP	
2		46.6664	34.54	-7.37	27.17	40.00	-12.83	QP	
3		72.0843	31.99	-11.29	20.70	40.00	-19.30	QP	
4		108.2667	33.30	-7.31	25.99	43.50	-17.51	QP	
5		167.8243	36.00	-11.04	24.96	43.50	-18.54	QP	
6		230.9068	35.68	-7.31	28.37	46.00	-17.63	QP	

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: H

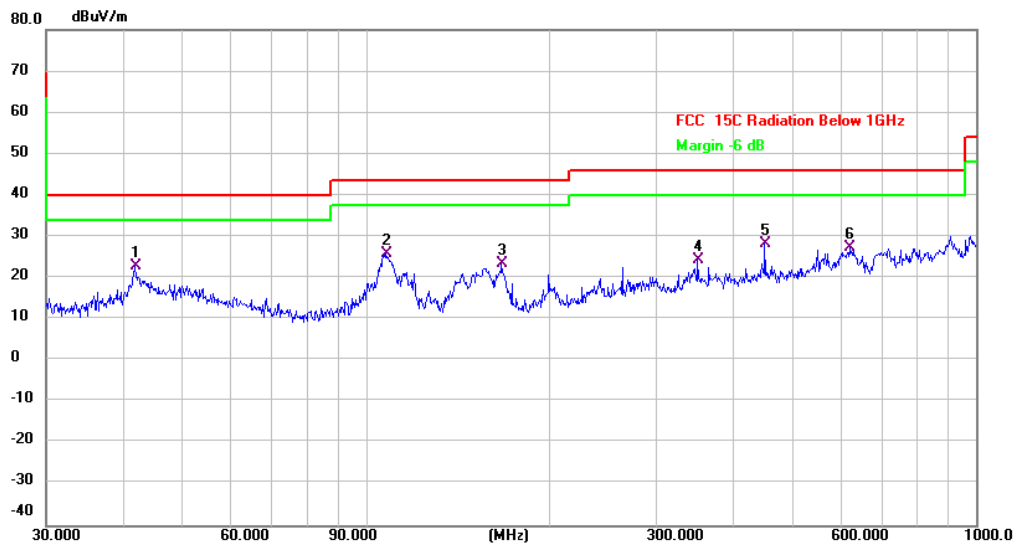


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	41.8596	30.79	-7.99	22.80	40.00	-17.20	QP	
2		107.8877	33.00	-7.28	25.72	43.50	-17.78	QP	
3		166.6514	34.49	-11.05	23.44	43.50	-20.06	QP	
4		350.4768	29.18	-4.91	24.27	46.00	-21.73	QP	
5		451.1350	32.41	-4.18	28.23	46.00	-17.77	QP	
6		620.7096	27.80	-0.54	27.26	46.00	-18.74	QP	

6.7 Radiated emissions (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	15.9 °C	Humidity:	49.1 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1, Mode3) is recorded in the report				
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

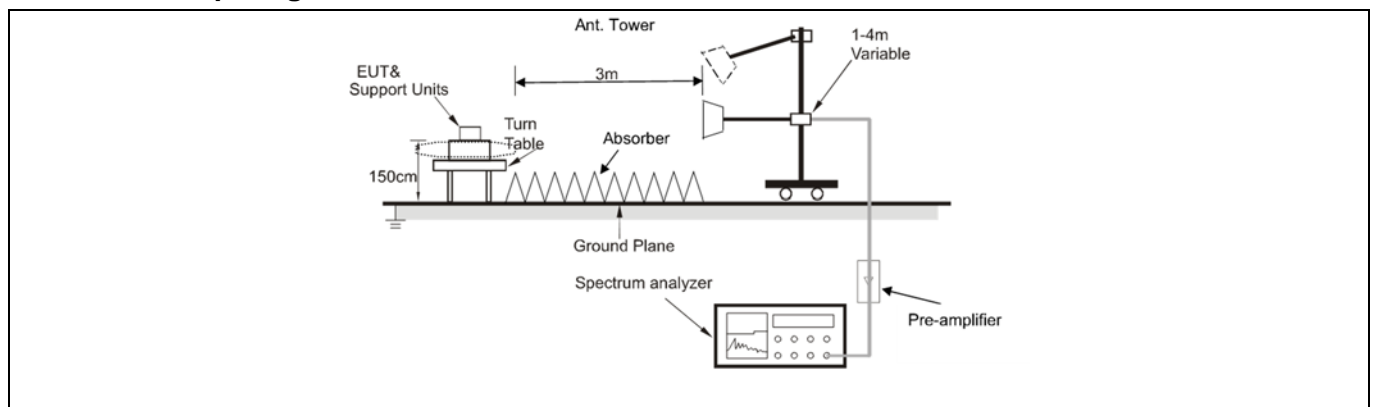6.7.2 Test Setup Diagram:


6.7.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4804.000	61.35	-7.70	53.65	74.00	-20.35	peak
2		4804.000	57.84	-7.70	50.14	54.00	-3.86	AVG
3		7206.000	56.21	0.84	57.05	74.00	-16.95	peak
4	*	7206.000	49.52	0.84	50.36	54.00	-3.64	AVG
5		9608.000	48.24	1.81	50.05	74.00	-23.95	peak
6		9608.000	44.44	1.81	46.25	54.00	-7.75	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4804.000	55.72	-7.70	48.02	74.00	-25.98	peak
2		4804.000	51.85	-7.70	44.15	54.00	-9.85	AVG
3		7206.000	52.64	0.84	53.48	74.00	-20.52	peak
4	*	7206.000	52.64	0.84	53.48	54.00	-0.52	AVG
5		9608.000	47.89	1.81	49.70	74.00	-24.30	peak
6		9608.000	47.89	1.81	49.70	54.00	-4.30	AVG

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4880.000	60.69	-7.84	52.85	74.00	-21.15	peak
2		4880.000	55.29	-7.84	47.45	54.00	-6.55	AVG
3		7320.000	53.63	0.60	54.23	74.00	-19.77	peak
4	*	7320.000	48.67	0.60	49.27	54.00	-4.73	AVG
5		9760.000	46.68	2.60	49.28	74.00	-24.72	peak
6		9760.000	42.67	2.60	45.27	54.00	-8.73	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4880.000	57.50	-7.84	49.66	74.00	-24.34	peak
2		4880.000	53.11	-7.84	45.27	54.00	-8.73	AVG
3		7320.000	51.72	0.60	52.32	74.00	-21.68	peak
4	*	7320.000	47.72	0.60	48.32	54.00	-5.68	AVG
5		9760.000	47.03	2.60	49.63	74.00	-24.37	peak
6		9760.000	42.67	2.60	45.27	54.00	-8.73	AVG

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4960.000	60.18	-7.73	52.45	74.00	-21.55	peak
2	*	4960.000	55.97	-7.73	48.24	54.00	-5.76	AVG
3		7440.000	50.43	0.78	51.21	74.00	-22.79	peak
4		7440.000	46.38	0.78	47.16	54.00	-6.84	AVG
5		9920.000	47.87	2.47	50.34	74.00	-23.66	peak
6		9920.000	43.78	2.47	46.25	54.00	-7.75	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4960.000	57.63	-7.73	49.90	74.00	-24.10	peak
2		4960.000	52.88	-7.73	45.15	54.00	-8.85	AVG
3		7440.000	48.94	0.78	49.72	74.00	-24.28	peak
4		7440.000	44.58	0.78	45.36	54.00	-8.64	AVG
5		9920.000	48.22	2.47	50.69	74.00	-23.31	peak
6	*	9920.000	44.31	2.47	46.78	54.00	-7.22	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4804.000	53.38	-7.70	45.68	74.00	-28.32	peak
2		4804.000	47.97	-7.70	40.27	54.00	-13.73	AVG
3		7206.000	52.54	0.84	53.38	74.00	-20.62	peak
4	*	7206.000	47.42	0.84	48.26	54.00	-5.74	AVG
5		9608.000	47.72	1.81	49.53	74.00	-24.47	peak
6		9608.000	43.48	1.81	45.29	54.00	-8.71	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4804.000	58.87	-7.70	51.17	74.00	-22.83	peak
2		4804.000	52.98	-7.70	45.28	54.00	-8.72	AVG
3		7206.000	57.01	0.84	57.85	74.00	-16.15	peak
4	*	7206.000	49.94	0.84	50.78	54.00	-3.22	AVG
5		9608.000	47.86	1.81	49.67	74.00	-24.33	peak
6		9608.000	42.44	1.81	44.25	54.00	-9.75	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4880.000	53.29	-7.84	45.45	74.00	-28.55	peak
2		4880.000	48.05	-7.84	40.21	54.00	-13.79	AVG
3		7320.000	52.03	0.60	52.63	74.00	-21.37	peak
4	*	7320.000	47.65	0.60	48.25	54.00	-5.75	AVG
5		9760.000	47.24	2.60	49.84	74.00	-24.16	peak
6		9760.000	43.69	2.60	46.29	54.00	-7.71	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4880.000	60.43	-7.84	52.59	74.00	-21.41	peak
2	*	4880.000	55.10	-7.84	47.26	54.00	-6.74	AVG
3		7320.000	52.36	0.60	52.96	74.00	-21.04	peak
4		7320.000	45.68	0.60	46.28	54.00	-7.72	AVG
5		9760.000	46.86	2.60	49.46	74.00	-24.54	peak
6		9760.000	41.66	2.60	44.26	54.00	-9.74	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4960.000	56.27	-7.73	48.54	74.00	-25.46	peak
2		4960.000	51.85	-7.73	44.12	54.00	-9.88	AVG
3		7440.000	49.55	0.78	50.33	74.00	-23.67	peak
4	*	7440.000	45.37	0.78	46.15	54.00	-7.85	AVG
5		9920.000	48.53	2.47	51.00	74.00	-23.00	peak
6		9920.000	42.76	2.47	45.23	54.00	-8.77	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4960.000	60.71	-7.73	52.98	74.00	-21.02	peak
2	*	4960.000	55.90	-7.73	48.17	54.00	-5.83	AVG
3		7440.000	50.47	0.78	51.25	74.00	-22.75	peak
4		7440.000	44.53	0.78	45.31	54.00	-8.69	AVG
5		9920.000	48.40	2.47	50.87	74.00	-23.13	peak
6		9920.000	42.71	2.47	45.18	54.00	-8.82	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Photographs of the EUT

Refer to Appendix - EUT Photos


Appendix

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.652	0.5	PASS
	Ant2	2402	0.692	0.5	PASS
	Ant1	2440	0.728	0.5	PASS
	Ant2	2440	0.668	0.5	PASS
	Ant1	2480	0.700	0.5	PASS
	Ant2	2480	0.728	0.5	PASS
BLE_2M	Ant1	2402	1.160	0.5	PASS
	Ant2	2402	1.232	0.5	PASS
	Ant1	2440	1.016	0.5	PASS
	Ant2	2440	1.136	0.5	PASS
	Ant1	2480	1.128	0.5	PASS
	Ant2	2480	1.128	0.5	PASS

Test Graphs

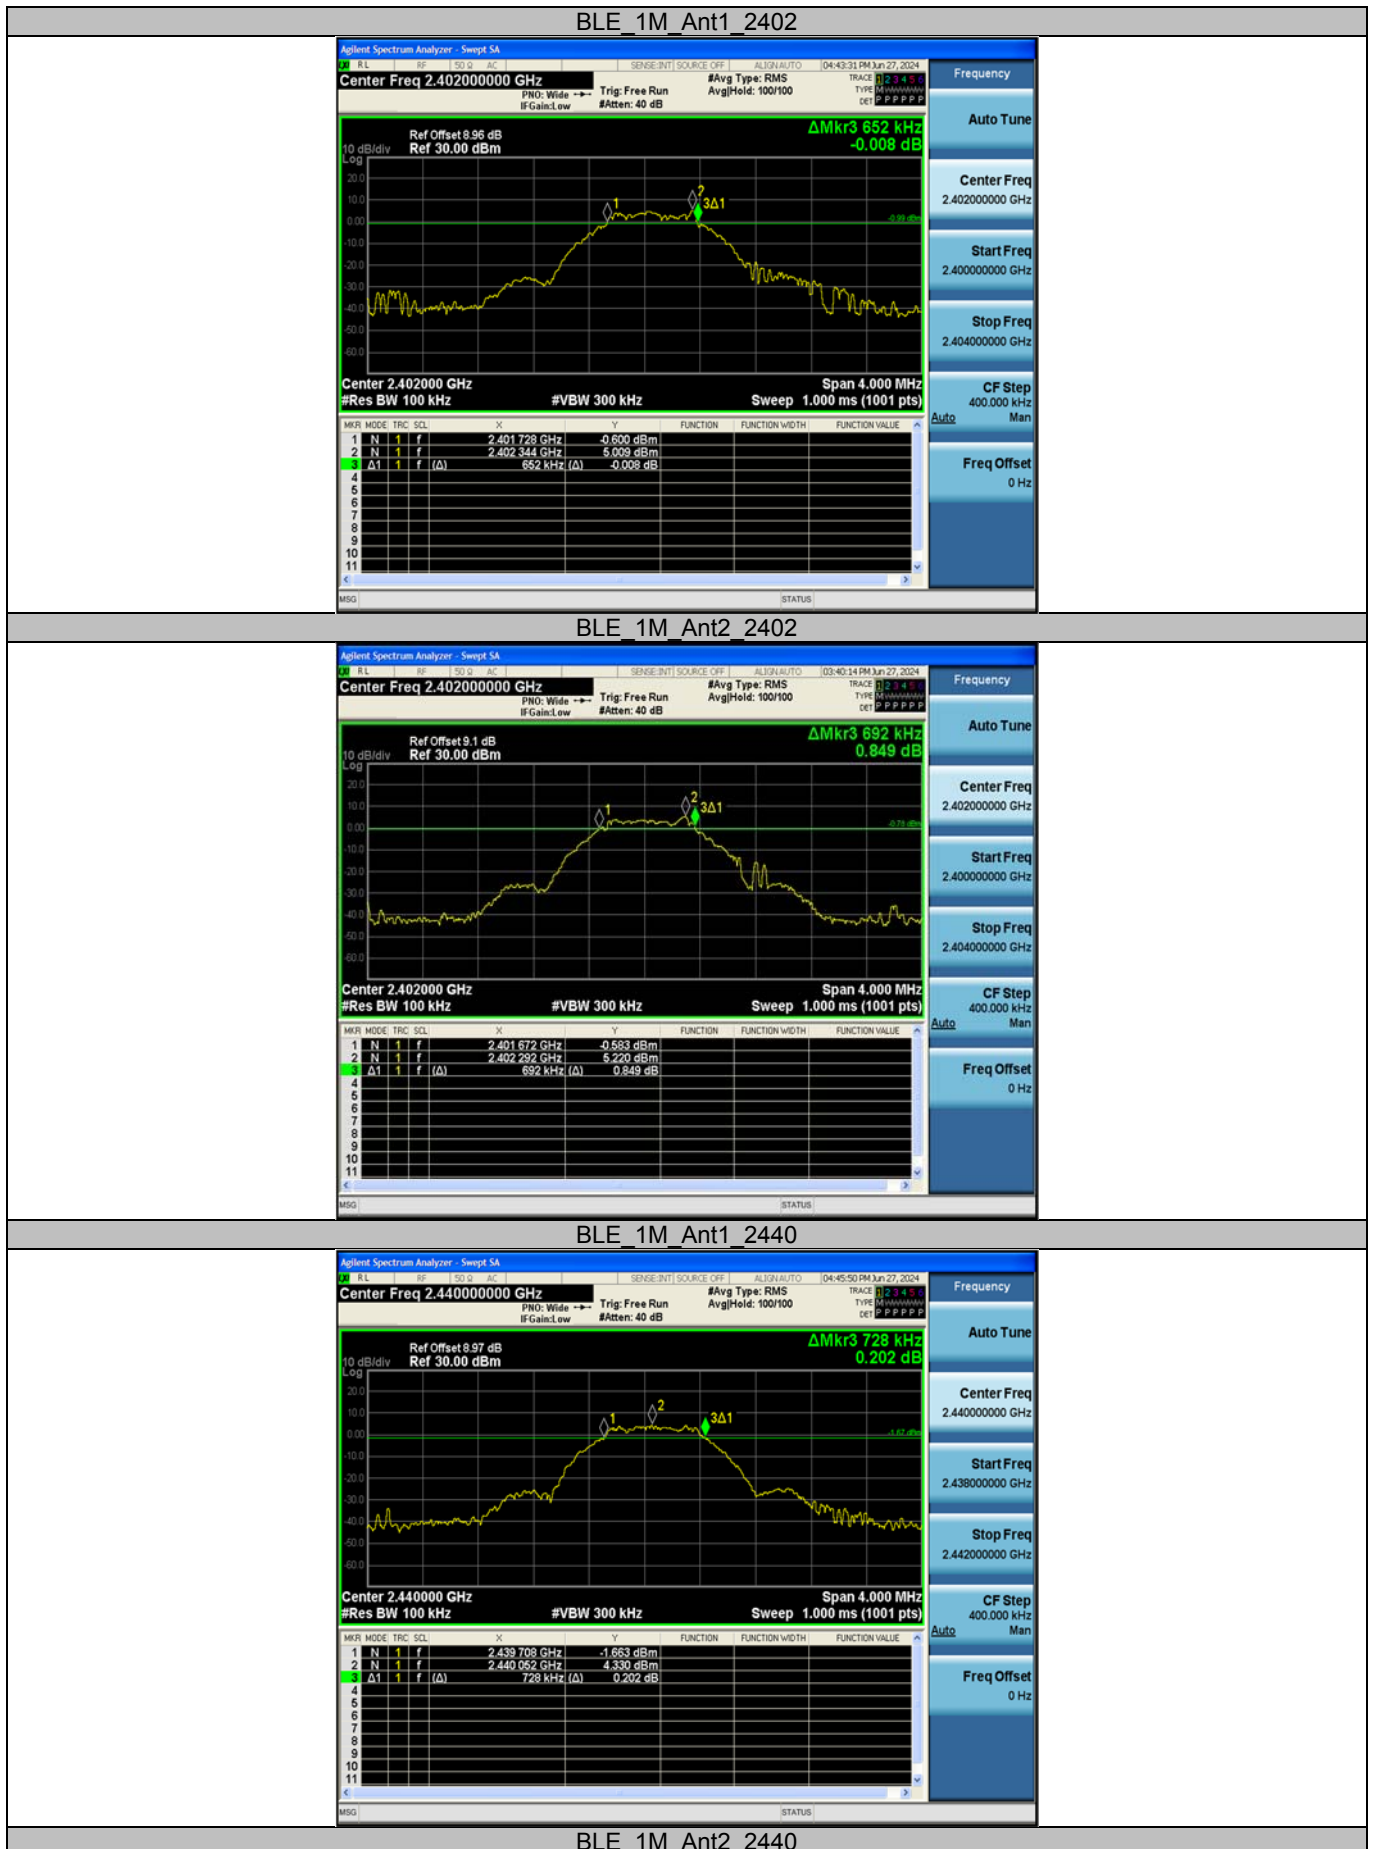





BLE_2M_Ant2_2402



BLE_2M_Ant1_2440



BLE_2M_Ant2_2440





Appendix B: Maximum conducted output power

Test Result-Peak


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	5.79	≤30	PASS
	Ant2	2402	5.45	≤30	PASS
	Ant1	2440	5.61	≤30	PASS
	Ant2	2440	5.49	≤30	PASS
	Ant1	2480	4.83	≤30	PASS
	Ant2	2480	5.02	≤30	PASS
BLE_2M	Ant1	2402	5.80	≤30	PASS
	Ant2	2402	5.41	≤30	PASS
	Ant1	2440	5.59	≤30	PASS
	Ant2	2440	5.50	≤30	PASS
	Ant1	2480	4.81	≤30	PASS
	Ant2	2480	4.99	≤30	PASS

Test Graphs

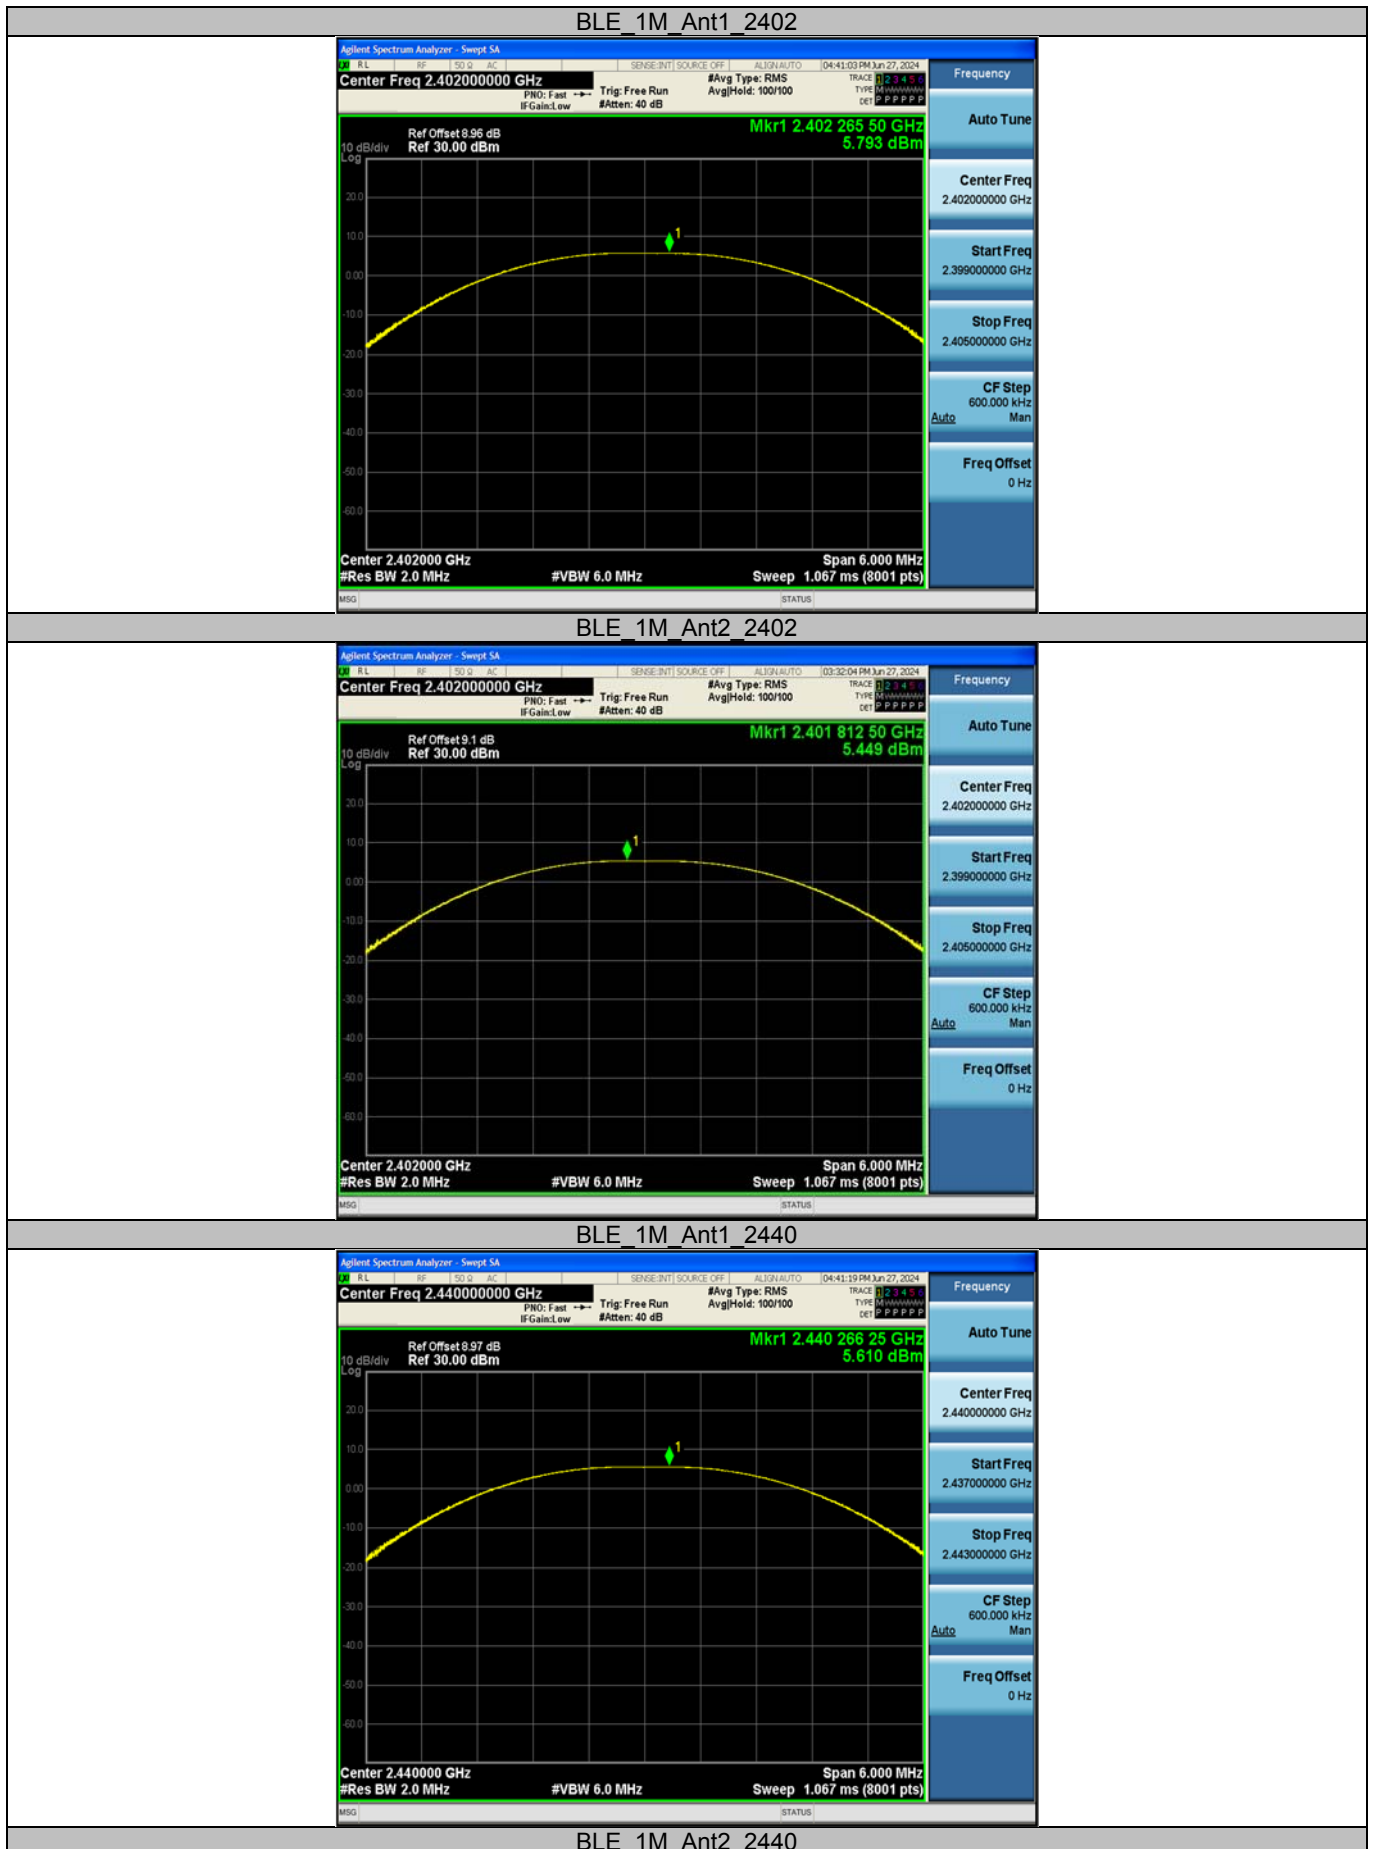


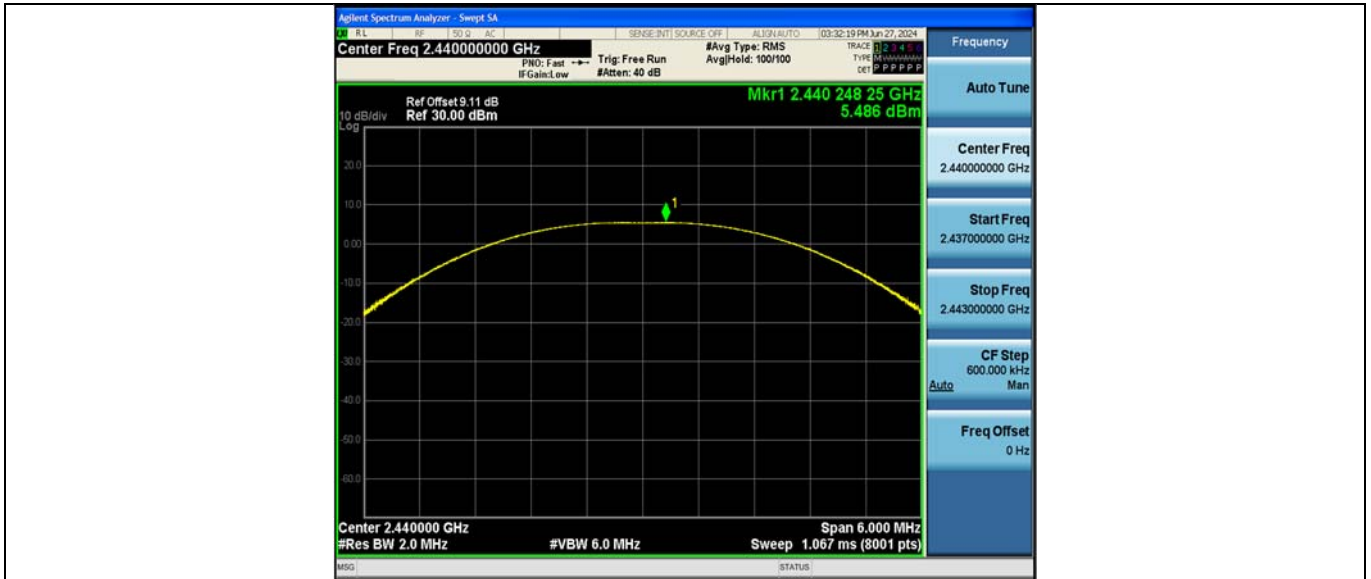

BLE_1M_Ant1_2480

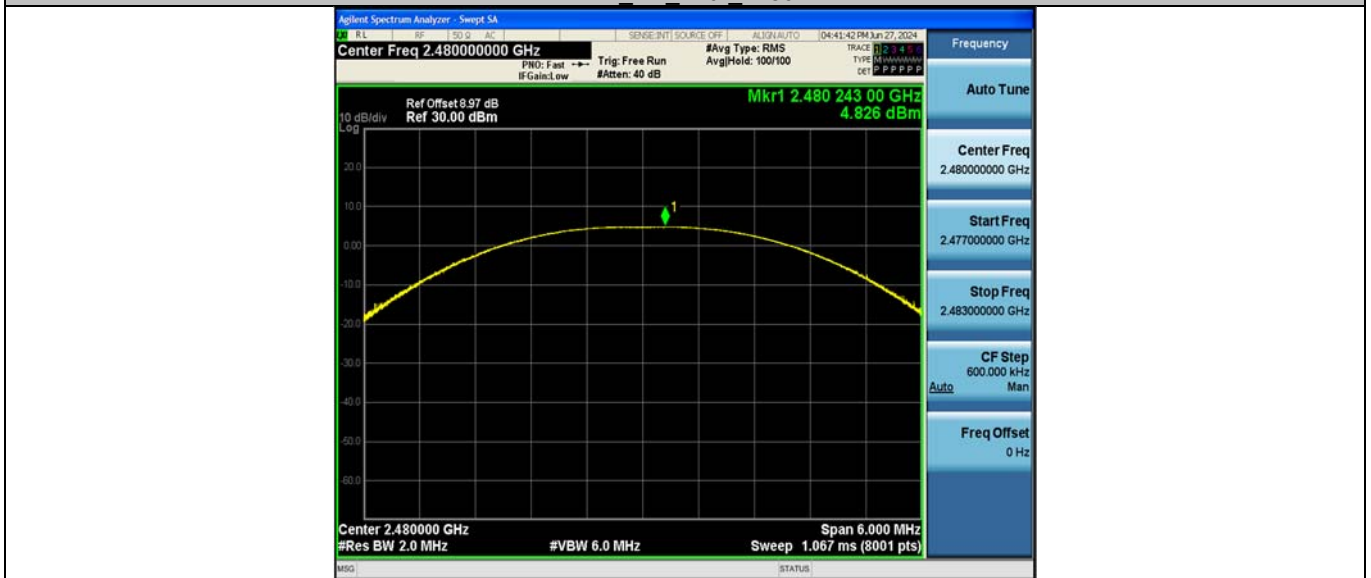


BLE_1M_Ant2_2480

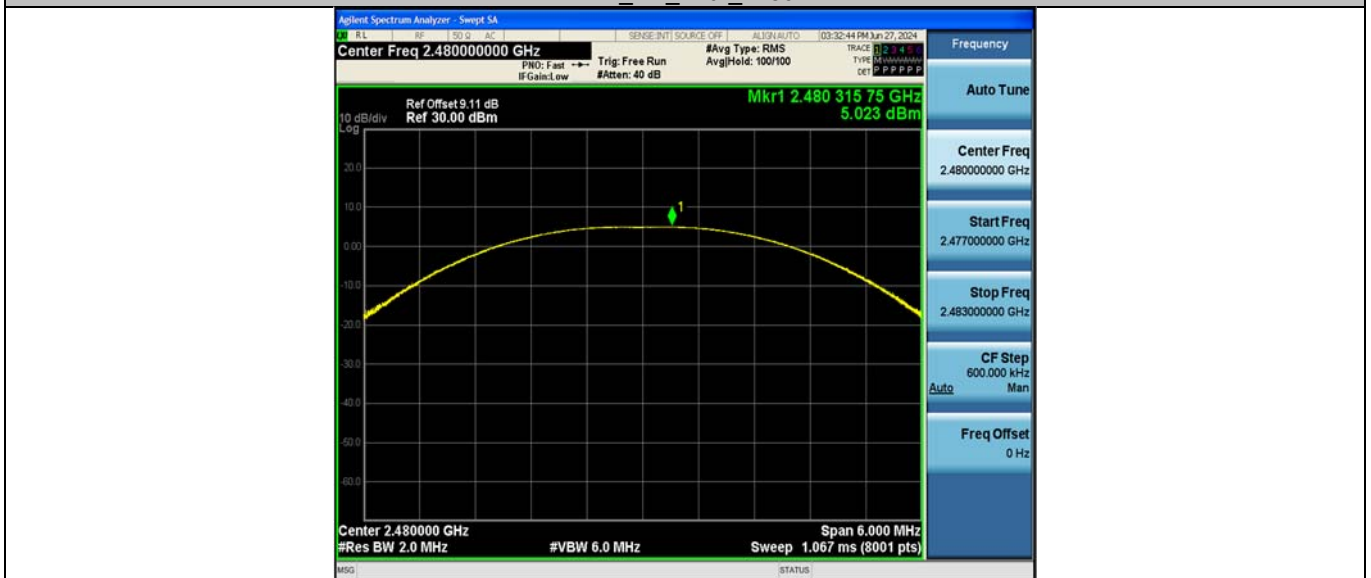


BLE_2M_Ant1_2402




BLE_2M_Ant2_2402

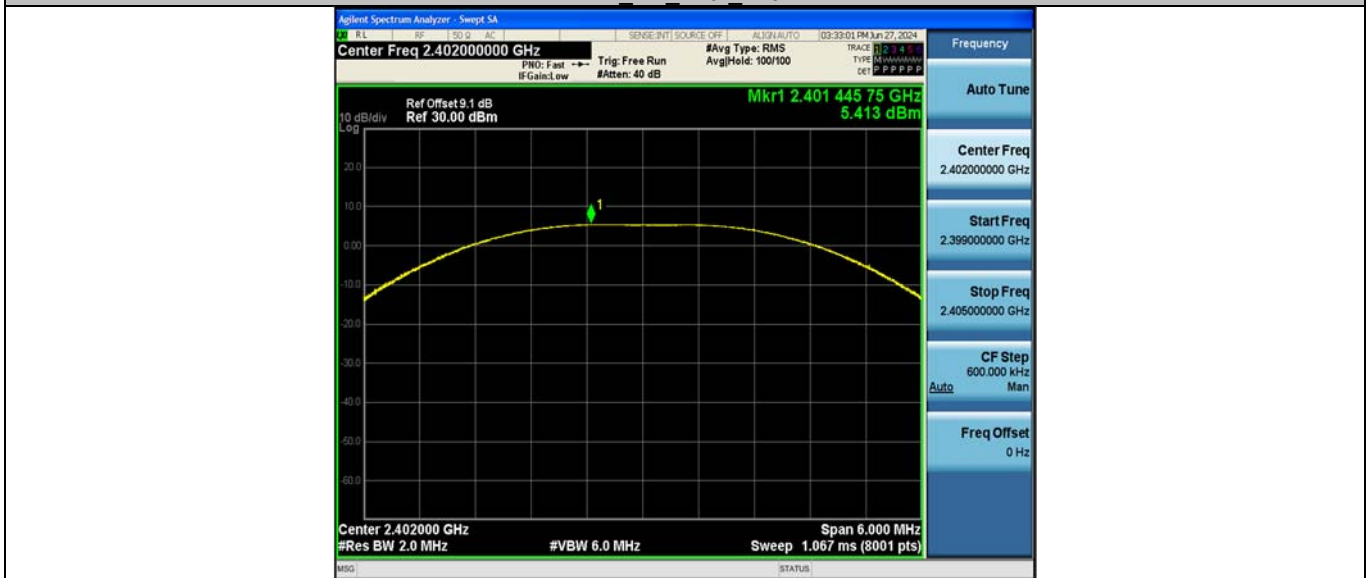


BLE_2M_Ant1_2440

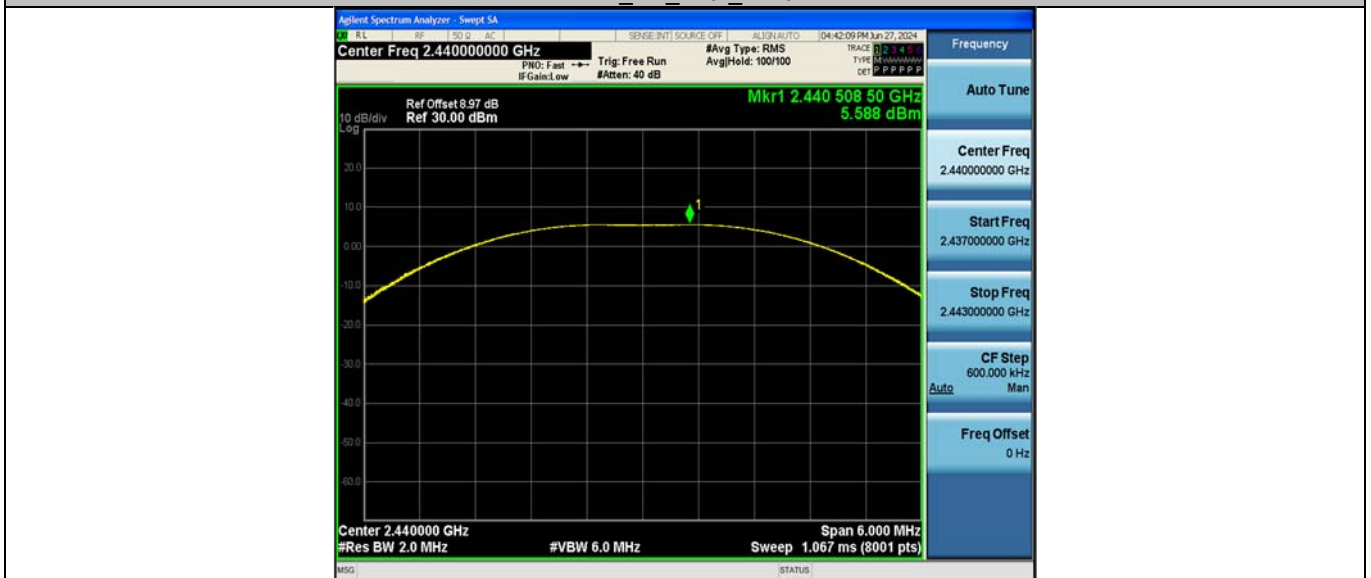


BLE_2M_Ant2_2440

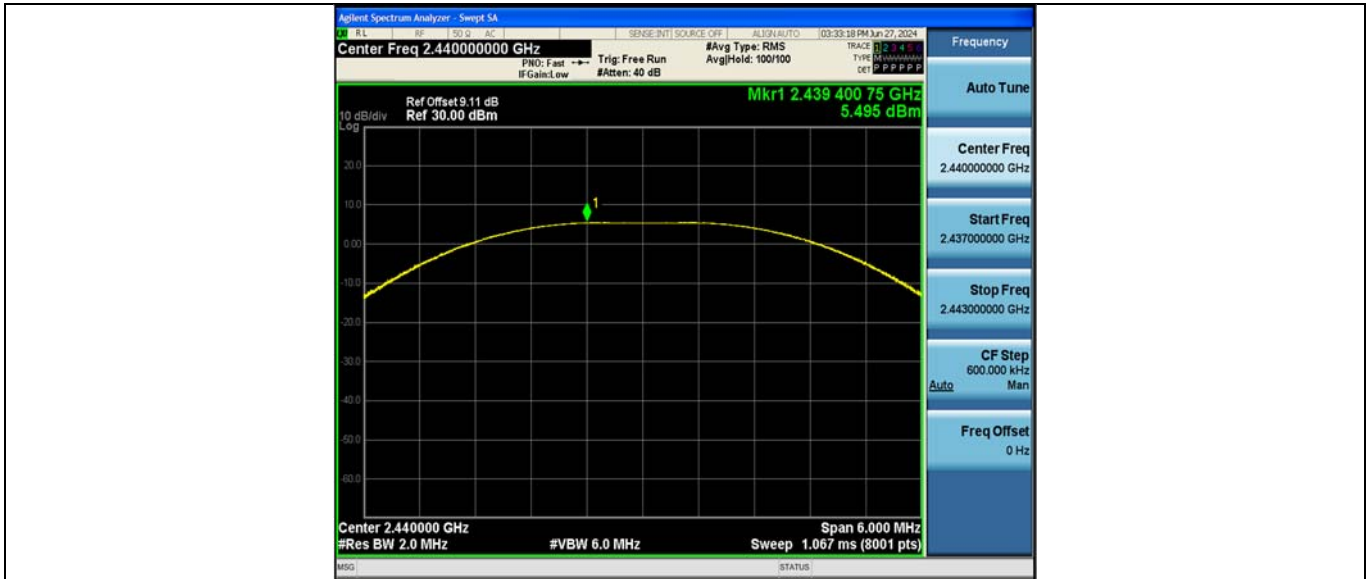

BLE_2M_Ant1_2480

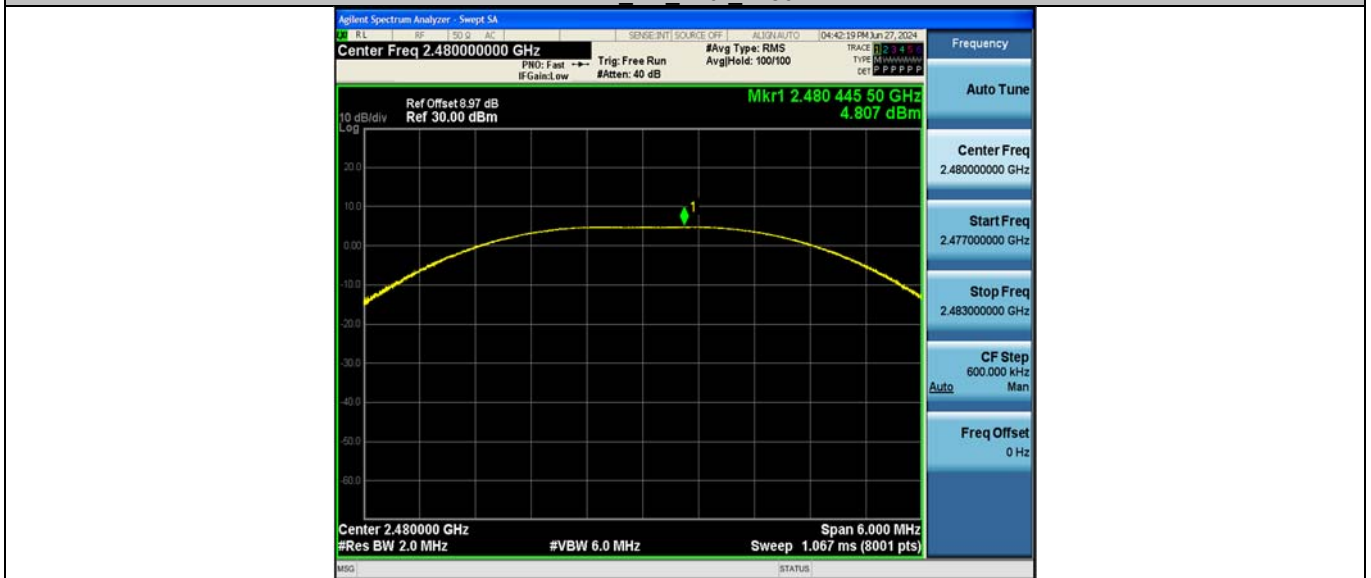

BLE_2M_Ant2_2480

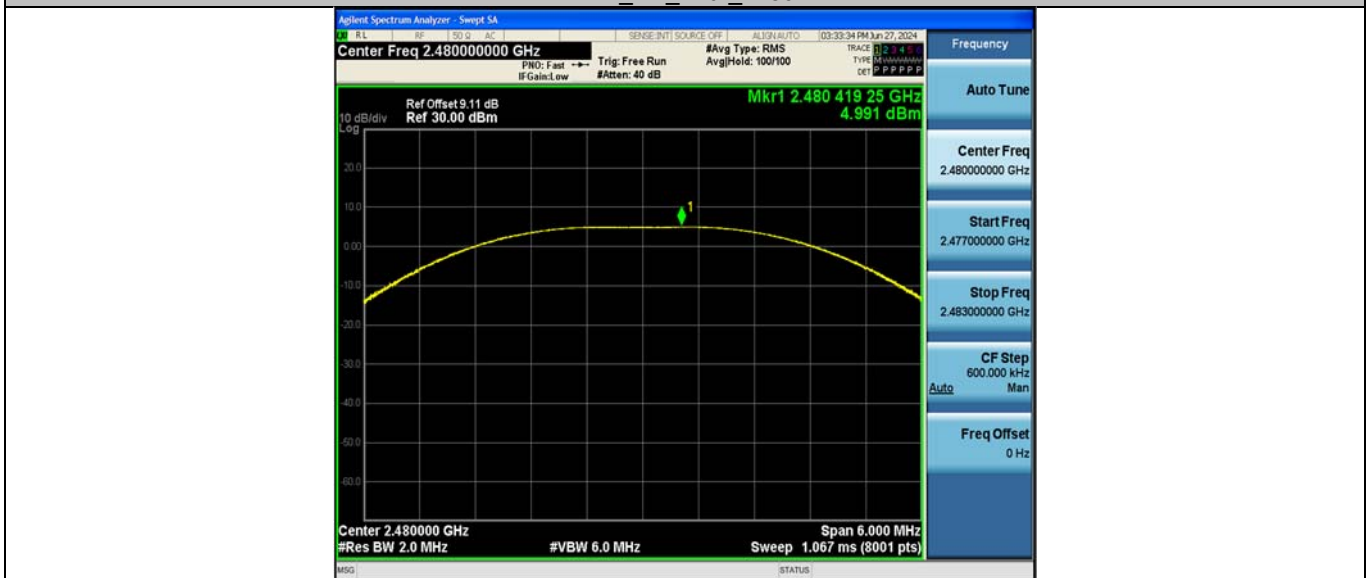


Appendix C: Maximum power spectral density

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.22	≤8.00	PASS
	Ant2	2402	-9.71	≤8.00	PASS
	Ant1	2440	-9.61	≤8.00	PASS
	Ant2	2440	-9.56	≤8.00	PASS
	Ant1	2480	-10.06	≤8.00	PASS
	Ant2	2480	-10.18	≤8.00	PASS
BLE_2M	Ant1	2402	-11.10	≤8.00	PASS
	Ant2	2402	-11.28	≤8.00	PASS
	Ant1	2440	-11.33	≤8.00	PASS
	Ant2	2440	-11.30	≤8.00	PASS
	Ant1	2480	-11.91	≤8.00	PASS
	Ant2	2480	-12.00	≤8.00	PASS

Test Graphs

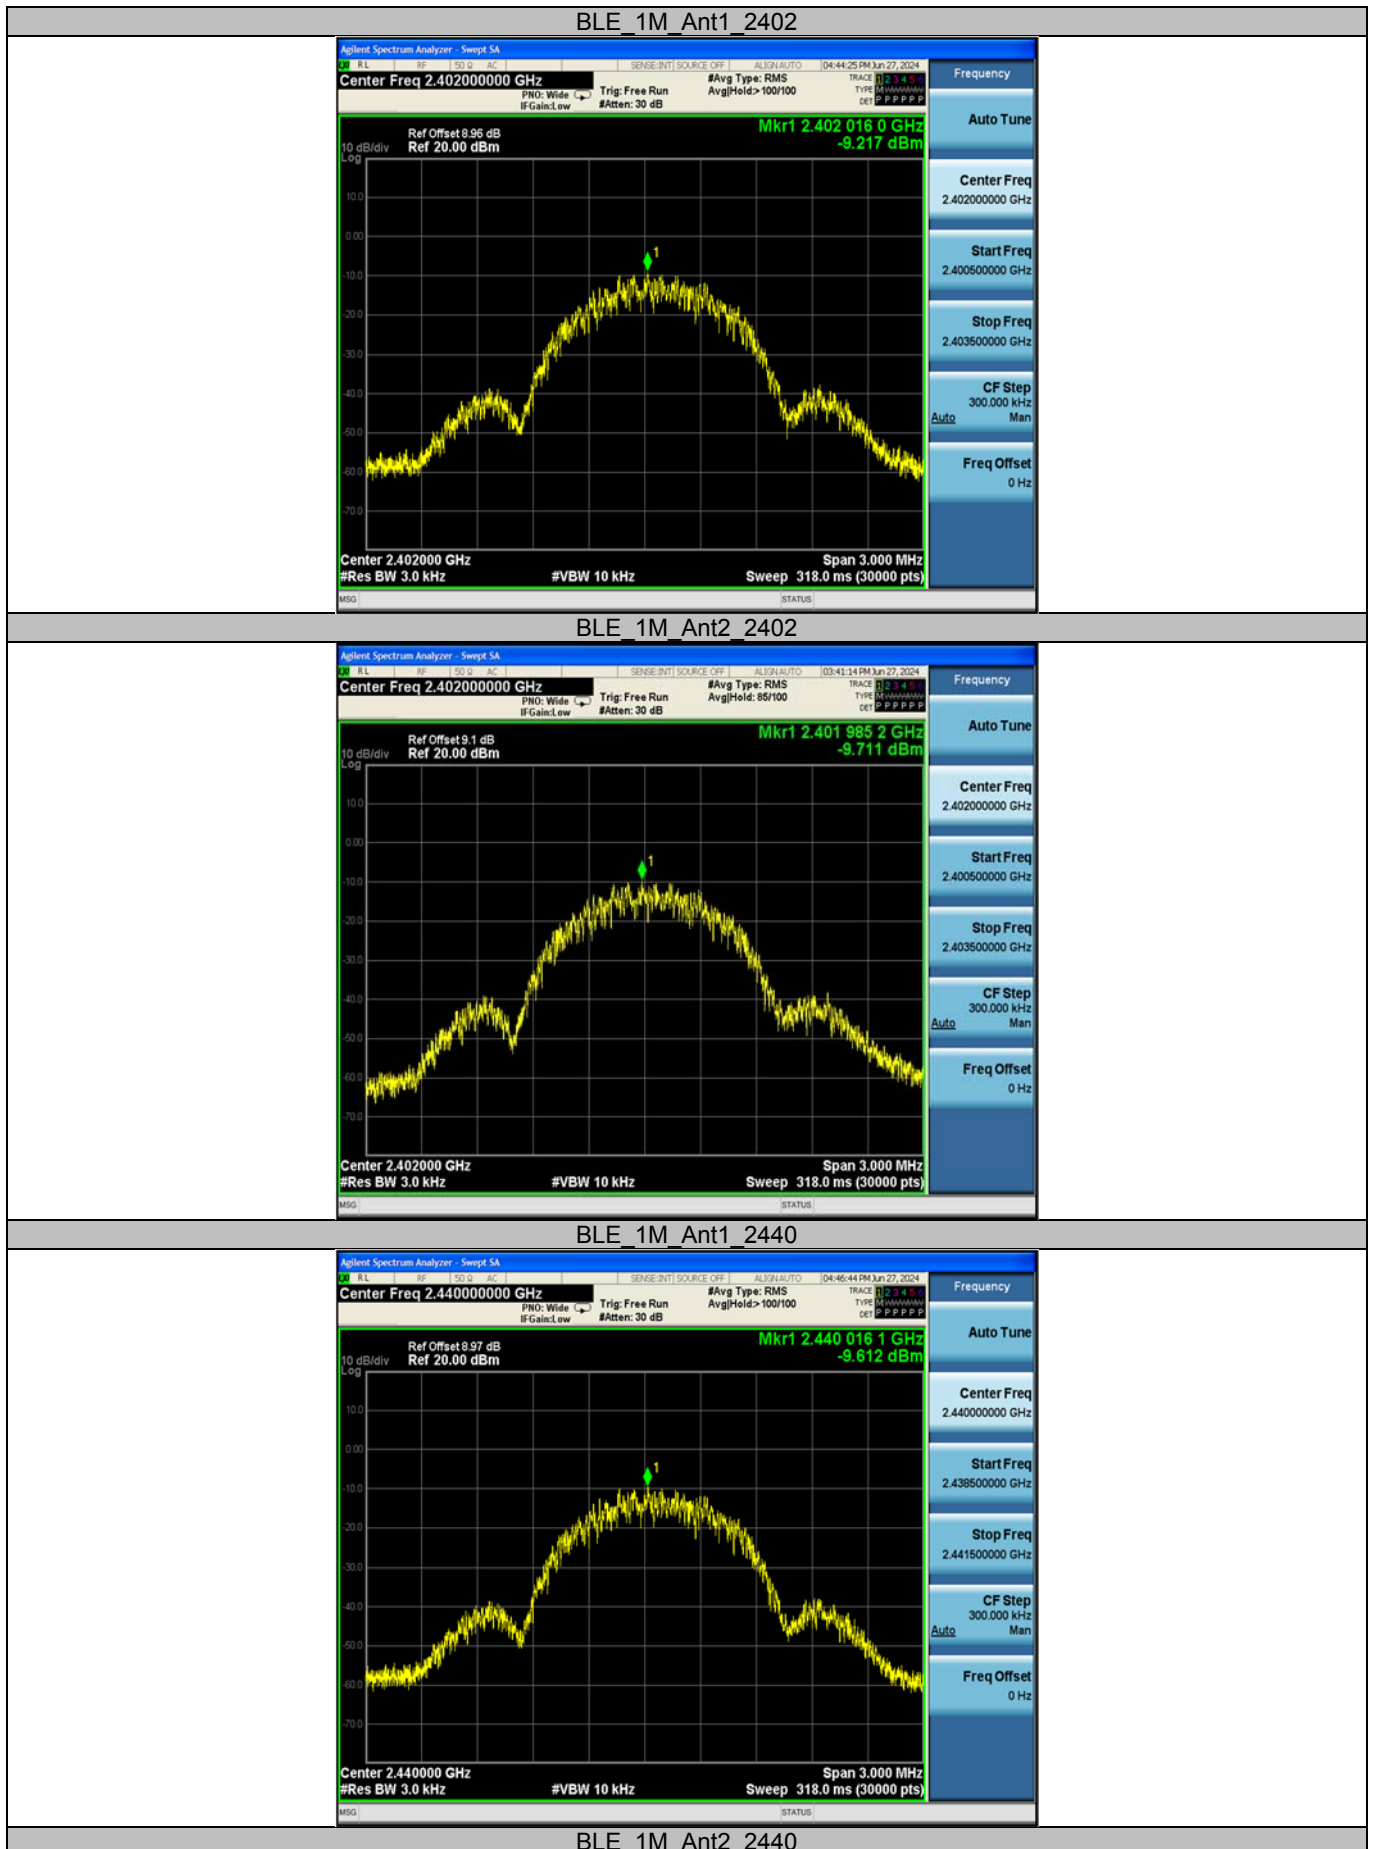




BLE_1M_Ant1_2480




BLE_1M_Ant2_2480




BLE_2M_Ant1_2402

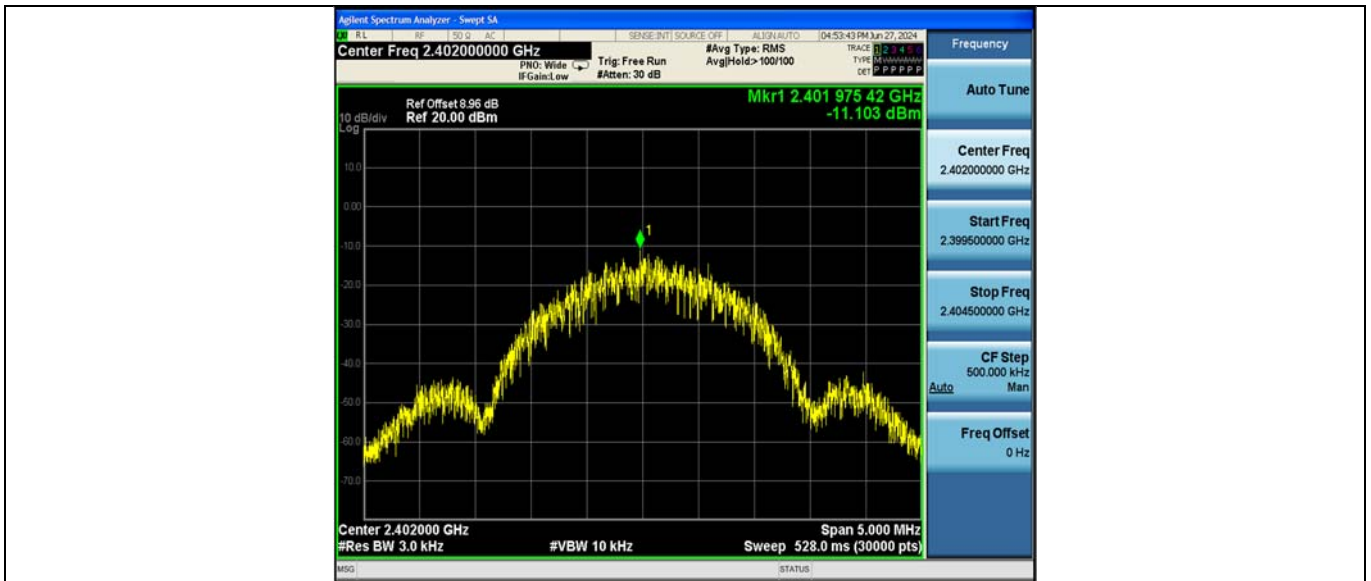


BLE_2M_Ant2_2402

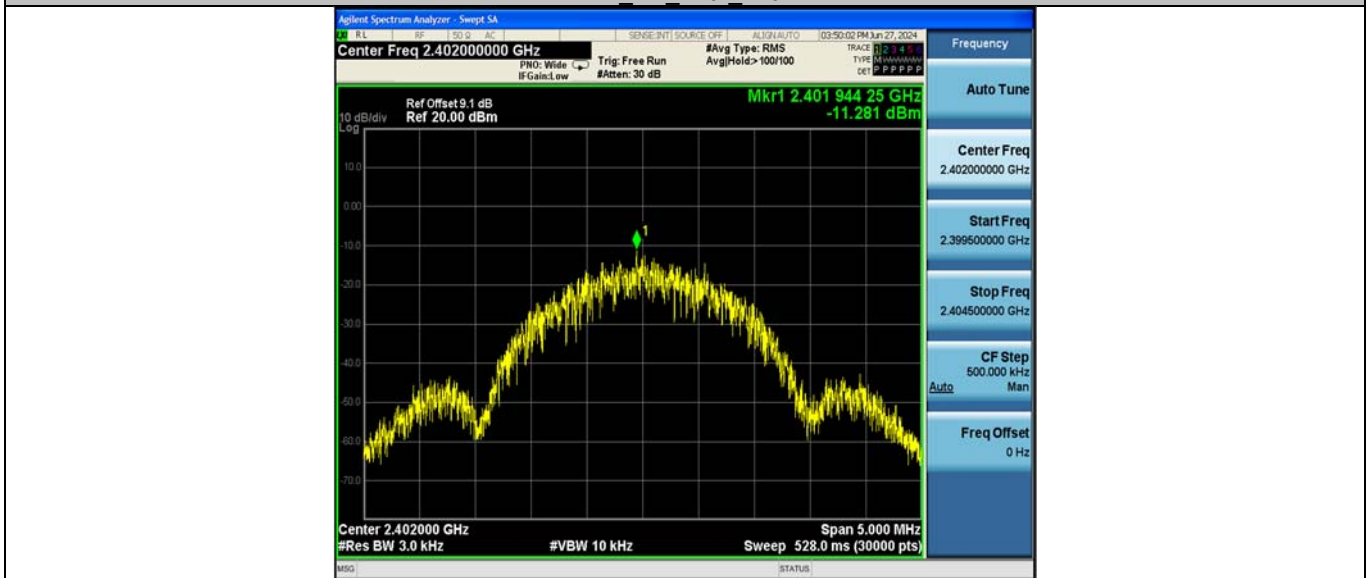


BLE_2M_Ant1_2440

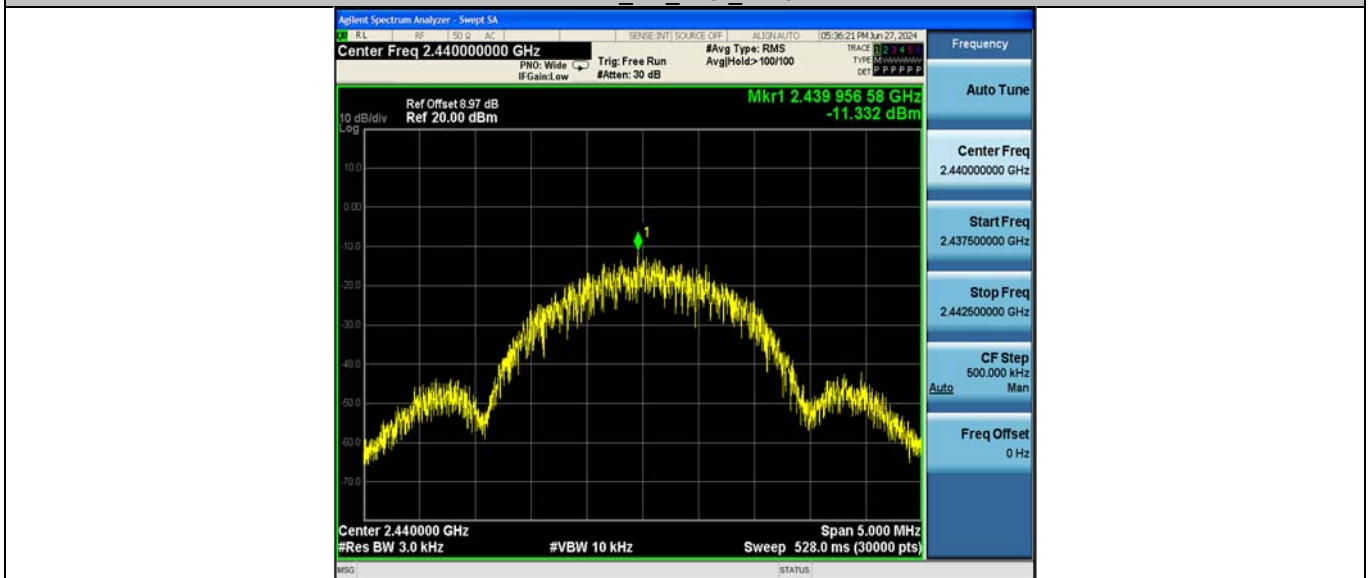


BLE_2M_Ant2_2440

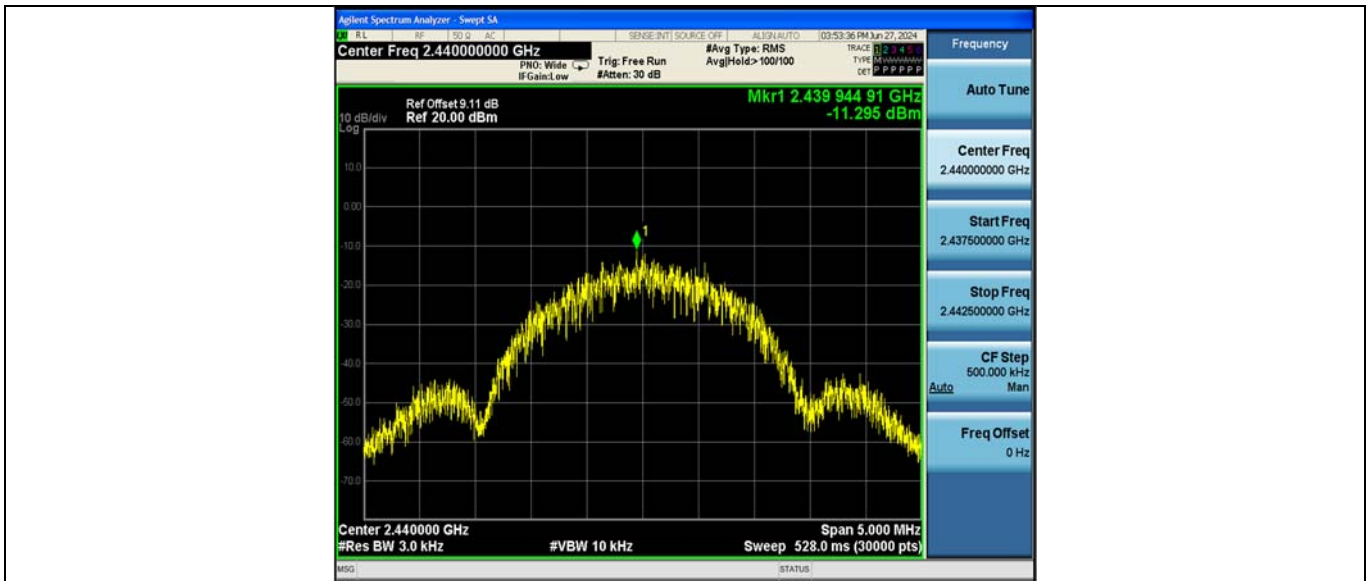

BLE_2M_Ant1_2480

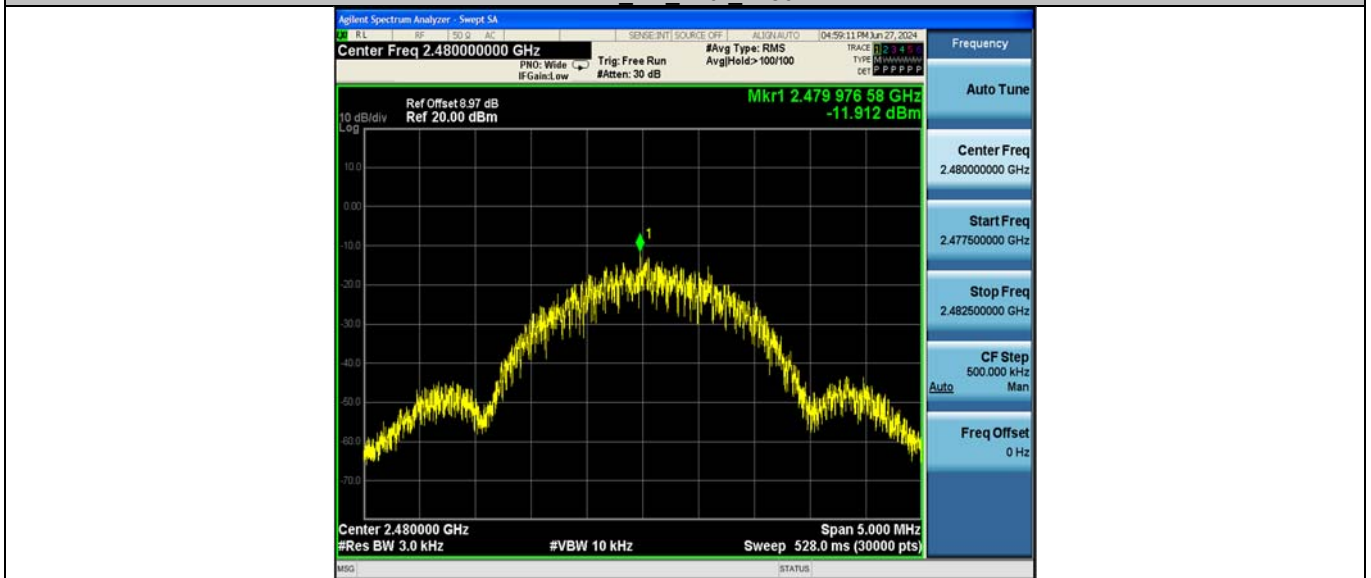




BLE_2M_Ant2_2480

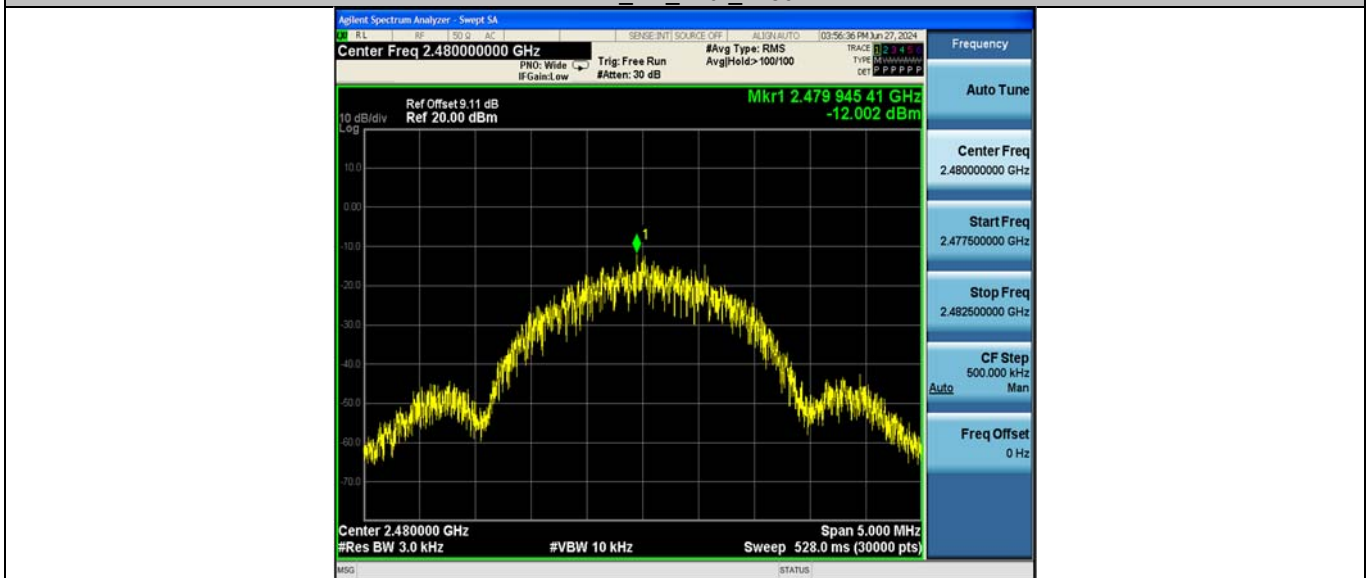


Appendix D: Band edge measurements


Test Graphs

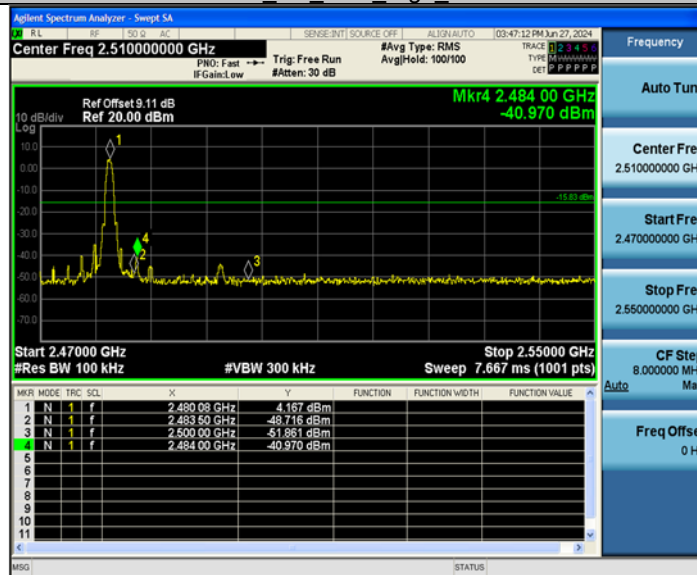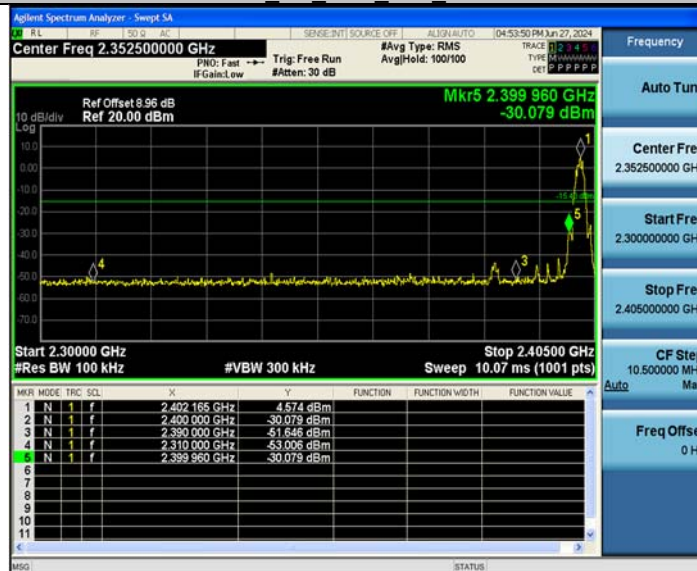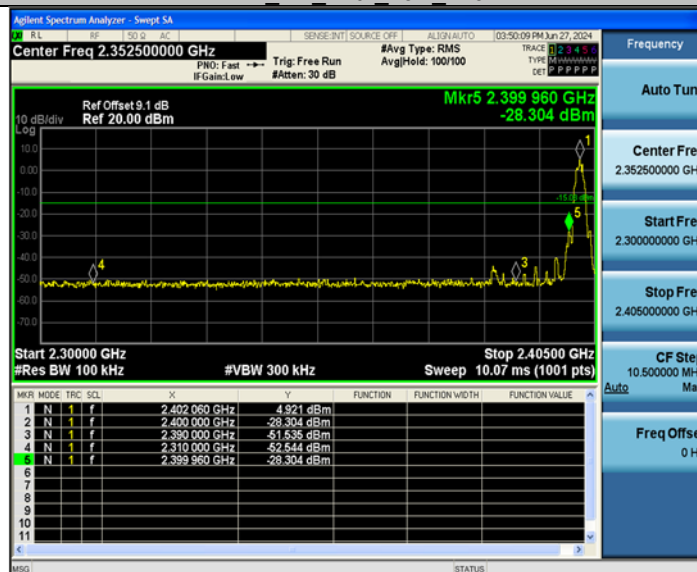

BLE 1M Ant2_High_2480

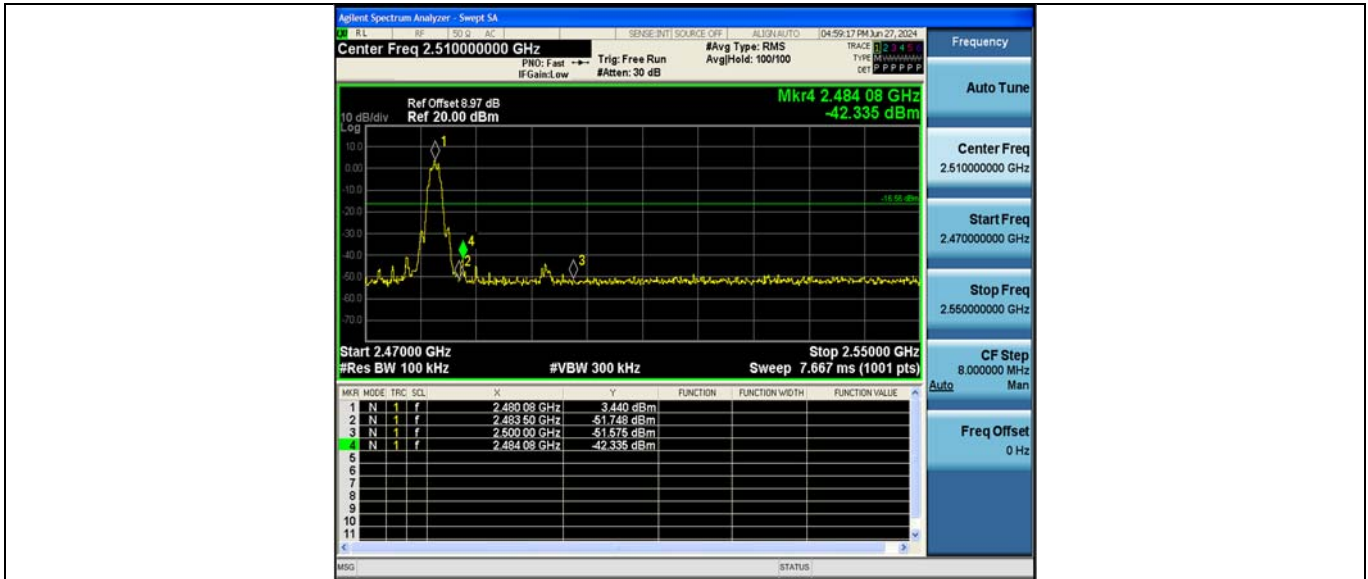BLE 2M Ant1_Low_2402

BLE 2M Ant2_Low_2402

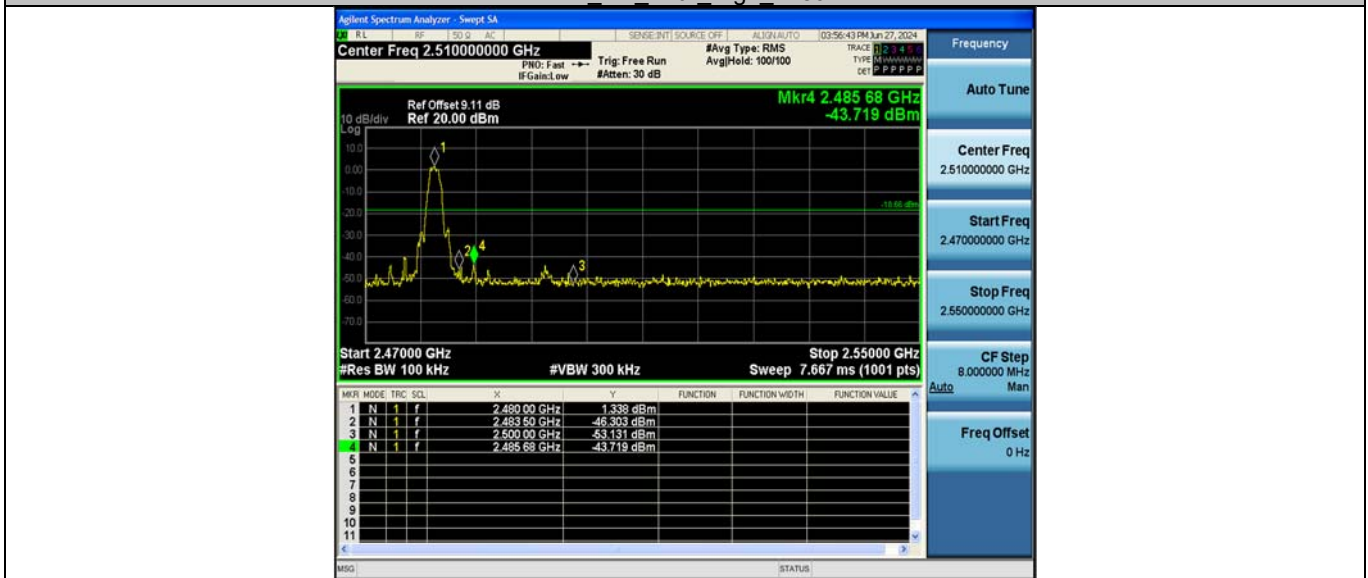BLE 2M Ant1_High_2480



BLE_2M_Ant2_High_2480





Appendix E: Conducted Spurious Emission

Test Graphs




BLE 1M Ant2 2402 0~Reference

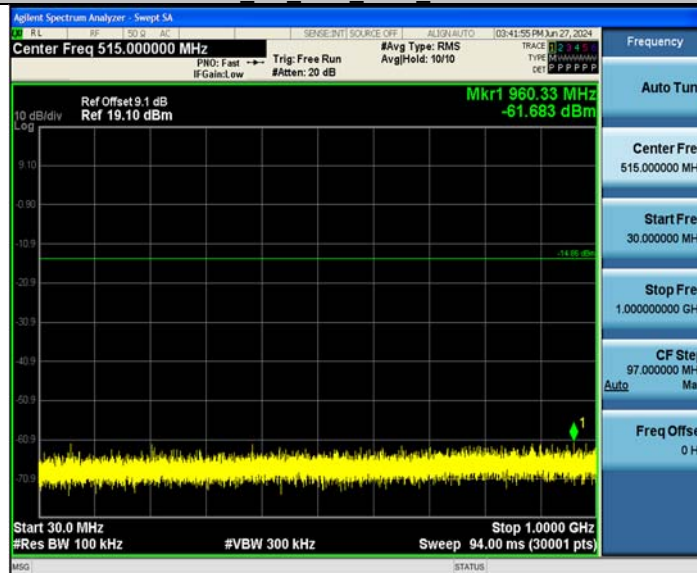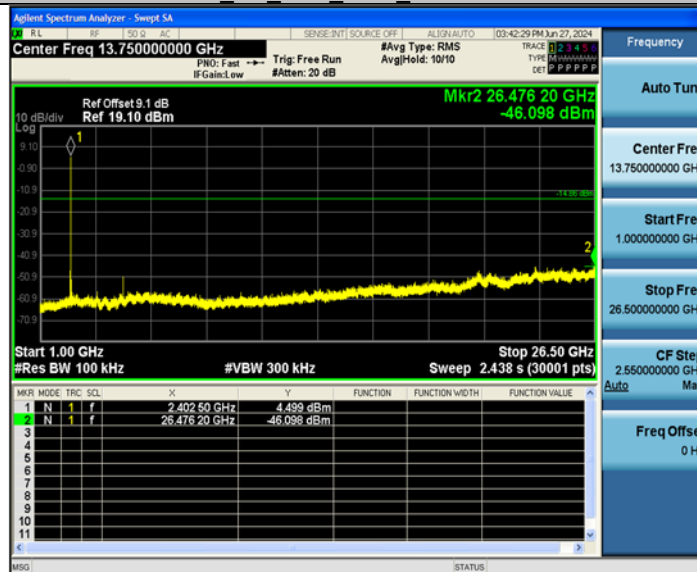
BLE 1M Ant2 2402 30~1000

BLE 1M Ant2 2402 1000~26500

BLE 1M Ant1 2440 0~Reference

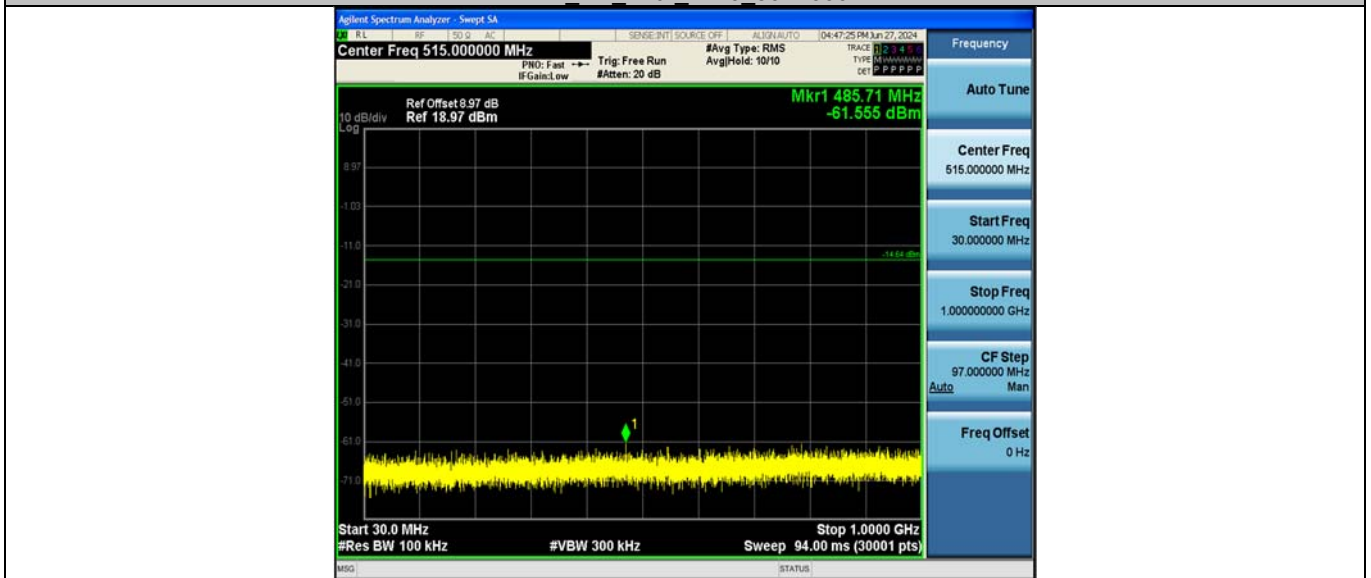

BLE_1M_Ant1_2440_30~1000

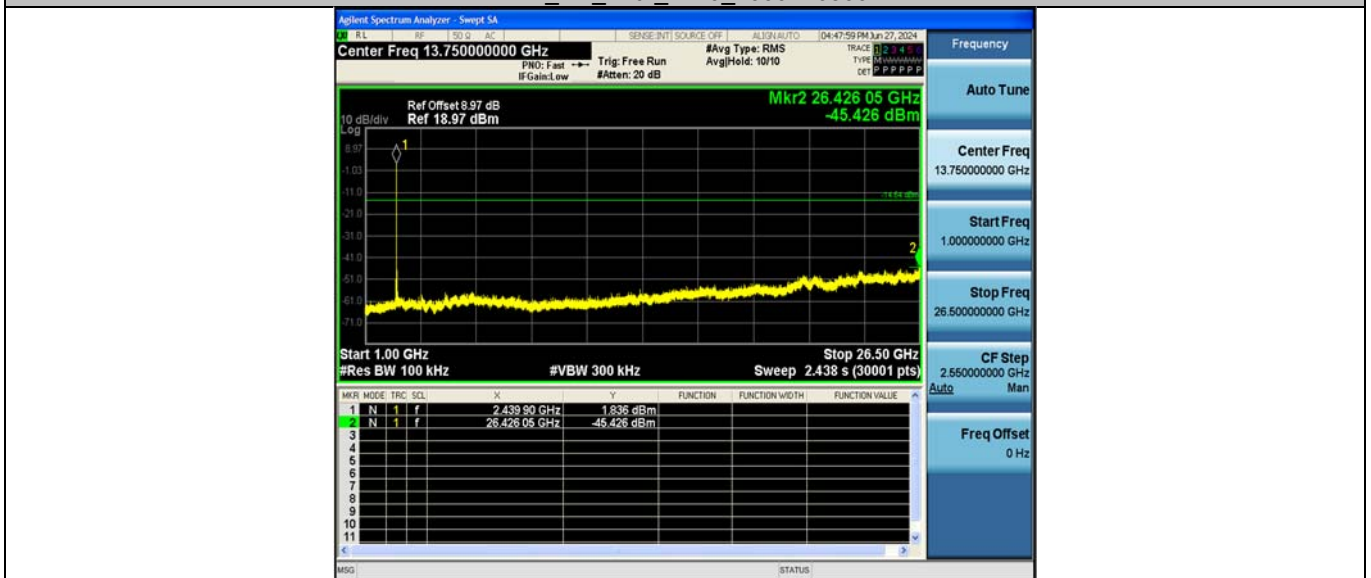


BLE_1M_Ant1_2440_1000~26500




BLE_1M_Ant2_2440_0~Reference



BLE_1M_Ant2_2440_30~1000

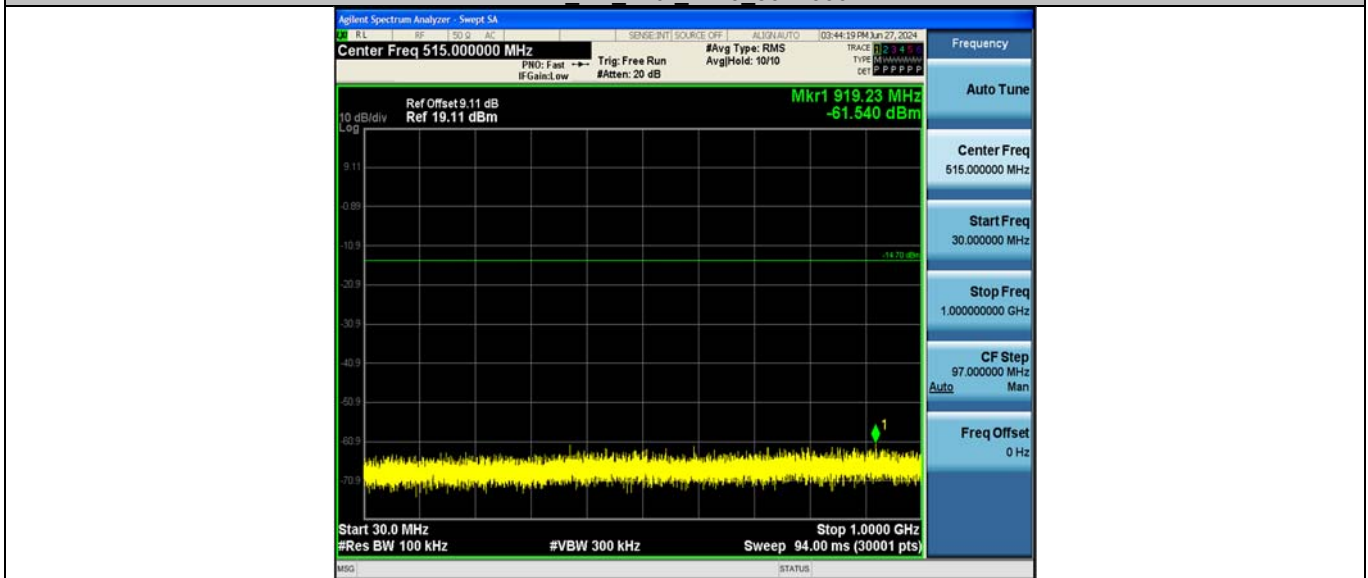


BLE_1M_Ant2_2440_1000~26500

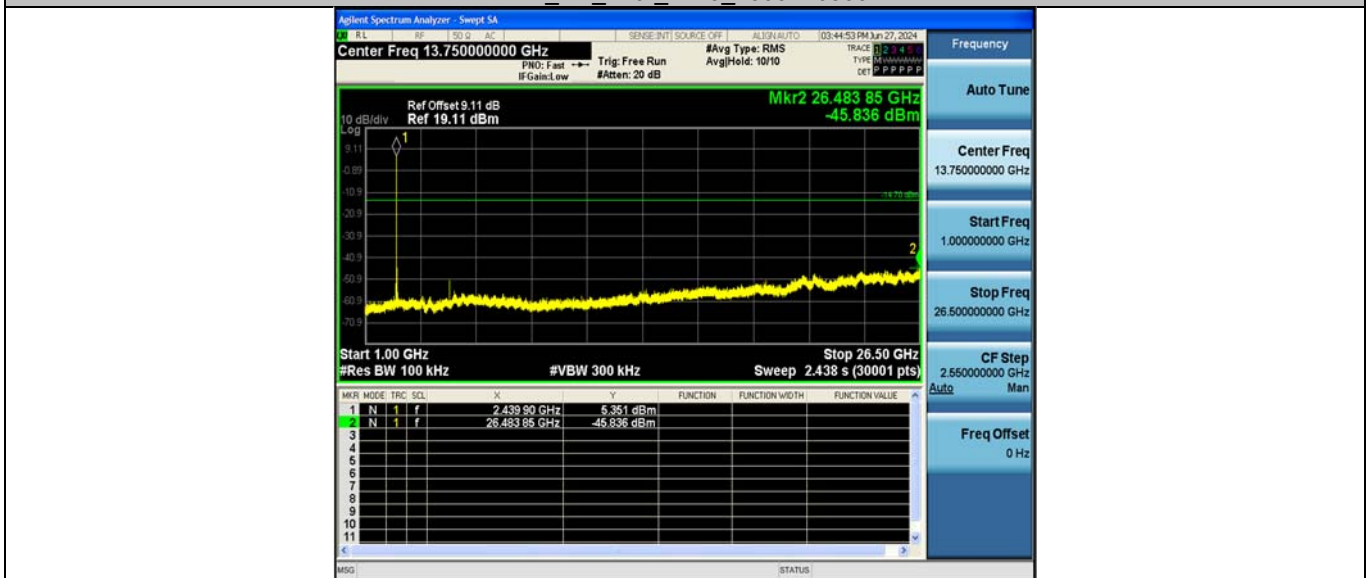


BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

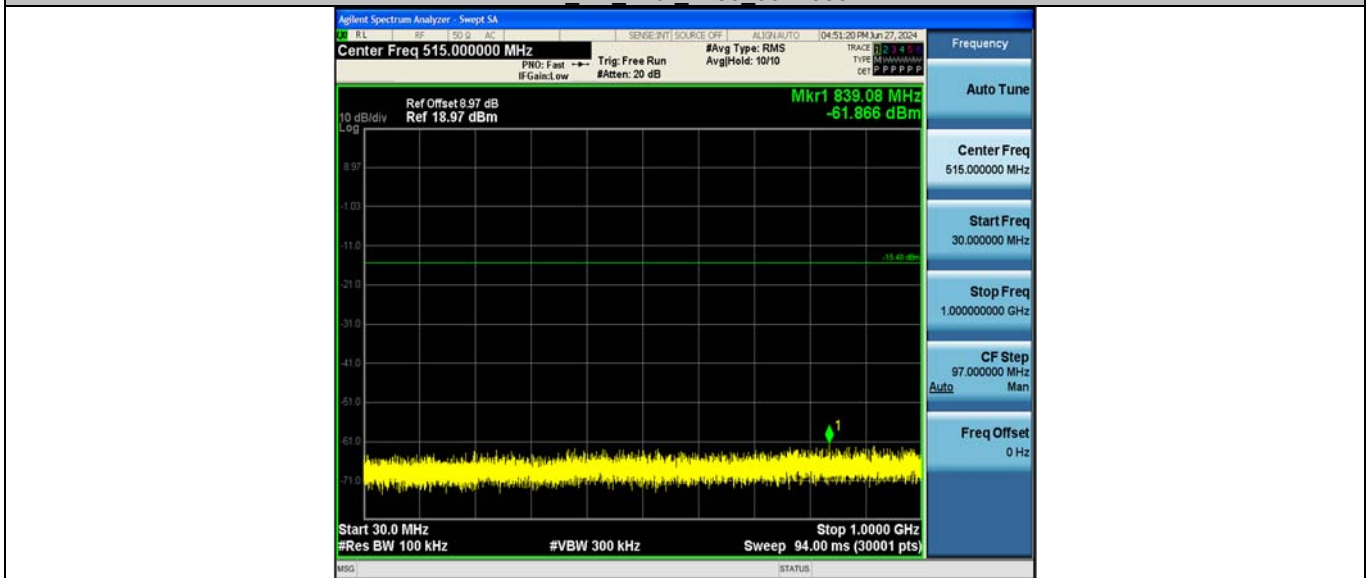


BLE_1M_Ant1_2480_1000~26500

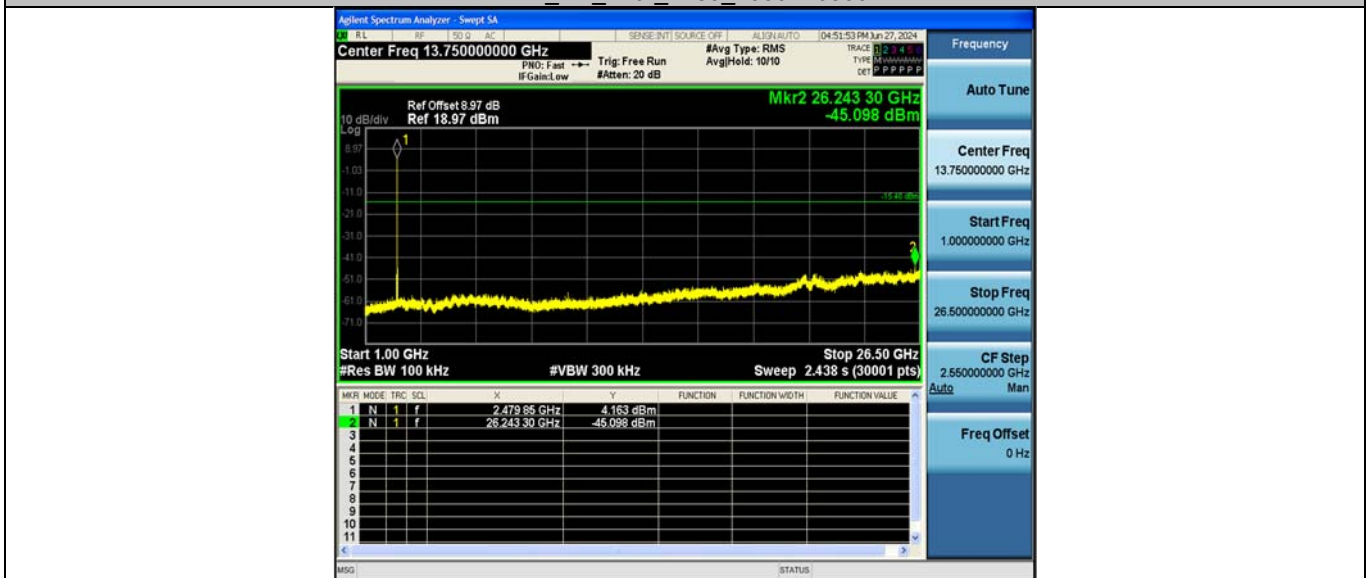


BLE_1M_Ant2_2480_0~Reference



BLE_1M_Ant2_2480_30~1000

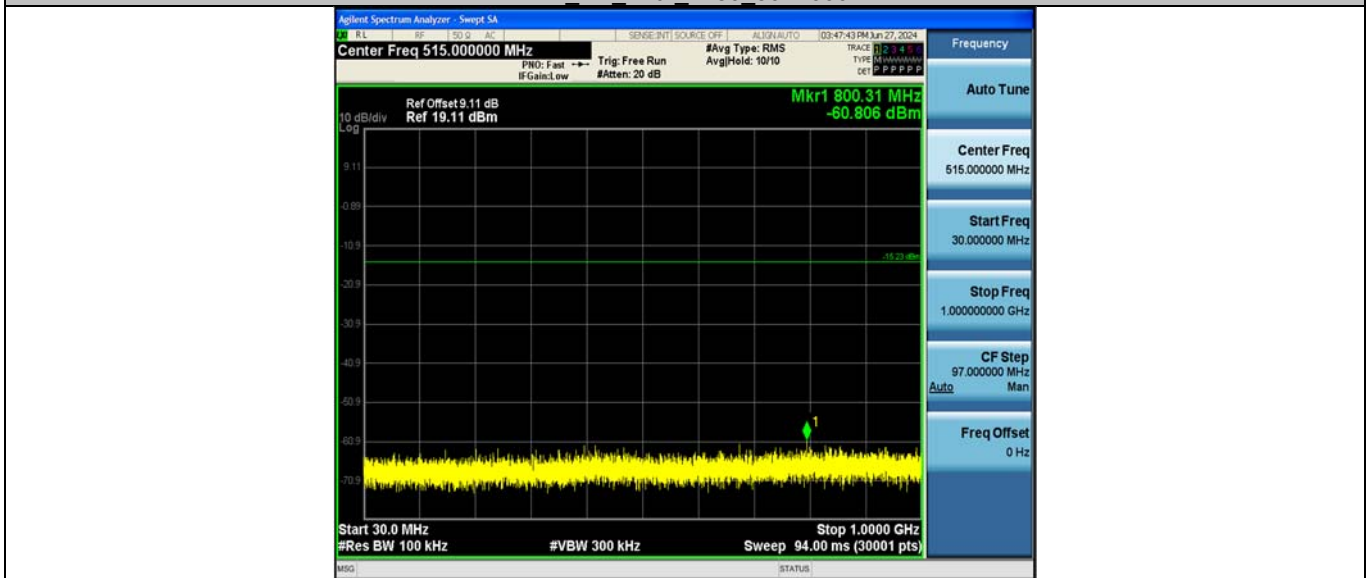


BLE_1M_Ant2_2480_1000~26500

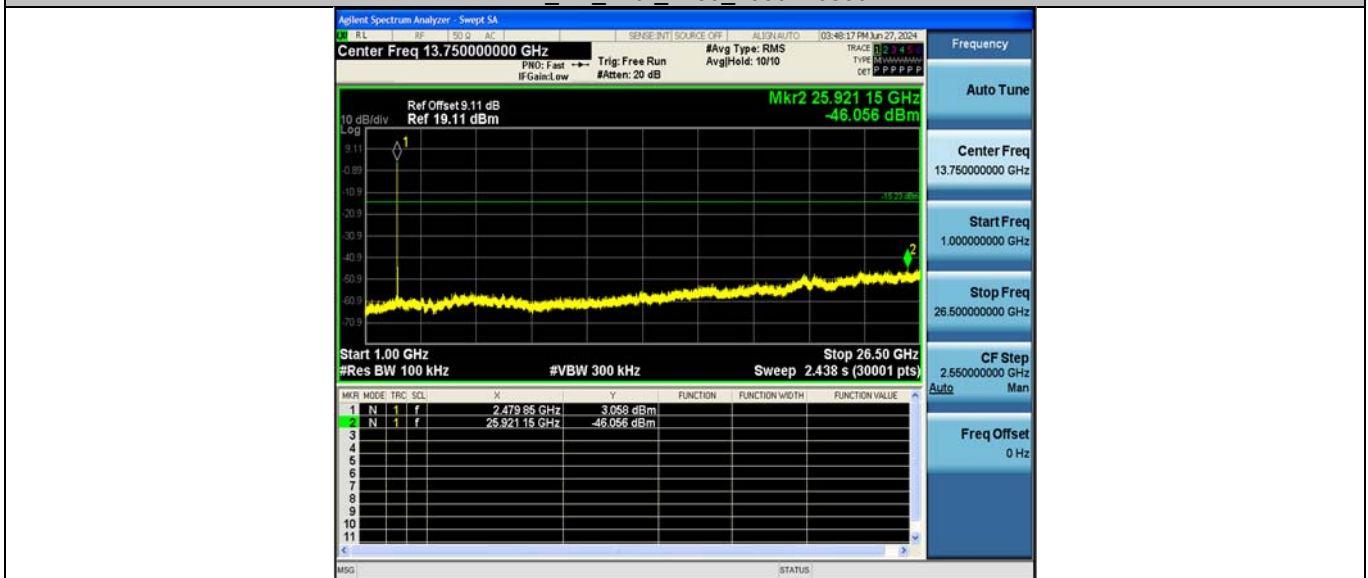


BLE_2M_Ant1_2402_0~Reference



BLE_2M_Ant1_2402_30~1000

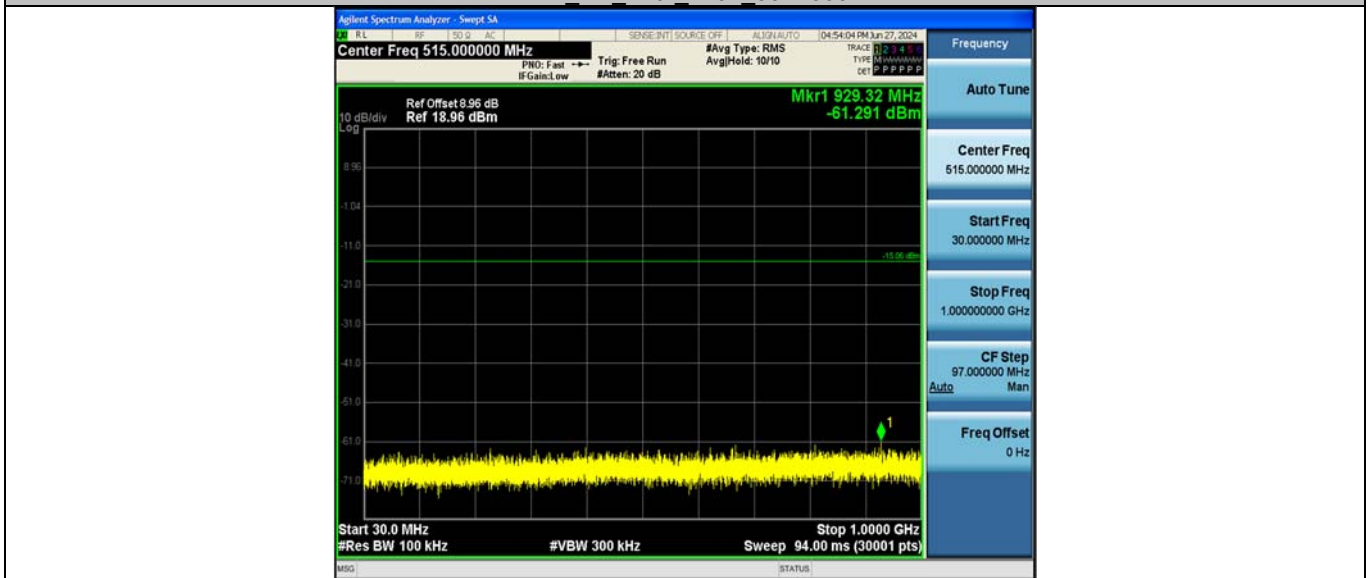

BLE_2M_Ant1_2402_1000~26500

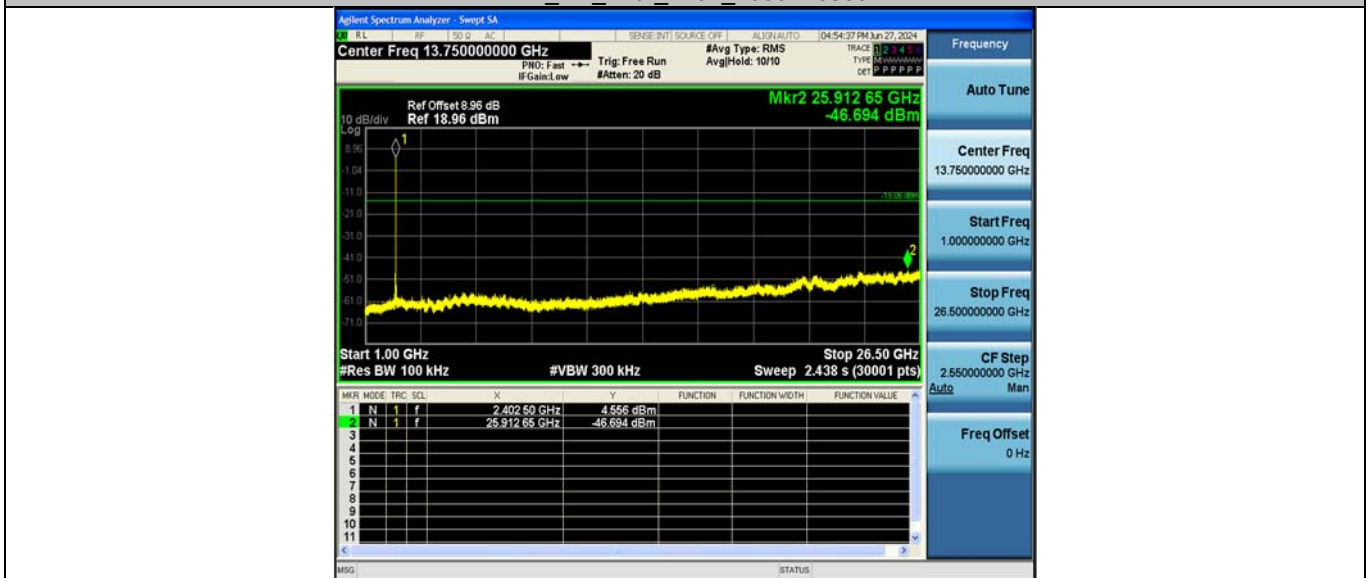

BLE_2M_Ant2_2402_0~Reference